State of New Mexico Energy, Minerals & Natural Resources LIVED

District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV

Oil Conservation DivsiionMAR 26 2007

Submit to appropriate District Office

1220 S. St. Francis Dr.

Santa Fe, NM 87509il Conservation Division [AMENDED REPORT

1220 S. St. Francis						·		8/505 1220 S. St	. Francis Drive	<u> </u>	NDED KEI OKI	
APPLIC	ATION					LL, RE-EN	ITER	R, DEEPEN A	<u>etheback</u>	۲, OR ADI		
¹ Operator Name and Address								² OGRID Number 16696				
OXY USA Inc.	OXY USA Inc.								³ API Number			
P.O. Box 502		ll and	<u>, TX 7</u>	79710-025	.0				30- 021- 2	10381		
⁴ Proper 271	rty Code			Br	avo Dom	⁵ Property 1 ne Carbon Di		e Gas Unit (5	222	6We	ell No.	
<u> </u>	.11	9 Pror	posed Po		avo bom	e carbon b.	100114	s das onte (10 Proposed Po			
Bravo Dome	Carbon					96010	<u> </u>		·			
⁷ Surface Location									· · · · · · · · · · · · · · · · · · ·			
UL or lot no.	Section	Town	nship	Range	Lot. Idn Feet from th			North/South Line	ne Feet from the East/West line		County	
K	۲_	ાહ	S N	32 E	l	1700		south	1700	west	Harding	
			8 Pro	oposed P	Jottom J	Hole Locati	ion If	Different From	m Surface			
UL or lot no.	Section	Town	nsh ip	Range	Lot. Idn	Feet from t	the	North/South Line	Feet from the	East/West line	County	
		<u> </u>			A	dditional W	ell L	ocation				
11 Work Typ		$\overline{}$	12 3	Well Type Code	ie	13 Cable/R			se Type Code		Level Elevation	
N	١	\rightarrow		С		R		5-16460		ا بره	55 4,9 '	
¹⁶ Multi N o	-		17 P	Proposed Depth 2600	n	¹⁸ Format Tub		12 C	Contractor N/A		oud Date	
Depth to ground	water	>100	1		Distance fro	om nearest fresh	water w	vell]	N/A Distance from neare	est surface water	((0)	
Pit: Liner: Syn			mils thi	ick Clay		>10 Pit Volume _40	000	bbls Drilling Meth		>1000'		
	oop System		, 11440	.CK	` _			vater X Brine	_	il-based	Gas/Air 🔲	
	-			²¹ F	ronose	d Casing an	nd Ce	ment Program	··			
Proposed Casing and Cement P Hole Size Casing Size Casing weight/foot Setting De							Setting Depth	Sacks of Cemer	nt E	Estimated TOC		
12-1/	4"		8-5/	/8"	 	24#		700'	300sx		Surface	
7-7/8" 5-1/2"					5.9#FG/15.5#			26001	300sx		Surface	
		Τ			<u></u>							
Describe the p	roposed proposed prevention	gram. I	If this ap	pplication is t ny. Use addi	o DEEPEN tional sheet	N or PLUG BAC ts if necessary. See Attack			sent productive zon	ne and proposed	new productive zone.	
I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify that the drilling pit will be constructed according to NMOCD guidelines a general permit , or an (attached) alternative OCD-approved plan					OIL CONSERVATION DIVISION Approved by:							
Signature:							 	<u>eu</u>	Ma	rtia		
Printed name: David Stewart							Title:			Towns or of the		
Title: Sr. Regulatory Analyst E-mail Address: david stewart@oxy.com							Appro	oval Date: 4-	3-07 E	epiration Date:	4-3-08	
E-mail Address:	dav1a_st	ewart					Cond	CA				
Date: Phone: 432-685-5717					Conditions of Approval: Attached							

ATTACHMENT C-101 BDCDGU 1832-041

PROPOSED TD: 2600' TVD

BOP PROGRAM: 0-700' None

> 8" 2M annular hydril preventer. 700-26001

8-5/8" OD 24# J55 8rd ST&C new casing set at 700' CASING: Surface:

12-1/4" hole

Centralizers from TD-Surf, every fourth joint

Production: 5-1/2" OD new casing from 0-2600'

300'-15.5# J55 8rd LTC 2300'-5.9# 10rd FG

7-7/8" hole - 5 centralizers

*This well will have fiberglass casing from surface to the productive interval (Tubb). Steel casing will be used across the Tubb. The fiberglass casing must penetrate the Cimarron at a minimum. The optimum point for setting the fiberglass casing is at the midpoint of the Cimarron formation.

CEMENT: Surface - Circulate cement with 300sx Premium Plus with 2% CaCl₂ + .25#/sx Poly E Flake, (WT-14.8ppg, Yld-1.34cf/sx, FW-6.3g/sx)

Production - Cement with 150sx Premium Plus with 3% CaCl₂ + .25#/sx Poly E Flake, (WT-11.1ppg, Yld-3.27cf/sx, FW-20.47g/sx)

followed by 150sx Premium Plus with 3% CaCl2 + .25#/sx Poly E

Flake, (WT-13.2ppg, Yld-1.86cf/sx, FW-9.93g/sx)

MUD: 0-700' Fresh water/native mud.

Wt 8.6-9.2ppg, Vis 32-36sec

700-26001 Fresh water/Starch/Gel

pH control as needed.

Wt 9.0-9.2ppg, Vis 28-29sec

District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 South First, Artesia, NM 88210

District III 1000 Rio Brazos Rd., Aztec, NM 87410

2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION 2040 South Pacheco Santa Fe, NM 87505


Form C-102 Revised October 18, 1994 Instructions on back Submit to Appropriate District Office

State Lease - 4 Copies Fee Lease - 3 Copies

AMENDED REPORT

	WELL	LOCATION	AND	ACREAGE	DEDICATION	PLAT
--	------	----------	-----	---------	------------	------

WELL LOCATION AND ACREAGE DEDICATION PLAT										
API Nur	mber		Pool Cod		Pool Name					
30-021-21		96010)	BRAVO DO	ME CARBO	ON DIO	XIDE	GAS 640		
Property Code			Property			_	,	Well Number		
27111	<u>O</u> DO	ME CA	ARBON DI	OXIDE GAS	<u>UNIT 18.</u>	32		041		
OGRID No.			Operator					Elevation		
16696				OXY US	SA INC.		4554.9			
	Surface Location									
UL or lot no. Section	n Township	Range	Lot Idn.	Feet from the	North/South line	Feet from the	from the East/West line		County	
K 4	18 N	32 E		1700'	SOUTH_	1700' WE		ST	HARDING	
		Botte	om Hol	e Location	If Different Fro	om Surface				
UL or lot no. Section	n Township	Range	Lot Idn.	Feet from the	North/South line	Feet from the	East/West	line	County	
Dedicated Acres Joi	int or Infill C	onsolidation	Code C	rder No.	<u> </u>		•			
-	N		\							
NO ALLOWABLE								EN CO	NSOLIDATED	
<u></u>	OR A	NON-\$1	ANDARD	UNIT HAS B	EEN APPROVED					
) 4	1					III			IFICATION	
\				ļ.		' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' '	•		ontained herein is mowledge and belief.	
				ļ			pare to the .	ucsi or may k	noncage and benefit	
						- 11				
				1		\\	_		Ì	
 			_			_\	/ - 0			
						Signature	a s			
								d Ster	wart	
				1		Printed Nam			Analyst	
				1		Title	Keguiz	LOLY	Analyst	
							3(23	107		
				Ì		Date				
	NIST FF	۸۵۵۶				SURV	EYOR	CERT	IFICATION	
		° 48'59.99''				11			shown on this plat	
	X - 7331			j		was plotted f	rom field ne	otes of actua	al surveys made by	
	1 1/53	1430.63				me or under	, .	•	at the same is true	
1700′—						H	ovemb	•	- 2006	
						Date of Surve				
						Signature and	d scalor by	CssiM# S	urveyor \	
1	, ,			j		}}	 ₹ ₹	Fry J.	10/3/	
	1700			, }			Areas (>	(15079	/ 2	
	 						XEX	NA P	2/9/2007	
)							X 30	ETAL AC		
) I		Certificate Ni	umber 15	FBSS ICAR		
<u></u>							13	0/9		

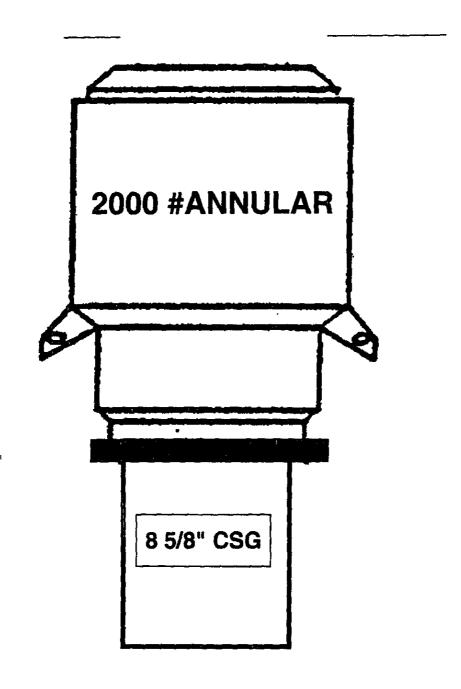

BRAVO DOME 2003 DRILLING PROJECT BOP DIAGRAM

80 8

Bravo Dome Unit Location and Pit Design Cheyenne Rig 8

Bravo Dome Unit Cellar and Sump Pit Cheyenne Rig 8

