

DHC -146 Due 8/5/7

DDRESS REPLY TO:

P. O. BOX 1351 MIDLAND, TEXAS 79701

SKELLY OIL COMPANY

July 10, 1974

DOMESTIC EXPL. & PROD. DEPARTMENT WEST CENTRAL E & P DISTRICT

F. L. FRANZ, DISTRICT PRODUCTION MANAGER

M. J. EKMAN, DISTRICT ENGINEER

F. J. HENSLEY, LEAD RESERVOIR ENGINEER

F. J. PETRO, LEAD PRODUCTION ENGINEER

File: Hobbs "A" Wells No. 6 & 7 Lease No. 54860 Justis Blinebry and Justis Tubb Drinkard Lea County, New Mexico

Re: Application for Administrative Approval For Exception to Rule 303-A

Oil Conservation Commission (2) State of New Mexico P. O. Box 2088 Santa Fe, New Mexico 87501 Oil Conservation Commission (1) State of New Mexico P. O. Box 1980 Hobbs, New Mexico 88240

Attention: Mr. Joe D. Ramey

Attention: Secretary Director

Gentlemen:

Skelly Oil Company respectively requests administrative approval for exception to Rule 303-A of the Commission rules and regulations for the purpose of down-hole commingling of the Justis Blinebry and Justis Tubb Drinkard zones in the Hobbs "A" Wells No. 6 & 7. The Hobbs "A" No. 6 is located 1650' FNL & 330' FWL of Section 30, T-25S, R-38E, NMPM. The Hobbs "A" No. 7 is located 467' FNL & 467' FWL of Section 30, T-25S, R-38E, NMPM, Lea County, New Mexico.

The Commission authorized the dual completion of Hobbs "A" No. 6 & 7 under Orders No. DC-779 and DC-825, respectively.

Offset operators have been notified by copy of this application. All necessary exhibits and required information for this application are attached.

Very truly yours,

DHC/clw Attach.

cc: Offset Operators

DC-779 was for ho.6 in montoya & Ellenburger Esc R-1402-A

OFFSET OPERATORS HOBBS "A" LEASE

Union Texas Petroleum 1300 Wilco Bldg. Midland, Texas 79701

٠

٠.

Getty Oil Company P. O. Box 249 Hobbs, New Mexico 88240

Atlantic Richfield Company P. O. Box 1710 Hobbs, New Mexico 88240

Amoco Production Company P. O. Box 68 Hobbs, New Mexico 88240 Requirements for Down-hole Commingling Application

- Current 24 hour productivity tests for both wells on Commission Form C-116 are attached. The Justis Tubb Drinkard zones in both wells are currently temporary abandoned.
- 2. Production decline curves and a completion history for each well are attached. It is recommended the production for each zone from each well be allocated as follows:

Hobbs "A" Well No. 6 Justis Blinebry: Oil 70%; Gas 50% Justis Tubb Drinkard: Oil 30% Gas 50%

• •

Hobbs "A" Well No. 7 Justis Blinebry: Oil 46%; Gas 50% Justis Tubb Drinkard: Oil 54%; Gas 50%

- 3. The bottom hole pressure for the Justis Blinebry and Justis Tubb Drinkard zones are estimated to be 800 psi (-2300') and 1120 psi (-2800') respectively.
- 4. Results of Water Analyses for both zones are attached.
- 5. The gravity of the individual oil samples from the Justis Blinebry and Justis Tubb Drinkard zones are both 37° API, therefore, the value of the commingled production should increase as a result of resuming production from the Tubb Drinkard zone in both wells.

,				·····			· · · ·			Cowan	i	1								
	-	Lea	Special X	dl X GAS – OIL	RATIO CU.FT/BBL	5500 6556		I hereby certify that the above information is true and complete to the best of my know- ledge and belief.		s H.										
			Speci	TEST	GAS M.C.F.	55 59		t the above to the best		(Signature) Dennis	Engineering leconitcian (Tide) 10, 1074	(Date)								
C-116 Revised 1-1-65			tion		PROD. DURING	01L BBLS.	10		rtify tha mplete ief.		(Sig	Tid 1077.	7							
О Щ				00.0	GRAV. OIL	37 37		eby cei and co ind bel	al Real and a second		ent al	July 10,								
			Completion	С Ц	WATER BBLS.	12		I hereby certifies true and complete to be and complete the second	Ŕ		년 - 1	٦ ا								
	ıty			LENGTH	⊢ °°	24 24		i is led	ith ith	יו 		=								
NO	County		duled		ALLOW- ABLE	००		in which well can be assign	fic gravity be accordance w	· • .										
CONSERVATION COMMISSION OIL RATIO TESTS			Sche		PRESS.	1 I I I		the pool that well	• F. Speci ission in											
		ory	ТҮРЕ ОF ТЕST (X)	CHOKE				t. Iowable for se in ord er 1	ature of 60 ation Comm											
TIO TIO			TYPE TEST	sn	TATE	<u></u> А А		l tes uit all eranc	serve											
o oil conservation c GAS-OIL RATIO TESTS		Justis Blinebry		DATEOF	TEST	6-17-74 6-17-74		l on the officia ding the top ur 25 percent tol	025 psia and a temperature of 60° F. Specific gravity base ough casing. w Mexico Oil Conservation Commission in accordance with											
NEW MEXICO OIL				TION	۲	38 38	, s	produced of exceed	of 15.02 ng throug te New 1											
VEW MB					+	25 25	······································	nt of oil a rate n dvantage	re base produci ice of tl											
2	Pool						10	5	LOCATION	s	30		he amou iced at a o take a	a pressu any well strict off						
											s 79701		n	ы Q		r than t e produ rraged t sion.	ured at sure for the dis			
									Texas		NO.	6 7		ble greate 11 shall b r is encou	ICF meas bing pres			•		
	Operator	Skelly Oil Company	Address D Rev 1351 Midland		LEASE NAME	Hobbs "A"		No well will be assigned an allowable greater than the amount of oil produced on the official test. During gas-oil ratio test, each well shall be produced at a rate not exceeding the top unit allowable for the pool in which well is located by more than 25 percent. Operator is encouraged to take advantage of this 25 percent tolerance in order that well can be assigned increased allowables when authorized by the Commission.	Gas volumes must be reported in MCF measured at a pressure base of 15.025 psia and a temperature of 60° F. Specific gravity base will be 0.60. Report casing pressure in lieu of tubing pressure for any well producing through casing. Mall original and one copy of this report to the district office of the New Mexico Oil Conservation Commission in accordance with	Rule 301 and appropriate pool rules.		•								

		Spectal X	GAS - OIL	KATIO CU.FT/BBL		I hereby certify that the above information is true and complete to the best of my know- ledge and belief. (Signature) Dennis H, Cowan (Signature) Dennis H, Cowan Engineering Technician							
		Spect	TEST	GAS M.C.F.		hereby certify that the above information of the set of							
				OIL BBLS		ief.							
		etion	PROD. DURING	GRAV. OIL		I hereby certify is true and comp ledge and belief. Engineerin							
	Lea	Completion	Ē.	WATER BBLS.		I her is true ledge a Eng							
			LENGTH	TEST HOURS		with second							
County		TYPEOF TEST - (X) Scheduled	DAILY	ALLOW- ABLE		in which we can be assi ific gravity b accordance							
	-		TBG.	PRESS.		r the pool that well o ⁶ F. Speci							
	Drinkard		СНОКЕ	SIZE		t. owable fo e in order ature of 6(ition Comm							
	Drin		ຣດ	TAT2	нн	al test nit all leranc emper							
	Tubb		DATEOF	ΤEST	Т.А.Т.	luced on the official test. luced on the official test. tceeding the top unit allowable for the pool in which well is this 25 percent tolerance in order that well can be assigned ⁵ 5.025 psia and a temperature of 60° F. Specific gravity base 5.025 psia and a temperature of 60° F. Specific gravity base arough casing.							
	Justis								œ	8 8 8 N N	i produce to this of 15.0' of 15.0' the New		
			LOCATION	F	25	arate r arate r advantag ure base ure base filce of f							
Pool		79701	LOC	S	0 0 0	the amo luced at to take t a press t a press istrict ol							
									1			∍	取 D
		i. Texas	5	NO.	۸ v	vable grea vable grea vell shall or is enc the Comm MCF mea MCF mea tubing pre is report							
	Skelly Oil Company	ress P. O. Box 1351. Midland		L EASE NAME	Hobbs "A"	No well will be assigned an allowable greater than the amount of oil produced on the official test. During gas-oil ratio test, each well shall be produced at a rate not exceeding the top unit allowable for the pool in which well is located by more than 25 percent. Operator is encouraged to take advantage of this 25 percent tolerance in order that well can be assigned increased allowables when authorized by the Commission. Gas volumes must be reported in MCF measured at a pressure base of 15.025 psia and a temperature of 60° F. Specific gravity base will be 0.60. Report casing pressure in lieu of tubing pressure for any well producing through casing. Mall original and one copy of this report to the district office of the New Mexico Oil Conservation Commission in accordance with Rule 301 and appropriate pool rules.							

4

Completion History Hobbs "A" Well No. 6

· _ •

The subject well was drilled and completed Aug. 16, 1959, as a dual oil producer in the Justis Blinebry and Justis Tubb Drinkard zones. The Blinebry zone was potentialed flowing 1129 BOPD, 0 BWPD, 828 MCFPD after treatment with 500 gallons of acid (15%) and fractured with 30,000 gallons lease oil and 24,600# sand. The producing interval treated was 5373-5547'.

Jan. 9, 1969, a D.R. Plug was set in packer @ 5760 and additional Blinebry perforations were opened from 5099-5329 and this interval fractured with 80,000 gallons gelled brine and 120,000# sand in four (4) stages using temperature survey.

The Justis Tubb Drinkard zone in the Hobbs "A" No. 6 was potentialed in Aug., 1959, for 226 BOPD, 0 BWPD, 92 MCFPD, after treatment with 18,000 gallons of lease oil and 14,000# sand. The producing interval fractured was 5837-5879'. Request for authority to shut down one zone of multiple completed well filed 1-24-69, and the lower zone (Justis Tubb Drinkard) was temporarily abandoned.

Completion History Hobbs "A" Well No. 7

' 4

The subject well was drilled and completed Sept. 26, 1959, as a dual oil producer in the Justis Blinebry and Justis Tubb Drinkard zones. The Blinebry zone was potentialed at 1104 BOPD, 0 BWPD, 907 MCFPD after treatment with 500 gallons mud acid and fractured with 30,000 gallons lease crude and 30,000# sand. The producing interval treated was 5340-5529'.

Nov. 26, 1968, additional Blinebry perforations were added 5117-5309'. An "EZ" Drill BP @ 5674 and interval fractured with 22,000 gallons gelled water and 30,000# sand.

The Justis Tubb Drinkard zone in the Hobbs "A" No. 7 was potentialed for 523 BOPD, 0 BWPD, 345 MCFPD after treatment with 500 gallons mud acid, and fractured with 20,000 gallons lease crude and 10,000# sand. Request for authority to shut down one zone of multiple completed well filed 11-20-68, and the lower zone (Justis Tubb Drinkard) was temporarily abandoned.


NE 943-3234 OR 563-1040		ANALYSES	671.00	IDLAND, TEXAS PHONE 683-4		
		ABORATORY NO	6 1/ 7	<u>67482</u> 6-14-74		
. <u>Mr. Dennis Cowan</u>	(SAMPLE RECEIVED				
P.O. Box 1351 Midland	d, <u>Texas</u>	RESULTS REPORTED	6-17-7	4		
MPANY Skelly Oil Company	¥7	Hobbs	11 11			
ELD OR POOL	Tustice (Blinbry)	<u></u>			
ELD OR POOL SURVEY		Lea	New	Mexico		
	COUNTY	SI	ATE 100			
NRCE OF SAMPLE AND DATE TAKEN: NO. 1 Produced (Tubb) wate	er – taken from St	ate "L". 6-14	-74			
Produced (Plinebry)	water - taken fro	m Hobbe !!!!!	6-14-74			
NO. 2FIGULCEG (BITHEBTY)		III HODDS A .		*		
NO. 3						
NO. 4						
EMARKS:						
	MICAL AND PHYSICAL	PROPERTIES		لنسيب كالنابي بين الكالية ا		
	NO. 1	NO. 2	NO. 3	NO. 4		
Specific Gravity at 60° F.	1.1005	1.0789				
pH When Sampled						
pH When Received	7.9	7.85				
Bicarbonate as HCO3	227	549				
Supersaturation as CaCO3						
Undersaturation as CaCO3			·			
Total Hardness as CaCO3	24,700	12,600		ļ		
Calcium as Ca	6,800	3,720	<u>. </u>			
Magnesium as Mg	1,871	802				
Sodium and/or Potassium	51,265	41,816				
Sulfate as SO4	1,708	2,806				
Chloride as Cl	95,165	71,019				
Iron as Fe	20.0	7.0				
Barium as Ba			<u> </u>			
Turbidity, Electric						
Total Solids, Calculated	157,036	120,712				
Temperature °F.		120,712		·		
Carbon Dioxide, Calculated		++				
Dissolved Oxygen, Winkler		1	<u> </u>			
Hydrogen Sulfide	0.0	1.0		· · · · · · · · · · · · · · · · · · ·		
Resistivity, ohms/m at 77° F.	0,068		······			
Suspended Oil						
Filtrable Solids as mg/1						
Volume Filtered, ml						
۹						
	Results Reported As Milligra	and the second				
Additional Determinations And Remarks A C	areful examination	<u>n of the above</u>	analyses rev	<u>reals no e</u>		
dence which would indicate a	ny incompatibilit	<u>y problem betwe</u>	en these wat	ers for m		
ing them or producing them f	rom the same well	• • • • • • • • • • • • • • • • • • • •				
n in malite a film a selected film. Theorem a state of the selected film and the selected film.						
				·····		
n an	·······			<u> </u>		
2.440.080平均440.000000000000000000000000000000000						
				. <u> </u>		
srm:No: 3		(1 m - 7		2		
*************************************		V 61/1	1 117 1	. 7		
c: Mr. Dale Crockett, Hobbs		By Montoll	17/1/2/12/10			

22


f

ţ


Martin Water Laboratories

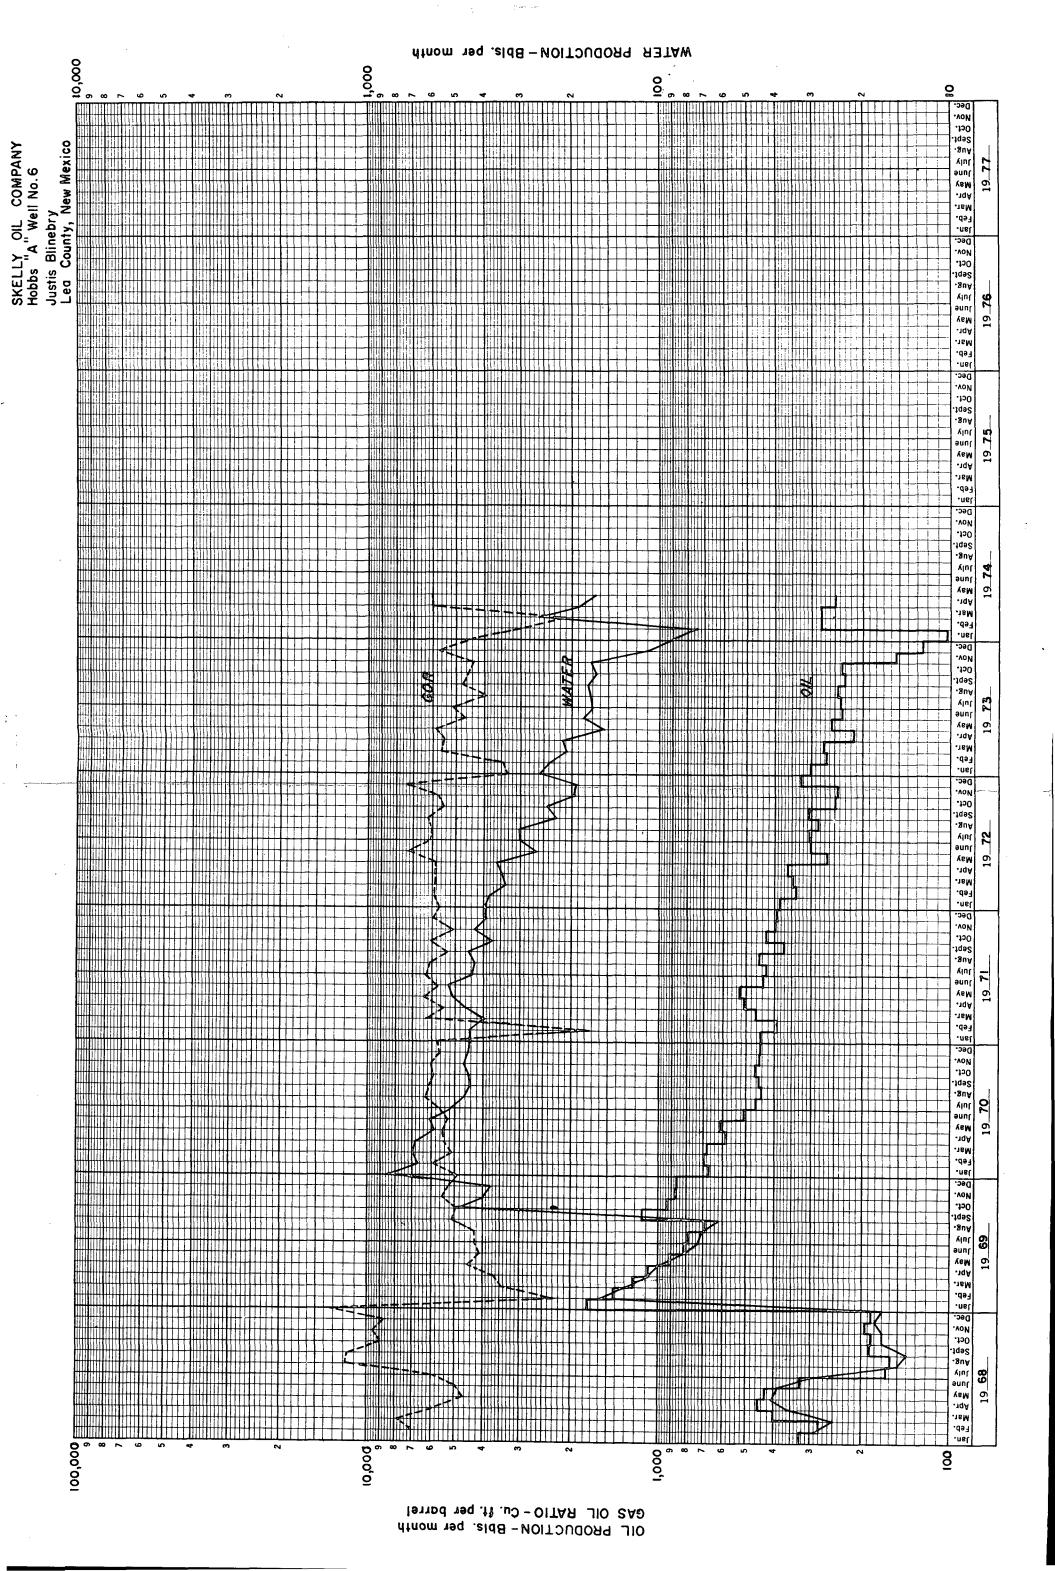


GAS OIL RATIO-Cu. 11; per barrel

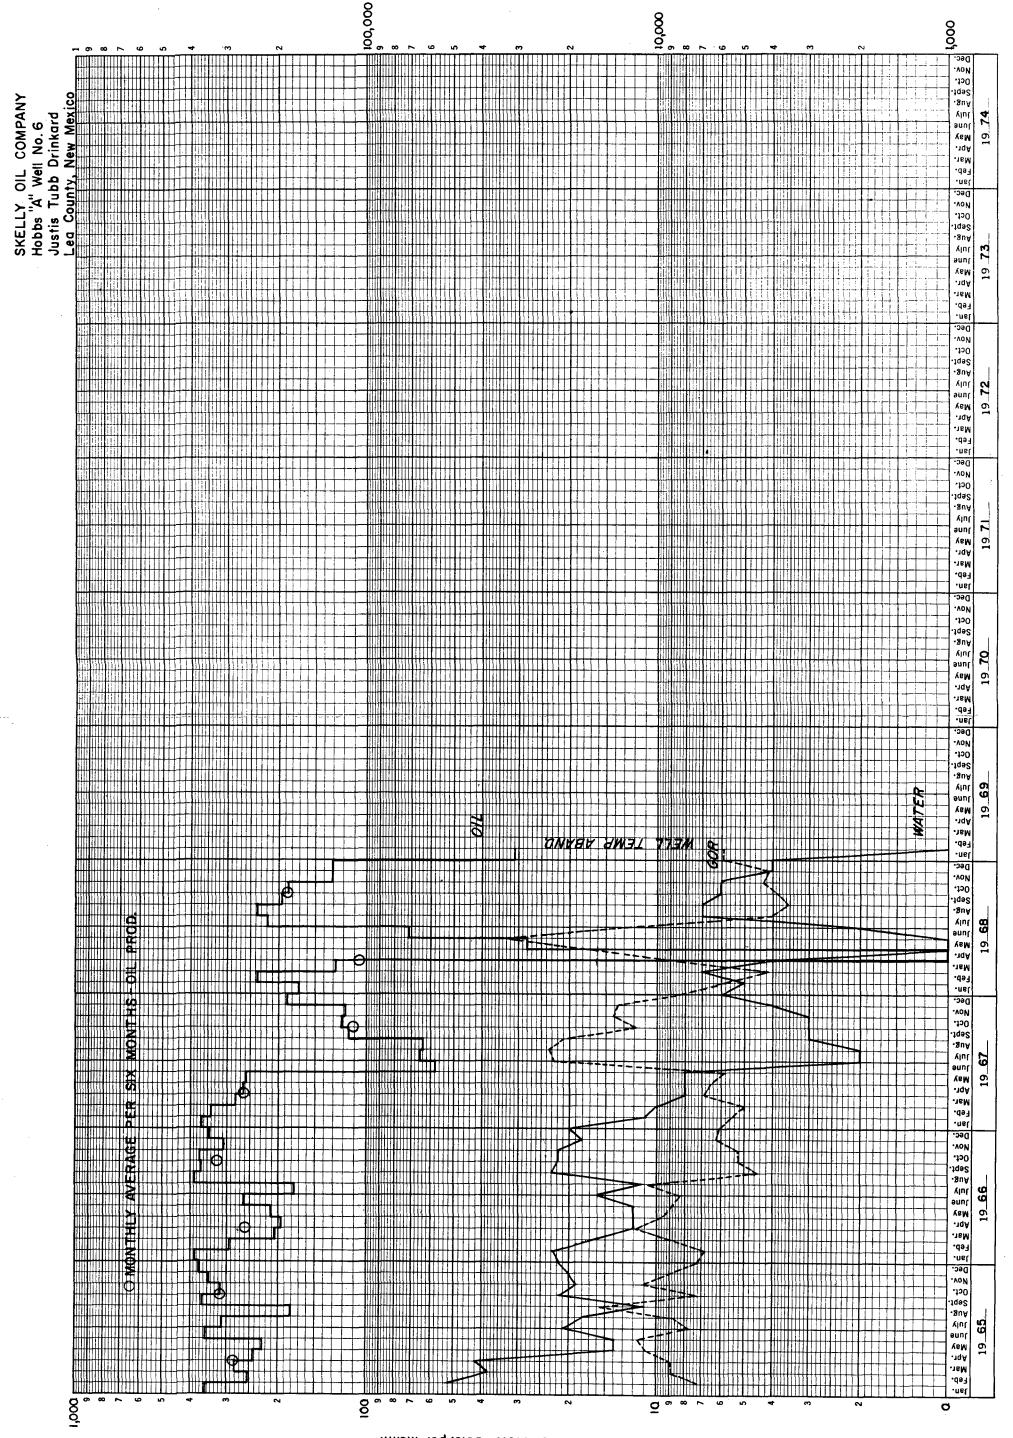

OIL PRODUCTION - Bbis. per month WATER PRODUCTION - Bbis. per month

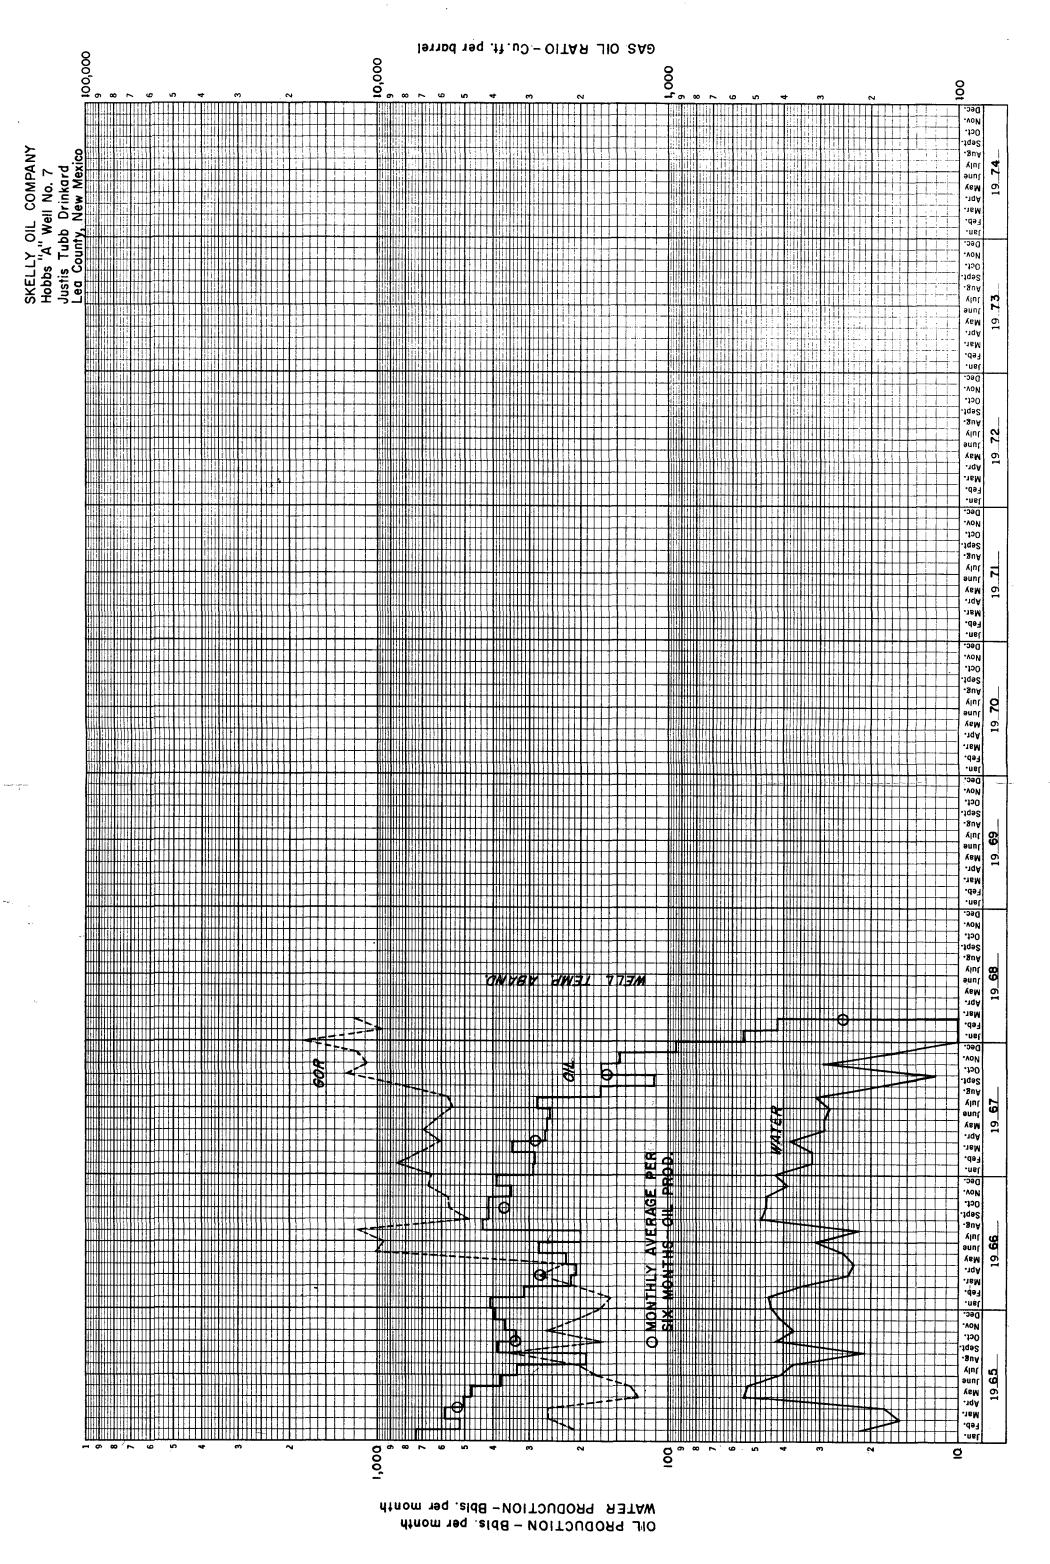

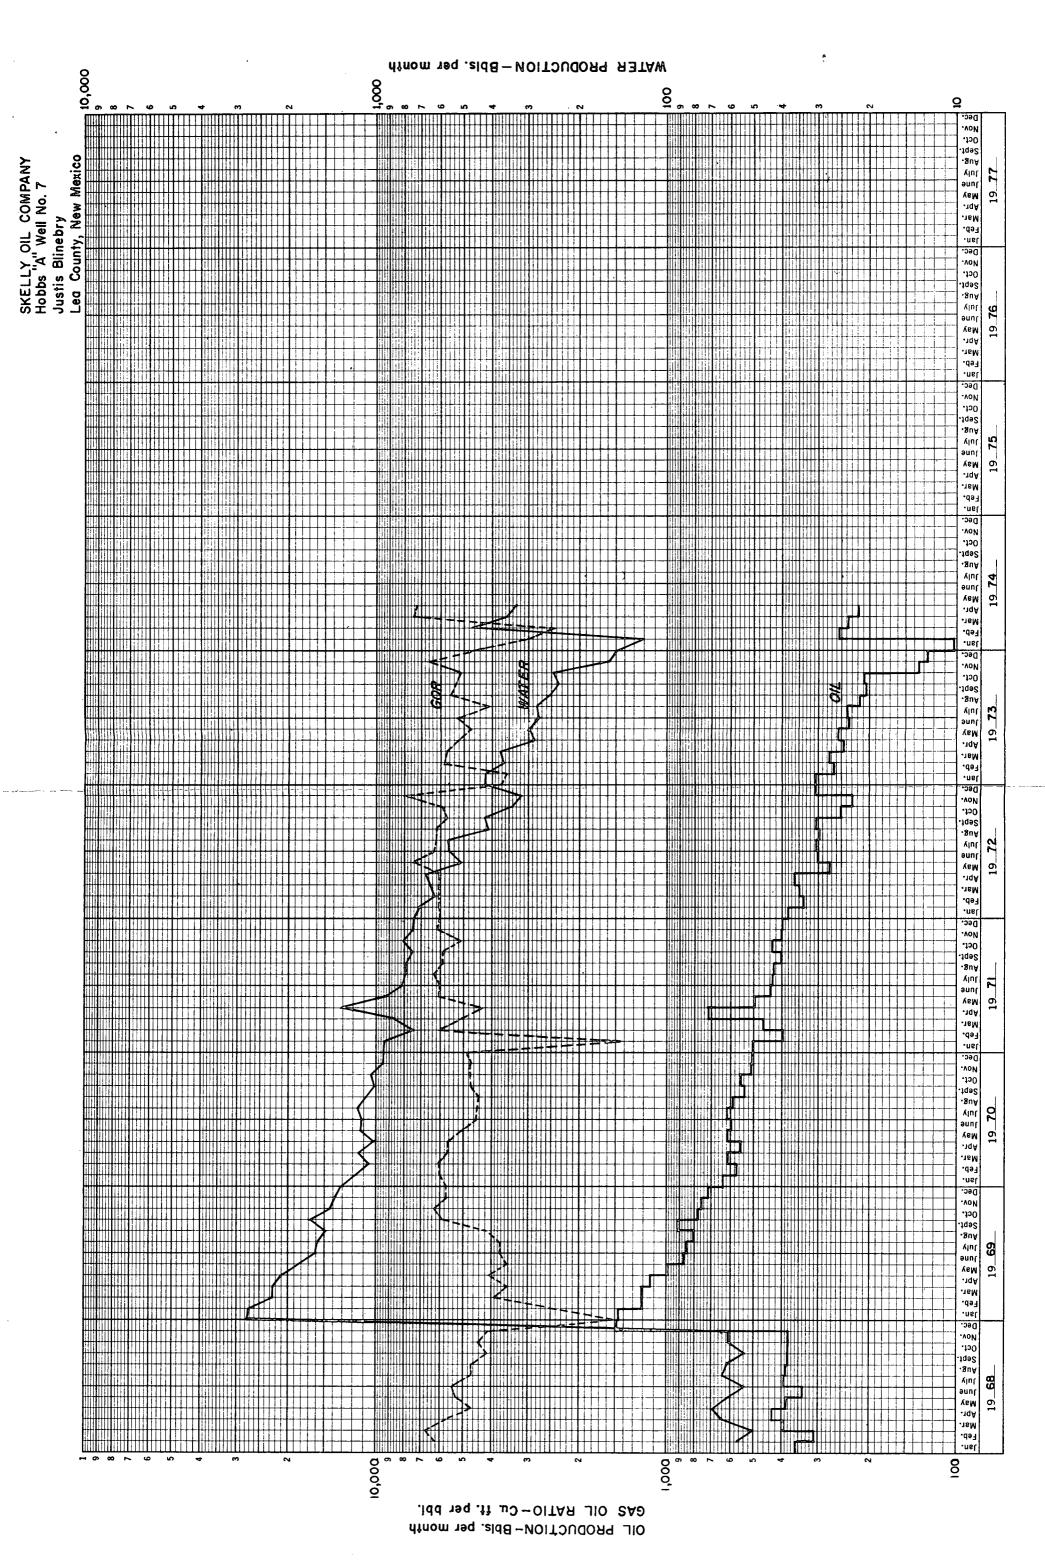

OIL CONSERVATION COMMISSION Hobbs DISTRICT

OIL	СС	NSEF	RVAT]	ION	COMMISSION
BOX	20	88			
SANI	'A	FE,	NEW	MEX	XICO

DATE	July	16,	1974	
DUTU				

RE: Proposed MC ______ Proposed DHC X Proposed NSL _____ Proposed SWD _____ Proposed WFX _____ Proposed PMX _____

Gentlemen:

I have examined the application dated_

for theSkelly Oil Co.Hobbs A#6-E30-25-38OperatorLease and Well No.Unit, S-T-R

and my recommendations are as follows:

0.K.---J.D.R.



Yours very truly,

OIL CONSERVATION COMMISSION Hobbs DISTRICT

OIL CONSERVATION COMMISSION BOX 2088 SANTA FE, NEW MEXICO DATE July 16, 1974

RE: Proposed MC ______ Proposed DHC _____ Proposed NSL _____ Proposed SWD _____ Proposed WFX _____ Proposed PMX _____

Gentlemen:

I have examined the application dated_____

for theSkelly Oil Co.Hobbs A #7-D30-25-38OperatorLease and Well No.Unit, S-T-R

and my recommendations are as follows:

0.K.---J.D.R.

1027 2014 1974 JUL 18 1974 TION COMM.

Yours very truly,