

#### **Report Description**

This report shows an AE Order Number in Barcode format for purposes of scanning. The Barcode format is Code 39.



**App Number:** pCS1808654729

144B - 16295 DJR OPERATING, LLC District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

# State of New Mexico Energy Minerals and Natural Resources Department

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Form C-144 Revised April 3, 2017

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application
Type of action:  Below grade tank registration  Permit of a pit or proposed alternative method  Closure of a pit, below-grade tank, or proposed alternative method  Modification to an existing permit/or registration  Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request  Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
Operator:DJR Operating, LLC OGRID #:371838   NMOCD
Address: PO BOX 156 Bloomfield, NM 87413  Facility or well name: CRI I hieration Plant RCT1  MAR 2 2 2018
Facility or well name:CBU Injection PlantBGT1
☐ Pit:       Subsection F, G or J of 19.15.17.11 NMAC         Temporary:       ☐ Drilling       ☐ Workover         ☐ Permanent       ☐ Emergency       ☐ Cavitation       ☐ P&A       ☐ Multi-Well Fluid Management       Low Chloride Drilling Fluid       ☐ yes ☐ no         ☐ Lined       ☐ Unlined       Liner type:       Thickness
Selow-grade tank: Subsection I of 19.15.17.11 NMAC   Volume:
4.  Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.
5.  Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)  Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)  Four foot height, four strands of barbed wire evenly spaced between one and four feet  Alternate. Please specify

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)  Screen □ Netting □ Other □ Monthly inspections (If netting or screening is not physically feasible)								
7.  Signs: Subsection C of 19.15.17.11 NMAC   12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers  □ Signed in compliance with 19.15.16.8 NMAC								
8.  Variances and Exceptions:  Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.  Please check a box if one or more of the following is requested, if not leave blank:  Variance(s): Requests must be submitted to the appropriate division district for consideration of approval.  Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.								
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.								
General siting								
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank.  - ☑ NM Office of the State Engineer - iWATERS database search; ☐ USGS; ☐ Data obtained from nearby wells	☐ Yes ☑ No ☐ NA							
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells								
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks)  - Written confirmation or verification from the municipality; Written approval obtained from the municipality								
Within the area overlying a subsurface mine. (Does not apply to below grade tanks)  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division								
Within an unstable area. (Does not apply to below grade tanks)  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map								
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	☐ Yes ☐ No							
Below Grade Tanks								
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site								
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;.  - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☑ No							
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)								
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.)  - Topographic map; Visual inspection (certification) of the proposed site								
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application.								
<ul> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> <li>Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application.</li> <li>NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site</li> </ul>	Yes No							

Within 100 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No							
Temporary Pit Non-low chloride drilling fluid								
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site								
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image								
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application;  - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site								
Within 300 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No							
Permanent Pit or Multi-Well Fluid Management Pit								
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	Yes No							
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No							
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site								
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site								
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.    Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC   Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC   Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC   Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC   Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC   Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC   Previously Approved Design (attach copy of design) API Number:								
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  A List of wells with approved application for permit to drill associated with the pit.  Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC  Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Previously Approved Design (attach copy of design) API Number: or Permit Number: or Permit Number:								

12. Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are									
######################################									
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.									
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well Fluid Management Pit Alternative  Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method									
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.  □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC									
15. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC									
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. Please refer to 19.15.17.10 NMAC for guidance.									
Ground water is less than 25 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No								
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells									
Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells									
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site									
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image									
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site									
Written confirmation or verification from the municipality; Written approval obtained from the municipality  Yes N									
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site									
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance									

adopted pursuant to NMSA 1978, Section 3-27-3, as amended.  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No									
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division										
Within an unstable area Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological										
Society; Topographic map Within a 100-year floodplain.										
- FEMA map	☐ Yes ☐ No									
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC  Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17.11 NMAC  Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC  Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC  Construction Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC  Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC  Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)  Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC										
Operator Application Certification:										
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and beli	ief.									
Name (Print): Amy Architeta Title: Regulatory										
Signature: Date:										
e-mail address: aarchuleta@djrllc.com Telephone: 505-632-3476 x201										
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)										
OCD Representative Signature: Approval Date: Approval Date:	8/18									
Title: Four rownesday Spec OCD Permit Number: 16295										
19.  Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC  Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report.  The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.  Closure Completion Date:										
Closure Method:  Waste Excavation and Removal On-Site Closure Method Alternative Closure Method Waste Removal (Closed-log If different from approved plan, please explain.	pop systems only)									
Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please in mark in the box, that the documents are attached.  □ Proof of Closure Notice (surface owner and division) □ Proof of Deed Notice (required for on-site closure for private land only) □ Plot Plan (for on-site closures and temporary pits) □ Confirmation Sampling Analytical Results (if applicable) □ Waste Material Sampling Analytical Results (required for on-site closure) □ Disposal Facility Name and Permit Number □ Soil Backfilling and Cover Installation □ Re-vegetation Application Rates and Seeding Technique □ Site Reclamation (Photo Documentation) On-site Closure Location: Latitude  NAD: □1927										

Operator Closure Certification:										
I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.										
Name (Print):	Title:									
Signature:	Date:									
e-mail address:	Telephone:									

## BELOW GRADE TANK (BGT) CLOSURE PLAN

# Site Name: Central Bisti Unit (CBU) Injection Plant BGT 1

Unit Letter: "O", Section 05, T25N-R12W San Juan County, NM Latitude 36.423636 Longitude -108.133583

#### **Submitted By:**

Amy Archuleta
DJR Operating, LLC
PO BOX 156 Bloomfield, NM 87413
(505) 632-3476 x201

March 2018

Below Grade Tank (BGT) Closure Plan DJR Operating, LLC Central Bisti Unit Injection Plant Unit Letter: "O" SW/SE Section: 5-T25N-R12W Latitude 36.423636 Longitude -108.133583

#### **Closure Plan:**

In accordance with 19.15.17.13 NMAC, the following plan describers the closure requirements of the existing Below Grade Tank (BGT) at the **Central Bisti Unit (CBU) Injection Plant** well site owned and operated by DJR Operating, LLC. CBU Injection plant is in San Juan County, NM approximately **27.4 miles**, by road

- 1) DJR Operating, LLC, shall dispose of all wastes at a division-approved facility.
- 2) DJR Operating, LLC will not commence closure without first obtaining approval of the closure plan submitted with this registration.
- 3) DJR Operating, LLC shall test the soils beneath the BGT as follows:
  - a. At a minimum, a five-point composite sample to include any obvious stained or wet soils, or other evidence of contamination shall be taken under the liner or BGT and that sample(s) shall be analyzed for constituents listed in Table 1 of 19.15.17.13 NMAC (below).
  - b. If any contaminant concentration is higher than the parameters listed in Table 1 of 19.15.17.13 NMAC (below) the division may require additional delineation upon review of the results and DJR must obtain approval before proceeding with closure.
  - c. If all contaminant concentrations are less than or equal to the parameters listed in Table 1 of 19.15.17.13 NMAC (below), then DJR may proceed to backfill the excavation with non-waste containing, uncontaminated, earthen material.
  - d. This site is >100 feet to groundwater based on the Gallegos wash, the prominent water feature, the BGT location elevation, and and a water well, SJ-1716, located in NE/SW Section 1- T25N-R12W (36.427617 -108.063778).

Latitude 36.423636 Longitude -108.133583

	or Soils Beneath Below	able I v-Grade Tanks, Drying Pads a its where Contents are Remove	
Depth below bottom of pit to groundwaterless than 10,000 mg 1 TDS	Constituent	Method *	Limit**
	Chloride	EPA 300.0	600 mg kg
≤50 feet	ТРН	EPA SW-846 Method 418.1	100 mg kg
	BIEZ	EPA SW-846 Method 8021B or 8260B	50 mg kg
	Benzene	EPA SW-846 Method 8021B or 8015 M	10 mg kg
	Chloride	EPA 300.0	10,000 mg/kg
51 feet-100 feet	PH	EPA SW-846 Method 418.1	2,500 mg/kg
-	GRO-DRO	EPA SW-846 Method 8015M	1,000 mg/kg
	STEX	EPA SW-846 Method 8021B or 8260B	50 mg/kg
	Benzene	EPA SW-846 Method 8021B or 8015M	10 mg kg
	Chlonde	EPA 300.0	20,000 mg/kg
> 100 feet	TPH	EPA SW-846 Method 418.1	2,500 mg/kg
	GRO+DRO	EPA SW-846 Method 8015M	1,000 mg kg
	BTEX	EPA SW-846 Method 8021B or 8260B	50 mg/kg
-	Benzene	EPA SW-846 Method 8021B or 8015 M	10 mg kg

\*Or other test methods approved by the division

#### <u>Timing and Requirements and Closure Methods for Below-Grade Tanks</u>

- 1. Within 60 days of conclusion of operations, DJR shall remove liquids and sludge from the BGT prior to implementing a closure method and shall dispose of liquids and sludge in a division-approved facility.
- 2. Within six (6) months of conclusion of operations, DJR shall remove the BGT and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate district office approves. If there is any equipment associated with the BGT, then DJR shall remove the equipment, unless the equipment is required for some other purpose.
- 3. DJR shall notify the surface owner by certified mail, return receipt requested, by hand delivered and surface owner signed letter, or if surface is owned by Bureau of Land Management (BLM), by sundry notice, that DJR plans closure operations at least 72 hours, but not more than one week, prior to any closure operation.

<sup>\*\*</sup>Numerical limits or natural background level, whichever is greater

Below Grade Tank (BGT) Closure Plan DJR Operating, LLC Central Bisti Unit Injection Plant Unit Letter: "O" SW/SE Section: 5-T25N-R12W Latitude 36.423636 Longitude -108.133583

- Notice shall include operator name, facility name, NMOCD permit number (if given), and location to be closed by unit letter, section, township, and range.
- 4. DJR shall notify the NMOCD, District 3-Aztec Office, that DJR plans closure operations, via email, at least 72 hours, but not more than one week, prior to any closure operation. Notice shall include operator name, facility name, NMOCD permit number (if given), and location to be closed by unit letter, section, township, and range.

#### **Reclamation of BGT Locations**

- 1. Once the area associated with the BGT is no longer in use, DJR shall reclaim the BGT location and all areas associated with the BGT including associated access roads to a safe and stable condition that blends with the surrounding undisturbed area. DJR shall substantially restore the impacted surface area to the condition that existed proper to oil and gas operations by placement of soil cover as provided in Paragraph (2) in Subsection H of 19.15.17.13 NMAC, recontour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography and revegetate according to Paragraph (5) in Subsection H of 19.15.17.13 NMAC.
- DJR shall replace topsoil and subsoil to their original relative position and contoured to achieve erosion control, long term stability, and preservations of surface water flow patterns. The disturbed area shall be reseeded in the first favorable growing season following the closure of the facility.
- 3. Reclamation of all disturbed areas no longer in use shall be considered complete when all ground surface disturbing activities at the facility have been completed, and uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre-disturbance levels and a total of percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds.
- 4. In areas reasonably needed for facility operations, DJR shall compact, cover, pave, or otherwise stabilize and maintain the areas in such a way as to minimize dust and erosion to the extent practicable.

#### **Closure Report**

1. Within 60 days of closure completion, DJR shall submit a closure report on Form C-144, with necessary attachments to document all closure activities including sampling

Below Grade Tank (BGT) Closure Plan DJR Operating, LLC Central Bisti Unit Injection Plant Unit Letter: "O" SW/SE Section: 5-T25N-R12W Latitude 36.423636 Longitude -108.133583

results; information on back-filling, and covering, where applicable. In the closure report, DJR shall certify that DJR has complied with all applicable closure requirements and conditions specified in the closure plan.

- 2. The closure report will include the following:
  - a. Proof of closure notice to surface owner and NMOCD;
  - b. Back-filling and cover installation with photos;
  - c. Analytical results of confirmation sampling;
  - d. Disposal facility name(s) and permit number (s);



### New Mexico Office of the State Engineer

## **Point of Diversion Summary**

(quarters are 1=NW 2=NE 3=SW 4=SE)

(quarters are smallest to largest)

(NAD83 UTM in meters)

Well Tag POD Number

Q64 Q16 Q4 Sec Tws Rng

X Y

SJ 01716

2 3 01 25N 12W

225189 4035835\*

**Driller License:** 

**Driller Company:** 

**Driller Name:** 

W.R. WEST DRILLING CO.

**Drill Start Date:** 

06/20/1963

**Drill Finish Date:** 

02/05/1964

Plug Date:

1h = 11 = ---

Log File Date:

PCW Rcv Date:

Source:

Shallow

Pump Type:

**WINDMI** 

**Pipe Discharge Size:** 

**Estimated Yield:** 

40 GPM

Casing Size:

6.63

Depth Well:

403 feet

Depth Water:

210 feet


The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.

3/28/18 8:30 AM

POINT OF DIVERSION SUMMARY

<sup>\*</sup>UTM location was derived from PLSS - see Help

Locate	well	and	areas	actually	irrigated	8.8	800	urately	8.8	possible	on	following plat				
Beatlen	(8)		1		Township		25	N.		Range .		12 W.	 M. 1	ML I	P. 1	M

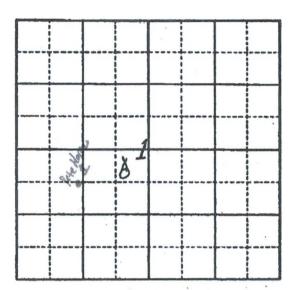

#### INSTRUCTIONS

Declaration shall be executed (preferably typewritten) in triplicate and must be accompanied by a \$1.00 filing fee. Each of triplicate copies must be properly signed and attested.

A separate declaration must be filed for each well in use.

All blanks shall be filled out fully. Required information which cannot be sworn to by declarant shall be supplied by affidavit of person or persons familiar with the facts and shall be submitted herewith.

- Secs. 1-3. Complete all blanks.
- Sec. 4. Fill out all blanks applicable as fully as possible.
- Sec. 5. Irrigation use shall be stated in acre feet of water per acre per year applied on the land. If used for domestic, municipal, or other purposes, state total quantity in acre feet used annually.
- Sec. 6. Describe only the acreage actually irrigated. When necessary to clearly define irrigated acreages, describe to nearest 2½ acre subdivision. If located on unsurveyed lands, describe by legal supdivision "as projected" from the nearest government survey corners, or describe by metes and bounds and the survey to some permanent, easily-located natural object.
- Sec. 7. Explain and give dates as nearly as possible of any years when all or part of acreage claimed was not irrigated.
- Sec. 5. If well irrigates or supplies supplemental water to any other land than that described above, or if land is also irrigated from any other source, explain under this section. Give any-other data necessary to fully describe water right.

If additional space is necessary, use a separate sheet or sheets and attach securely hereto.





## United States Department of the Interior

BUREAU OF LAND MANAGEMENT FARMINGTON RESOURCE AREA P.O. BOX 568 FARMINGTON, NEW MEXICO 87499-0568

APR 28 1983

New Mexico State Engineer District I Office 2340 Menaul, NE, Suite 206 Albuquerque, New Mexico 87107-1884

Dear Sir:

Enclosed, please find <u>Declaration of Owner of Underground Water Right</u> for sixteen of our wells for livestock and wildlife watering purposes. Sixteen dollars are enclosed for filing fees.


If you have any questions, please call Dana Shuford of our staff (505-325-3581).


Sincerely yours,

AT Area Manager


Enclosures

STAPR 29 AID: 34

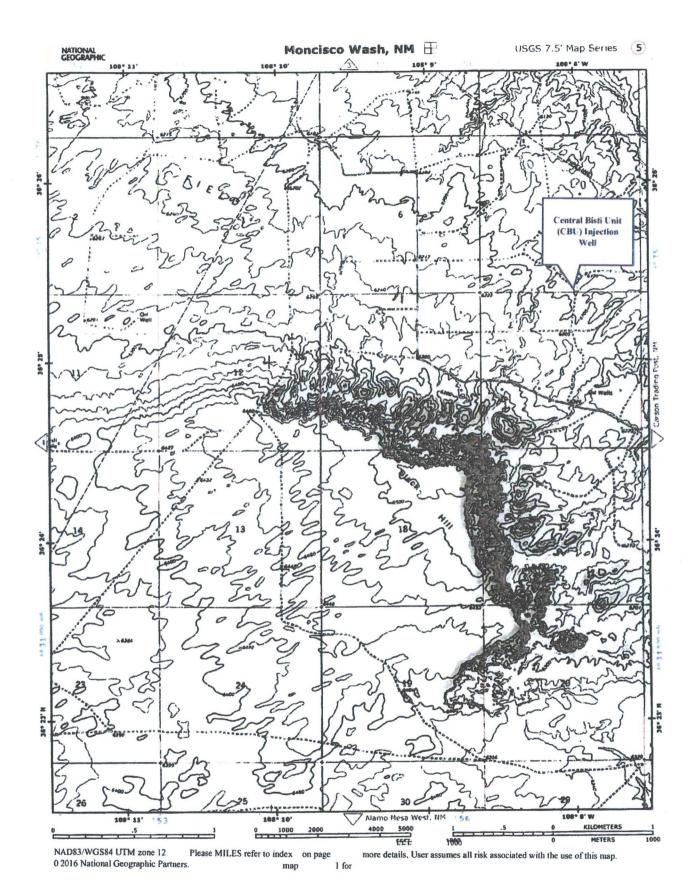

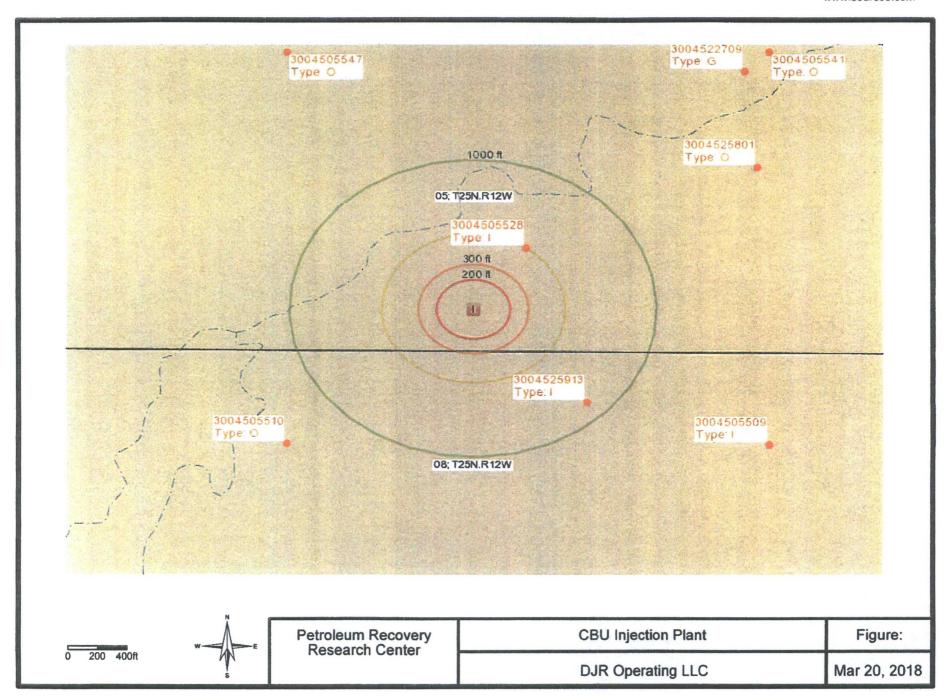



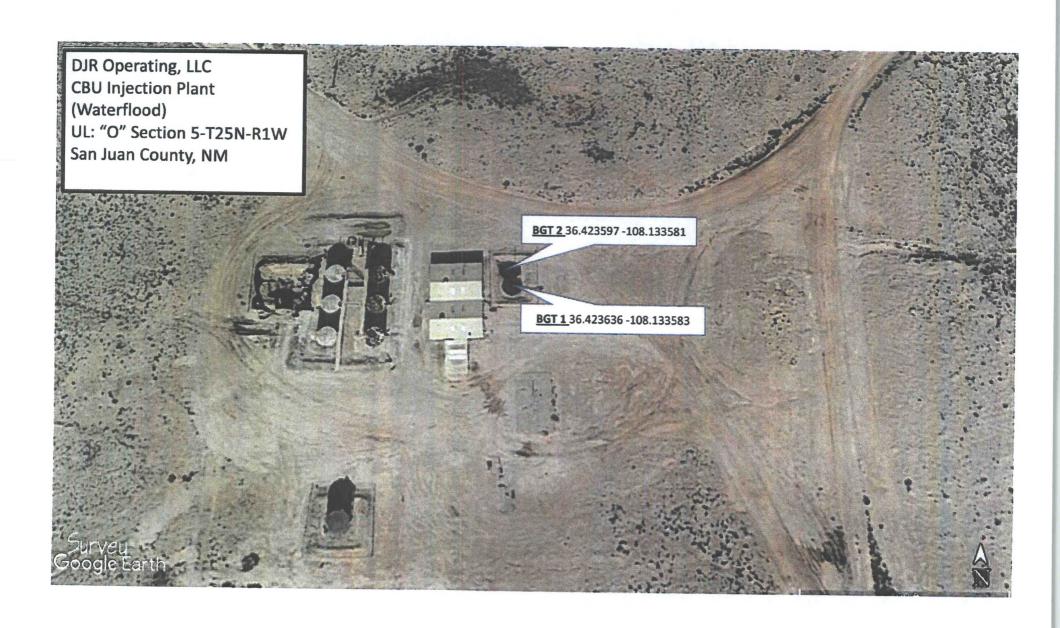

## DJR Operating, LLC Mine Map





