



DIRECTIONAL SURVEY REPORT

**OGX RESOURCES, LLC.
WINCHESTER 5 STATE #1
*EDDY COUNTY, NEW MEXICO***

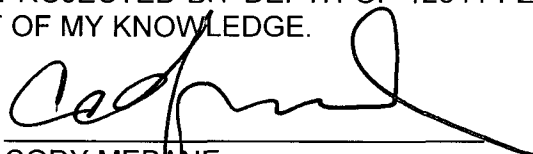
PREPARED BY: CODY MEBANE

DIRECTIONAL SURVEY COMPANY REPORT:

1. NAME OF SURVEYING COMPANY: PATHFINDER ENERGY SERVICES
2. NAME OF PERSON(S) PERFORMING SURVEY:
A) CHUCK HARPER
B) JAY FULTON
3. POSITION OF SAID PERSON(S): (A-F) SURVEYORS (FIELD ENGINEERS)
4. DATE(S) ON WHICH SURVEY WAS PERFORMED: 10/10/07 TO 10/06/07
5. STATE IN WHICH SURVEY WAS PERFORMED: NEW MEXICO
6. LOCATION OF WELL: EDDY COUNTY, NM
7. TYPE OF SURVEY(S) PERFORMED: MWD
8. COMPLETE IDENTIFICATION OF WELL:

OGX RESOURCES, LLC.
WINCHESTER 5 STATE #1
EDDY COUNTY, NM
RIG: PERMIAN #3
9. SURVEY CERTIFIED FROM: 9448 TO 12791 FEET MEASURED DEPTH.

THIS IS TO VERIFY THAT ATTACHED DOCUMENTS SHOWING THE WELL TO BE DISPLACED AT 920.81 FEET ON A BEARING OF 258.46 DEGREES FROM THE CENTER OF THE ROTARY TABLE AT A PROJECTED BIT DEPTH OF 12844 FEET, ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE.


CODY MEBANE
M/LWD SERVICE COORDINATOR

PathFinder Energy Services, Inc.

BHL Report

Page 01/01
Tie-in Date: 10/10/2007
Date Completed: 11/06/2007

OGX RESOURCES L.L.C.
WINCHESTER 5 STATE#1
EDDY COUNTY, NEW MEXICO
Rig:PERMIAN 3
PathFinder Office Supervisor: Francisco Sinisterra
PathFinder Field Engineers:Chuck Harper
Jay Fulton

Survey Horiz. Reference:WELLHEAD
Ref Coordinates: LAT:32.9.16.5112 N LON:104.6.41.3096 W
GRID Reference:NAD83 new mexico east Transverse Mercator
Ref GRID Coord: X: 609995.4100 Y: 420044.5700
North Aligned To:GRID NORTH
Total Magnetic Correction: 8.13° EAST TO GRID
Vertical Section Plane: 255.46
Survey Vert. Reference: 20.00' Kelly Bushing To Ground
Altitude:3004.00' Ground To MSL

Measured Depth	12844.00	(feet)
Inclination	8.55	(deg)
Azimuth	255.94	(deg)
True Vertical Depth	12748.06	(feet)
Vertical Section	919.54	(feet)
Survey X cord	609093.21	(feet)
Survey Y cord	419860.42	(feet)
Survey Lat	32.15408529 N	(deg)
Survey Lon	104.11439142 W	(deg)
Rectangular Corr. N/S	184.15 S	(feet)
Rectangular Corr. E/W	902.20 W	(feet)
Closure Distance	920.81	(feet)
Direction of Closure	258.46	(deg)
Dogleg Severity	3.28	(deg/100ft)

PathFinder Energy Services, Inc.

Survey Report

OGX RESOURCES L.L.C.
WINCHESTER 5 STATE#1
EDDY COUNTY, NEW MEXICO
Rig:PERMIAN 3

PathFinder Office Supervisor: Francisco Sinisterra
PathFinder Field Engineers: Chuck Harper
Jay Fulton

Survey Horiz. Reference:WELLHEAD
Ref Coordinates: LAT:32.9.16.5112 N LON:104.6.41.3096 W
Reference:NAD83 new mexico east Transverse Mercator
Ref GRID Coord: X: 609995.4100 Y: 420044.5700
North Aligned To:GRID NORTH
Total Magnetic Correction: 8.13° EAST TO GRID
Vertical Section Plane: 255.46
Survey Vert. Reference: 20.00' Kelly Bushing To Ground
Altitude:3004.00' Ground To MSL

Survey Calculations by PathCalc v1.97 using Minimum Curvature

Measured Depth (ft)	Incl (deg)	Drift Dir. (deg)	TVD (ft)	Subsea Depth (ft)	Vertical Section (ft)	TOTAL Rectangular Offsets (ft) (ft)		Closure Dist Dir (ft) (deg)		DLS (dg/100ft)	TEMP (F)
TIE IN TO SCIENTIFIC GYRO SURVEY @ 9300' MD.											
9300.00	1.70	265.74	9297.61	9277.61	149.65	73.73 S	135.48 W	154.24@	241.44	0.00	0.00
THE FOLLOWING ARE PATHFINDER MWD SURVEYS.											
9448.00	6.60	275.15	9445.18	9425.18	159.83	73.13 S	146.15 W	163.42@	243.42	3.33	137.17
9480.00	6.51	272.42	9476.97	9456.97	163.29	72.89 S	149.79 W	166.58@	244.05	1.01	140.78
9543.00	7.47	262.58	9539.50	9519.50	170.77	73.27 S	157.42 W	173.63@	245.04	2.43	140.78
9607.00	8.44	272.16	9602.89	9582.89	179.40	73.63 S	166.24 W	181.81@	246.11	2.56	140.78
9671.00	9.58	270.14	9666.10	9646.10	189.05	73.44 S	176.26 W	190.95@	247.38	1.85	140.78
9735.00	10.46	272.60	9729.12	9709.12	199.75	73.16 S	187.39 W	201.16@	248.67	1.53	140.78
9798.00	10.90	271.10	9791.03	9771.03	210.95	72.79 S	199.06 W	211.95@	249.91	0.83	144.39
9862.00	12.31	274.44	9853.72	9833.72	223.23	72.14 S	211.91 W	223.85@	251.20	2.44	144.39
9925.00	14.68	276.29	9914.98	9894.98	237.05	70.75 S	226.54 W	237.33@	252.66	3.82	144.39
9989.00	16.27	271.98	9976.66	9956.66	253.22	69.55 S	243.56 W	253.30@	254.06	3.06	148.01
10053.00	14.86	272.60	10038.31	10018.31	269.66	68.87 S	260.72 W	269.66@	255.20	2.22	148.01
10116.00	15.39	269.70	10099.13	10079.13	285.49	68.54 S	277.15 W	285.50@	256.11	1.47	148.01
10180.00	16.97	266.63	10160.59	10140.59	302.88	69.14 S	294.97 W	302.96@	256.81	2.81	151.62
10213.00	16.71	266.09	10192.18	10172.18	312.27	69.74 S	304.51 W	312.40@	257.10	0.92	155.24
10277.00	18.03	263.98	10253.26	10233.26	331.11	71.41 S	323.54 W	331.33@	257.55	2.28	151.62
10340.00	18.20	258.71	10313.14	10293.14	350.57	74.36 S	342.89 W	350.86@	257.76	2.61	151.62
10404.00	18.03	258.18	10373.97	10353.97	370.45	78.34 S	362.38 W	370.76@	257.80	0.37	155.24
10468.00	17.50	256.25	10434.92	10414.92	389.96	82.66 S	381.42 W	390.28@	257.77	1.24	155.24
10565.00	16.88	252.42	10527.58	10507.58	418.61	90.38 S	409.02 W	418.88@	257.54	1.33	133.55
10625.00	16.36	252.62	10585.08	10565.08	435.75	95.54 S	425.39 W	435.98@	257.34	0.87	133.55
10689.00	15.92	252.56	10646.55	10626.55	453.52	100.86 S	442.36 W	453.71@	257.16	0.69	137.17

PathFinder Energy Services, Inc.

Survey Report

OGX RESOURCES L.L.C.
WINCHESTER 5 STATE#1
EDDY COUNTY, NEW MEXICO
RIG:PERMIAN 3

Page 02/04

Measured Depth (ft)	Incl (deg)	Drift Dir. (deg)	TVD (ft)	Subsea Depth (ft)	Vertical Section (ft)	TOTAL Rectangular Offsets (ft) (ft)		Closure Dist Dir (ft) (deg)		DLS (dg/100ft)	TEMP (F)
10753.00	15.48	251.59	10708.17	10688.17	470.80	106.19 S	458.84 W	470.97@	256.97	0.80	137.17
10784.00	15.48	251.89	10738.04	10718.04	479.06	108.78 S	466.70 W	479.21@	256.88	0.26	140.78
10816.00	14.95	251.75	10768.92	10748.92	487.44	111.40 S	474.68 W	487.57@	256.79	1.66	140.78
10848.00	14.60	251.25	10799.86	10779.86	495.58	113.99 S	482.42 W	495.70@	256.71	1.16	140.78
10878.00	14.33	250.49	10828.91	10808.91	503.05	116.44 S	489.50 W	503.15@	256.62	1.10	140.78
10910.00	13.98	250.01	10859.94	10839.94	510.84	119.09 S	496.86 W	510.93@	256.52	1.15	140.78
10942.00	13.54	248.49	10891.02	10871.02	518.41	121.78 S	503.98 W	518.48@	256.42	1.78	144.39
10974.00	13.01	249.51	10922.17	10902.17	525.71	124.42 S	510.84 W	525.77@	256.31	1.81	144.39
11006.00	13.01	249.17	10953.34	10933.34	532.87	126.96 S	517.58 W	532.92@	256.22	0.24	144.39
11037.00	13.54	249.72	10983.52	10963.52	539.95	129.46 S	524.24 W	539.99@	256.13	1.76	148.01
11069.00	14.07	250.51	11014.59	10994.59	547.56	132.05 S	531.42 W	547.58@	256.05	1.76	148.01
11101.00	13.54	250.04	11045.67	11025.67	555.16	134.63 S	538.61 W	555.18@	255.97	1.69	148.01
11132.00	13.98	250.50	11075.78	11055.78	562.50	137.12 S	545.55 W	562.52@	255.89	1.46	151.62
11164.00	14.07	251.12	11106.82	11086.82	570.23	139.67 S	552.88 W	570.24@	255.82	0.55	151.62
11196.00	13.37	252.33	11137.91	11117.91	577.81	142.05 S	560.08 W	577.81@	255.77	2.36	151.62
11228.00	13.28	252.76	11169.05	11149.05	585.17	144.26 S	567.12 W	585.18@	255.73	0.42	151.62
11260.00	13.10	255.14	11200.21	11180.21	592.47	146.28 S	574.13 W	592.48@	255.71	1.79	155.24
11292.00	13.01	255.77	11231.38	11211.38	599.70	148.10 S	581.13 W	599.70@	255.70	0.53	151.62
11324.00	12.31	256.16	11262.60	11242.60	606.71	149.80 S	587.93 W	606.72@	255.71	2.20	148.01
11355.00	12.05	257.56	11292.90	11272.90	613.25	151.29 S	594.30 W	613.26@	255.72	1.27	148.01
11387.00	12.05	257.97	11324.20	11304.20	619.92	152.70 S	600.83 W	619.93@	255.74	0.27	151.62
11423.00	11.87	258.40	11359.42	11339.42	627.38	154.23 S	608.13 W	627.39@	255.77	0.56	151.62
11454.00	11.96	258.33	11389.75	11369.75	633.77	155.52 S	614.40 W	633.78@	255.80	0.29	151.62
11485.00	11.52	258.90	11420.10	11400.10	640.07	156.77 S	620.58 W	640.08@	255.82	1.47	151.62
11513.00	12.05	255.83	11447.51	11427.51	645.78	158.02 S	626.16 W	645.79@	255.84	2.93	151.62
11545.00	10.82	252.76	11478.87	11458.87	652.12	159.73 S	632.27 W	652.13@	255.82	4.29	151.62
11577.00	9.85	252.56	11510.35	11490.35	657.85	161.44 S	637.75 W	657.87@	255.79	3.03	151.62

PathFinder Energy Services, Inc.

Survey Report

OGX RESOURCES L.L.C.
WINCHESTER 5 STATE#1
EDDY COUNTY, NEW MEXICO
RIG:PERMIAN 3

Page 03/04

Measured Depth (ft)	Incl (deg)	Drift Dir. (deg)	TVD (ft)	Subsea Depth (ft)	Vertical Section (ft)	TOTAL Rectangular Offsets (ft) (ft)		Closure Dist Dir (ft) (deg)	DLS (dg/100ft)	TEMP (F)
11609.00	10.29	254.14	11541.86	11521.86	663.45	163.04 S	643.11 W	663.46@ 255.77	1.62	155.24
11640.00	10.46	257.15	11572.35	11552.35	669.03	164.42 S	648.52 W	669.04@ 255.77	1.83	155.24
11672.00	10.73	257.05	11603.81	11583.81	674.91	165.74 S	654.25 W	674.92@ 255.78	0.85	155.24
11704.00	11.52	257.53	11635.21	11615.21	681.08	167.09 S	660.28 W	681.09@ 255.80	2.49	155.24
11736.00	11.26	257.48	11666.58	11646.58	687.39	168.46 S	666.45 W	687.41@ 255.81	0.81	158.85
11768.00	10.99	259.01	11697.98	11677.98	693.56	169.72 S	672.49 W	693.58@ 255.84	1.25	155.24
11800.00	10.64	258.61	11729.41	11709.41	699.55	170.88 S	678.38 W	699.57@ 255.86	1.12	155.24
11832.00	10.73	259.54	11760.85	11740.85	705.48	172.01 S	684.21 W	705.50@ 255.89	0.61	158.85
11863.00	10.64	260.55	11791.31	11771.31	711.20	173.00 S	689.87 W	711.23@ 255.92	0.67	158.85
11897.00	10.29	258.50	11824.75	11804.75	717.36	174.12 S	695.94 W	717.39@ 255.95	1.50	158.85
11928.00	10.20	259.67	11855.26	11835.26	722.87	175.17 S	701.35 W	722.90@ 255.98	0.73	162.46
11960.00	10.20	259.46	11886.75	11866.75	728.52	176.19 S	706.92 W	728.55@ 256.00	0.12	158.85
11992.00	10.55	264.69	11918.23	11898.23	734.24	176.98 S	712.63 W	734.28@ 256.05	3.14	162.46
12024.00	11.26	268.59	11949.65	11929.65	740.17	177.33 S	718.67 W	740.22@ 256.14	3.20	162.46
12054.00	11.70	271.54	11979.05	11959.05	745.95	177.32 S	724.64 W	746.02@ 256.25	2.45	166.08
12086.00	11.61	272.93	12010.39	11990.39	752.14	177.07 S	731.10 W	752.23@ 256.39	0.92	166.08
12118.00	11.34	272.31	12041.75	12021.75	758.22	176.78 S	737.46 W	758.35@ 256.52	0.93	166.08
12150.00	11.87	273.31	12073.10	12053.10	764.36	176.46 S	743.88 W	764.53@ 256.66	1.77	166.08
12180.00	11.61	273.68	12102.47	12082.47	770.17	176.09 S	749.98 W	770.37@ 256.79	0.90	166.08
12214.00	13.28	274.98	12135.67	12115.67	777.10	175.53 S	757.28 W	777.36@ 256.95	4.98	166.08
12244.00	14.42	275.23	12164.80	12144.80	783.86	174.89 S	764.44 W	784.19@ 257.11	3.81	166.08
12276.00	14.86	275.66	12195.76	12175.76	791.46	174.12 S	772.49 W	791.87@ 257.30	1.42	169.69
12308.00	14.51	275.01	12226.71	12206.71	799.09	173.37 S	780.56 W	799.58@ 257.48	1.21	169.69
12340.00	14.42	276.23	12257.70	12237.70	806.59	172.59 S	788.52 W	807.18@ 257.65	0.99	169.69
12372.00	14.86	275.29	12288.66	12268.66	814.18	171.77 S	796.56 W	814.87@ 257.83	1.56	169.69
12403.00	15.83	273.55	12318.55	12298.55	821.94	171.15 S	804.74 W	822.74@ 257.99	3.46	173.31
12435.00	15.56	272.38	12349.36	12329.36	830.19	170.70 S	813.39 W	831.11@ 258.15	1.30	173.31

PathFinder Energy Services, Inc.

Survey Report

OGX RESOURCES L.L.C.
WINCHESTER 5 STATE#1
EDDY COUNTY, NEW MEXICO
RIG:PERMIAN 3

Page 04/04

Measured Depth (ft)	Incl (deg)	Drift Dir. (deg)	TVD (ft)	Subsea Depth (ft)	Vertical Section (ft)	TOTAL Rectangular Offsets		Closure Dist Dir		DLS (dg/100ft)	TEMP (F)
						(ft)	(ft)	(ft)	(deg)		
12627.00	13.10	258.99	12535.42	12515.42	876.57	173.79 S	860.49 W	877.87@	258.58	2.14	169.69
12655.00	12.93	258.76	12562.70	12542.70	882.86	175.00 S	866.68 W	884.17@	258.58	0.63	162.46
12690.00	12.49	255.05	12596.85	12576.85	890.55	176.74 S	874.18 W	891.87@	258.57	2.65	173.31
12723.00	12.05	254.26	12629.09	12609.09	897.57	178.60 S	880.94 W	898.86@	258.54	1.43	173.31
12759.00	11.34	255.36	12664.34	12644.34	904.86	180.51 S	887.98 W	906.15@	258.51	2.07	173.31
12791.00	10.29	255.58	12695.78	12675.78	910.87	182.02 S	893.80 W	912.14@	258.49	3.28	173.31
STRAIGHT LINE PROJECTION TO BIT @ 12844' MD.											
12844.00	8.55	255.94	12748.06	12728.06	919.54	184.15 S	902.20 W	920.81@	258.46	3.28	0.00

SCIENTIFIC DRILLING CONTROLS

KEEPER GYRO SURVEY
Directional Survey Report
for

OGX RESOURCES

Well Number	:	WINCHESTER 5 STATE COM #1
Well Location	:	EDDY COUNTY, NEW MEXICO
Job Number	:	32K1007905
Location Latitude	:	32.155
Survey Date	:	9-OCT-2007
S.D.C. Personnel	:	ANGEL MADRID
Length Units	:	Feet
North Reference	:	GRID North
Grid Correction	:	-0.12 Degrees
Survey Depth Zero	:	RKB
Proposal Direction	:	255.96
Calculation Method	:	Minimum Curvature

Remarks : The INRUN Survey will be called definitive

S C I E N T I F I C D R I L L I N G C O N T R O L S

Inrun Survey

for

OGX RESOURCES

Page 1

Well No.: WINCHESTER 5 STATE COM

Date : 9-OCT-2007

Job Depth : 3261007905 V.S.

Inc

GRID

Latitude

Proposed Departure

D-leg

(Feet) (Feet) (Feet) Deg. Deg. (Feet) (Feet) /100

0.00	0.00	0.00	0.00	359.88	0.00	0.00	0.00
100.00	100.00	0.11	0.15	291.95	0.05	-0.12	0.15
200.00	200.00	0.58	0.43	247.02	-0.05	-0.59	0.34
300.00	299.98	2.37	1.69	240.33	-0.93	-2.21	1.26
400.00	399.92	5.75	2.26	249.40	-2.35	-5.34	0.65
500.00	499.81	10.42	3.11	253.84	-3.80	-9.79	0.87
600.00	599.65	15.97	3.25	254.24	-5.32	-15.13	0.14
700.00	699.51	21.38	2.96	254.99	-6.76	-20.35	0.29
800.00	799.39	26.18	2.55	260.45	-7.80	-25.04	0.49
900.00	899.30	30.50	2.41	257.62	-8.62	-29.28	0.19
1000.00	999.20	34.82	2.55	261.11	-9.41	-33.53	0.21
1100.00	1099.11	39.17	2.45	253.13	-10.38	-37.78	0.36
1200.00	1199.01	43.62	2.66	253.34	-11.66	-42.05	0.21
1300.00	1298.91	48.15	2.54	253.10	-12.97	-46.39	0.12
1400.00	1398.82	52.18	2.08	254.03	-14.12	-50.26	0.46
1500.00	1498.76	55.65	1.90	256.06	-15.01	-53.61	0.19
1600.00	1598.71	58.77	1.68	257.10	-15.74	-56.65	0.22
1700.00	1698.69	60.95	0.82	260.47	-16.19	-58.78	0.86
1800.00	1798.69	61.69	0.07	187.03	-16.37	-59.49	0.80
1900.00	1898.68	61.27	0.50	73.14	-16.30	-59.08	0.53
2000.00	1998.68	61.11	0.31	250.91	-16.26	-58.92	0.81
2100.00	2098.68	61.75	0.53	220.41	-16.70	-59.48	0.31
2200.00	2198.68	62.62	0.61	232.83	-17.38	-60.20	0.15
2300.00	2298.67	63.37	0.44	209.37	-18.03	-60.81	0.27
2400.00	2398.67	63.86	0.35	213.89	-18.62	-61.17	0.10
2500.00	2498.67	64.26	0.25	216.23	-19.05	-61.47	0.10
2600.00	2598.67	64.74	0.38	237.24	-19.41	-61.88	0.17
2700.00	2698.66	65.42	0.43	241.97	-19.76	-62.49	0.06
2800.00	2798.66	66.17	0.46	243.53	-20.12	-63.18	0.03
2900.00	2898.66	67.10	0.66	234.04	-20.63	-64.01	0.22
3000.00	2998.65	68.22	0.74	231.66	-21.37	-64.98	0.09
3100.00	3098.64	69.45	0.80	231.49	-22.21	-66.03	0.06
3200.00	3198.63	70.55	0.60	230.07	-22.98	-66.98	0.20
3300.00	3298.62	71.56	0.71	225.07	-23.75	-67.82	0.12
3400.00	3398.62	72.57	0.71	217.13	-24.68	-68.63	0.10
3500.00	3498.61	73.51	0.87	202.70	-25.88	-69.30	0.25
3600.00	3598.59	74.48	0.94	205.27	-27.32	-69.94	0.08
3700.00	3698.58	75.47	0.82	207.20	-28.70	-70.62	0.12
3800.00	3798.57	76.56	0.97	212.69	-30.05	-71.40	0.17
3900.00	3898.56	77.83	1.02	212.76	-31.51	-72.34	0.05

S C I E N T I F I C D R I L L I N G C O N T R O L S

Inrun Survey
for
OGX RESOURCES

Page 2

Well No.: WINCHESTER 5 STATE COM

Date : 9-OCT-2007

Job No. : 32K1007905

Proposal : 255.96

Depth (Feet)	T.V.D. (Feet)	V.S. (Feet)	Inc Deg.	GRID Azimuth Deg.	Latitude (Feet)	Departure (Feet)	D-leg /100
-------------------	--------------------	------------------	-------------	-------------------------	----------------------	-----------------------	---------------

4000.00	3998.54	79.14	0.98	216.88	-32.94	-73.34	0.08
4100.00	4098.53	80.35	0.84	214.07	-34.23	-74.26	0.15
4200.00	4198.52	81.45	0.92	209.67	-35.54	-75.07	0.10
4300.00	4298.50	82.68	0.97	219.37	-36.89	-76.00	0.17
4400.00	4398.49	83.89	0.84	212.56	-38.16	-76.94	0.17
4500.00	4498.48	85.06	1.05	209.29	-39.58	-77.78	0.22
4600.00	4598.46	86.26	0.93	211.00	-41.07	-78.64	0.12
4700.00	4698.45	87.35	0.94	205.29	-42.51	-79.41	0.09
4800.00	4798.43	88.53	1.13	207.55	-44.12	-80.22	0.19
4900.00	4898.41	89.90	1.13	212.60	-45.83	-81.21	0.10
5000.00	4998.39	91.34	1.14	212.95	-47.50	-82.28	0.01
5100.00	5098.37	92.62	1.10	200.98	-49.23	-83.16	0.24
5200.00	5198.36	93.72	0.97	206.22	-50.88	-83.88	0.16
5300.00	5298.34	94.90	1.08	208.16	-52.47	-84.70	0.12
5400.00	5398.32	96.03	1.12	196.70	-54.24	-85.42	0.22
5500.00	5498.30	96.98	1.11	193.57	-56.12	-85.93	0.06
5600.00	5598.28	97.90	1.22	192.33	-58.10	-86.39	0.11
5700.00	5698.26	98.82	1.13	192.65	-60.10	-86.83	0.09
5800.00	5798.24	99.68	1.17	190.13	-62.07	-87.23	0.06
5900.00	5898.22	100.55	1.31	189.07	-64.20	-87.59	0.14
6000.00	5998.19	101.47	1.32	190.35	-66.46	-87.97	0.03
6100.00	6098.17	102.38	1.21	190.33	-68.64	-88.37	0.11
6200.00	6198.15	103.49	1.06	212.41	-70.45	-89.06	0.46
6300.00	6298.13	104.88	0.99	223.32	-71.86	-90.14	0.21
6400.00	6398.11	106.53	1.08	244.05	-72.91	-91.58	0.38
6500.00	6498.10	108.36	1.06	242.59	-73.74	-93.25	0.03
6600.00	6598.08	110.15	1.07	238.63	-74.66	-94.87	0.07
6700.00	6698.07	111.78	0.90	235.91	-75.58	-96.32	0.18
6800.00	6798.06	112.94	0.54	230.52	-76.32	-97.33	0.37
6900.00	6898.06	113.59	0.26	249.43	-76.70	-97.91	0.31
7000.00	6998.05	113.86	0.09	307.18	-76.73	-98.18	0.23
7100.00	7098.05	114.08	0.23	291.68	-76.61	-98.43	0.15
7200.00	7198.05	114.30	0.11	306.12	-76.48	-98.70	0.13
7300.00	7298.05	114.60	0.32	287.45	-76.34	-99.04	0.22
7400.00	7398.05	115.08	0.46	310.07	-76.00	-99.61	0.21
7500.00	7498.04	115.64	0.70	313.17	-75.32	-100.37	0.24
7600.00	7598.03	116.63	1.07	300.87	-74.42	-101.61	0.41
7700.00	7698.02	117.81	1.06	311.76	-73.33	-103.11	0.20
7800.00	7798.00	118.84	0.98	309.35	-72.17	-104.46	0.09
7900.00	7897.99	119.84	0.66	287.77	-71.45	-105.67	0.44

S C I E N T I F I C D R I L L I N G C O N T R O L S

Inrun Survey
for
OGX RESOURCES

Page 3

Well No.: WINCHESTER 5 STATE COM

Date : 9-OCT-2007

Job No. : 32K1007905

GRID

Proposal : 255.96

Depth (Feet)	T.V.D. (Feet)	V.S. (Feet)	Inc Deg.	Azimuth Deg.	Latitude (Feet)	Departure (Feet)	D-leg /100
-------------------	--------------------	------------------	-------------	-----------------	----------------------	-----------------------	---------------

8000.00	7997.98	120.90	0.77	288.01	-71.07	-106.85	0.11
8100.00	8097.97	122.15	0.83	277.07	-70.77	-108.21	0.16
8200.00	8197.96	123.38	0.73	285.32	-70.52	-109.54	0.15
8300.00	8297.95	124.74	0.96	271.31	-70.33	-111.00	0.31
8400.00	8397.94	126.20	0.82	280.81	-70.17	-112.54	0.20
8500.00	8497.93	127.68	0.99	270.79	-70.03	-114.10	0.23
8600.00	8597.91	129.41	1.07	273.81	-69.95	-115.90	0.10
8700.00	8697.89	131.32	1.17	258.55	-70.10	-117.83	0.31
8800.00	8797.86	133.67	1.53	260.67	-70.52	-120.15	0.36
8900.00	8897.82	136.51	1.73	256.85	-71.08	-122.94	0.23
9000.00	8997.77	139.71	1.94	258.26	-71.76	-126.06	0.21
9100.00	9097.72	143.01	1.85	256.81	-72.47	-129.29	0.10
9200.00	9197.66	146.24	1.85	256.14	-73.23	-132.43	0.02
9300.00	9297.61	149.32	1.70	265.74	-73.73	-135.48	0.33
9396.00	9393.57	152.30	1.89	261.18	-74.08	-138.46	0.25

The Horizontal Displacement (in Feet) at
Measured Depth 9396.00 is 157.03 in a Direction of 241.85 Degrees