241R -

REPORTS

DATE:

-20-(

Page 1 of 1

Katie Lee

From:	Katie Lee [katie@rthicksconsult.com]	
Sent:	Tuesday, October 20, 2009 2:03 PM	RECEIVED
To:	Edward J. EMNRD Hansen (edwardj.hansen@state.nm.us)	
Cc:	Hack Conder (hconder@riceswd.com); Katie Jones; Lara Weinheimer	OCT 2 1 2009
Subject: EME M-5, NMOCD #1R 0424, plugging report		Environmental Bureau
		Oil Conservation Division


Dear Mr. Hansen,

RT Hicks Consultants is pleased to submit documentation of the plugging and abandonment of MW-1S and MW-2D at EME M-5, (NMOCD #1R-0424) on September 30, 2009. These wells were plugged using a 1% - 3% bentonite slurry and a 3 foot cap of concrete at the surface.


If you have any questions, please contact me at the number below or Hack Conder at the Rice office in Hobbs.

Best regards,

Katie Lee Project Scientist R.T. Hicks Consultants, Ltd. ph. 505-266-5004 fax 505-266-0745 mobile 505-400-7925

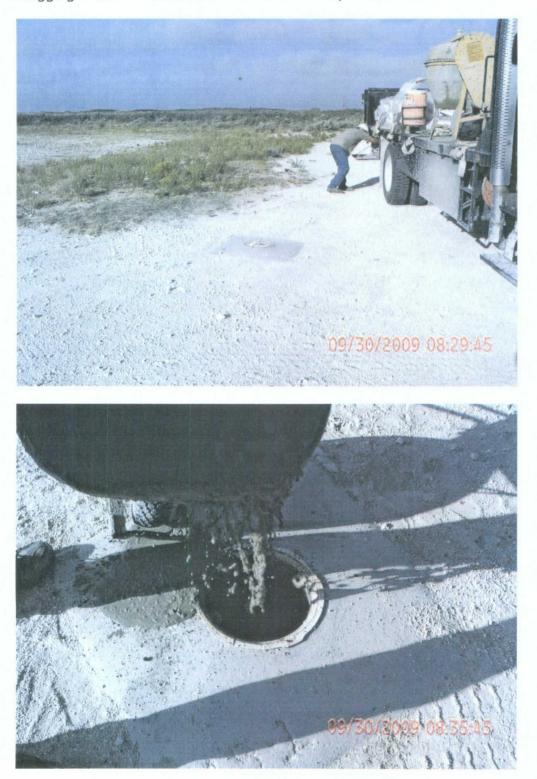

Plugging Wells MW-1S and MW-2D at EME M-5, NMOCD Case #1R 424

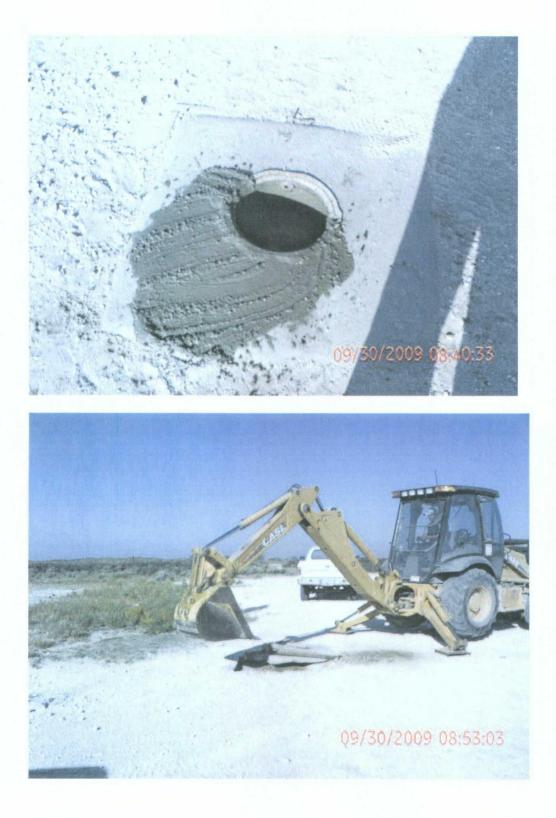



7414 85th Street, Lubbock, Texas 79424-4951

P.O. Box 96, Wolfforth, Texas 79382-0096

Drilling & Pump Professionals

Ph: (806) 866-4026

Fax: (806) 866-4044

harrisoncooper-drilling.com

Plugging Report

Client	Rice Operating	
Contractor	Harrison & Cooper	
Date Completed	9/30/2009	
Site	EME M-5 SWD	
Well ID	MW-1	
Casing Diameter	2"	
Well Depth	52'	
Casing Material	PVC	
Plugging Material	Portland/Bentonite Slurry	
Slurry Interval	3'-52'	
Cement Interval	0'-3'	

Copies: File Email (Lara Weinheimer) Mail (Rice-Hobbs)

Regulated by: Texas Dept. of Licensing & Regulation, Water Well Division, P.O. Box 12157, Austin, TX 78711, (800) 803-9202