



STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION

GARREY CARRUTHERS
GOVERNOR

POST OFFICE BOX 2088
STATE LAND OFFICE BUILDING
SANTA FE, NEW MEXICO 87504
(505) 827-5800

CORRECTED ADMINISTRATIVE ORDER NO. WFX-600

APPLICATION OF PLAINS PETROLEUM OPERATING COMPANY TO EXPAND ITS
WATERFLOOD PROJECT IN THE TODD LOWER SAN ANDRES ASSOCIATED
POOL IN ROOSEVELT COUNTY, NEW MEXICO

ADMINISTRATIVE ORDER
OF THE OIL CONSERVATION DIVISION

Under the provisions of Division Order No. R-6677, Plains Petroleum Operating Company has made application to the Division on July 5, 1990 for permission to expand its Todd Lower San Andres Unit Waterflood Project in the Todd Lower San Andres Associated Pool in Roosevelt County, New Mexico.

NOW, on this 7th day of November, 1990, the Division Director finds that:

- (1) The application has been filed in due form.
- (2) Satisfactory information has been provided that all offset operators have been duly notified of the application.
- (3) No objection has been received within the waiting period as prescribed by Rule 701(B).
- (4) The proposed injection wells are eligible for conversion to water injection under the terms of Rule 701.
- (5) The proposed expansion of the above-referenced waterflood project will not cause waste nor impair correlative rights.
- (6) The application should be approved.

IT IS THEREFORE ORDERED THAT:

The applicant, Plains Petroleum Operating Company, be and the same is hereby authorized to inject water into the San Andres formation through the gross perforated interval from approximately 4312 feet to 4317 feet through 2 3/8-inch plastic lined tubing set in a packer located within 100 feet of the uppermost injection perforation in the wells shown on Exhibit "A" attached hereto for purposes of secondary recovery.

IT IS FURTHER ORDERED THAT:

The operator shall take all steps necessary to ensure that the injected water enters only the proposed injection interval and is not permitted to escape to other formations or onto the surface.

Prior to commencing injection operations into the well, the casing shall be pressure tested from the surface to the packer setting depth to assure the integrity of said casing.

The casing-tubing annulus shall be loaded with an inert fluid and equipped with a pressure gauge at the surface or left open to the atmosphere to facilitate detection of leakage in the casing, tubing or packer.

The injection wells or system shall be equipped with a pressure limiting device which will limit the wellhead pressure on the injection wells to no more than 0.2 psi/ft. of depth to the uppermost perforation as shown on Exhibit "A".

The Director of the Division may authorize an increase in injection pressure upon a proper showing by the operator of said wells that such higher pressure will not result in migration of the injected fluid from the San Andres formation. Such proper showing shall consist of a valid step-rate test run in accordance with and acceptable to this office.

The operator shall notify the supervisor of the Hobbs district office of the Division of the date and time of the installation of injection equipment and of the mechanical integrity test so that the same may be inspected and witnessed.

The operator shall immediately notify the supervisor of the Hobbs district office of the Division of the failure of the tubing, casing or packer in said wells and shall take such steps as may be timely and necessary to correct such failure or leakage.

The subject wells shall be governed by all provisions of Division Order No. R-6677 and Rules 701-708 of the Division Rules and Regulations not inconsistent herewith.


Corrected Administrative Order WFX-600
Plains Petroleum Operating Company
November 19, 1990
Page 3

PROVIDED FURTHER THAT, jurisdiction of this cause is hereby retained by the Division for the entry of such further order or orders as may be deemed necessary or convenient for the prevention of waste and/or protection of correlative rights; upon failure of the operator to conduct operations in a manner which will ensure the protection of fresh water or in a manner inconsistent with the requirements Mwt forth in this order, the Division may, after notice and hearing, terminate the injection authority granted herein.

The operator shall submit monthly progress reports of the project in accordance with Rules 706 and 1115 of the Division Rules and Regulations.

Approved at Santa Fe, New Mexico, on this 7th day of November, 1990.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

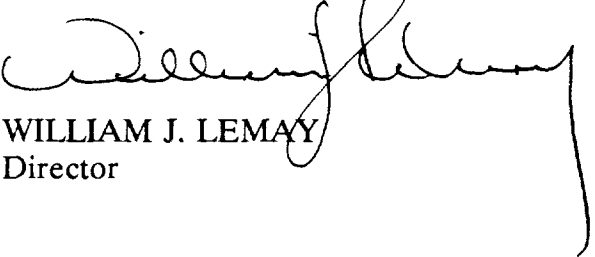

WILLIAM J. LEMAY
Director

S E A L

EXHIBIT "A"
PLAINS PETROLEUM OPERATING COMPANY
TODD LOWER SAN ANDRES UNIT WATERFLOOD PROJECT
DIVISION ADMINISTRATIVE ORDER WFX-600

<i>Well Number</i>	<i>Location</i>	<i>S-T-R</i>	<i>Injection Perforations</i>	<i>Packer Depth</i>	<i>Injection Pressure</i>
8	1980' FNL - 660' FEL (Unit H)	25-7S-35E	4242 - 4284	4162	848
15	330' FSL - 1650' FEL (Unit O)	25-7S-35E	4213 - 4241	4133	843
11	1980' FSL - 1980' FWL (Unit K)	29-7S-36E	4259 - 4289	4178	852
3	660' FNL - 1871' FWL (Unit C)	30-7S-36E	4230 - 4270	4150	846
7	2040' FNL - 1867' FEL (Unit G)	30-7S-36E	4223 - 4272	4143	845
11	1780' FSL - 1980' FWL (Unit K)	30-7S-36E	4269 - 4270	4189	854
11	2120' FSL - 2023' FWL (Unit K)	31-7S-36E	4282 - 4317	4202	840
15	660' FSL - 1980' FEL (Unit O)	19-7S-36E	4235 - 4280	4164	847