


RELEASE 3-8-93

NEW MEXICO
DIVISION
1-12



February 5, 1993

New Mexico Oil Conservation District
P. O. Box 2088
State Land Office Building
Santa Fe, New Mexico 87501

Re: Application for Authorization to Inject
G.H. Mattix Federal No. 7
1980' FSL & 1980' FWL, Sec 3-T24S-R37E
Lea County, New Mexico

Dear Sirs:

Please find enclosed an Application for Authorization to Inject for the above wells. This well is an expansion of the G. H. Mattix Federal Waterflood Project that was originally approved by the Oil Conservation Commission on September 30, 1982 with Order No. R-7082. Should you have any questions in regard to this application, please call me at (915) 683-4434.

Sincerely yours,

Plains Petroleum Operating Company

Mark A. Nieberding
Mark A. Nieberding
Petroleum Engineer

cc: Well File
Reading File

February 5, 1993

New Mexico Oil Conservation District
P. O. Box 1980
Hobbs, New Mexico 88240


Re: Application for Authorization to Inject
G.H. Mattix Federal No. 7
1980' FSL & 1980' FWL, Sec 3-T24S-R37E
Lea County, New Mexico

Dear Sirs:

Please find enclosed an Application for Authorization to Inject for the above wells. This well is an expansion of the G. H. Mattix Federal Waterflood Project that was originally approved by the Oil Conservation Commission on September 30, 1982 with Order No. R-7082. Should you have any questions in regard to this application, please call me at (915) 683-4434.

Sincerely yours,

Plains Petroleum Operating Company


Mark A. Nieberding
Petroleum Engineer

cc: Well File
Reading File

February 5, 1993

Bureau of Land Management
P. O. Box 1778
Carlsbad, NM 88221


Re: Application for Authorization to Inject
G.H. Mattix Federal No. 7
1980' FSL & 1980' FWL, Sec 3-T24S-R37E
Lea County, New Mexico

Dear Sirs:

Plains Petroleum Operating Company respectfully submits the enclosed an Application for Authorization to Inject for the above well. The conversion of this well from producer to water injector will be an expansion of the G. H. Mattix Federal Waterflood Project that was originally approved by the Oil Conservation Commission on September 30, 1982 with Order No. R-7082. Should you have any questions in regard to this application, please call me at (915) 683-4434.

Sincerely yours,

Plains Petroleum Operating Company

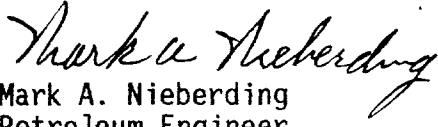
Mark A. Nieberding
Petroleum Engineer

cc: Well File
Reading File

APPLICATION FOR AUTHORIZATION TO INJECT

- I. Purpose: ☒ Secondary Recovery ☐ Pressure Maintenance ☐ Disposal ☐ Storage
Application qualifies for administrative approval? ☐ yes ☐ no
- II. Operator: Plains Petroleum Operating Company
Address: 415 West Wall, Suite 1000, Midland, TX 79701
Contact party: Mark A. Nieberding Phone: 915/683-4434
- III. Well data: Complete the data required on the reverse side of this form for each well proposed for injection. Additional sheets may be attached if necessary.
- IV. Is this an expansion of an existing project? ☒ yes ☐ no
If yes, give the Division order number authorizing the project R-7082.
- V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.
- * VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.
- VII. Attach data on the proposed operation, including:
1. Proposed average and maximum daily rate and volume of fluids to be injected;
 2. Whether the system is open or closed;
 3. Proposed average and maximum injection pressure;
 4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and
 5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).
- *VIII. Attach appropriate geological data on the injection zone including appropriate lithologic detail, geological name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such source known to be immediately underlying the injection interval.
- IX. Describe the proposed stimulation program, if any.
- * X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division they need not be resubmitted.)
- * XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.
- XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground source of drinking water.
- XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form.
- XIV. Certification
- I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.
- Name: Mark A. Nieberding Title Petroleum Engineer
Signature: Mark A. Nieberding Date: 2/16/93
- * If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be duplicated and resubmitted. Please show the date and circumstance of the earlier submittal.

III. WELL DATA

A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:

- (1) Lease name; Well No.; location by Section, Township, and Range; and footage location within the section.
- (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
- (3) A description of the tubing to be used including its size, lining material, and setting depth.
- (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.

- (1) The name of the injection formation and, if applicable, the field or pool name.
- (2) The injection interval and whether it is perforated or open-hole.
- (3) State if the well was drilled for injection or, if not, the original purpose of the well.
- (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
- (5) Give the depth to and name of the next higher and next lower oil or gas zone in the area of the well, if any.

XIV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) the intended purpose of the injection well; with the exact location of single wells or the section, township, and range location of multiple wells;
- (3) the formation name and depth with expected maximum injection rates and pressures; and
- (4) a notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, P. O. Box 2088, Santa Fe, New Mexico 87501 within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

NOTICE: Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.

APPLICATION FOR AUTHORIZATION TO INJECT
G. H. MATTIX FEDERAL #7
LEA COUNTY, NEW MEXICO
February 5, 1993

In addition with Form C-108, Application for Authorization to Inject for the subject well, Plains Petroleum Operating Company submits the following typical well data in accordance with NMOCD requirements.

III. Well Data

See the attached Well Data sheets.

VI. Tabulation of Offsetting Well Data

The attached data sheets provide a description of all of the wells within a 1/2 mile radius around the subject well that penetrate the Queen-Penrose interval. The 1/2 mile circle was used because the subject well are an expansion of an existing approved waterflood project and is surrounded by other waterflood projects in operation within the Queen-Penrose interval.

VII. Proposed Operating Conditions:

- | | |
|--|-----------------------------|
| 1. Average and Maximum Daily Rate: | 400, 1000 BWPD |
| 2. Water Injection System Configuration: | Open |
| 3. Average and Maximum Injection Pressure: | 1500 psig |
| 4. Sources of Injection Fluids: | Produced and
Fresh water |
| 5. Water Injection Purpose: | Secondary Oil
Recovery |

VIII. Geological Data:

The injection zone in the Queen-Penrose between 3400 and 3800' consists of fine grained quartzose sandstone. The fresh water source is the Santa Rosa Formation between 350 and 650'. This unit is comprised of medium grained sandstone units of variable thickness and lateral extent.

IX. Proposed Stimulation Program:

The proposed injection well will be stimulated with approximately 10,000 gals 15% NEFE HCl acid upon conversion. Thereafter, maintenance of injectivity will be obtained with smaller volume acid stimulation treatments as needed.

APPLICATION FOR AUTHORIZATION TO INJECT

G. H. MATTIX FEDERAL #7

LEA COUNTY, NEW MEXICO

February 5, 1993

Page 2

X. Logging or Test Data:

Upon drilling and completing the wells, injectivity test data and well logs will be acquired, reported, and submitted to the appropriate Federal and State offices.

XI. Analysis of Fresh Water:

Attached is a chemical analysis of the fresh water produced from the E. C. Hill 'B' No. 7 WSW located 990' FNL & 330' FWL of Section 35-T23S-R37E. The well is currently producing from the Santa Rosa formation with perforations between 580' to 681'.

XIV. Proof of Notice:

Attached are copies of the certified mail receipts to the surface owner and offsetting leasehold operators within the 1/2 mile radii of the subject wells. In addition, a proof of publication is attached to show that a public advertisement has been published in the Hobbs Sun on September 23, 1992.

STATE OF NEW MEXICO
ENERGY AND MINERALS DEPARTMENT
OIL CONSERVATION DIVISION

IN THE MATTER OF THE HEARING
CALLED BY THE OIL CONSERVATION
DIVISION FOR THE PURPOSE OF
CONSIDERING:

CASE NO. 7662
Order No. R-7082

APPLICATION OF CARTER FOUNDATION
PRODUCTION COMPANY FOR A WATERFLOOD
PROJECT, LEA COUNTY, NEW MEXICO.

ORDER OF THE DIVISION

BY THE DIVISION:

This cause came on for hearing at 9 a.m. on September 1, 1982, at Santa Fe, New Mexico, before Examiner Richard L. Stamets.

NOW, on this 30th day of September, 1982, the Division Director, having considered the testimony, the record, and the recommendations of the Examiner, and being fully advised in the premises,

FINDS:

(1) That due public notice having been given as required by law, the Division has jurisdiction of this cause and the subject matter thereof.

(2) That the applicant, Carter Foundation Company, seeks authority to expand its Blaine-Cade Waterflood Project in the Langlie Mattix Pool, by the injection of water into the Queen formation through its Mattix Federal Wells Nos. 2, 5, 6 located in Units C, E, and O, respectively, in Section 3, Township 24 South, Range 37 East, NMPM, Lea County, New Mexico.

(3) That the proposed injection is not an expansion of said Blaine-Cade project but is in fact a new project.

(4) That the wells in the project area are in an advanced state of depletion and should properly be classified as "stripper" wells.

(5) That the proposed waterflood project should result in the recovery of otherwise unrecoverable oil, thereby preventing waste.

(6) That the operator should take all steps necessary to ensure that the injected water enters only the proposed injection interval and is not permitted to escape to other formations or onto the surface from injection, production, or plugged and abandoned wells.

(7) That the injection wells or injection pressurization system should be so equipped as to limit injection pressure at the wellhead to no more than 900 psi, but the Division Director should have authority to increase said pressure limitation, should circumstances warrant.

(7) That the subject application should be approved and the project should be governed by the provisions of Rules 702 through 708 of the Division Rules and Regulations.

IT IS THEREFORE ORDERED:

(1) That the applicant, Carter Foundation Production Company, is hereby authorized to institute a waterflood project on its Mattix Federal Lease, Langlie Mattix Pool, by the injection of water into the Queen formation through its Mattix Federal Wells Nos. 2, 5, and 6, located in Units C, E, and O, respectively, in Section 3, Township 24 South, Range 37 East, NMPM, Lea County, New Mexico.

(2) That injection into each of said wells shall be through internally coated tubing, set in a packer which shall be located as near as practicable to the uppermost perforation or in the case of an open hole completion, the casing shoe; that the casing-tubing annulus of each injection well shall be loaded with an inert fluid and equipped with an approved pressure gauge or attention-attracting leak detection device.

(3) That the operator shall immediately notify the supervisor of the Division's Hobbs district office of the failure of the tubing or packer in any of said injection wells, the leakage of water or oil from around any producing well, or the leakage of water or oil from any plugged and abandoned well within the project area and shall take such timely steps as may be necessary or required to correct such failure or leakage.

(4) That the injection wells herein authorized and/or the injection pressurization system shall be so equipped as to limit injection pressure at the wellhead to no more than 900 psi, provided however, the Division Director may authorize a higher surface injection pressure upon satisfactory showing that such pressure will not result in fracturing of the confining strata.


(5) That the subject waterflood project is hereby designated the Carter-Mattix Waterflood Project and shall be governed by the provisions of Rules 701 through 708 of the Division Rules and Regulations.

(6) That monthly progress reports of the waterflood project herein authorized shall be submitted to the Division in accordance with Rules 706 and 1115 of the Division Rules and Regulations.

(7) That jurisdiction of this cause is retained for the entry of such further orders as the Division may deem necessary.

DONE at Santa Fe, New Mexico, on the day and year hereinabove designated.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

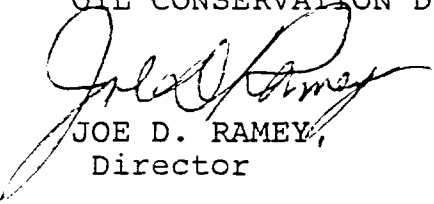


JOE D. RAMEY,
Director

S E A L

S-J. C. R. NO. 1

UL L, Sec. 3-T24S-R37E

P+A 4/52

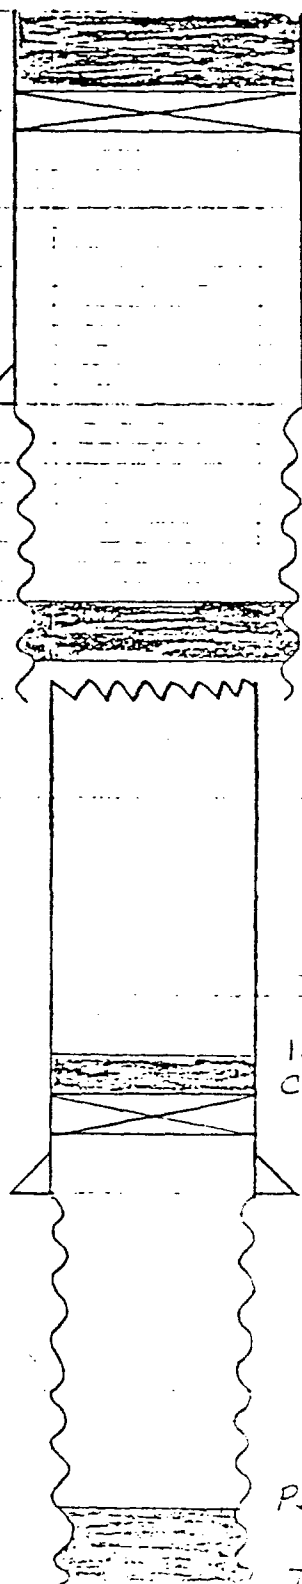

13 SX Cement Plug SURFACE - 25'

Bridge Plug @ 25'

15 1/2 CSG. @ 148' NOT Cemented

10 3/4 CSG. @ 1237' Cemented w/250 SXs

Cement TOP @ SURFACE

34 SX Cement Plug 2445' - 2520'

Shot 7" CSG. OFF @ 2554' + PULLED

15' OF Cement ON TOP OF Retainer

Cement Retainer @ 3466' Squeezed 20 SXs Below Retainer

7" CSG. @ 3484' Cemented w/100 SXs.

CALC. Cement TOP @ 2600'

PBD @ 3625'

TD @ 3826'

APPLICATION FOR AUTHORIZATION TO INJECT

- I. Purpose: ☒ Secondary Recovery ☐ Pressure Maintenance ☐ Disposal ☐ Storage
Application qualifies for administrative approval? ☒ yes ☐ no

II. Operator: Carter Foundation Production Company

Address: 901 W. Missouri, Midland, Texas 79701

Contact party: Robert D. Fitting Phone: (915) 683-4616

III. Well data: Complete the data required on the reverse side of this form for each well proposed for injection. Additional sheets may be attached if necessary.

IV. Is this an expansion of an existing project? ☒ yes ☐ no
If yes, give the Division order number authorizing the project R-3027.

V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.

* VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.

VII. Attach data on the proposed operation, including:

1. Proposed average and maximum daily rate and volume of fluids to be injected;
2. Whether the system is open or closed;
3. Proposed average and maximum injection pressure;
4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and
5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).

*VIII. Attach appropriate geological data on the injection zone including appropriate lithologic detail, geological name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such source known to be immediately underlying the injection interval.

IX. Describe the proposed stimulation program, if any.

* X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division they need not be resubmitted.)

* XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.

XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground source of drinking water.

XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form.

XIV. Certification

I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

Name: Robert D. Fitting

Title Agent

Signature: Robert D. Fitting Date: 7-7-82

* If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be duplicated and resubmitted. Please show the date and circumstance of the earlier submittal.

July 7, 1982

CERTIFIED - RETURN RECEIPT

Getty Oil Company
P. O. Box 1231
Midland, Texas 79702

Re: Carter Foundation Production Company,
G. H. Mattix Federal #2, #5 and #6,
Section 3, T-24-S, R-37-E,
Lea County, New Mexico

Gentlemen:

The Carter Foundation Production Company is in the process of making application to convert the above wells to water injection service. The New Mexico Oil Conservation Division requires that a copy of this application be furnished all offset operators. The enclosed application is being mailed this date to the New Mexico Oil Conservation Division in Santa Fe.

Should you have any questions concerning this application, you may contact us at the address shown above.

Yours very truly,

CARTER FOUNDATION PRODUCTION COMPANY

By: Robert D. Fitting
Robert D. Fitting, Agent

RDF:jd
Encl -

VIII.

GEOLOGICAL DATA

The wells in this area of the Langlie Mattix Pool have encountered oil and gas zones within the Penrose Sand section of the Queen formation. In a 1968 secondary recovery study prepared by Skelly Oil Company (now Getty Oil Company), an east-west cross section depicts the producing zone changes. In this section the westerly wells produce from the Seven Rivers with gradational changes to the east to the Upper Queen and then to the Penrose Sand section of the Lower Queen.

This report also shows that of eight Penrose wells cored, the average permeability was 5.7 millidarcies with an average porosity of 14.2% and a residual oil saturation of 10.1%.

Of the subject injectors, the G. H. Mattix #5 was cored from 3430' to 3633'. The overall pay section was 169' with 58' of net pay. The average porosity was 7.33% with an average permeability of 0.67 millidarcies. In addition, the G. H. Mattix #6 was cored from 3450' to 3605'. The overall pay section of this well was 120' with 41' of net pay. The average porosity was 10.71% with an average permeability of 0.97 millidarcies. The average oil saturation in both of the cored intervals was extremely low, varying from a trace to 20.4%. Volumetric recovery calculations of the oil in place and the recoverable oil are not considered a correct indication of the probable oil reserves. This conclusion is verified by the fact that the six older wells on the G. H. Mattix Lease through the year of 1981 had produced approximately 302,000 barrels or 50,330 barrels of oil per well. It must be assumed that either at the time the Carter Foundation Production Company cores were taken, the degree of reservoir depletion created the low oil saturations, or that fractures within the Penrose are an important part of the reservoir oil voidage. The lithology of the subject wells consists of interbedded sand in dolomite and sandy dolomite. The oil pay occurrence is both in the sand and dolomite facies.

The depth of the presently produced drinkable water well within a mile of these proposed injection wells is 120'. In the southwest part of Unit D, Section 35, T-23-S, R-37-E, the Carter Foundation Production Company has developed a Santa Rosa water supply well at a depth of 681'. The water produced from this well is not considered potable.


VII.

PROPOSED OPERATIONS

The Carter Foundation Production Company proposes to use the subject G. H. Mattix Federal #2, #5 and #6 as cooperative water injection wells to match the injection pattern established by the Getty Oil Company, Myers Langlie Mattix Unit wells. The average initial daily rate should approximate 200 barrels to a maximum of 350 barrels per well per day.

The system will be closed and the average initial injection pressure is estimated from 0 to 50 psi with an after fillup approximate maximum injection pressure of 1600 psi.

The water source will be primarily of produced salt water from the multipay wells owned by Carter Foundation Production Company in Sections 34 and 35, T-23-S, R-37-E, and the subject lease. If the quantity is insufficient, produced Santa Rosa formation brakish water from our approved water supply well, the E. C. Hill Federal #7 in Section 35, T-23-S, R-37-E, will be used to supplement the supply.

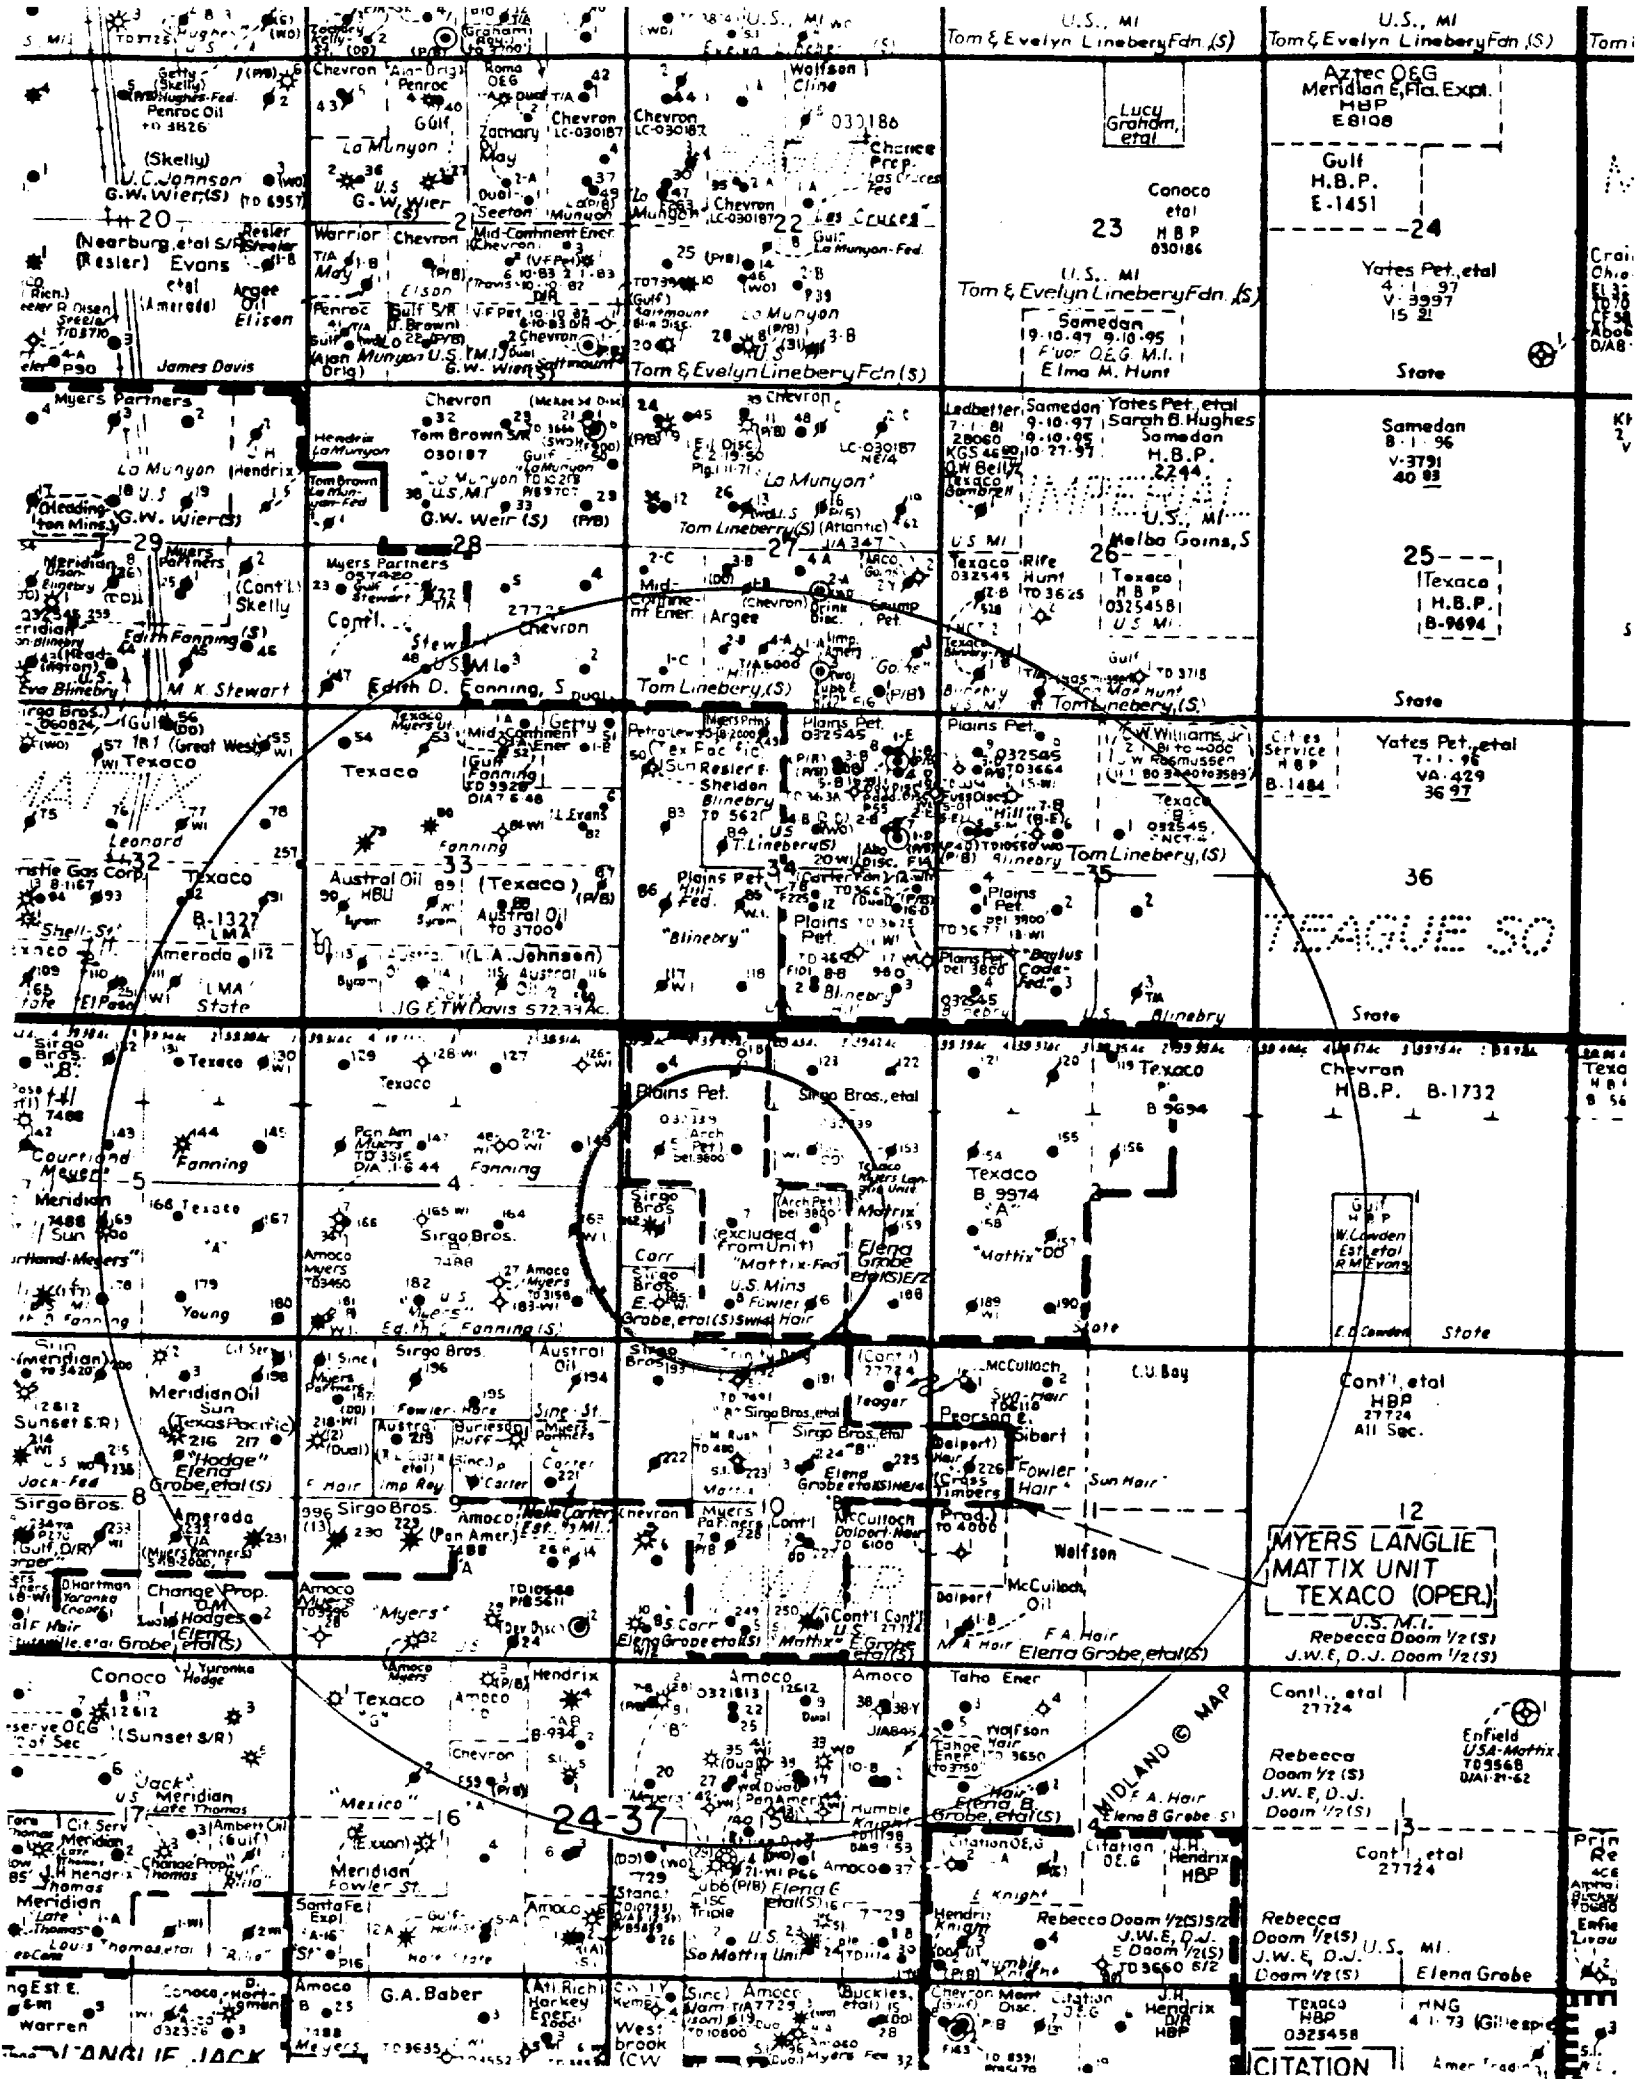

TEAGUE SO

12
MYERS LANGLEIE
MATTIX UNIT
TEXACO (OPER.)

Cont'l., etal
HBP
27724
All Sec.

Rebecca
Doom 1/2 (S)
J.W.E. D.J. Doom 1/2 (S)

Rebecca
Doom 1/2 (S)
J.W.E. D.J. Doom 1/2 (S)

MIDLAND © MAP


24-37

INJECTION WELL DATA SHEET

Plains Petroleum Operating Company
OPERATORG. H. Mattix Federal
LEASE

7	Unit K, 1980' FSL & 1980' FWL	3	24S	37E
WELL NO.	FOOTAGE LOCATION	SECTION	TOWNSHIP	RANGE

Lea	NM
COUNTY/PARISH	STATE

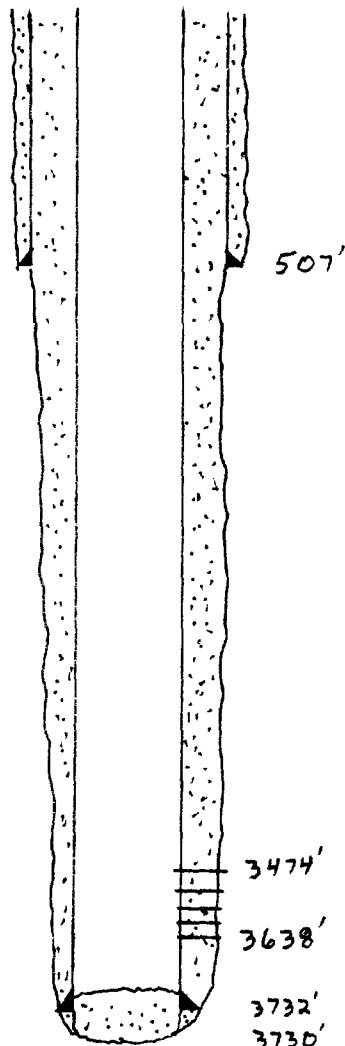SchematicTabular DataSurface CasingSize 8-5/8 " Cemented with 360 sxTOC Surface feet determined by CirculatedHole size 12-1/4"Intermediate CasingSize - " Cemented with - sxTOC - feet determined by -Hole size -Long StringSize 5-1/2 " Cemented with 900 sxTOC Surface feet determined by CirculatedHole size 7-7/8"Total Depth 3730'Injection Interval3474' feet to 3638' feet Perforated
(perforated or open-hole, indicate which)

Tubing size 2-3/8 lined with SALTA PVC set in a
(material)
2-3/8" x 5-1/2" Arlington - Elder Nickel Coated Lockset packer at 3400' feet
(brand and model)
(or describe any other casing-tubing seal).

Other Data

- Name of the injection formation Queen-Penrose Sand
- Name of Field of Pool (if applicable) Langlie Mattix
- Is this a new well drilled for injection? Yes ☐ No ☒
If no, for what purpose was the well originally drilled? Oil and gas production
- Has the well ever been perforated in any other zone(s)? List all such perforated intervals and give plugging detail (sacks of cement or bridge plug(s) used) None
- Give the depth to and name of any overlying and/or underlying oil or gas zones (pools in this area).
Above: Yates - Seven Rivers
Below: Teague (Glorietta - Paddock)

G. H. MATTIX FEDERAL NO. 7 - WATER INJECTION PERMIT

LEASE NAME	WELL NO.	WELL LOCATION				CASING SIZE	DEPTH	CEMENT NO. OF SX	TOP OF CEMENT	TD	COMPLETION INTERVAL	DATE DRILLED	WELL TYPE
		UL	SEC	TWP	RNG								
G. H. MATTIX FEDERAL	1	F	3	24S	37E	13"	200'			3913'	QUEEN-PENROSE	03-Apr-35	PROD
						8-3/4"	1284'	300					
						7"	3407'	400					
G. H. MATTIX FEDERAL	2	C	3	24S	37E	13-3/8"	312'	175	SURFACE	3605'	QUEEN-PENROSE	13-Jan-51	WIW
						7"	3313'	875	SURFACE				
G. H. MATTIX FEDERAL	3	J	3	24S	37E	13-3/8"	323'	175	SURFACE	3574'	QUEEN-PENROSE	22-Jan-51	WIW
						7"	3310'	875	SURFACE				
G. H. MATTIX FEDERAL	5	E	3	24S	37E	9-5/8"	308'	300	SURFACE	3667'	QUEEN-PENROSE	02-Nov-61	WIW
						7"	3665'	1000	SURFACE				
G. H. MATTIX FEDERAL	6	O	3	24S	37E	9-5/8"	311'	300	SURFACE	3671'	QUEEN-PENROSE	17-Nov-61	WIW
						7"	3670'	1000	SURFACE				
G. H. MATTIX FEDERAL	7	K	3	24S	37E	8-5/8"	507'	360	SURFACE	3730'	QUEEN-PENROSE	08-Oct-81	PROD
						5-1/2"	3722'	900	SURFACE				
G. H. MATTIX FEDERAL	8	N	3	24S	37E	8-5/8"	565'	360	SURFACE	3692'	QUEEN-PENROSE	01-Aug-81	PROD
						5-1/2"	3692'	900	SURFACE				
MYERS LANGLEY MATTIX UNIT	152	G	3	24S	37E	9-5/8"	287'	150	SURFACE	3560'	QUEEN-PENROSE	07-Oct-51	WIW
						7"	3328'	800	SURFACE				
MYERS LANGLEY MATTIX UNIT	159	I	3	24S	37E	10-3/4"	261'	150	SURFACE	3586'	QUEEN-PENROSE	06-Feb-52	WIW
						7"	3323'	800	SURFACE				
MYERS LANGLEY MATTIX UNIT	162	L	3	24S	37E	8-5/8"	501'	350	SURFACE	3745'	QUEEN-PENROSE	23-Jul-81	PROD
						5-1/2"	3745'	1100	SURFACE				
MYERS LANGLEY MATTIX UNIT	163	I	4	24S	37E	8-5/8"	1374'	400	SURFACE	3731'	QUEEN-PENROSE	20-Jul-78	WIW
						5-1/2"	3486'	400	SURFACE				
						4"	3218 TO 3731'	125	3200'				
MYERS LANGLEY MATTIX UNIT	185	M	3	24S	37E	8-5/8"	500'	350	SURFACE	3705'	QUEEN-PENROSE	11-Jul-81	WIW
						5-1/2"	3703'	1150	SURFACE				
CARR & HAIR	1	L	3	24S	37E	7"	3484'	100	3300'	3885'	QUEEN-PENROSE	10-Sep-36	P&A

**AQUANESS
WATER ANALYSIS REPORT**

Lab ID No. : Analysis Date: January 25, 1993

Company : Plains Petro.	Sampled By :
Field :	Sample Date: 1-20-93
Lease/Unit : GH Mattix	Salesperson:
Well ID. : #1	Formation :
Sample Loc.:	Location :

CATIONS	MG/L	MEQ/L	ANIONS	MG/L	MEQ/L
Calcium as Ca++	2,141	107	Hydroxyl as OH-	0	0
Magnesium as Mg++	3,244	266	Carbonate as CO3=	0	0
Sodium as Na+ (Calc)	12,398	539	Bicarbonate as HCO3-	913	15
Barium as Ba++	Not Determined		Sulfate as SO4=	2,450	51
Oil Content	0		Chloride as Cl-	29,993	846

Total Dissolved Solids, Calculated: 51,139 mg/L.

Calculated Resistivity: 0.169 ohm-meters	pH: 7.250
mg/L. Hydrogen Sulfide: Not Determined	Specific Gravity 60/60 F.: 1.038
mg/L. Carbon Dioxide: Not Determined	Saturation Index @ 80 F.: +0.712
mg/L. Dissolved Oxygen: Not Determined	@ 140 F.: +1.622

Total Hardness:	18,690	mg/L. as CaCO3
Total Iron:	13.00	mg/L. as Fe++

PROBABLE MINERAL COMPOSITION		
COMPOUND	MG/L	MEQ/L
Ca(HCO3)2	1,212	15.0
CaSO4	3,474	51.0
CaCl2	2,279	41.1
Mg(HCO3)2	0	0.0
MgSO4	0	0.0
MgCl2	12,662	265.9
NaHCO3	0	0.0
Na2SO4	0	0.0
NaCl	31,512	539.0

Calcium Sulfate Scaling Potential
Marginal

Estimated Temperature of Calcium
Carbonate Instability is
57 F.

Cyndi A. Ward
Analyst 12:46 PM

**AQUANESS
WATER ANALYSIS REPORT**

Lab ID No. : Analysis Date: January 25, 1993

Company : Plains Petro. Sampled By :
Field : Sample Date: 1-20-93
Lease/Unit : GH Mattix Salesperson :
Well ID. : Fed Batt Water Tank Formation :
Sample Loc.: Location :

CATIONS	MG/L	MEQ/L	ANIONS	MG/L	MEQ/L
Calcium as Ca++	2,355	118	Hydroxyl as OH-	0	0
Magnesium as Mg++	1,557	128	Carbonate as CO3=	0	0
Sodium as Na+ (Calc)	13,530	588	Bicarbonate as HCO3-	1,020	17
Barium as Ba++	Not Determined		Sulfate as SO4=	1,313	27
Oil Content	0		Chloride as Cl-	27,994	790

Total Dissolved Solids, Calculated: 47,769 mg/L.


Calculated Resistivity: 0.210 ohm-meters pH: 7.790
mg/L. Hydrogen Sulfide: Not Determined Specific Gravity 60/60 F.: 1.033
mg/L. Carbon Dioxide: Not Determined Saturation Index @ 80 F.: +1.431
mg/L. Dissolved Oxygen: Not Determined @ 140 F.: +2.331

Total Hardness: 12,282 mg/L. as CaCO3
Total Iron: 18.00 mg/L. as Fe++

PROBABLE MINERAL COMPOSITION		
COMPOUND	MG/L	MEQ/L
Ca(HCO3)2	1,355	16.7
CaSO4	1,862	27.4
CaCl2	4,090	73.7
Mg(HCO3)2	0	0.0
MgSO4	0	0.0
MgCl2	6,078	127.6
NaHCO3	0	0.0
Na2SO4	0	0.0
NaCl	34,390	588.3

Calcium Sulfate Scaling Potential
Not Present

Estimated Temperature of Calcium
Carbonate Instability is
53 F.

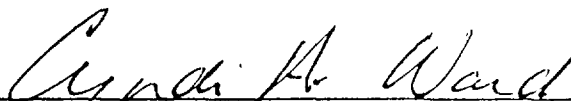
Analyst 12:46 PM

**AQUANEES
WATER ANALYSIS REPORT**

Lab ID No. : Analysis Date: January 25, 1993

Company : Plains Petroleum
Field :
Lease/Unit : GH Mattix
Well ID. : Fed #3
Sample Loc.:

Sampled By :
Sample Date: 1-20-93
Salesperson:
Formation :
Location :

CATIONS	MG/L	MEQ/L	ANIONS	MG/L	MEQ/L
Calcium as Ca++	1,178	59	Hydroxyl as OH-	0	0
Magnesium as Mg++	1,233	101	Carbonate as CO3=	0	0
Sodium as Na+ (Calc)	6,784	295	Bicarbonate as HCO3-	789	13
Barium as Ba++	Not Determined		Sulfate as SO4=	910	19
Oil Content	0		Chloride as Cl-	14,997	423

Total Dissolved Solids, Calculated: 25,890 mg/L.

Calculated Resistivity: 0.245 ohm-meters pH: 7.250
mg/L. Hydrogen Sulfide: Not Determined Specific Gravity 60/60 F.: 1.023
mg/L. Carbon Dioxide: Not Determined Saturation Index @ 80 F.: +0.539
mg/L. Dissolved Oxygen: Not Determined @ 140 F.: +1.469

Total Hardness: 8,010 mg/L. as CaCO3
Total Iron: 8.00 mg/L. as Fe++

PROBABLE MINERAL COMPOSITION

COMPOUND	MG/L	MEQ/L
Ca(HCO3)2	1,048	12.9
CaSO4	1,290	19.0
CaCl2	1,498	27.0
Mg(HCO3)2	0	0.0
MgSO4	0	0.0
MgCl2	4,812	101.0
NaHCO3	0	0.0
Na2SO4	0	0.0
NaCl	17,244	295.0

Calcium Sulfate Scaling Potential
Not Present

Estimated Temperature of Calcium
Carbonate Instability is
60 F.

Cynthia A. Ware
Analyst 12:46 PM

Dickey

Analytical Laboratory, Inc.

P.O. Box 2163
Midland, Texas 79702
915 - 687-2240

Plains Petroleum Operating Company
SWD Injection System
Teague Field
Lea County, NM

Date of Analysis: September 28, 1992
Date of Sample: September 24, 1992
Sample Source: Header
Reference Number: DL-13488
EVA BLINEBRY SWD
SEC. 34-T235-R37E
LEA CO., NM.

A P I W A T E R A N A L Y S I S

DISSOLVED SOLIDS

CATIONS	mg/l	me/l
Sodium, Na	18028	784
Calcium, Ca	3008	150
Magnesium, Mg	1458	120

ANIONS

Chloride, Cl	34435	971
Sulfate, SO4	3207	67
Carbonate, CO3	0	0
Bicarbonate, HCO3	976	16

Total Dissolved Solids 61112

Specific Gravity	1.044
pH	7.6
Hardness as CaCO3, mg/l	13514
Resistivity, ohm-meters @ 75°F	0.120
Sulfate as H2S	present

R.S. Dickey
Dickey Analytical Laboratory, Inc.

Post-It™ brand fax transmittal memo 7671		# of pages > 2
To	M. JC NIEBERDING	
From	RITA Dickey	
Co.	PLAINS PETROLEUM	
Co.	DICKEY ANAL. LAB	
Dept.	Phone # 687-2240	
Fax # 683-8046	Fax # 682-6830	

P.O. Box 2163
Midland, Texas 79702
915 - 687-2240

Plains Petroleum Operating Company
Fresh Water Station
Teague Field
Lee County, NM

Date of Analysis: September 28, 1992
Date of Sample: September 24, 1992
Sample Source: Header
Reference Number: DL-13489

E.C. HILL 'B' No. 7 WSW
SEC. 36-T235-R37E
LEA CO., NM

A P I W A T E R A N A L Y S I S

DISSOLVED SOLIDS

CATIONS	mg/l	me/l
Sodium, Na	272	12
Calcium, Ca	92	5
Magnesium, Mg	73	6

ANIONS

Chloride, Cl	389	11
Sulfate, SO4	340	7
Carbonate, CO3	0	0
Bicarbonate, HCO3	268	4

Total Dissolved Solids 1434

Specific Gravity	1.000
pH	7.8
Hardness as CaCO3, mg/l	531
Resistivity, ohm-meters @ 75°F	4.6
Sulfate as H2S	none detected

R.S. Dickey
Dickey Analytical Laboratory, Inc.



PLAINS
PETROLEUM
OPERATING
COMPANY

February 5, 1993

Mr. J. J. Doom
Star Route
Jal, NM 88252

Texaco E & P
P. O. Box 3109
Midland, TX 79702
Attn: D. D. Ulrich

Re: Notification of Application for Authorization to Inject
G.H. Mattix Federal No. 7
1980' FSL & 1980' FWL, Sec 3-T24S-R37E
Lea County, New Mexico

Dear Mr. Linebery:

Please find enclosed an Application for Authorization to Inject for the above well. This well is an expansion of the G. H. Mattix Federal Waterflood Project that was originally approved by the Oil Conservation Commission on September 30, 1982 with Order No. R-7082. The purpose of this letter is to request a waiver, please sign and return one copy of this letter in the enclosed self-addressed envelope. Any objections or requests for hearing must be filed with the Oil Conservation Division, P. O. Box 2088, Santa Fe, New Mexico 87501. Should you have any other questions in regard to this application, please call me at (915) 683-4434.

Sincerely yours,
PLAINS PETROLEUM OPERATING COMPANY

Mark A. Nieberding
Mark A. Nieberding
Petroleum Engineer

Company _____

Signature _____

Date _____

cc: Well File
Reading File

P 963 193 413

RECEIPT FOR CERTIFIED MAIL

NO INSURANCE COVERAGE PROVIDED
NOT FOR INTERNATIONAL MAIL
(See Reverse)

Sent to Texaco E & P Attn: D. D. Ulrich	
Street and No. P. O. Box 3109	
P.O., State and ZIP Code Midland, TX 79702	
Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom, Date, and Address of Delivery	
TOTAL Postage and Fees	\$
Postmark or Date	
RE: G. H. Mattix 7	

PS Form 3800, June 1985

P 963 193 414

RECEIPT FOR CERTIFIED MAIL

NO INSURANCE COVERAGE PROVIDED
NOT FOR INTERNATIONAL MAIL
(See Reverse)

Sent to Mr. J. J. Doom	
Street and No. Star Route	
P.O., State and ZIP Code Jal, NM 88252	
Postage	\$
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom, Date, and Address of Delivery	
TOTAL Postage and Fees	\$
Postmark or Date	
RE: G.H. Mattix 7	

PS Form 3800, June 1985

SENDER:

- Complete items 1 and/or 2 for additional services.
- Complete items 3, and 4a & b.
- Print your name and address on the reverse of this form so that we can return this card to you.
- Attach this form to the front of the mailpiece, or on the back if space does not permit.
- Write "Return Receipt Requested" on the mailpiece below the article number.
- The Return Receipt Fee will provide you the signature of the person delivered to and the date of delivery.

I also wish to receive the following services (for an extra fee):

- ☐ Addressee's Address
- ☐ Restricted Delivery

Consult postmaster for fee.

3. Article Addressed to:

Texaco E & P
Attn: D. D. Ulrich
P. O. Box 3109
Midland, Texas 79702

4a. Article Number

P 963 193 413

4b. Service Type

- ☐ Registered ☐ Insured
☒ Certified ☐ COD
☐ Express Mail ☐ Return Receipt for Merchandise

7. Date of Delivery

FEB 17 1993

RE: G. H. Mattix 7

5. Signature (Addressee)

8. Addressee's Address (Only if requested and fee is paid)

6. Signature (Agent)

PS Form 3811, November 1990 *U.S. GPO: 1991-287-066

DOMESTIC RETURN RECEIPT

SENDER:

- Complete items 1 and/or 2 for additional services.
- Complete items 3, and 4a & b.
- Print your name and address on the reverse of this form so that we can return this card to you.
- Attach this form to the front of the mailpiece, or on the back if space does not permit.
- Write "Return Receipt Requested" on the mailpiece below the article number.
- The Return Receipt Fee will provide you the signature of the person delivered to and the date of delivery.

I also wish to receive the following services (for an extra fee):

- ☐ Addressee's Address
- ☐ Restricted Delivery

Consult postmaster for fee.

3. Article Addressed to:

Mr. J. J. Doom
Star Route
Jal, NM 88252

4a. Article Number

P 963 193 414

4b. Service Type

- ☐ Registered ☐ Insured
☒ Certified ☐ COD
☐ Express Mail ☐ Return Receipt for Merchandise

7. Date of Delivery

2-17-93

Re: G.H. Mattix 7

5. Signature (Addressee)

8. Addressee's Address (Only if requested and fee is paid)

6. Signature (Agent)

PS Form 3811, November 1990 *U.S. GPO: 1991-287-066

DOMESTIC RETURN RECEIPT

AFFIDAVIT OF PUBLICATION

State of New Mexico,
County of Lea.

I, Kathi Bearden

of the Hobbs Daily News-Sun, a daily newspaper published at Hobbs, New Mexico, do solemnly swear that the clipping attached hereto was published once a week in the regular and entire issue of said paper, and not a supplement thereof for a period

of _____

three weeks.
Beginning with the issue dated

Feb. 10, 1993
and ending with the issue dated

Feb. 12, 1993

Kathi Bearden
General Manager

Sworn and subscribed to before

me this 12th day of

February, 1993

Reagan Gentry
Notary Public.

My Commission expires _____

July 6, 1994
(Seal)

This newspaper is duly qualified to publish legal notices or advertisements within the meaning of Section 3, Chapter 167, Laws of 1937, and payment of fees for said publication has been made.

1984 Bronco II - AM-FM
Plains Petroleum Operating Company (415 West Wall Street, Suite 1000, Midland, Texas 79701, (815) 683-4434, Attention: Mark Nieberding, Petroleum Engineer) intends to convert the G.H. Matix Federal No. 12 well to expand the secondary oil recovery operations in the G.H. Matix Federal Waterflood Project in Sec. 3-T24S-R37E, Lea County, New Mexico. Water will be injected into the Queen-Penrose formation through perforations from 3400' to 3590'. Water will be injected at average and maximum rates of about 400 BWPD and 1000 BWPD; average and maximum expected injection pressures are 1100 and 1500 psig respectively. Interested parties must file objections or requests for hearing with the New Mexico Oil Conservation Division, P.O. Box 2088, Santa Fe, New Mexico 87501 within 15 days.



STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION
HOBBS DISTRICT OFFICE

RECEIVED
FEB 26 AM 9 42

BRUCE KING
GOVERNOR

POST OFFICE BOX 1980
HOBBS, NEW MEXICO 88241-1980
(505) 393-6161

OIL CONSERVATION DIVISION
P. O. BOX 2088
SANTA FE, NEW MEXICO 87501

RE: Proposed:

MC _____
DHC _____
NSL _____
NSP _____
SWD _____
WFX ☒ _____
PMX _____

Gentlemen:

I have examined the application for the:

Plains Petroleum Co. Unit # 7-K 3-24-37
Operator Lease & Well No. Unit S-T-R

and my recommendations are as follows:

OK

Yours very truly

Jerry Sexton
Supervisor, District 1

/ed