



ADMINISTRATIVE ORDER NO. WFX-722

***APPLICATION OF ALTURA ENERGY LTD. TO EXPAND ITS WATERFLOOD
PROJECT IN THE NORTH EUNICE BLINEBRY-TUBB-DRINKARD OIL & GAS POOL
IN LEA COUNTY, NEW MEXICO***

**ADMINISTRATIVE ORDER
OF THE OIL CONSERVATION DIVISION**

Under the provisions of Division Order No. R-8541 as amended, Altura Energy Ltd. has made application to the Division on June 30, 1997 for permission to expand its Northeast Drinkard Unit Waterflood Project in the North Eunice Blinebry-Tubb-Drinkard Oil & Gas Pool in Lea County, New Mexico.

THE DIVISION DIRECTOR FINDS THAT:

- (1) The application has been filed in due form.
- (2) Satisfactory information has been provided that all offset operators have been duly notified of the application.
- (3) No objection has been received within the waiting period as prescribed by Rule 701(B).
- (4) The proposed injection wells are eligible for conversion to injection under the terms of Rule 701.
- (5) The proposed expansion of the above referenced waterflood project will not cause waste nor impair correlative rights.
- (6) The application should be approved.

IT IS THEREFORE ORDERED THAT:

The applicant, Altura Energy Ltd., be and the same is hereby authorized to inject water into the Blinebry, Tubb and Drinkard formations at approximately 5730 feet to approximately 6790 feet through 2 3/8-inch fiberglass lined tubing set in a packer located within 100 feet of the uppermost injection perforations in the wells shown in Exhibit 'A' for purposes of secondary recovery.

IT IS FURTHER ORDERED THAT:

The operator shall take all steps necessary to ensure that the injected water enters only the proposed injection interval and is not permitted to escape to other formations or onto the surface.

Prior to commencing injection operations into the well, the casing shall be pressure tested from the surface to the packer setting depth to assure the integrity of said casing.

The casing-tubing annulus shall be loaded with an inert fluid and equipped with a pressure gauge at the surface or left open to the atmosphere to facilitate detection of leakage in the casing, tubing or packer.

The injection well or system shall be equipped with a pressure limiting device which will limit the wellhead pressure on the injection wells to no greater than .2 psi per foot of depth to the uppermost injection perforations.

The Director of the Division may authorize an increase in injection pressure upon a proper showing by the operator of said well that such higher pressure will not result in migration of the injected fluid from the Blinbry, Tubb or Drinkard formations. Such proper showing shall consist of a valid step-rate test run in accordance with and acceptable to this office.

The operator shall notify the supervisor of the Hobbs district office of the Division of the date and time of the installation of injection equipment and of the mechanical integrity tests so that the same may be inspected and witnessed.

The operator shall immediately notify the supervisor of the Hobbs district office of the Division of the failure of the tubing, casing or packer in said wells and shall take such steps as may be timely and necessary to correct such failure or leakage.


The subject wells shall be governed by all provisions of Division Order No. R-8541 as amended and Rules 702-706 of the Division Rules and Regulations not inconsistent herewith.

PROVIDED FURTHER THAT, jurisdiction of this cause is hereby retained by the Division for the entry of such further order or orders as may be deemed necessary or convenient for the prevention of waste and/or protection of correlative rights; upon failure of the operator to conduct operations in a manner which will ensure the protection of fresh water or in a manner inconsistent with the requirements set forth in this order, the Division may, after notice and hearing, terminate the injection authority granted herein.

The injection authority granted herein shall terminate one year after the effective date of this order if the operator has not commenced injection operations into the subject wells, provided however, the Division, upon written request by the operator, may grant an extension thereof for good cause shown.

DONE at Santa Fe, New Mexico, on this 30th day of September, 1997.

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

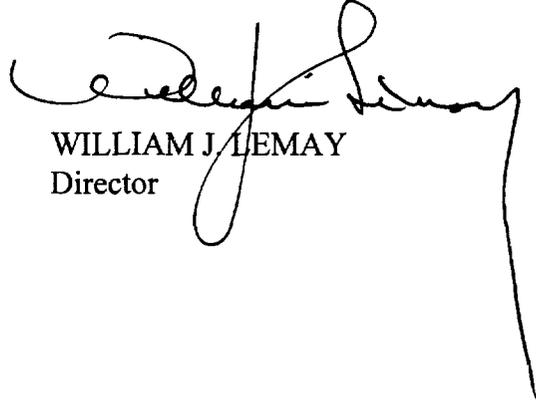

WILLIAM J. LEMAY
Director

S E A L

WJL/BES

cc: Oil Conservation Division - Hobbs
Case File No.9232

EXHIBIT 'A'
 DIVISION ORDER NO. WFX-722
NORTHEAST DRINKARD UNIT WATERFLOOD PROJECT
 APPROVED INJECTION WELLS

<i>Well Name</i>	<i>Well No.</i>	<i>Location</i>	<i>Unit</i>	<i>S-T-R</i>	<i>Injection Interval</i>	<i>Packer Depth</i>	<i>Tubing Size</i>	<i>Injection Pressure</i>
NEDU	116	5790' FSL & 660' FWL	E	2-21S-37E	5790'-6000'	5700'	2 3/8"	1158 PSIG
NEDU	210	2970' FSL & 1650' FEL	G	3-21S-37E	6550'-6790'	6500'	2 3/8"	1310 PSIG
NEDU	215	3175' FSL & 660' FWL	M	2-21S-37E	5760'-6060'	5700'	2 3/8"	1152 PSIG
NEDU	218	3546' FNL & 1700' FWL	K	2-21S-37E	5790'-6100'	5600'	2 3/8"	1158 PSIG
NEDU	408	660' FNL & 660' FEL	A	10-21S-37E	5730'-6740'	5650'	2 3/8"	1146 PSIG
NEDU	611	1980' FNL & 1978' FEL	G	15-21S-37E	5730'-5910'	5650'	2 3/8"	1146 PSIG

All wells in Lea County, New Mexico