

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-43470
1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other: Acid Gas Injection Well <input checked="" type="checkbox"/>		5. Indicate Type of Lease BLM STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator Targa Midstream Services, LLC		6. State Oil & Gas Lease No. NA
3. Address of Operator 1000 Louisiana, Houston, TX 77002		7. Lease Name or Unit Agreement Name Monument AGI D
4. Well Location Surface Unit Letter <u>O</u> : <u>685</u> feet from the SOUTH line and <u>2,362</u> feet from the EAST line Section <u>36</u> Township <u>19S</u> Range <u>36E</u> NMPM County <u>Lea</u>		8. Well Number #2
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,384 (GR)		9. OGRID Number 24650
		10. Pool name or Wildcat AGI: Devonian

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

<p>NOTICE OF INTENTION TO:</p> <p>PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/></p> <p>TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/></p> <p>PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPL <input type="checkbox"/></p> <p>DOWNHOLE COMMINGLE <input type="checkbox"/></p> <p>CLOSED-LOOP SYSTEM <input type="checkbox"/></p> <p>OTHER: <input type="checkbox"/></p>		<p>SUBSEQUENT REPORT OF:</p> <p>REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/></p> <p>COMMENCE DRILLING OPNS. <input type="checkbox"/> P AND A <input type="checkbox"/></p> <p>CASING/CEMENT JOB <input type="checkbox"/></p> <p>OTHER: Quarterly Injection Data Reports <input checked="" type="checkbox"/></p>	
---	--	--	--

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. **Well bore Diagrams attached.**

MONUMENT AGI D #2 MAOP 3000 psig NMOCC Administrative Order SWD-1654.

Quarterly Report for the period from January 1 through March 31, 2021 Pursuant to NMOCC Administrative Order SWD-1654.

This report includes the data and analysis of surface injection pressure, TAG temperature, casing annular pressures as well as downhole injection pressure, and temperature (i.e. injection parameters) for the Monument AGI D #2 for Q1 2021. Based on data for surface injection/annular pressure, the well continues to show excellent integrity throughout all of Q1. For this quarter, the values for injection parameters are generally stable (almost identical to Q1 except correspondingly lower due to 10% lower injection rate) and yielded the following results, which are graphed in detail in attached Figures 1 through 6. The following average values represent the operational condition of the well:

Surface Measurements: Average TAG Injection Pressure: 1,657 psig, Average Annular Pressure: 391 psig, Average Pressure Differential: 1,340 psig, Average Tag Temperature: 106 °F, Average TAG injection rate: 1,804 MSCFD.

Downhole Measurements: Average bottom-hole pressure 4,557 psig, Average bottom-hole Temperature: 117° F.

The data gathered throughout this quarter demonstrate the correlative behavior of the annular pressure with the flowrate, injection pressure and temperature, and show the sensitive and correlative response of the annular pressure confirming that the well has good integrity and is functioning appropriately within the requirements of the NMOCC order. Plant upsets and drops in injection rate caused decreases in injection rates resulting in typical and corresponding changes in the other injection parameters. This well has had its annual required MIT successfully completed in January 2021 and reported to OCD. No mechanical changes to the well or wellhead have been made since the last quarterly report. The Monument AGI D #2 well displays excellent reservoir characteristics easily accommodating the required volumes of TAG from the facility.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE  TITLE Consultant to Targa Midstream Services, LLC DATE 4/11/2021

Type or print name: Alberto A Gutierrez, RG E-mail address: aag@geolex.com PHONE: 505-842-8000

For State Use Only

APPROVED BY: _____ TITLE _____ DATE _____

Conditions of Approval (if any):

FIGURE 1: MONUMENT AGI D #2 INJECTION RATES WHILE OPERATING

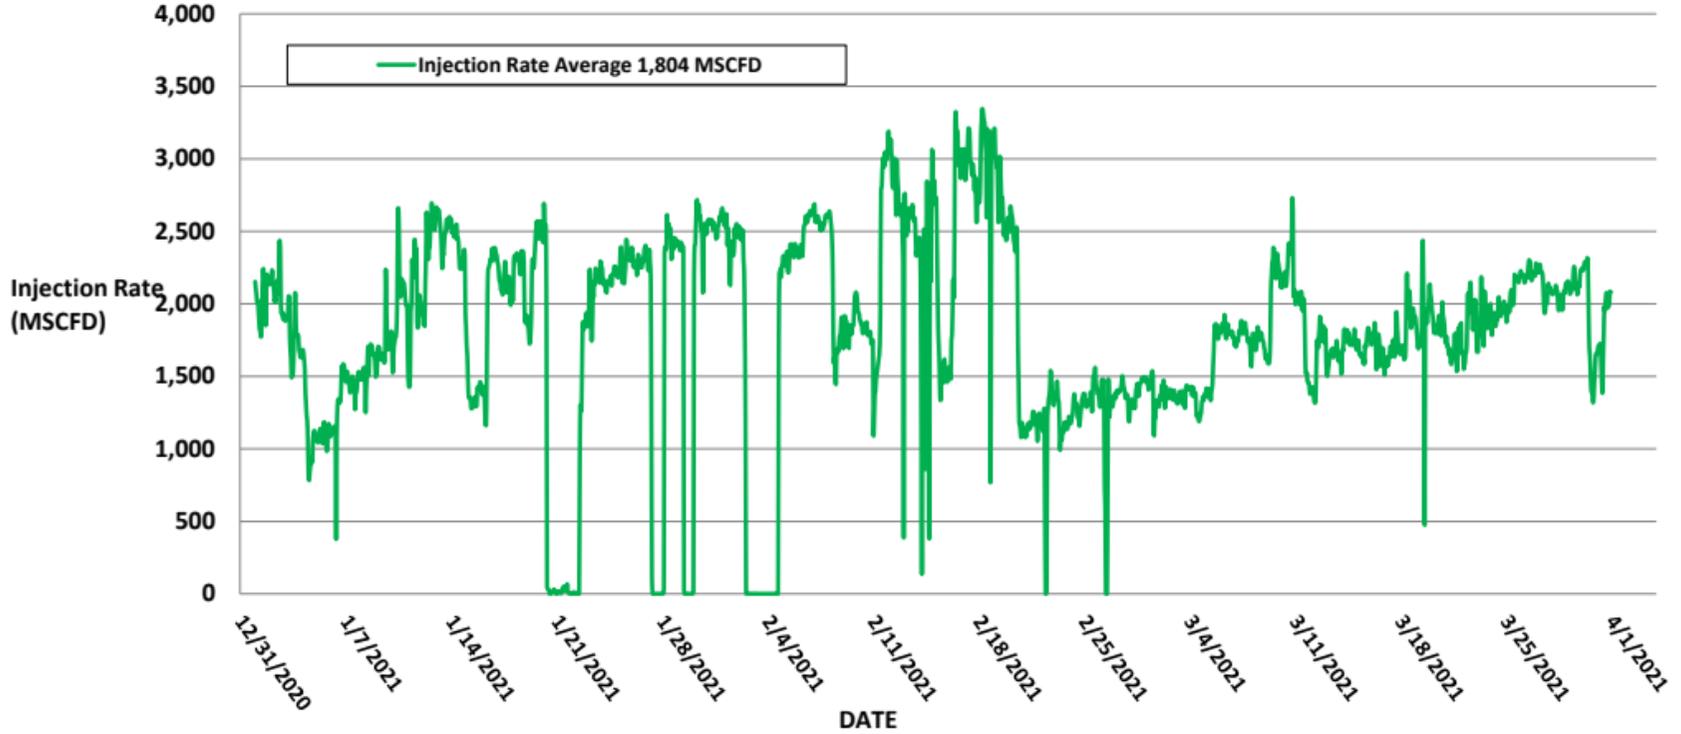


FIGURE 2: MONUMENT AGI D #2 SURFACE INJECTION PRESSURE, ANNULAR PRESSURE AND INJECTION RATE

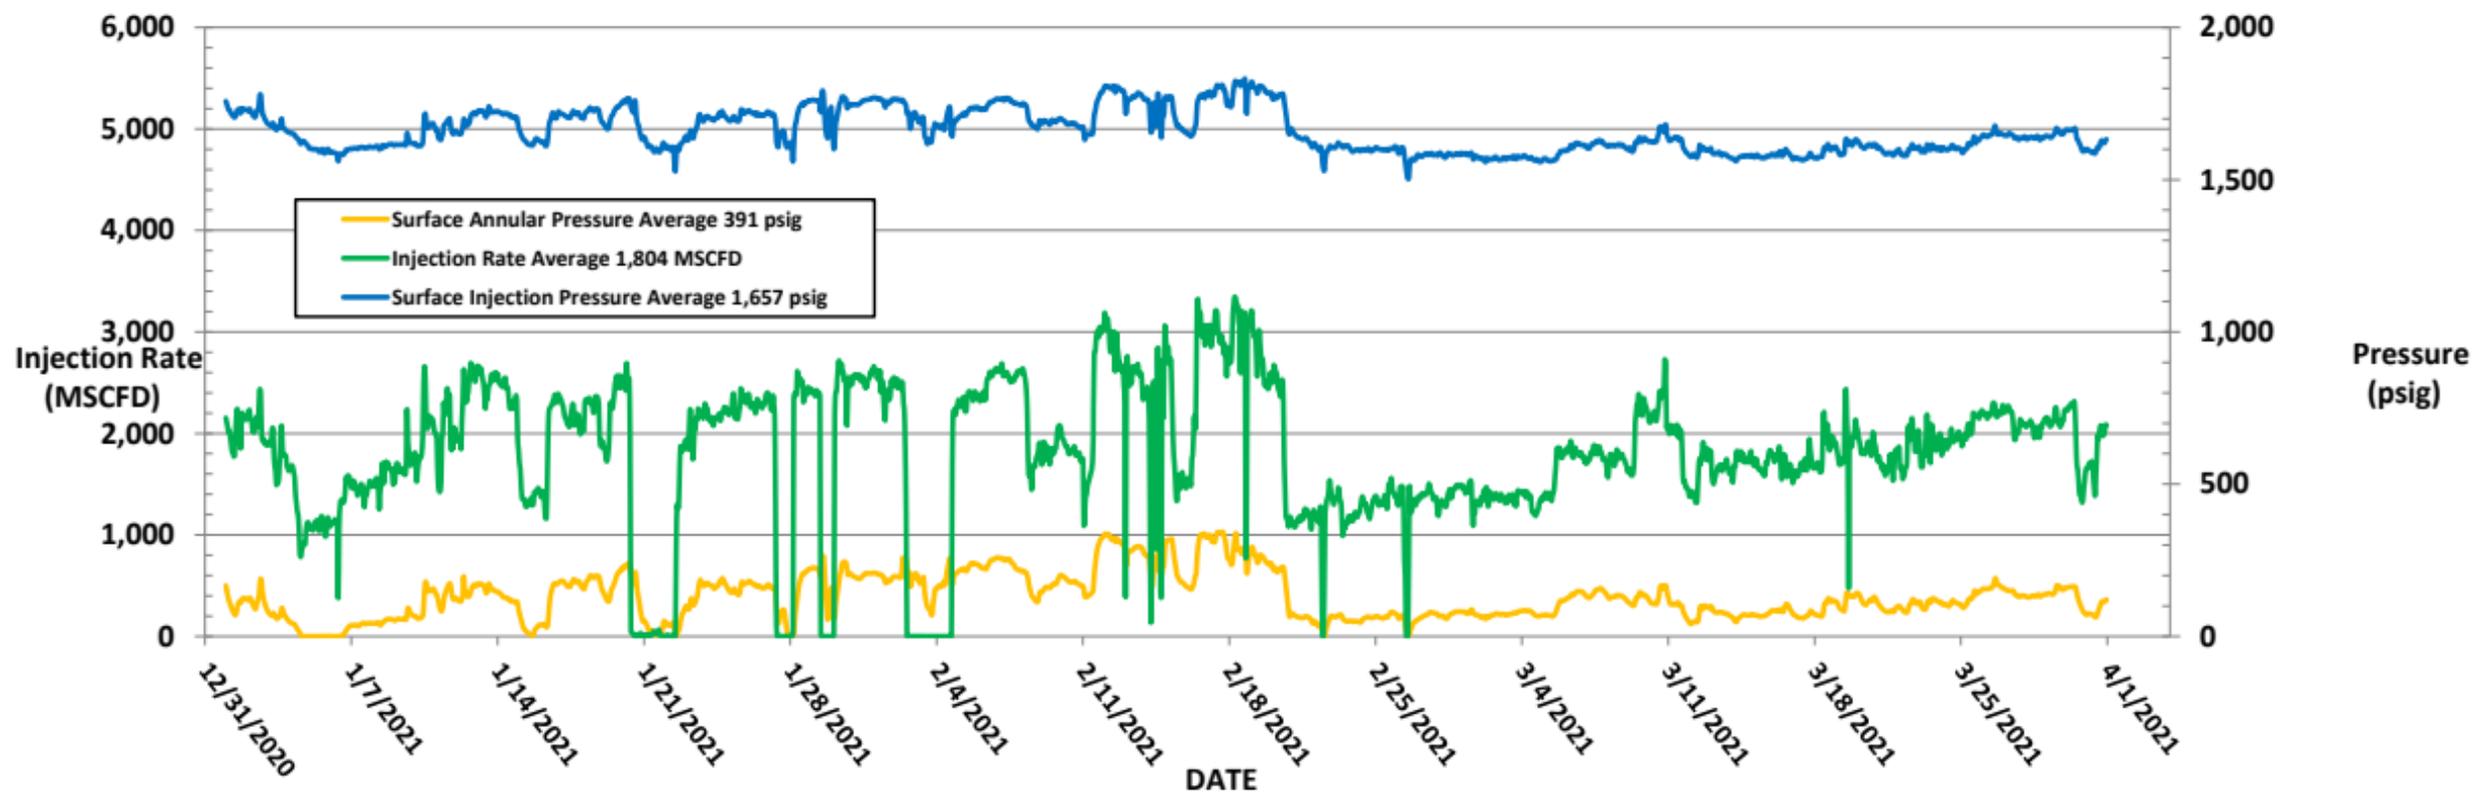


FIGURE 3: MONUMENT AGI D #2 SURFACE INJECTION PRESSURE, ANNULAR PRESSURE AND INJECTION TEMPERATURE

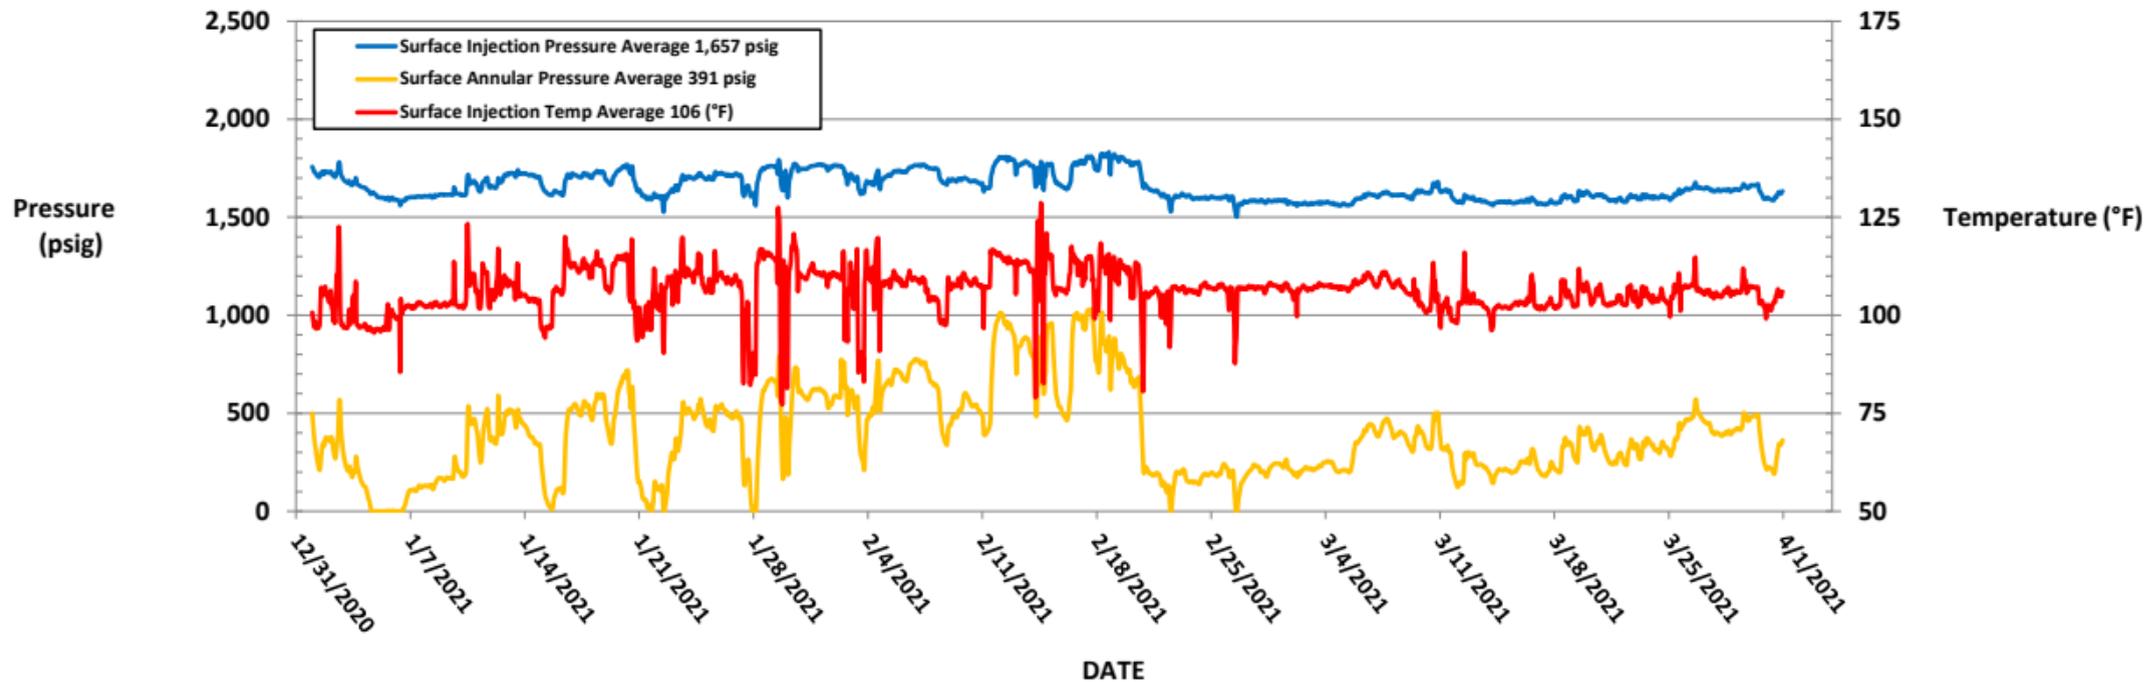


FIGURE 4: MONUMENT AGI D #2 SURFACE INJECTION PRESSURE AND BOTTOM HOLE PRESSURE

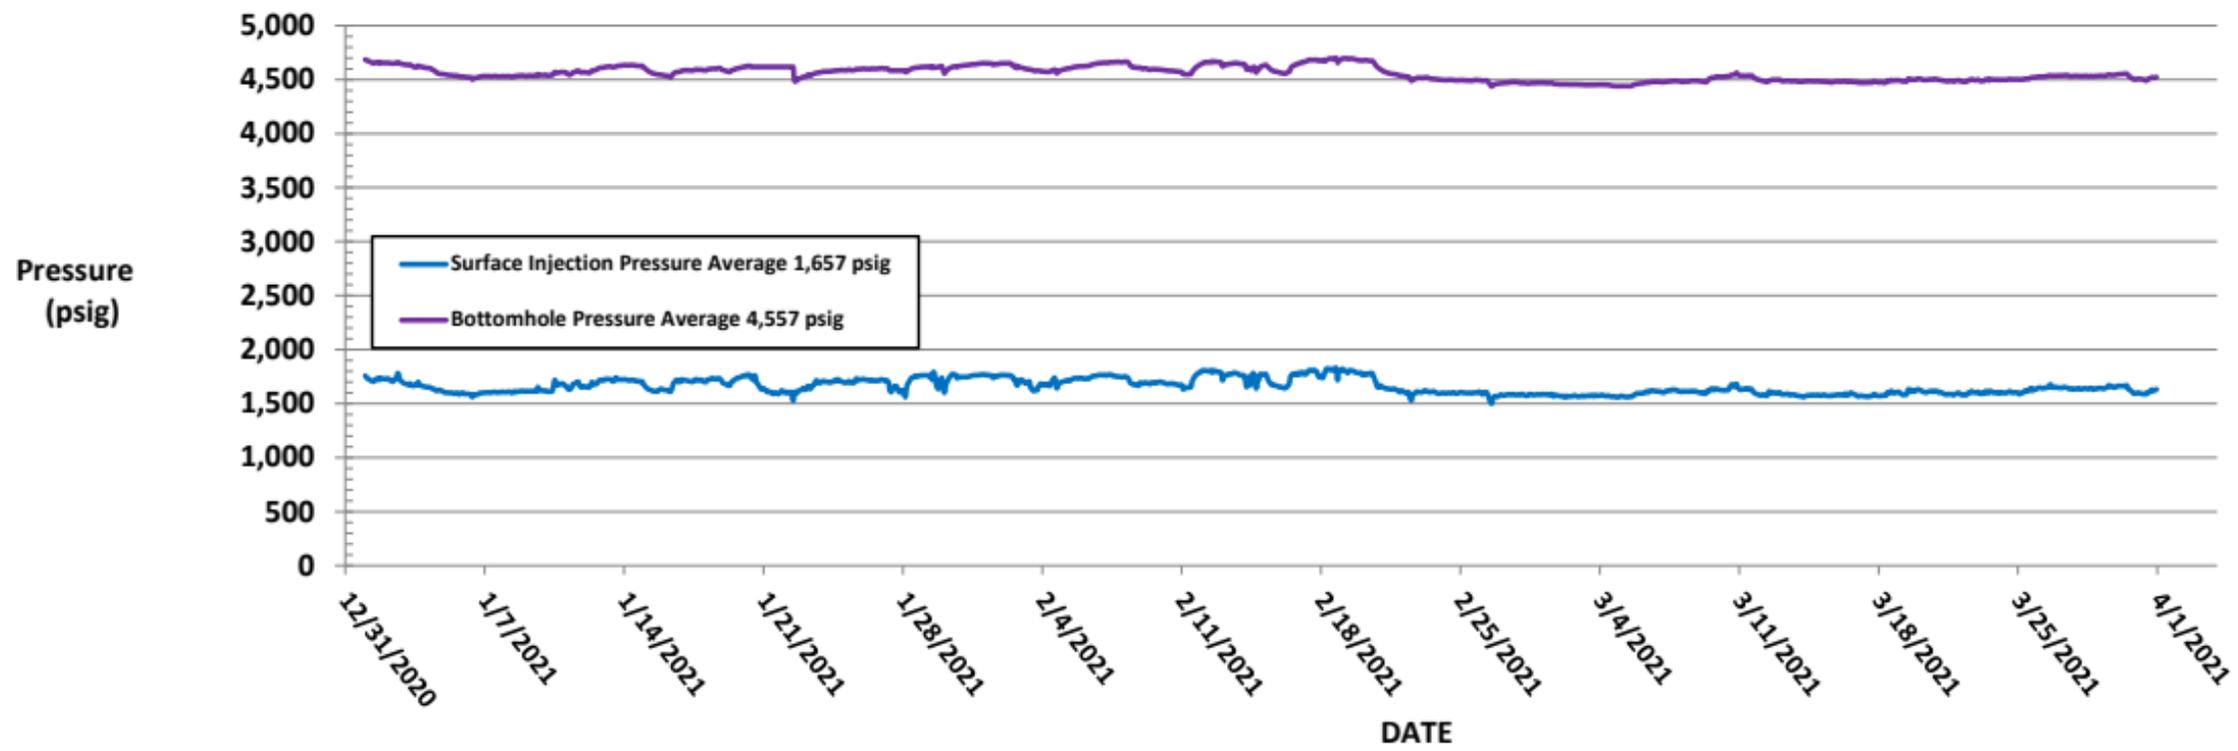


FIGURE 5: MONUMENT AGI D #2 BOTTOM HOLE PRESSURE AND TEMPERATURE


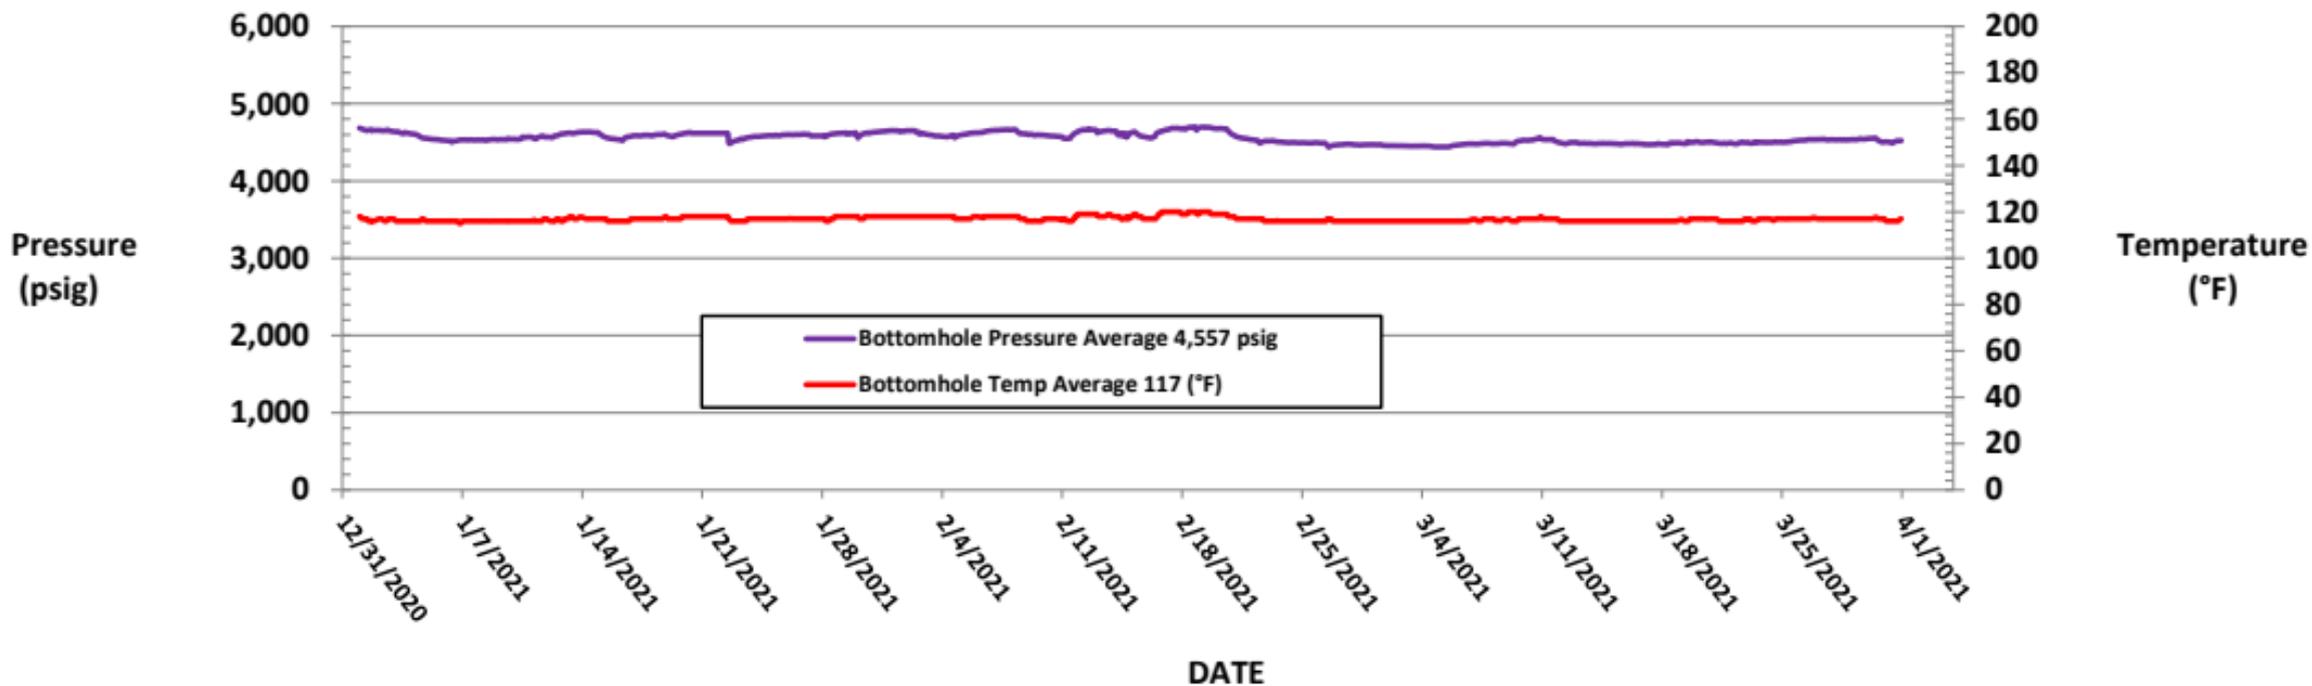


FIGURE 6: MONUMENT AGI D #2 DIFFERENTIAL PRESSURE

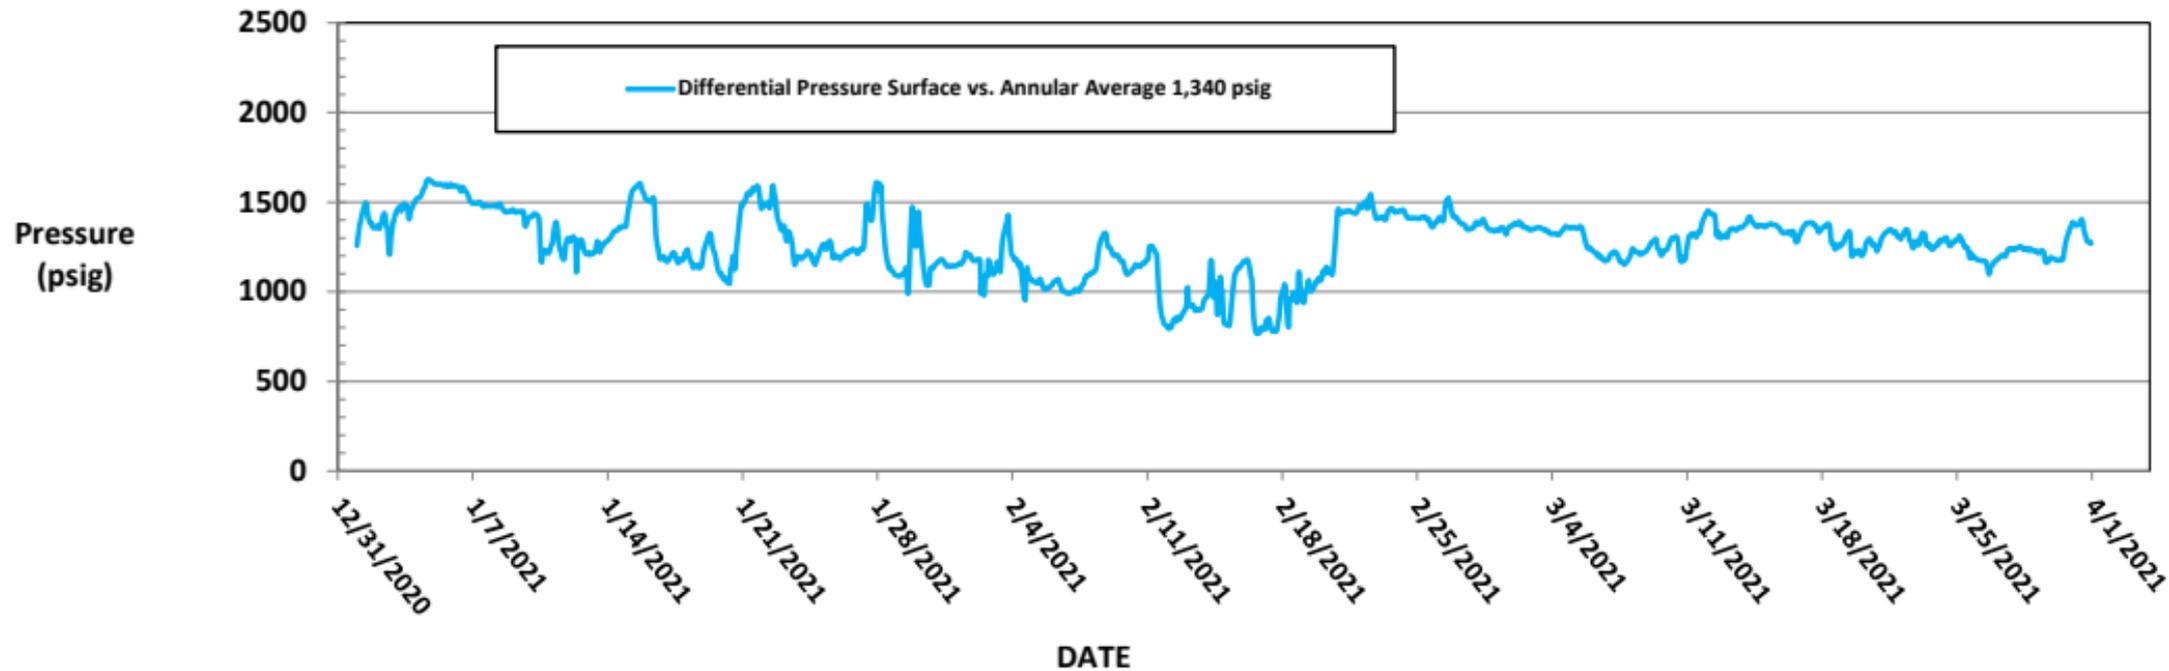


WELL AND TUBING SCHEMATIC
Monument AGI D #2 API# 30-025-43470

Targa Monument AGI D #2 As-Built Well Schematic

Well Name: Monument AGI D #2
API: 30-025-43470
STR: Sec. 36(O), T19S-R36E
County, St.: Lea County, New Mexico

Footage: 685' FSL & 2,362' FEL
Well Type: AGI Devonian
KB/GL: 3,609'/3,584'
Lat, Long: 32.6115308, -103.3063534

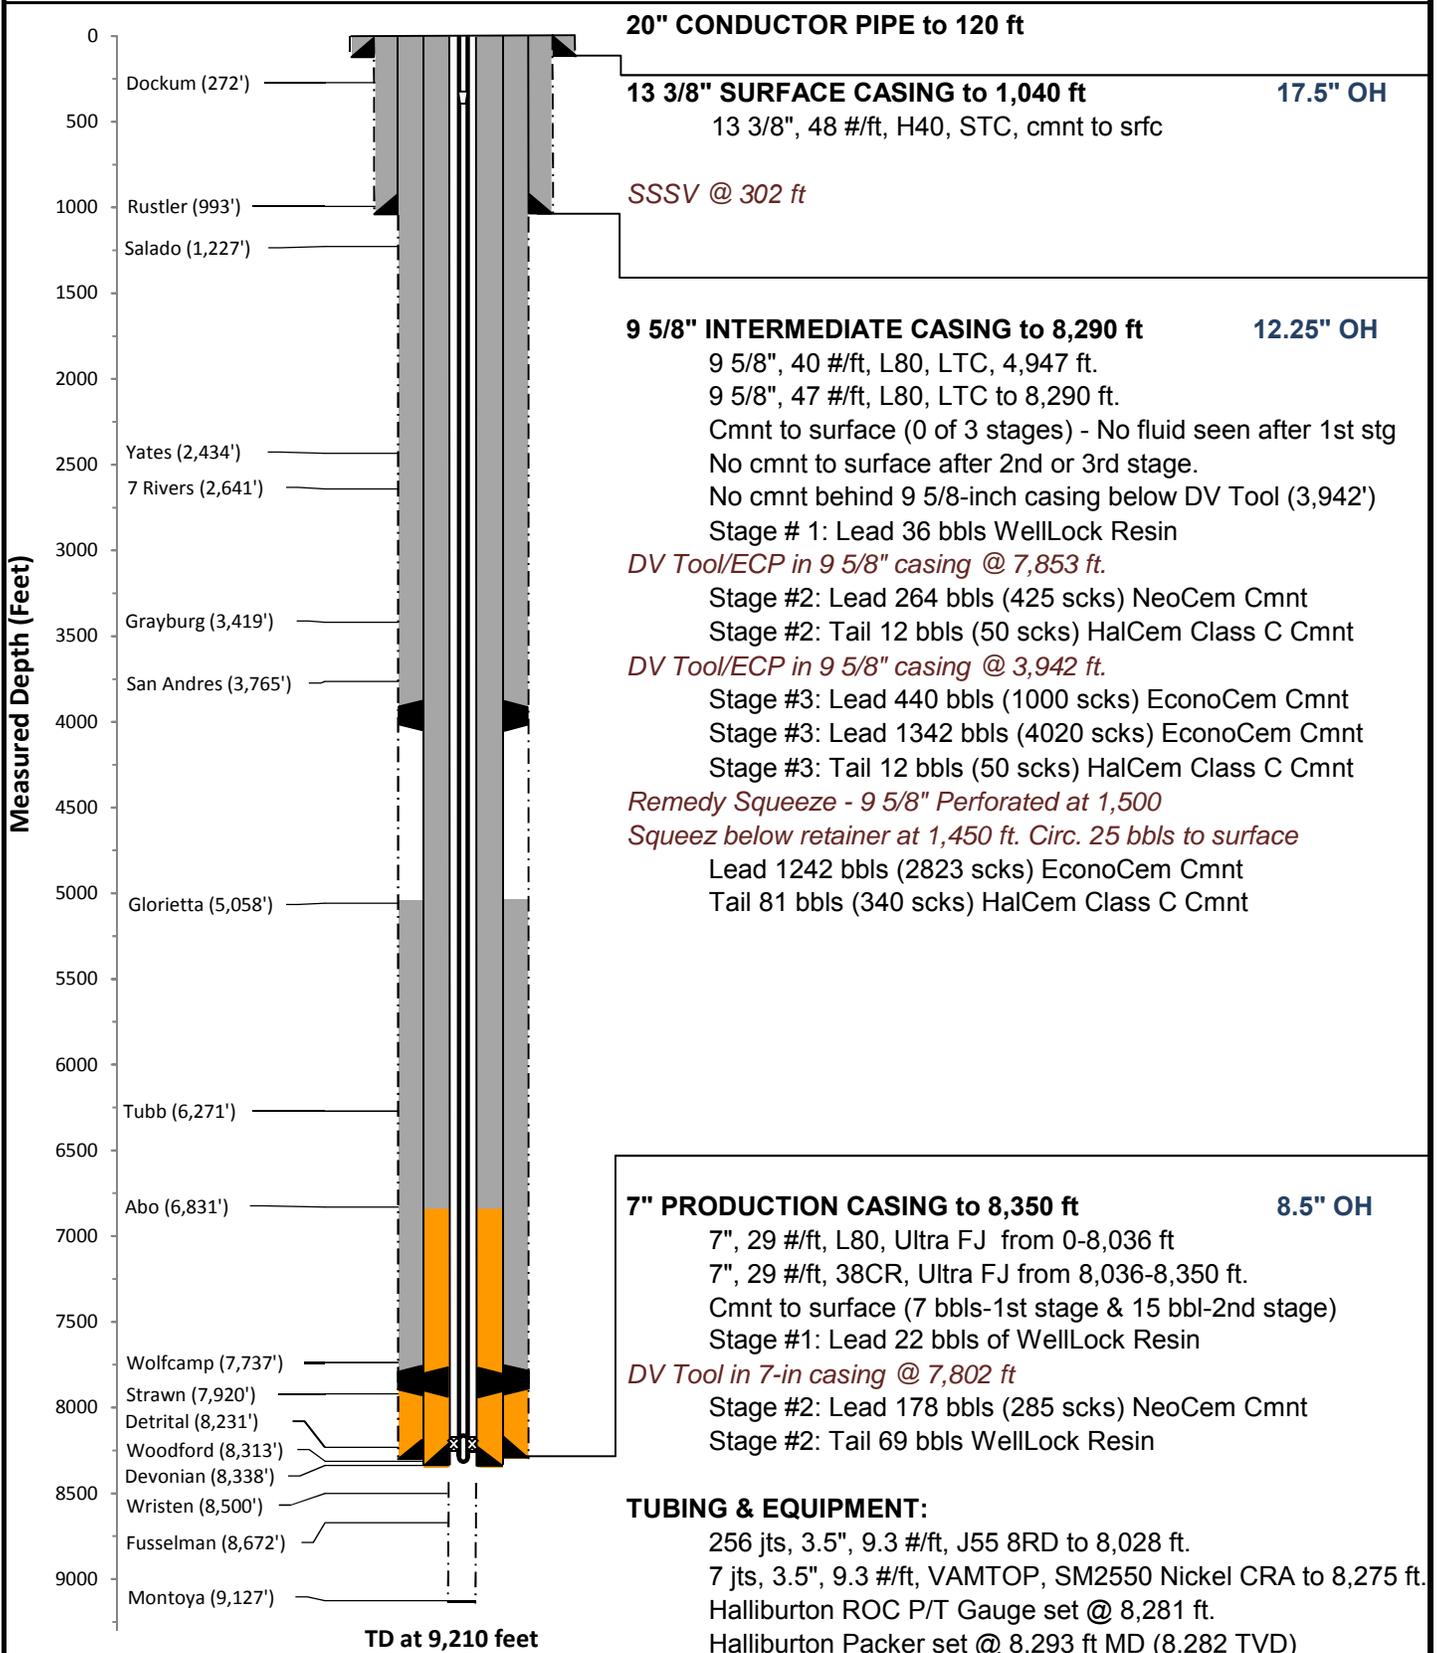

**Schematic is properly scaled
 (Fromation Depths are MD)**

TD Location: Sec. 36, T19S-R36E (734' FSL & 2131' FEL)

Final Installation		Installation	Length	Depth	Description	OD	ID
	1	→	25.00	1.99	KB CORRECTION		
	2	→	0.50	26.99	TUBING HANGER		
	3	→	1	27.49	3.5" 9.3# J55 8RD DOUBLE PIN ADAPTER	3.500	2.992
	2	→	28.75	28.11	1 JOINTS 3.5" 9.3# J55 8RD TUBING	3.500	2.670
	3	→	16.10	56.86	3.5" 9.3# J55 8RD TUBING SUBS(10.05 - 6.05)		
	4	→	220.93	72.96	7 JOINTS 3.5" 9.3# J55 8RD TUBING	3.500	2.670
	5	→	6.04	293.89	3.5" 9.3# J55 8RD TUBING SUB	3.550	2.670
	6	→	2.30	299.93	X OVER 3.5" 9.3# 8RD BOX X 3.5# 12.7# VAMTOP PIN	4.000	2.750
	7	→	4.08	302.23	HALLIBURTON TUBING RETRIEVABLE SAFETY VALVE NICKLE ALLOY 925 15,000# PRESSURE RATING 750 PSI CLOSING 781HRE25224 101757100 SN 0003747503-1 3.5" 12.7# VAMTOP B X P 2300 PSI OPENING 2.562 'X' PROFILE IN TOP OF VALVE.	5.610	2.562
	8	→	2.16	306.31	X-OVER 3.5" 12.7# VAMTOP BOX X 3.5" 9.3# 8RD PIN	4.070	2.750
	9	→	5.97	308.47	3.5" 9.3# J55 8RD TUBING SUB	3.550	2.670
	10	→	7713.30	314.44	248 JOINTS 3.5" 9.3# J55 8RD TUBING	3.500	2.670
	11	→	2.38	8,027.74	X-OVER 3.5" 9.3# 8RD BOX X 3.5" 9.2# VAMTOP PIN	3.970	2.980
	12	→	244.58	8,030.12	7 JOINTS 3.5" 9.2# VAMTOP SM2550 NICKELTUBING	3.500	2.992
	13	→	5.75	8,274.70	3.5" 9.2# VAMTOP BOX X PIN SUB	3.530	2.992
	14	→	4.08	8,280.45	HALLIBURTON ROC GAUGE MANDREL 3.5" VAMTOP BXP 102329817 SN-464192 ROC GAUGE ROC16K175C 101863926 WD#9381-6034 ADDRESS 126 SN-ROC004483	4.670	2.950
	15	→	0.96	8,284.53	X-OVER SUB 3.5" 9.2# VAMTOP BOX X 2.875" 6.5# VAMTOP PIN	3.930	2.441
	16	→	6.09	8,285.49	X-OVER SUB 2.875" 6.5# VAMTOP BOX X PIN	2.900	2.441
	17	→	1.11	8,291.58	2.313" 'X' NIPPLE 2.875" 6.4# VAMTOP BOX X PIN	3.240	2.313
	A				HALLIBURTON SEAL ASSEMBLY		
	a-1	→	1.73	8,292.69	STRAIGHT SLOT LOCATOR 2.875" VAMTOP BOX X 2.875 NU 10 INCOLOY 925 (212S3270-D)(102582273)(SN-0003781099-1)	3.950	2.431
	a-2	→	1.00	8,294.42	SEAL UNIT 212MSF32500-D 102666617 SN 0003779766-5 2.875" NU 10 RD INCOLOY 925	3.200	2.380
	a-3	→	6.06	8,295.42	3 EXTENSIONS 2.875 NU 10 RD 2.06' EACH NICKEL ALLOY 925 (212X32500-D) (120056337)(SN-0003777400-1)	3.200	2.347
	a-4	→	4.00	8,301.48	4 -SEAL UNITS 3.250" X 2.875" NU 10RD NICKEL ALLOY 925 1 EA- (212MSF32500-D)(102666617)(SN 0003779766-3 3-EA (212MSA3200-D)(102666512)(SN 0003779766-1 0003779766-4 0003779766-2	3.200	2.380
	a-5	→	0.52	8,305.48	(FLOUREL SEALS SAP# 100014586 AFLAS SEALS SAP# 100006529) MULE SHOE GUIDE 2.875" NU 10RD NICKEL ALLOY 925 (812G32500-D) (10143327)(SN-0003777382-1)	3.200	2.380
	A				LAND HANGER WITH 26,000# COMPRESSION PUTS 20,000# COMPRESSION ON PACKER PICK UP WEIGHT IS 68,000# SLACK OFF IS 64,000#		
	18	→	3.99	8,292.69	HALLIBURTON PACKER ASSEMBLY HALLIBURTON 7" 23-38# BWD PERMANENT PACKER WITH 3.250" BORE, 4" 8UN BOX THREAD, INCOLOY 925 (212BWD7007-D)(101302623) WAS RUN ON W/L AND TOP @ 8292.69' ELEMENTS @ 8294'	5.690	3.250
	19	→	9.47	8,296.68	SEAL BORE EXTENSION INCOLOY 925 4" 8UN PXP (PN212N11584)(101468460)(SN-0003744131-1)	4.750	3.250
	20	→	0.56	8,306.15	X-OVER 4" 8UN BOX X 2.875" 6.5# 8RD INCOLOY 925 (212N9343)(101159929-A)(SN-0003777396-1)	5.000	2.430
	21	→	8.10	8,306.71	PUP JOINT 2.875" 6.5# EU 8RD INCOLOY 925	2.880	2.380
	22	→	1.21	8,314.81	HALLIBURTON 2.188" 'R' LANDING NIPPLE INCOLOY 925 (811R21807-D) (102362504) (SN- 0003777399-2) NICKEL ALLOY 925	3.670	2.188
	23	→	8.09	8,316.02	PUP JOINT 2.875" 7.9# EU 8RD INCOLOY 925	2.880	2.290
	24	→	1.31	8,324.11	HALLIBURTON 2.125" 'R' LANDING NIPPLE (811R21286) (102667285) (SN- 0003781497-1) NICKEL ALLOY 925	3.940	2.125
	25	→	4.10	8,325.42	PUP JOINT 2.875" 6.5# EU 8RD INCOLOY 925	2.880	2.380
	26	→	0.58	8,329.52	WIRELINE RE-ENTRY GUIDE 2." 9.3# VAM INCOLOY 925	3.950	2.441
				8,330.10	BOTTOM OF ASSEMBLY		
					EOC @ 8348' TD @ 9210'		
					DIESEL USED FOR PACKER FLUID		

Filename: