

# Lynx Petroleum Consultants, Inc.

P.O. Box 1708  
3325 Enterprise Drive  
Hobbs, New Mexico 88241

505 392-6950 Fax: 505 392-7886

August 20, 2002

Mr. Guy Baber  
Pronghorn Management Corp.  
P.O. Box 1772  
Hobbs, NM 88241

Re: Proposed San Andres SWD Operations

Dear Guy:

Per your request, I have calculated the water volumes required to sweep the south offset wellbore using the following assumptions:

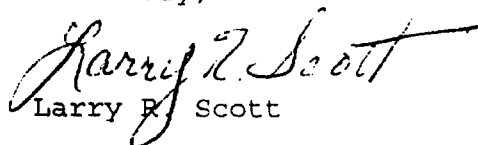
1. Reservoir height = 34 ft.
2. Reservoir porosity = 15 percent
3. All water currently contained in the reservoir is movable.
4. Distance to the south offset well is 1320 ft.

These numbers yield a total volume requirement of 4.97 million barrels or approximately 9 years of operation at 1500 barrels per day.

Your well was logged (electric logs) with conventional resistivity devices, but no direct measurement of porosity. Nevertheless, deep resistivities in the zone of interest run from 1 to 7.5 ohm which will yield water saturations approaching 100% with most any reasonable combination of formation water resistivity and porosity. The south offset well was reported by the original operator to be 29 feet downdip of your well, indicating that it too will be wet in the correlative zone.

Good luck with your application and don't hesitate to call if you have any additional questions.

Sincerely,

  
Larry R. Scott

Pronghorn Exhibit 6  
Case No. 12905

NMOCD CASE NO. 13686  
APRIL 27, 2006  
DKD, LLC  
EXHIBIT NO. 12