

APPLICATION FOR AUTHORIZATION TO INJECT

- I. Purpose: ☒ Secondary Recovery ☐ Pressure Maintenance ☐ Disposal ☐ Storage
Application qualifies for administrative approval? ☐ Yes ☒ No
- II. Operator: Great Western Drilling Company
Address: P.O. Box 1659 Midland, Texas 79702
Contact party: Dennis L. Hendrix Phone: (915) 682-5241
- III. Well data: A. Well data for each injection well covered by this application has been provided in the attached table (**Attachment A**) and attached wellbore schematics (**Attachments B.1 thru B.5**).
B. Additional required information for each injection well covered by this application is provided in **Attachment C**.
- IV. Is this an expansion of an existing project? ☐ Yes ☒ No
- V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.
> > A map has been attached as **Attachment D** that identifies the area of review for all proposed injection wells.
- VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.
> > A table of data has been provided on the wells in the "area of review" as **Attachments E1 & E2**. Also, wellbore schematics have been provided of all plugged wells in this "area of review" and are **Attachments F.1 thru F.11**.
- VII. Attach data on the proposed operation. The appropriate data has been included as **Attachments G1 & G2**.
- VIII. Attach appropriate geological data on the injection zone including appropriate lithologic detail, geological name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such source known to be immediately underlying the injection interval.
> > The required geological data is included as **Attachment H**.
- IX. Describe the proposed stimulation program, if any.
> > The proposed stimulation program is described in **Attachment H**.
- X. Attach appropriate logging and test data on the well, if not on file with the Division. **All logs are on file.**
- XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.
> > The analyses are included as **Attachments I**, with the location map included as **Attachment J**.
- XII. Not applicable to this project.
- XIII. Applicants must complete "Proof of Notice" section. Proof is provided by certified receipt stubs included.
- XIV. Certification

I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

Name: Dennis L. Hendrix Title: Operations Engineer

Signature:  Date: 08/30/94

If the information required under Section VI, VIII, X, and XI above has been previously submitted, it need not be duplicated and resubmitted. Please show the date and circumstance of the earlier submittal. _____

**GREAT WESTERN DRILLING COMPANY
C-108 APPLICATION TO INJECT
SOUTH CARTER SAN ANDRES UNIT WF PROJECT**

LIST OF ATTACHMENTS

Attachment A: Table of well data for each proposed injection well.
(III. A.)

Attachment B.1-B.5: Wellbore schematics of each proposed injection well.
(III. A.)

Attachment C: Additional information for each proposed injection well.
(III. B.)

Attachment D: Two-mile map that identifies "area of review" w/ 1/2 mi.
(V.) radius'.

Attachment E.1-E.2: Table of well data for each well in the "area of review".
(VI.)

Attachment F.1-F.11: Schematics of all plugged wells in the "area of review".
(VI.)

Attachment G.1-G.2: Data on the proposed operation.
(VII.)

Attachment H: Geologic data on injection zone.
(VIII. & IX.) Description of the proposed stimulation program.

Attachment I: Chemical analyses of two or more fresh water wells within
one mile (XI.) one mile of any proposed injection well.

Attachment J: Map showing location of fresh water wells sampled.
(XI.)

Page 1

LEASE Effie Carter WELL # 2 FIELD Carter South
 LOCATION 330 FSL + 2310 FWL COUNTY Lea STATE N.M.
Sec 5, T-18-S, R 39E Completed 9-1-57

ELEVATION: GL 3632 KDB 3652
 CASING: SURFACE 8 5/8 CSG GR 24 WT
@ 548 W/ 500 SX. TOC Surf
 PRODUCTION 5 1/2 CSG GR 14 WT
@ 5139 W/ 100 SX. TOC 4748 Calc.

INITIAL COMPLETION: FORMATION: Appears to
be Natural OH completion w/ 22,000
gals acid (5129-5182). 9-1-57.

SUBSEQUENT WORKOVERS AND RECONDITIONING:

2 3/8" Duoline 10
PVC-lined tbg
@ 5079'

TOC - 4748' Calc
7 7/8" Hole

Guiberson Model
G6 PKR @ 5084'

DEPTH 5129

4 3/4" OH

TOTAL DEPTH

5210

PRODUCING EQUIPMENT DATA:

PUMPING UNIT SIZE _____ MAX. SL _____

PUMP DATA _____ SN @ _____

RODS _____

TUBING 2 3/8 Duoline 10 PVC-lined tbg @ 5160

REMARKS:

Guiberson Model G6 PKR @ 5084

7/24/62 A.M.

LEASE Effie Carter WELL # 3 FIELD Carter South
 LOCATION 1980 FWL + 1650 FSL COUNTY Lea STATE N.M.
Sec 5, T-18S, R-39E Unit K Completed 10-27-57

11" Hole
 TOC - Surf

DEPTH 478

ELEVATION: GL 3626 KDB
 CASING: SURFACE 8 5/8 CSG GR 24 WT
 @ 478 W/ 500 SX. TOC Surf
 PRODUCTION 5 1/2 CSG GR 14 WT
 @ 5094 W/ 100 SX. TOC 4713

INITIAL COMPLETION: FORMATION: Appears to be
Natural OH completion w/ 15,000 gals
.15% acid. 10-27-57

SUBSEQUENT WORKOVERS AND RECONDITIONING:

2 3/8" Duoline 10
 PVC-lined tbg @ 5044'

7 7/8" Hole
 TOC - 4713'

Guiberson Model
 G6 pkc @ 5049'

DEPTH 5094

4 3/4" OH
 TOTAL DEPTH

5235

PRODUCING EQUIPMENT DATA:

PUMPING UNIT SIZE _____ MAX. SL _____

PUMP DATA _____ SN @ _____

RODS _____

TUBING 2 3/8 Duoline 10 PVC-lined tbg @ 5044'

REMARKS:

Guiberson Model G6 pkc @ 5049'

LEASE S.P. Johnson WELL # 2 FIELD South Carter (San Andres)LOCATION 990FSL - 990FWL COUNTY Lea STATE N.Mex
Sec 5 - 18S - 39ECompleted 4-11-58

ELEVATION: GL 3636 KDB
 CASING: SURFACE 8 5/8 CSG GR 24 WT
 @ 344 W/ 200 SX. TOC Circ
 PRODUCTION 5 1/2 CSG GR 15 1/2 WT
 @ 5097 W/ 200 SX. TOC 4335
 INITIAL COMPLETION: FORMATION: 6H Completion
Acidize w/ 4000 gals acid.

11" Hole
 TOC-SURF

DEPTH 344

SUBSEQUENT WORKOVERS AND RECONDITIONING:

2 3/8" Duoline 10
 PVC-lined tbg set
 @ 5047'

TOC-4335'
 7 7/8" Hole

Guiberson Model G6
 PKR @ 5052'

DEPTH 5097

43/4" OH
 PBDT 5235

TOTAL DEPTH

5246

PRODUCING EQUIPMENT DATA:

PUMPING UNIT SIZE _____ MAX. SL _____

PUMP DATA _____ SN @ _____

RODS _____

TUBING 2 3/8 Duoline 10 PVC-lined tbg @ 5047'

REMARKS:

Guiberson Model G6 PKR @ 5052'

LEASE McQueen WELL # 2 FIELD Carter South
 LOCATION 1650 FNL + 2310 FWL COUNTY Lea STATE N.M.
Sec 8, T18S - R39E Unit F Completed 10-10-57

ELEVATION: GL 3628 KDB
 CASING: SURFACE 8 7/8 CSG GR 24 WT
 @ 571 W/ 500 SX. TOC Surf
 PRODUCTION 5 1/2 CSG GR 14 WT
 @ 5095 W/ 100 SX. TOC 4914

INITIAL COMPLETION: FORMATION: San Andres
10-10-57 Natural OH completion. Acidize
w/6000 gals acid 5266-5250. Frac w/4,000
gals 1st oil w/4000 # sd.

SUBSEQUENT WORKOVERS AND RECONDITIONING:

12-2-58 Perf 5040-5046 w/4 SPF Acidize
w/5000 gals 28% acid.

3-11-71 Perf 5012-5026 w/1 SPF acidize w/
5000 gals 28% acid.

2 3/8" Duoline 10
pvc-lined tbq
@ 4962'

Guiberson Model
G6 PKR @ 4962'

#5012-5026

#5040-5046

7 1/8" Hole

DEPTH 5095

4 3/4" Hole

TOTAL DEPTH

5270

PRODUCING EQUIPMENT DATA:

PUMPING UNIT SIZE _____ MAX. SL _____

PUMP DATA _____ SN @ _____

RODS _____

TUBING 2 3/8 Duoline 10 PVC-lined tbq @ 4962'

REMARKS:

Guiberson Model G6 PKR @ 4962'

7/10/10 1.00

LEASE Sylvester Johnson WELL # 3 FIELD Carter South
 LOCATION 330 FNL + 990 FWL COUNTY Lea STATE New Mexico
 Sec 8, T-18-S, R-39E Unit D Completed 9-16-58

ELEVATION: GL 3631 KDB
 CASING: SURFACE 8 5/8 CSG GR 24 WT
 @ 336 W/ 225 SX. TOC Circ
 PRODUCTION 5 1/2 CSG GR 14 WT
 @ 5108 W/ 100 SX. TOC 4727

INITIAL COMPLETION: FORMATION: San Andres
9-16-58 Natural OH completion. No acid was
 used.

DEPTH 336

998' Change top 2
 jts csg w/15.5#
 csg. Sg 998-1313
 w/350 SX Cmt.
 Press to 2000#.

1087

1240

1304

1305

1313

2 3/8" Duoline 10
 PVC-lined tbg
 Set @ 5058'

7 1/8" Hole
 TOC - 4727'

Guiberson Model G6
 PKR set @ 5063'

DEPTH 5108

4 3/4" OH

TOTAL DEPTH

5233

SUBSEQUENT WORKOVERS AND RECONDITIONING:

11-3-60 Acid Sg w/3000 gals 15% XLST + 500
 gals acid gel 5213-5233, Sg 3000 gals 15%
 XLST + 500 gals acid gel 5171-5213, Sg 3000
 gals 15% XLST + 500 gals gel 5129-5171,
 Sg 3000 gals 15% XLST + 500 gals acid
 gel 5129-5233.
 5-21-68 Acidize w/15,000 gals 15% NH
 6-14-68 8 Holes in csg 1313-Surf. Chng out top
 2 jts csg w/15.5# csg. Sg 998-1313 w/
 350 SXs "Class C". Max press 2000#. DOC
 710-1365.

PRODUCING EQUIPMENT DATA:

PUMPING UNIT SIZE _____ MAX. SL _____

PUMP DATA _____ SN @ _____

RODS _____

TUBING 2 3/8 Duoline 10 PVC-lined tbg @ 5058'

REMARKS:

Guiberson Model G6 PKR @ 5063'

**FORM C-108 APPLICATION
GREAT WESTERN DRILLING COMPANY
SOUTH CARTER SAN ANDRES WATERFLOOD PROJECT**

III. WELL DATA

- B.
- (1) The name of the injection formation and, if applicable, the field or pool name.
 - (2) The injection interval and whether it is perforated or open-hole.
 - (3) State if the well was drilled for injection or, if not, the original purpose of the well.
 - (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
 - (5) Give the depth to and name of the next higher and next lower oil or gas zone in the area of the well, if any.

Since the information in item (2) is on the wellbore schematic, it will be omitted. Other items that are common to all the proposed injection wells will be grouped.

Effie Carter #2, Sylvester Johnson #3, & McQuein #2:

- (1) San Andres formation, Carter, South (San Andres) Field.
- (2) On Schematic(s).
- (3) Originally drilled as an oil producer in the San Andres.
- (4) No other perforated or open-hole intervals, other than those listed on the schematic(s).
- (5) There are no productive oil or gas zones above or below the proposed injection interval.

Effie Carter #3 & S.P. Johnson #2:

- (1) San Andres formation, Carter, South (San Andres) Field.
- (2) On Schematic(s).
- (3) Originally drilled as an oil producer in the San Andres.
- (4) No other perforated or open-hole intervals, other than those listed on the schematic(s).
- (5) Within the 1/2 mile area of these wellbores is the Blackwood & Nichols Carter #1, which was perforated in the interval 5822'-5837' (Glorieta). This is the next lowest producing zone in the area of these proposed injectors. The B&N Carter #1 never established commercial production and was subsequently plugged and abandoned. There are no known producing zones above the injection interval within the area of this proposed injector.

SCARTER.XLS

PROPOSED SOUTH CARTER (S/A) UNIT

Texas Wells Within Area of Review

Lease Name	Well No.	Type	Location	Casing Size (Inches)	Casing Depth (Feet)	Cement Used (Sacks)	TOC	Total Depth (Feet)	Hole Size (Inches)	OH/ Perfs	Compl Date
Granberry	2	Oil	330 FSL, 660' FWL, Sec. 6 Blk. A-9 PSL Survey Gaines Co., Tx.	8 5/8	325	300	Circ.		12 1/4		7/12/77
				4 1/2	5245	1300	Circ	5273	7 7/8	5150-78'	
										5210-31'	
J.A. Taylor	1	Oil	660 FNL, 660 FWL, Sec. 15 Blk. A-9 PSL Survey Gaines Co., Tx.	8 5/8	329	300	Circ		12 1/4		8/28/57
				5 1/2	5127	125	4651' Calc	5210	7 7/8	5124-27'	
										5127-5210' OH	
aylor	2	Oil	1650 FNL, 330 FWL, Sec. 15 Blk. A-9 PSL Survey Gaines Co., Tx	8 5/8	2072	1100	Circ		12 1/4		8/3/77
				4 1/2	5569	165	4500' Calc	5585	7 7/8	5050-5107' Sqz'd	
										5087-5104'	
aylor	3	Oil	770 FNL, 660 FWL, Sec. 15 Blk. A-9 PSL Survey Gaines Co., Tx	8 5/8	308	2575	Circ.		12 1/4		10/18/77
				4 1/2	5109	1400	Circ.	5212	7 7/8	5109-5212' OH	
Francis S. Granberry	1	Oil	660 FSL, 660 FWL, Sec. 6 Blk. A-9 PSL Survey Gaines Co., Tx.	13 3/8	343	300	58' Calc.		17 1/2		2/4/57
		P&A		9 5/8	4636	850	2845' Calc		12 1/4		
				Left in Well	3942			PB 5270			
				7	5358	90	4963' Calc	11912	8 3/4	5180-90'	
				Left in Well	1606					5284-92'	
Francis S. Granberry	1-A	Oil	2310 FSL, 330 FWL, Sec. 6 Blk. A-9 PSL Survey Gaines Co., Tx.	8 5/8	548	500	Circ		12 1/4		10/31/51
		P&A		5 1/2	5197	100	4816' Calc	5276	7 7/8	5197-5276'	

PROPOSED SOUTH CARTER (S/A) UNIT

Texas Wells Within Area of Review

Page 2

NMCARTER.XLS

PROPOSED SOUTH CARTER (S/A) UNIT

New Mexico Wells Within Area of Review

Lease Name	Well No.	Type	Location	Casing Size (Inches)	Casing Depth (Feet)	Cement Used (Sacks)	TQC	Total Depth (Feet)	Hole Size (Inches)	Perfs/OH	Compl Date
S.P. Johnson	#1	SWD	990 FWL & 1650 FSL	9 5/8	335	225	Circ		12 1/4		
		SI	Sec 5, 18S, 39E	7	5142	250	4044' Calc	5854	8 3/4	4772-4880'	1/3/58
			Lea County, NM							5142-5854' OH	4/14/61
McQueen	#1	Oil	1980 FNL & 435 FEL	13 3/8	300	300	Circ		17 1/4		
		P&A	Sec 8, 18S, 39E	8 5/8	3600	500	2440' Calc		11 1/4		
			Lea County, NM	5 1/2	5411	850	2173' Calc	6500	7 7/8	5025-5035'	1/31/55
										5058-5066'	2/23/59
Blackwood & Nichols											
		Oil	1972 FNL & 660 FWL	10 3/4	297	200	Circ		13 3/4		
Carter	#1	P&A	Sec 5, 18S, 39E	7 5/8	3367	1450	Circ		9 7/8		
			Lea County, NM	5 1/2	5940	650	930' Calc	6628	6 3/4	5822-5837'	8/31/53
Steve Taylor	#1-B	Oil	660 FNL & 660 FEL	8 5/8	306	150	Circ		12 1/4		
		P&A	Sec. 7, 18S, 39E	5 1/2	5221	150	4030' Calc	5257	7 7/8	4900-5184'	3/2/57
			Lea County, NM							5221-5263' OH	
Carter	#1-B	Oil	1650 FNL & 330 FEL	8 5/8	331	331	Circ		11		
		P&A	Sec 7, 18S, 39E	5 1/2	5076	150	4505' Calc	5155	7 7/8	5090-5155' OH	6/14/59
			Lea County, NM								
Fee	#1	Oil	1650 FEL & 330 FSL	8 5/8	340	225	Circ		11		
		P&A	Sec 6, 18S, 39E	5 1/2	5124	100	4743' Calc	5199	7 7/8	5124-5200' OH	1/16/59
			Lea County, NM								
S.P. Johnson "A"	#3	Oil	330 FEL & 1650 FSL	8 5/8	287	200	Circ		11		
		P&A	Sec 6, 18S, 39E	5 1/2	5124	100	4553' Calc	5201	7 7/8	5124-5201' OH	11/22/58
			Lea County, NM								
Johnson	#1-A	Oil	330 FEL & 330 FSL	8 5/8	331	250	Circ		11		
		P&A	Sec 6, 18S, 39E	5 1/2	5115	100	4734' Calc	5228	7 7/8	5115-5228' OH	11/22/58
			Lea County, NM								
Sylvester Johnson	#2	Oil	1650 FWL & 330 FNL	8 5/8	530	480	Circ		11		
		Active	Sec 8, 18S, 39E	5 1/2	5122	100	4741' Calc	5232	7 7/8	5122-5232' OH	4/22/58
			Lea County, NM								

PROPOSED SOUTH CARTER (S/A) UNIT
New Mexico Wells Within Area of Review

Lease Name	Well No.	Type	Location	Casing Size (Inches)	Casing Depth (Feet)	Cement Used (Sacks)	TOC	Total Depth (Feet)	Hole Size (Inches)	Perfs/OH	Compl Date
Lurton Federal	#1	Oil	660 FSL & 330 FEL	8 5/8	265	275	Circ.		11		
		Active	Sec 5, 18S, 39E	5 1/2	5105	100	4724' Calc	5220	7 7/8	5105-5220' OH	8/7/57
			Lea County, NM								
Lillian Carter	#1	Oil	330 FEL & 1650 FSL	8 5/8	367	350	Circ		11		
		Active	Sec 5, 18S, 39E	5 1/2	5168	100	4787' Calc	5185	7 7/8	5168-5185' OH	4/19/57
			Lea County, NM								
Wylvester Johnson	#1	Oil	660 FNL & 330 FEL	8 5/8	369	350	Circ		11		
		Active	Sec 8, 18S, 39E	5 1/2	5176	100	4795' Calc	5184	7 7/8	5176-5184' OH	3/27/57
			Lea County, NM							5059-5158'	6/29/67
Carter	#1A	Oil	330 FNL & 330 FEL	8 5/8	340	300	Circ		11		
		Active	Sec 7, 18S, 39E	5 1/2	5075	100	4694' Calc	5230	7 7/8	5075-5230' OH	2/27/69
			Lea County, NM								

LEASE Francis S. Granberry WELL # 1-A FIELD Cortez New Mexico (San Andres)LOCATION 2310 FNL + 330 FWL COUNTY Gaines STATE Tx
Sec 6, B1K A-9, PSL SummaryCompleted 10-13-51Set 10 SK cmt
plug @ surf.

12 1/4" Hole

Set 25 SK cmt
plug @ 510'.DEPTH 548ELEVATION: GL 3630 KDB _____
CASING: SURFACE 8 5/8" CSG _____ GR _____ WT _____@ 548 W/ 500 SX. TOC CircPRODUCTION 5 1/2 CSG _____ GR _____ WT _____@ 5197 W/ 100 SX. TOC 4816 Calc

INITIAL COMPLETION: FORMATION: _____

Acidize w/ 7000 gals.P+A'd 11-7-57 Shot + pulled csg @ 4420'Set 25 SK cmt plug @ 5000' and 510'Set 10 SK cmt plug @ surface.

SUBSEQUENT WORKOVERS AND RECONDITIONING:

7 7/8" Hole

Shot + pulled
csg @ 4420'

ToC 4816' - Calc

Set 25 SK cmt
plug @ 5000'DEPTH 5197

TOTAL DEPTH

5276

PRODUCING EQUIPMENT DATA:

PUMPING UNIT SIZE _____ MAX. SL _____

PUMP DATA _____ SN @ _____

RODS _____

TUBING _____

REMARKS:

WELL DATA SHEET

Date 4-20-94

Lease FRANCIS S. Granberry Well NO. #1 Field S. Carter (San Andrees)
 Location 660 FSL + 660 FWL Sec 6, B1K A-9 County Gaines State Tx
PSL Survey

Date Completed: 2-4-57Well Elevation: 3612' GR KS

Producing Formation: _____

From _____ to _____

_____ to _____

Initial Production _____ BOPD _____ BWPD

Initial Treatment: Total acid 4500gals.

Subsequent Workover or Reconditioning:

P+A well and pull casing13 3/8 343' left in well9 5/8 3942' left in well7" 1606' left in well

Present Production: _____ BOPD _____ BWPD

Gas: _____ MCF/D

Static F.L. @ _____ Date _____

Pumping F.L. @ _____ Date _____

Well Depth by SLM _____ Date _____

Static BHP _____ psi @ Ga. Depth _____

Date _____


Tubular Data: _____

7" OD _____ ft.
OD _____ ft.
OD _____ ft.
Thd _____ Gr.,

Casing
 Set @ 5358 w/ 90 sx
 TOC 4963 By Calc

P. STD 5358T. D. 11,912'

Remarks: _____

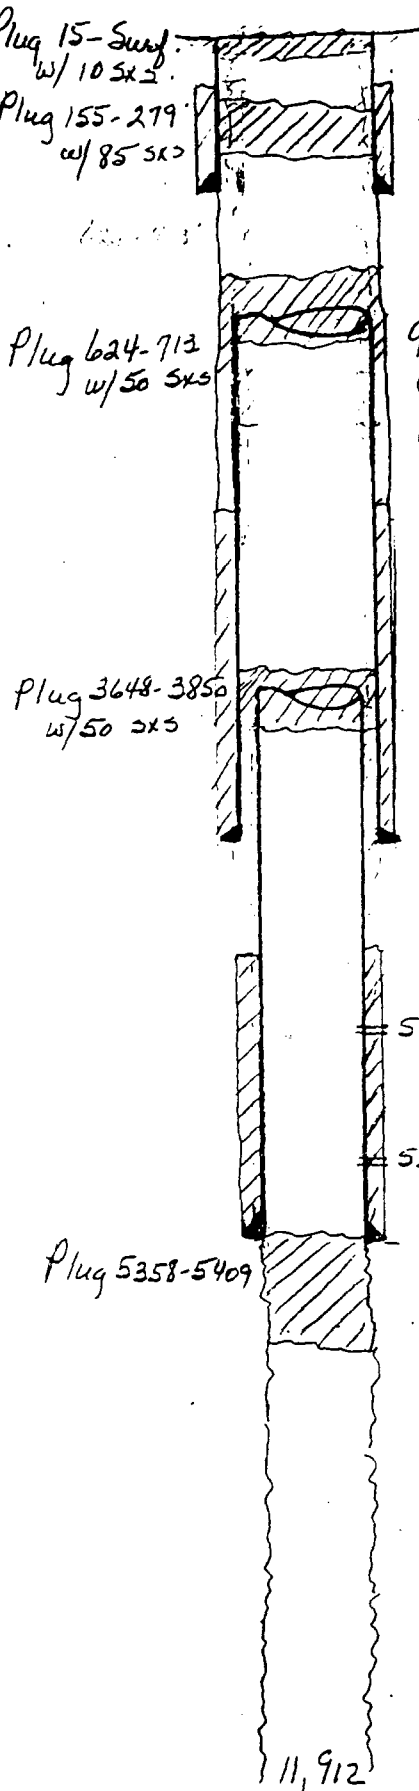

17 1/2" Hole

13 3/8 OD Surface Pipe

Set @ 343 w/ 300 sx

wt. _____ #ft.

Circ to 58'

9 5/8 csg Stub

@ 694'

12 1/4" Hole

9 5/8 OD Intermediate

Casing Set @ 4636w/ 850 sx _____ #ft.TOC 2845' Calc

7" csg stub

@ 3752'

8 3/4" Hole


5180 - 5190'

40 Shots

5284 - 92

8 3/4" OH

11,912'

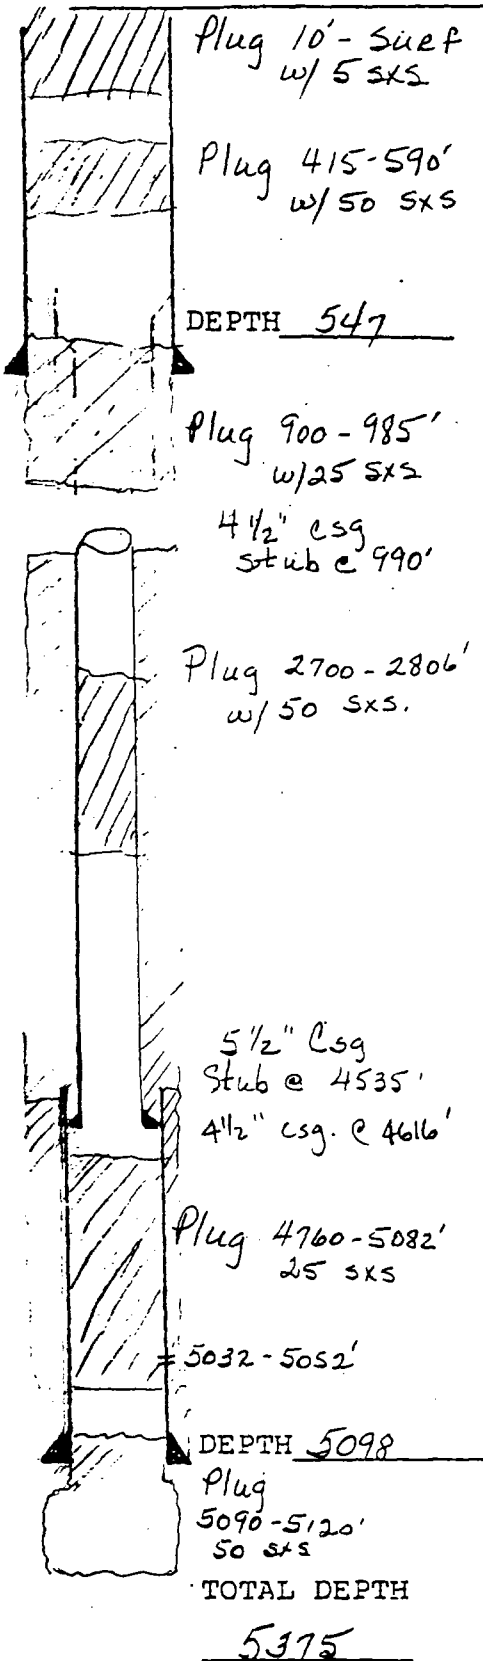

ELEVATION: GL _____ KDB 3649
CASING: SURFACE 8 5/8 CSG _____ GR _____ WT _____
@ 547 W/ 500 SX. TOC Surf
PRODUCTION 5 1/2 CSG _____ GR _____ WT _____
@ 5098 W/ _____ SX. TOC 4100'

INITIAL COMPLETION: FORMATION:

Pulled out 4535' 5 1/2" csg. Re-entree well and set 4 1/2' csg. 3626 - 4616. TOC @ 1010' by T.S.

SUBSEQUENT WORKOVERS AND RECONDITIONING:

10-16-57 P+A'd well. Se⁺ plug in O.H. Se⁺ plug across
perfs in 5 1/2" csg. Cut-off 5 1/2" @ 4535'. Set plugs
@ 8 5/8" shoe + surface.

2-6-79 Re-entered wellbore. Drilled out plugs to TD. Ran
4 1/2" 11.5# csg. & landed at 4616' (inside 5 1/2" stub @ 4535').
Cemented in-place w/ 100 SKs. cnt. TOC @ 1010'. Tested S/A
All water.

4-27-79 P+A'd well. Set 50 SK plug in O.H. 5090-5120'. Set 25 SK plug fr. 4760'-5082'. Set 50 SK plug from 2700-2806'. Pulled 4 1/2" cs. @ 990'. Set 25 SK plug across 85/8" shoe @ 900-985'. Set 50 SK plug @ 415-590'. Set 10' surface plug w/ 5 SK.

PRODUCING EQUIPMENT DATA:

PUMPING UNIT SIZE	MAX. SL
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

PUMP DATA	SN @
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

RODS

TUBING

REMARKS:

LOCATION 1980 FNL + 540 FWL COUNTY Gaines

STATE Tx

Sec 15, BIK A-9, PSL Survey

(Completed) D+A 2-13-93

Spot 10 Sx cnt
/ plug @ surf.

135 sy amt
plug @ 350

(11" Hole).

DEPTH 2150

35 sq ant
plug @ 1650

Spot 35 sx cnt
plug @ 2,000

Spot 40 sk cnt
plug @ 2200

Set 40 sx amt
plug @ 3250

Set 45 sq amt
plug @ 4800'

Spot 50 5x Cmt
plug @ 6900'

DEPTH

7 7/8" Hole

TOTAL DEPTH

7425

ELEVATION: GL 3641 KDB _____
CASING: SURFACE 8 5/8 CSG _____ GR 24# WT
@ 2150 W/1050 SX. TOC CIRC
PRODUCTION _____ CSG _____ GR _____ WT
@ _____ W/ _____ SX. TOC _____

INITIAL COMPLETION: FORMATION: Set 8 5/8 csg @ 2150 cmt w/1050 sx. Circ to surf. Do to TDC 7425' Test for prod. Dry hole. Spot 50 sx cmt plug @ 6900' w/o cmt. R.I.N.-No plug. Spot 50 sx cmt @ 6900'. Set plugs as follows: 45 sx cmt @ 4800', 40 sx @ 3250', 40 sx @ 2200', 35 sx @ 2000', 35 sx @ 1650', 35 sx @ 350', Spot 10 sx cmt plug @ surface.

SUBSEQUENT WORKOVERS AND RECONDITIONING:

PRODUCING EQUIPMENT DATA:

PUMPING UNIT SIZE	MAX. SL
-------------------	---------

PUMP DATA	SN @
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

RODS

TUBING

REMARKS:

WELL DATA SHEET

Date 8-11-94

Lease Blackwood Nichols Carter Well NO. #1 Field South Carter (San Andres)
 Location 660 FWL & 1972 FWL - Sec 5-185-39E County Lea State N.M.

Date Completed: 8-31-53Well Elevation: GP 3629 KBProducing Formation: San AndresFrom _____ to _____
to _____Initial Production 12.42 BOPD / 100 BWPDInitial Treatment: Perf 5822-5837Acidize w/1000 gal 15% HCL +
Reacidize w/5000 gal 15% HCL.

Subsequent Workover or Reconditioning:

(5-31-55) Set 25 sx cmt plug
@ 3300-3500. Shot + pulled CSG
@ 931'. Placed 5 sx cmt plug
in top of 7 5/8" CSG.* Note: NUOCD records indicated "additional"
plugging detail on Form C-103 filed 6-15-54,
but could find no record in District office.Present Production: _____ BOPD _____ BWPD
Gas: _____ MCF/D

Static F.L. @ _____ Date _____


Pumping F.L. @ _____ Date _____

Well Depth by SLM _____ Date _____

Static BHP _____ psi @ Ga. Depth _____
Date _____

Tubular Data: _____

5 1/2 OD 15.5 # _____ ft.
 OD _____ # _____ ft.
 OD _____ # _____ ft.
 Thd _____ Gr.,
 Casing

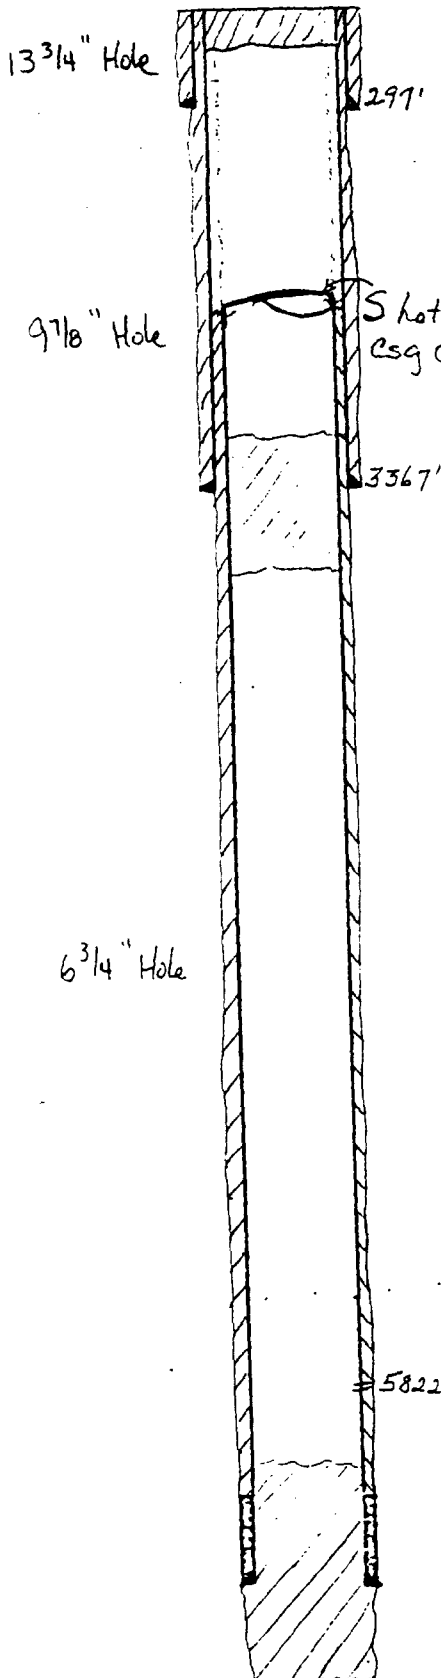Set @ 5940 w/ 650 sxTOC 930 By calc.5822-5837P. STD 5890T. D. 6628

LEASE S.P. Johnson WELL # 3 FIELD South Carter (San Andres)LOCATION 330 FEL + 1650 FSL COUNTY Lea STATE New Mexico
Sec 6, 18S, 39ECompleted 11-25-58

Spot 10 sx. surf. plug.

ELEVATION: GL _____ KDB 3658CASING: SURFACE 8 5/8 CSG _____ GR _____ WT _____@ 298 W/ 225 SX. TOC SurfPRODUCTION 5 1/2 CSG _____ GR _____ WT _____@ 5124 W/ 150 SX. TOC 4553

INITIAL COMPLETION: FORMATION: _____

Acidize OH 5124-5201' w/8000 gal.DEPTH 298Spot 10 sx cnt
plug @ 298'

7 7/8" Hole

Spot 25 sx cnt
plug @ 2100'Spot 25 sx cnt
plug @ 3150'Cut + pull csg
@ 4184'Spot 25 sx cnt
plug @ 5000'DEPTH 5124

4 3/4" OH

TOTAL DEPTH

5201

SUBSEQUENT WORKOVERS AND RECONDITIONING:

(7-25-59) Spot 25 sx cnt plug @ 5000'. A 25 sx
cnt plug was set @ top and base of salt @
2100' + 3150'. Cut + pulled 4184' csg, set 10 sx
cnt plug @ 298'. Base of 8 5/8' csg. A 10 sx
cnt plug was set @ surf.

PRODUCING EQUIPMENT DATA:

PUMPING UNIT SIZE _____ MAX. SL _____

PUMP DATA _____ SN @ _____

RODS _____

TUBING _____

REMARKS:

LEASE Johnson WELL # 1-A FIELD South Carter (San Andres)
 LOCATION 330 FEL + 330 FSL COUNTY Lea STATE New Mexico
Sec 6, 18S, 39E Completed (7-23-58)

Spot 10 3/4 cmt
 plug in top of
 surf pipe.

11" Hole

DEPTH 361

Spot 38 sx cmt
 plug @ 375'

Cut + pulled
 CSG @ 1075'
 Spot 38 sx cmt
 plug @ 1100'

Spot 38 sx cmt
 plug @ 2047

7 7/8" hole

Set CIBP @ 5092'
 Cap w/30' cmt.

DEPTH 5115

TOTAL DEPTH

5230

ELEVATION: GL _____ KDB 3657
 CASING: SURFACE 8 5/8 CSG _____ GR _____ WT _____
 @ 361 W/ 200 SX. TOC Surf
 PRODUCTION 5 1/2 CSG _____ GR _____ WT _____
 @ 5115 W/ 100 SX. TOC 4734 Calc

INITIAL COMPLETION: FORMATION: Natural OH
Completion. Acidize w/14,000 gals in stages
from 5155-5228.

SUBSEQUENT WORKOVERS AND RECONDITIONING:

(8-24-73) Set CIBP @ 5092' cap w/30' cmt.
 Spot 38 sx cmt plug @ 2047. Cut + pulled
 CSG @ 1075'. Spot 38 sx cmt plug @ 1100'. Spot
 38 sx cmt plug @ 375. Spot 10 3/4 cmt plug
 in top of surface pipe.

PRODUCING EQUIPMENT DATA:

PUMPING UNIT SIZE _____ MAX. SL _____

PUMP DATA _____ SN @ _____

RODS _____

TUBING _____

REMARKS:

LEASE F.J. Danglade Fee WELL #1FIELD South Carter (San Andres)LOCATION 330 FSL + 11650 FEL COUNTY LeaSTATE N.M.Sec 6, 18S-39E

Completed (2-1-59)

ELEVATION: GL _____ KDB 3642
 CASING: SURFACE 8 5/8 CSG _____ GR 24# WT _____
 @ 340 W/ 225 SX. TOC surf
 PRODUCTION 5 1/2 CSG _____ GR 14# WT _____
 @ 5124 W/ 100 SX. TOC 1206

INITIAL COMPLETION: FORMATION: Natural OH
Completion, Acidice w/7000 gals acid.

SUBSEQUENT WORKOVERS AND RECONDITIONING:

(2-6-60) Spot 15 sx cmt @ btm of well.
Shot + pulled csg @ 1205'. Spot 10 sx cmt @ 325'.

PRODUCING EQUIPMENT DATA:

PUMPING UNIT SIZE _____ MAX. SL _____

PUMP DATA _____ SN @ _____

RODS _____

TUBING _____

REMARKS:

11" Hole
 Toc - surf

Spot 10 sx cmt
 plug @ 325'
 DEPTH 340

7 7/8" Hole

Shot + pulled
 @ 1205'

Toc - 1206' Calc

P805118'

DEPTH 5124

4 3/4" O.H.

TOTAL DEPTH

5199

Attachment F.9

LEASE Steve Taylor "B" WELL # 1 FIELD South Carter (San Andres)LOCATION 660 FNL + 660 FEL COUNTY Lea STATE New Mexico
Sec 7, 18S, 39E

Completed - 4-12-57

Set 15 sx cmt plug
@ top of surf csq.
1 1/4" HoleELEVATION: GL _____ KDB 3649
CASING: SURFACE 8 5/8 CSG _____ GR 34# WT _____
@ 305 W/ 150 SX. TOC SURF _____
PRODUCTION 5 1/2 CSG _____ GR 15 1/2 WT _____
@ 5219 W/ 150 SX. TOC 4030Set 15 sx cmt plug
@ base of surf csq
DEPTH 305INITIAL COMPLETION: FORMATION: Perf @ 5180-5184,
4962-4978 acidize w/250 gals mud acid, 8000 gals
15% HCL. Perf 4900-4914 acidize w/250 gals
Mud acid, 6,000 gals W-19.Set 25 sx cmt
plug @ 2600'Set 15 sx cmt
plug @ 3000'

7 7/8" Hole

cut + pull csq
@ 4000'. Set 25 sx
cmt plug @ 4200.* 4900-4914
Sgz Perfs* 4962-4978
Sgz Perfs* 5180-5184
Sgz PerfsDEPTH 5221TOTAL DEPTH
5263

SUBSEQUENT WORKOVERS AND RECONDITIONING:

(4-12-57) Squeeze perfs 4900-4914, 4962-4978,
5180-5184 CD + deepen to 5257. Acidize w/500
gals Mud acid. Frac w/10,000 gals oil-10,000#
sand.(7-12-57) Set 25 sx cmt plug @ 4200. Cut +
pull csq @ 4000'. Set 15 sx cmt plug @ 3000'.
Set 25 sx cmt plug @ 2600'. Set 15 sx cmt
plugs @ top + btm of surface csq.

PRODUCING EQUIPMENT DATA:

PUMPING UNIT SIZE _____ MAX. SL _____

PUMP DATA _____ SN @ _____

RODS _____

TUBING _____

REMARKS:

LEASE Carter "B" WELL # 1 FIELD South Carter (San Andres)LOCATION 1650 FNL & 330 FEL COUNTY Lea STATE New Mexico
See 7, 18S, 39ECompleted 2-10-60

Set top hole plug

11" Hole

DEPTH 344Set 30 sx cmt
plug @ 350'Set 30 sx cmt
plug @ 2100'Set 25 sx cmt
plug @ 3200'Set 25 sx cmt
plug @ 3800'Set 25 sx cmt
plug @ 4328'Shot + pulled
csg @ 4370'

7 7/8" Hole

DEPTH 5069Set 25 sx cmt
plug @ btm hole.

TOTAL DEPTH

5154ELEVATION: GL 3642 KDB _____
CASING: SURFACE 8 5/8 CSG GR 24# WT _____
@ 344 W/ 331 SX. TOC CIRC
PRODUCTION 5 1/2 CSG GR 14# WT _____
@ 5076 W/ 150 SX. TOC 4505 Calc.INITIAL COMPLETION: FORMATION: Natural OH
Completion. Acidize OH w/2000 gal non-emul-
sion acid.

SUBSEQUENT WORKOVERS AND RECONDITIONING:

(5-28-60) Set 25 sx cmt btm hole plug, w/hole
loaded. Shot + pulled csg @ 4370'. Set
cmt plugs as follows: 25 sx @ 4328, 25 sx
@ 3800, 25 sx @ 3200, 30 sx @ 2100, 30 sx
@ 350. Set top hole plug + marker.

PRODUCING EQUIPMENT DATA:

PUMPING UNIT SIZE _____ MAX. SL _____

PUMP DATA _____ SN @ _____

RODS _____

TUBING _____

REMARKS:

WELL DATA SHEET

Date 8-12-94Lease M^c DUEINWell NO. #1Field South Carter (San Andres)Location 1980 FNL - 435 FEL Sec 8-185-39E County Lea State N.M.Date Completed: 2-1-55Well Elevation: 3642 GP K3

Producing Formation: _____

From _____ to _____
to _____

Initial Production _____ BOPD _____ BWPD

Initial Treatment: Perf @ 5025-35
w/6 SPF. Trt w/14,000 gals acid
+ 14,000 gals sd. oil.Subsequent Workover or Reconditioning:
(2-24-59) Set CIBP @ 5076. Perf
5058-5066 w/4 SPF. Acidice
w/5000 gals.(5-4-70) Good Hole w/10.5 ppg Mud.
Set 25 SX cmt plug 4835-5035. Shot + pull
CSG @ 3375. Set 35 SX cmt plug @ 3280-3410.
Shot + pull 8 5/8 CSG @ 1200. Set 35 SX cmtPresent Production: _____ BOPD _____ BWPD
Gas: _____ MCF/D


Static F.L. @ _____ Date _____

Pumping F.L. @ _____ Date _____

Well Depth by SLM _____ Date _____

Static BHP _____ psi @ Ga. Depth _____
Date _____Cont
Set 25 SX cmt plug 1160-1218, 25
SX cmt plug 280-310 + a 10 SX
cmt plug @ surface.

Remarks: _____

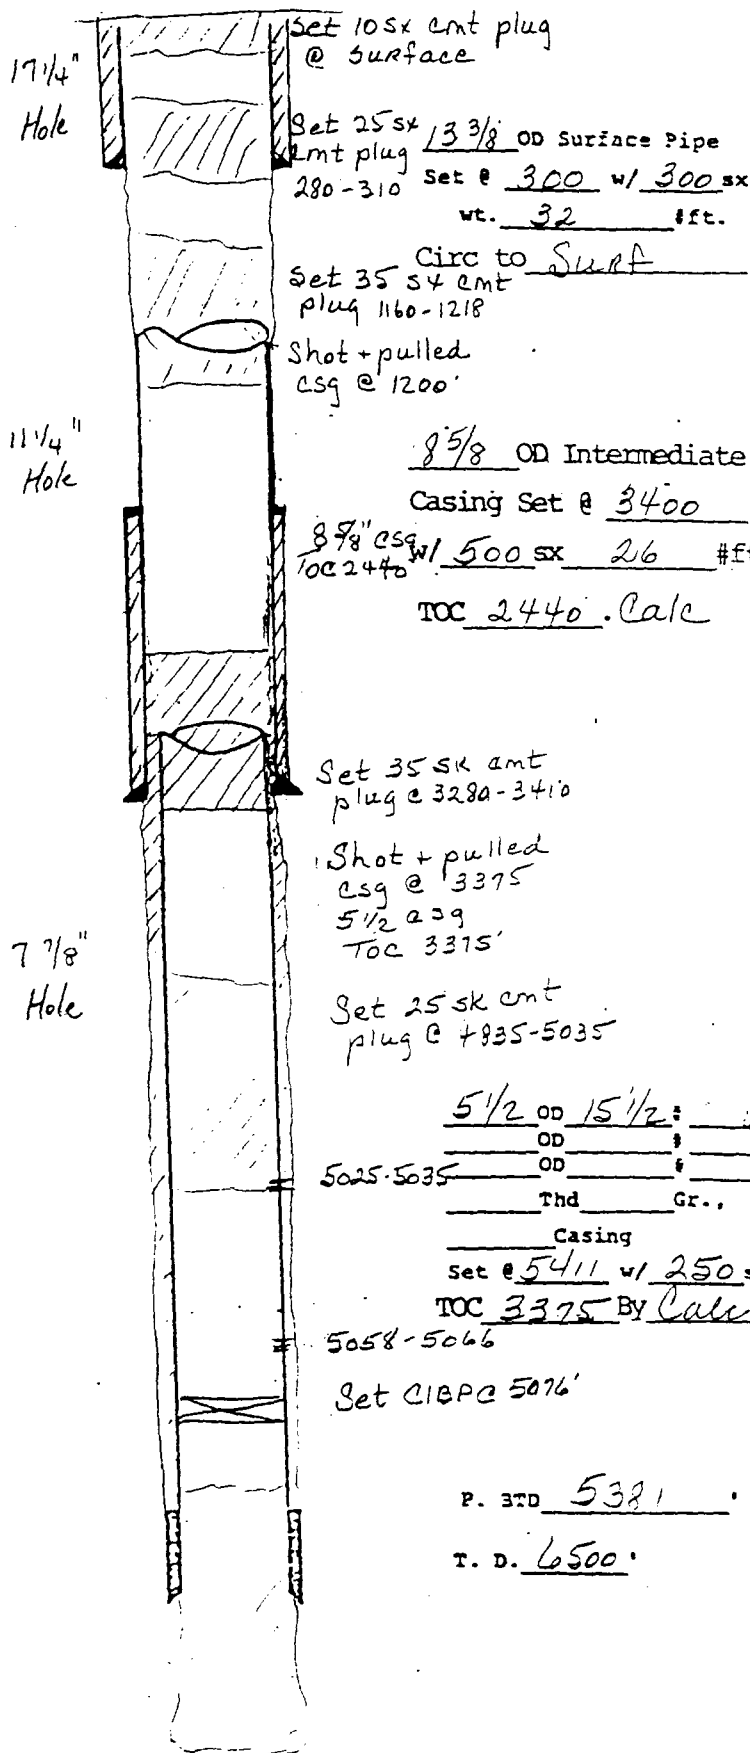P. 370 5381T. D. 6500

**FORM C-108 APPLICATION
GREAT WESTERN DRILLING COMPANY
SOUTH CARTER SAN ANDRES WATERFLOOD PROJECT**

VII. Attach data on the proposed operation, including:

1. Proposed average and maximum daily rate and volume of fluids to be injected;

Proposed Average Rate:	2000 BWIPD (400 BWIPD/well)
Proposed Maximum Rate:	3000 BWIPD (600 BWIPD/well)
Proposed Volume to be Injected:	15,000,000 BW (~ 1 HCPV)

2. Whether system is open or closed;

The waterflood operation will be a closed system.

3. Proposed average and maximum injection pressure;

Proposed Average Inj. Pressure:	800 psi
Proposed Maximum Inj. Pressure:	1025 psi

4. Sources and appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water;

**Sources: San Andres produced water & Ogallala makeup water.
Analysis and the compatibility results of Ogallala with the San Andres are attached (Attachment G.2).**

5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).

Not applicable to this project.

Martin Water Laboratories, Inc.

WATER CONSULTANTS SINCE 1953
BACTERIAL AND CHEMICAL ANALYSES

P. O. BOX 1468
MONAHANS, TEXAS 79756
(915) 943-3234 or 563-1040

709 W. INDIANA
MIDLAND, TEXAS 79701
(915) 683-4521

August 26, 1994

Mr. Joe Clements
Great Western Drilling Company
P. O. Box 515
Lovington, NM 88260


Subject: Recommendations relative to laboratory #894174 (8-25-94),
American Exploration water supply well.

Dear Mr. Clements:

The objective herein is to evaluate compatibility between the supply water and each of the produced waters recorded on laboratory #894133 (8-23-94). We have carefully compared all of these waters and have encountered a single condition of concern regarding this compatibility. This supply water contains a significant amount of oxygen and all of the produced waters contain a significant amount of hydrogen sulfide. Therefore, any resulting combination would cause precipitation of elemental sulfur and serious aggravation of an already severe corrosiveness from the individual waters. The only means to resolve this would be through the elimination of the oxygen from the supply water prior to mixing with the produced waters.

We would not consider this incompatibility to be of sufficient magnitude to cause any need for concern if there are any plans to inject this supply well alone into the producing intervals represented by the produced waters. This incompatibility would be so extensively distributed throughout the reservoir that we feel the minor precipitation of sulfur that would occur would clearly have no detectable influence on the mobility of the fluid back in the reservoir.

Yours very truly,

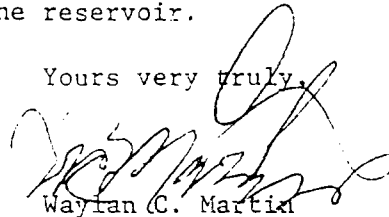

Waylan C. Martin

WCM/plm

P. O. BOX 1468
MONAHANS, TEXAS 79756
PH. 943-3234 OR 563-1040

Martin Water Laboratories, Inc.

709 W. INDIANA
MIDLAND, TEXAS 79701
PHONE 683-4521

RESULT OF WATER ANALYSES

TO: Mr. Joe Clements
P. O. Box 515, Lovington, NM 88260

LABORATORY NO. 894174
SAMPLE RECEIVED 8-25-94
RESULTS REPORTED 8-26-94

COMPANY Great Western Drilling Company LEASE American Exploration

FIELD OR POOL _____

SECTION _____ BLOCK _____ SURVEY _____ COUNTY Gaines STATE TX

SOURCE OF SAMPLE AND DATE TAKEN:

NO. 1 Raw water - taken from water supply well. 8-25-94 (OGALLALA)

NO. 2 _____

NO. 3 _____

NO. 4 _____

REMARKS:

CHEMICAL AND PHYSICAL PROPERTIES				
	NO. 1	NO. 2	NO. 3	NO. 4
Specific Gravity at 60° F.	1.0016			
pH When Sampled	7.8			
pH When Received	7.52			
Bicarbonate as HCO ₃	156			
Supersaturation as CaCO ₃	0			
Undersaturation as CaCO ₃	--			
Total Hardness as CaCO ₃	152			
Calcium as Ca	41			
Magnesium as Mg	12			
Sodium and/or Potassium	55			
Sulfate as SO ₄	81			
Chloride as Cl	43			
Iron as Fe	0.65			
Barium as Ba	0			
Turbidity, Electric	12			
Color as Pt	35			
Total Solids, Calculated	388			
Temperature °F.	70			
Carbon Dioxide, Calculated	4			
Dissolved Oxygen.	3.3			
Hydrogen Sulfide	0.0			
Resistivity, ohms/m at 77° F.	20.70			
Suspended Oil				
Filtrable Solids as mg/l	2.5			
Volume Filtered, ml	2,000			

Results Reported As Milligrams Per Liter

Additional Determinations And Remarks	Letter of recommendation attached.
---------------------------------------	------------------------------------

**FORM C-108 APPLICATION
GREAT WESTERN DRILLING COMPANY
SOUTH CARTER SAN ANDRES WATERFLOOD PROJECT**

- VIII. Attach appropriate geologic data on the injection zone including appropriate lithologic detail, geological name, thickness and depth.

The Carter, South (San Andres) field produces from porous dolomite in the San Andres formation at depths ranging from 5000' to 5250'. The San Andres dolomite in the the field varies in thickness from 600' to 770'. The productive interval occurs approximately 250' from the top of the San Andres (refer to type log) where the dolomite is cleaner with less interruptions from deeper water mudstones or shelfal anhydrite.

Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such source known to be immediately underlying the injection interval.

The only known drinking water source overlying the proposed injection interval is the Ogallala, which occurs at an approximate depth of 125'-140'. There are no such drinking water sources underlying the injection interval.

- IX. Describe the proposed stimulation program, if any.

Any stimulation performed will involve either a cleanup acid job or acid-stimulating new perfs or open-hole pay. In either case, the acid jobs would include using 15% NEFEHCL at 50-75 gallons per net foot of pay, utilizing ball sealers and/or rock salt for diversion. The jobs will be pumped at relatively low rates of 2-3 BPM.

