


DIAGRAMMATIC SKETCH
OF
TYPICAL DENTON FIELD WELLBORE

Denton Field, Lea County, New Mexico

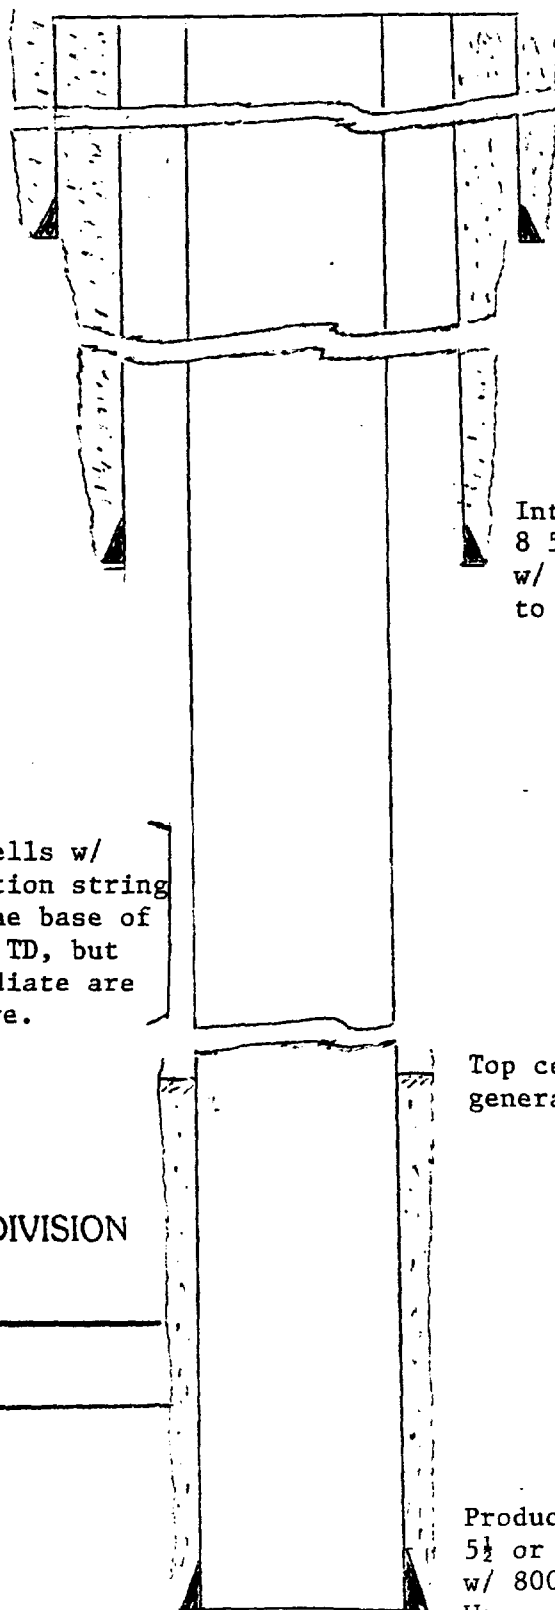

Surface Csg:
13 3/8" set @ 330' to 380'
w/ 300-400 sx. Cement circs.
to surface.

Intermediate Csg:
8 5/8" set @ 4650' to 4800'
w/ 2200-3000 sx. Cement circs.
to surface.

Note: There are some wells w/
5 1/2" liners for a production string
set and cemented from the base of
the Intermediate Csg to TD, but
Surface Csg and Intermediate are
the same as depicted here.

Top cement behind Production Csg.
generally @ 7000-8000' dwn fm surf.

NEW MEXICO
OIL CONSERVATION DIVISION

Blair EXHIBIT
CASE NO. 11812

Production Csg:
5 1/2 or 7" Csg set @ approx 9400 or 12,500'
w/ 800-1000 sx for Dev. or 200-300 sx for
Wc

8-19-97