

RR Woolley
Woolley #12-D
330' FNL & 330 FEL, Unit D
Section 33-T17S-R30E
Plugged 07/10/52


4

SET 5 SX PLUG AT SURFACE

DEA 7/52

8 5/8" CUT & PULLED
FROM 245'

SET 10 SX PLUG IN/OUT
OF 8 5/8" STUB

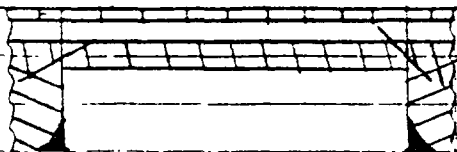


10" HOLE @ 506

8 5/8" 24" SA 506' w/ 50 SX

FILLED HOLE w/ HEAVY MUD
TO BASE OF SALT @ 1205'

NO OIL OR WATER FOUND
IN WELL.

10 SX PLUG SA 3100'



7 7/8" HOLE TO 3256

EXHIBIT 13

11973

KL 4/16/98

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Las Cruces

Lease No. 028936 (d)

Unit D

4

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL		SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	☒
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

July 10, 1952

Woolley
Well No. 12-D is located 330 ft. from N line and 330 ft. from E line of sec. 33

NW 1/4 NW 1/4 Sec. 33 17 S 30 E N.M.P.M.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)

Premier Eddy New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

We ~~will~~^{ed} abandon our Woolley 12-D, it was drilled to a total depth of 3256' and no oil was found in the Premier Pay. There was no water in this well. A 10 sack cement bridge was set at 3100', hole filled with heavy mud to base of salt, we put a 10 sack cement plug on top of 8 5/8" stub at 245', filled to top and a 5 sack cement and 4" pipe ~~marker~~ for marker.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Roland Rich Woolley

Address Box 398


Loco Hills

New Mexico

By J. V. Brown

Title Superintendent

Form 9-390

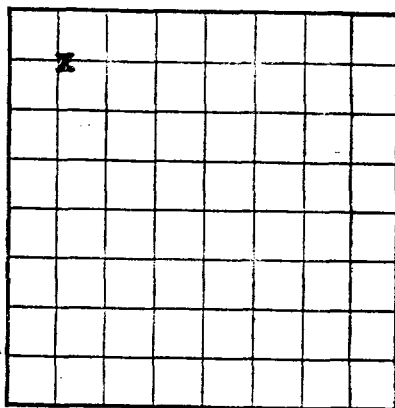U. S. LAND OFFICE Las Cruces
SERIAL NUMBER X229325
LEASE OR PERMIT TO PROSPECT _____

LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company Roland Rich Woolley Address Box 398, Loco Hills
Lessor or Tract same Field Premier State New Mexico
Woolley
Well No. 12-D Sec. 33 T. 17 R. 30 Meridian N.M.P.M. County Eddy
Location 330ft. {N.} of N. Line and 330ft. {E.} of W. Line of Sec. 33 Elevation _____
(Derive floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed J. S. BricesDate _____ Title Superintendent

The summary on this page is for the condition of the well at above date.

Commenced drilling June 1, 19 52 Finished drilling July 7, 19 52

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from _____ to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS
No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____
CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
8 5/8"	24#	8 rd	Nat'l	500					

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
8 5/8"	506	50	Denton H.O.W.O. Co.	heavy	top to bottom

PLUGS AND ADAPTERS

MARRIAGE AND BAPTISMAL RECORD			
NAME	DATE	PLACE	REMARKS
JOHN DOE	1900	NEW YORK	
JANE DOE	1900	NEW YORK	
JOHN DOE	1900	NEW YORK	
JANE DOE	1900	NEW YORK	
JOHN DOE	1900	NEW YORK	
JANE DOE	1900	NEW YORK	
JOHN DOE	1900	NEW YORK	
JANE DOE	1900	NEW YORK	
JOHN DOE	1900	NEW YORK	
JANE DOE	1900	NEW YORK	

HISTORY OF OIL OR GAS WELL

18-43094-1 U. S. GOVERNMENT PRINTING OFFICE

It is of the greatest importance to have a complete history of the well. Please state in detail the dates of redrilling, together with the reasons for the work and its results. If there were any changes made in the casing, state fully, and if any casing was "sidetracked" or left in the well, give its size and location. If the well has been dynamited, give date, size, position, and number of shots. If plugs or bridges were put in to test for water, state kind of material used, position, and results of pumping or bailing.

This well was commenced drilling June 1, 1952 and was completed July 7, 1952. 506' of 8 5/8" casing was set at top of salt using 50 sacks of cement by Denton O.W.C. Co. This well was drilled to the pink line, or to top of Zone 7, there was no oil. We pulled 245' of 8 5/8". A 10 sack cement bridge was set at 3100', filled hole with heavy mud to base of salt, put a 10 sack cement plug on top of 8 5/8" stub at 245', filled to top & put 5 sacks cement & 4" pipe for marker.

No. 3 FLOW to No. 6 FLOW

No. 5 There was no water anywhere in this well.

No. 1 FLOW to No. 4 FLOW

~~70-5-1287~~ There was no water anywhere in this well.

No. 110111

(Dawson, 1973, p. 1)

OIL OR GAS SANDS OR ZONES

Commenced drilling 2-15-71 10:33 Finished drilling 2-15-71 11:10

The summary on this page is for the condition of the ship as of the date

0916

၇၂၆၆၆၆

NOTES: INFORMATION NOT DETERMINED FROM THE AVAILABLE RECORDS.

present and the day after tomorrow to present the results of the investigation to the committee.

INVESTIGATION TO DETERMINE THE CAUSE OF THE COLLAPSE OF THE BRIDGE

[illegible]

195501 01 JUL 51 2017 1919 5230101 20170 1919 5230101

CONFIDENTIAL

ГОСАТЕ МЕЛ СОВЕСТГА

[illegible]

TOC OF OIG OK CYS LEFT

GEOLOGICAL SURVEY

DEPARTMENT OF THE INTERIOR

UNITED STATES

LEADER OF CENTRAL TO PROSPECT

202577 7 OCT 68

CONFIDENTIAL SERVICE

PLATE 10

[illegible]

—

AMERICAN

Adapters—Material

Size

Depth set

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

_____, 19____

Put to producing _____, 19____

The production for the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment.

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

W.E. Settlement _____ Driller C.C. Pratt _____ Driller

A.H. Lowrey _____ Driller _____ Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
2000	2000	0	
0	10	10	Sand
10	20	10	Caliche
20	255	235	Red bed
255	390	135	Anhydrite
390	395	5	Red bed
395	405	10	Anhydrite
405	435	30	Sandy shale
435	480	45	Red rock & anhydrite
480	1205	725	Salt
1205	1225	20	Anhydrite
1225	1275	50	& red rock
1275	1335	60	
1335	1380	45	& blue shale
1380	1430	50	
1430	1525	95	Broken anhydrite
1525	1847	322	Anhydrite
1847	1880	33	Brown lime
1880	1966	86	Anhydrite
1966	1975	9	Brown lime
1975	2005	30	Anhydrite
2005	2015	10	Brown lime
2015	2180	165	Anhydrite
2180	2255	75	" & red rock
2255	2425	170	
2425	2460	35	Red sand

FORMATION RECORD—Continued

BLM

(4)

Submit in triplicate
 UNITED STATES
 DEPARTMENT OF THE INTERIOR
 GEOLOGICAL SURVEY
 ARTS, NEW MEXICO

SUNDY NOTICES AND REPORTS ON WELLS

REPORT OF INTENTION TO DRILL	REPORT OF INTENTION TO ABANDON WELL
REPORT OF INTENTION TO CHANGE PLUG	REPORT OF INTENTION TO SHOOTING OR ACIDING
REPORT OF INTENTION TO TEST WATER SHUT-OFF	REPORT OF INTENTION TO ALTERING CEMENT
REPORT OF INTENTION TO REPAIR OR REGRIND WELL	REPORT OF INTENTION TO REPAIRING OR REGRINDING
REPORT OF INTENTION TO SHOOT OR ACIDISE	REPORT OF INTENTION TO SHOOT OR ACIDISE
REPORT OF INTENTION TO PUMP UP WATER CEMENT	REPORT OF INTENTION TO PUMP UP WATER CEMENT
REPORT OF INTENTION TO ABANDON WELL	REPORT OF INTENTION TO ABANDON WELL

June 10, 1952

Woolley Well No. 12-D is located 350 ft from line and 350 ft from line of sec. 23

Woolley Well No. 12-D is located 17 8 30 N. M. E. M.

Owner Addy New Mexico

The direction of the derrick floor above sea level is ft.

DETAILS OF WORK

We shall abandon Woolley 12-D, it was drilled to a total depth of 3256' and no oil found in the Premier Key. There was no water in this well. A 10 sack cement bridge was set at 3100', hole filled with heavy mud to base of salt, we put a 10 sack cement plug on top of 8 5/8" stub at 245', filled to top and 5 sack cement and 4" pipe for marker.

I understand that this notice is being published for the Geological Survey before operations are to be commenced.

Company Roland 2100 Woolley
 Address Box 298
 Logo Hills
 New Mexico
 By C. W. Price
 Title Superintendent

Case No. 1 No. 2 No. 3 No. 4 No. 5 No. 6 No. 7 No. 8 No. 9 No. 10 No. 11 No. 12 No. 13 No. 14 No. 15 No. 16 No. 17 No. 18 No. 19 No. 20 No. 21 No. 22 No. 23 No. 24 No. 25 No. 26 No. 27 No. 28 No. 29 No. 30 No. 31 No. 32 No. 33 No. 34 No. 35 No. 36 No. 37 No. 38 No. 39 No. 40 No. 41 No. 42 No. 43 No. 44 No. 45 No. 46 No. 47 No. 48 No. 49 No. 50 No. 51 No. 52 No. 53 No. 54 No. 55 No. 56 No. 57 No. 58 No. 59 No. 60 No. 61 No. 62 No. 63 No. 64 No. 65 No. 66 No. 67 No. 68 No. 69 No. 70 No. 71 No. 72 No. 73 No. 74 No. 75 No. 76 No. 77 No. 78 No. 79 No. 80 No. 81 No. 82 No. 83 No. 84 No. 85 No. 86 No. 87 No. 88 No. 89 No. 90 No. 91 No. 92 No. 93 No. 94 No. 95 No. 96 No. 97 No. 98 No. 99 No. 100