

C W Trainer
P. O. Box 754 - Midland, Texas 79702
Ph: 915\687-2505 - Fax: 915\687-2625

August 30, 20002

SEP - 3 2000

State of New Mexico
Energy, Minerals, and Natural Resources Department
Oil Conservation Division
1220 South Francis Drive
Santa Fe, NM 87505

Attn: David R. Catanch

Re: Case #12866 - Order #11816

Thanks for captioned order. I present more evidence for (10) and (11) page 3 as follows:

- (10) Plugging Report for Columbian Carbon Graham #1 - Unit M - 330 PSL & 990 FWL Sec 9 - 15S - 36E, Lea County, NM showing 25 sx 9605 - 9655 and 25 sx 10405 - 10355 from C-102 filed June 22, 1956. This report was found in Hobbs file for Disposal well in Unit N - East offset - yesterday. I hope you will not require I replug this well as stated in (12). It was plugged OK to permit disposal in the offset well in Unit N.
- (11) My form C-103 dated 5-26-2000, enclosed, shows I ran 5-1/2" casing and spliced 8689' into Shell's ~~oil~~ pipe and circulated cement to surface. I request you not require any more cementing on GB#1.

Sincerely,



C W Trainer

Cc: Hobbs - OCS - Chris
Perry Hughes
Gaye Heard w/Oil Reports
Jim Bruce
D. Morse
P. KislaK

OIL CONSERVATION DIVISION

DISTRICT I
1925 N. French Dr., Hobbs, NM 88240
DISTRICT II
811 E. First, Artesia, NM 88210
DISTRICT III
1000 Rio Grande Rd., Aztec, NM 87410
DISTRICT IV
2640 South Postroad, Santa Fe, NM 87508

2040 S. Pecos
Santa Fe, New Mexico 87505

| | |
|--------------------------------------|--|
| WELL API NO. | 30-025-03689 |
| 1. Indicate Type of Lease | STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/> |
| 4. State Oil & Gas Lease No. | E-1687 |
| 7. Lease Name or Unit Agreement Name | State GS |
| 8. Well No. | 1 |
| 9. Well Name or Location | Caudill, Spotts-Penn Devonian |

| | |
|---|---|
| SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL or TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS) | |
| 1. Type of Well: OIL <input checked="" type="checkbox"/> GAS <input type="checkbox"/> WELL WELL OTHER | 2. Name of Operator C. W. TRAINER |
| 3. Address of Operator c/o OIL REPORTS & GAS SERVICES, INC., 1008 W. BROADWAY, HOBBS, NM 88240 | 4. Well Location Unit Name C : 660 From From The NORTH Line and 1985 From From The WEST Line Section 16 Township 15S Range 38E NMPN LEA County 10. Elevation (Show whether OF, RES, RT, GR, etc.) 3920 OF |

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG & ABANDONMENT ☐
CASING TEST & CEMENT JOB ☐
OTHER: Re-Entry ☒

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent data, including estimated date of starting any proposed work) SEE RULE 1101.

2/28/00 MIRU. NU BOP.

2/29/00 RU reverse equip. RIH w/ metal muncher & drill collar. Install stripper head. Mill on old dry hole marker cmt'd inside 8 5/8" csg.

3/1/00-3/8/00 CO & circ. hole to 9887'.

3/9/00 Run 8689' 5 1/2" 17 & 20# N80 & J55 8rd csg.)

3/13/00 Cut off 5 1/2" csg. Install tbg head & NU BOP. RIH w/dri collars & 272 jts tbg. CO to 8875'. Circ. hole clean.

3/14/00-3/17/00 CO to 9950'. Dri cmt to 10,540'. Circ. hole clean.

3/20/00 RIH w/5.5" cmt retainer on 2 7/8" tbg set @ 10,103'. Test tbg to 5000#. Sqz Wolfcamp perms w/100 sx Class "H" + 5% FL for total 21 bbls.cmt. Spot cmt to end of tbg, displaced w/fresh wtr. Pressure to 4300# & held. Start to reverse out cmt. would not circ.

3/21/00 RIH w/44 jts tbg. RU & tie into 2" outlets on tbg head w/blind rams on BOP shut. Break circ. down 5 1/2" csg w/15 bbls fresh wtr circ'd free. Pump 1300 sx cmt. open up BOP & insert 5 1/2" top rubber plug in 5 1/2" csg. Close BOP blind rams & displace w/187 bbls fresh wtr. Displaced plug down to 8550'. Circ'd 77 sx cmt to surf.

3/22/00 GIH w/2 7/8" tbg, tag @ 8311'. DO rubber plug then cmt down to 8580'. Circ hole clean.

3/23/00-3/29/00 Dri cmt from 8560'-10,295'. Circ. hole clean. Tagged @ 9930'. Dri cmt retainer @ 10,545'. Circ. hole clean.

Tag @ 10,547'. DO cmt to 10,594' & fall free. Circ'd hole clean. Tagged @ 13,294'.

3/30/00 Dri on CIBP. CIBP turned loose & pushed down hole to next CIBP @ 13,470'. Pump 3000 gals 15% NEFE acid down tbg & wash across perms & up to 13,000'. Displace acid w/40 bbls wtr down tbg.

Cont'd next page

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Gaye Heard TITLE AGENT DATE 05/26/00
TYPE OR PRINT NAME Gaye Heard TELEPHONE NO. (505) 393-2727

(THIS SPACE FOR STATE USE)

APPROVED BY
CONDITIONAL APPROVAL, IF ANY:

TITLE DISTRICT SUPERVISOR DATE 2000
DISTRICT SUPERVISOR

C. W. Trainer
State GB #1
Sec. 16, T15S, R36E
Re-Entry Cont'd

3/31/00 & 4/1/00 Well on vacuum. GIH w/40 jts tbg. Cont'd DO plug, chased down to 13,488'. Lost 8K weight when spudding on plug. Circ. hole clean.

4/3/00 & 4/4/00 Lay down 810 jts 2 7/8" tbg. Tag fish.

4/5/00-4/8/00 Tag top of fish @ 13,000'. Mill on fish from 13,000'-13,010'. Recovered fish.


4/10/00 Tag CIBP @ 13,480' & mill. Plug turned loose & went down hole to 13,652'. Circ. hole clean.

4/11/00-4/14/00 CO to 13,562' & circ'd clean. Ran tbg, rods & pump. Load tbg & test to 500# w/no leaks. Set pumping unit & Ajax motor. Well placed on prod. 4/16/00.

Graham #1

Unit letter M - 330' FSL & 990' FWL

Sec 9, T15S, R36E Lea County New Mexico

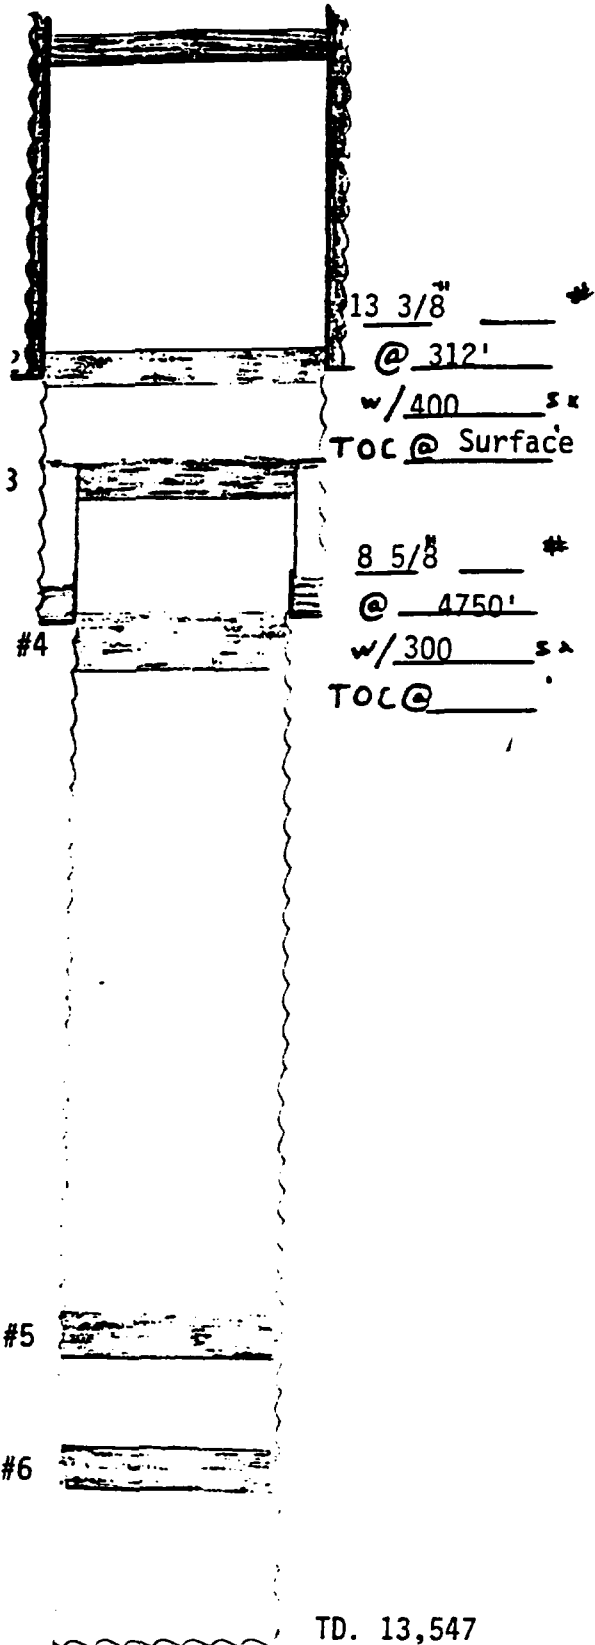

8 5/8 csg shot off & pulled from 900'

#1 Cement plug 14'-surface 10 sx

#2 Cement plug 320-285' 25 sx

#3 Cement plug 940-860' 30 sx

#4 Cement plug 5,020-4,700' 100 sx

#5 Cement plug 9,655-9,605' 25 sx

#6 Cement plug 10,405-10,355' 25 sx

* Per C-102 filed June 22, 1956

GA 7E Heard 8/26/02

**STATE OF NEW MEXICO
ENERGY, MINERALS, AND NATURAL RESOURCES DEPARTMENT
OIL CONSERVATION DIVISION**

**IN THE MATTER OF THE HEARING
CALLED BY THE OIL CONSERVATION
DIVISION FOR THE PURPOSE OF
CONSIDERING:**

**CASE NO. 12866
ORDER NO. R-11816**

**APPLICATION OF C. W. TRAINER FOR APPROVAL OF A SALT WATER
DISPOSAL WELL, LEA COUNTY, NEW MEXICO.**

ORDER OF THE DIVISION

BY THE DIVISION:

This case came on for hearing at 8:15 a.m. on August 1, 2002, at Santa Fe, New Mexico, before Examiner David R. Catanach.

NOW, on this 16th day of August, 2002, the Division Director, having considered the testimony, the record, and the recommendations of the Examiner,

FINDS THAT:

(1) Due public notice has been given, and the Division has jurisdiction of this case and its subject matter.

(2) The applicant, C. W. Trainer ("Trainer"), seeks authority to utilize its State "GA" Well No. 6 (API No. 30-025-03687) located 660 feet from the North line and 990 feet from the West line (Unit D) of Section 16, Township 15 South, Range 36 East, NMPM, Lea County, New Mexico, to dispose of produced water into the San Andres and Glorieta formations from a depth of 4,749 feet to 6,230 feet.

(3) Trainer originally filed the subject application for administrative approval on March 18, 2002.

(4) The Law Office of Heidel, Samberson, Newell, Cox & McMahon sent a letter to Trainer dated March 27, 2002 on behalf of U. S. Alexander, the surface owner at the site of the State "GA" Well No. 6, objecting to the application. A copy of this letter was received by the Division on or about March 28, 2002.

(5) Due to the objection by U. S. Alexander, Trainer's application was set for hearing before a Division examiner.

Rec'd 8/23/02 from James Bruce

(6) Trainer appeared at the hearing through legal counsel.

(7) Notice of this hearing was sent to U. S. Alexander and to all offset operators within one-half mile of the State "GA" Well No. 6. Neither U. S. Alexander nor any other party appeared at the hearing in opposition to the application.

(8) Trainer did not present testimony at the hearing; however, legal counsel for Trainer requested that the Division issue an order in this case based upon the Form C-108 (Application to Inject) and supporting data originally filed by Trainer in this matter.

(9) Trainer's evidence demonstrates that:

- (a) the subject well was drilled by Shell Oil Company in November, 1955 to a total depth of approximately 13,682 feet;
- (b) the well was plugged and abandoned in January, 1967;
- (c) the well is currently equipped with 13 3/8 inch casing set at a depth of 352 feet and cemented to surface, and 8 5/8 inch casing set at a depth of 4,749 feet and cemented to surface; and
- (d) Trainer proposes to:
 - i) re-enter, drill out cement plugs and clean out the well to a depth of approximately 6,230 feet;
 - ii) set 2 7/8 inch internally coated tubing in a packer set at a depth of 4,675 feet; and
 - iii) inject into the San Andres and Glorieta formations through the open-hole interval from approximately 4,749 feet to 6,230 feet.

H&M Disposal Well in Use

(10) The evidence presented demonstrates that there is a well within the "area of review" that is not plugged and abandoned in a manner that will ensure that the injected fluid is confined to the injection interval. The Columbian Carbon Company M. Graham Well No. 1, located 330 feet from the South line and 990 feet from the West line (Unit M) of Section 9, Township 15 South, Range 36 East, NMPM, has no plugs within the vertical interval from 5,020 feet to 13,547 feet.

(11) The evidence further demonstrates that there is a well within the "area of review" that is not cemented in a manner that will ensure that the injected fluid is confined to the injection interval. The C. W. Trainer State "GB" Well No. 1 (API No. 30-025-03689) located 660 feet from the North line and 1988 feet from the West line (Unit C) of Section 16, Township 15 South, Range 36 East, NMPM, has 8 5/8 inch intermediate casing set at a depth of 4,748 feet and cemented to surface, and 5 1/2 inch production casing set at a depth of 13,674 feet and cemented to a depth of approximately 12,151 feet.

From 5 1/2" casing & 11 1/2" tool string from surface and circulated cement to surface.

(12) Prior to commencing injection operations into the State "GA" Well No. 6, Trainer should be required to re-enter and re-plug the M. Graham Well No. 1 and perform remedial cement operations on the State "GB" Well No. 1, both in a manner approved by the supervisor of the Division's Hobbs District Office. *Nothing needed.*

(13) The evidence presented demonstrates that the State "GA" Well No. 6 will be adequately cased and cemented so as to preclude the movement of fluid from the injection zone into other formations, including any fresh water aquifers.

(14) Approval of the application will prevent the drilling of unnecessary wells and will otherwise prevent waste and protect correlative rights.

IT IS THEREFORE ORDERED THAT:

(1) The applicant, C. W. Trainer, is hereby authorized to utilize its State "GA" Well No. 6 (API No. 30-025-03687) located 660 feet from the North line and 990 feet from the West line (Unit D) of Section 16, Township 15 South, Range 36 East, NMPM, Lea County, New Mexico, to dispose of produced water into the San Andres and Glorieta formations through the open-hole interval from a depth of 4,749 feet to 6,230 feet.

(2) Prior to commencing injection operations into the State "GA" Well No. 6, a cement plug shall be set at a depth of approximately 6,230 feet in order to isolate the open-hole interval within the wellbore from 6,230 feet to 7,408 feet.

- (3) Prior to commencing injection operations into the State "GA" Well No. 6, the applicant shall re-enter and re-plug the Columbian Carbon Company M. Graham Well No. 1 located 330 feet from the South line and 990 feet from the West line (Unit M) of Section 9, Township 15 South, Range 36 East, NMPM, in a manner that will ensure that this wellbore will not provide an avenue for the escape of injected fluids from the injection interval, and in a manner approved by the supervisor of the Division's Hobbs District Office.
- (4) Prior to commencing injection operations into the State "GA" Well No. 6, the applicant shall perform remedial cement operations on the C. W. Trainer State "GB" Well No. 1 located 660 feet from the North line and 1988 feet from the West line (Unit C) of Section 16, Township 15 South, Range 36 East, NMPM, in a manner that will ensure that this wellbore will not provide an avenue for the escape of injected fluids from the injection interval, and in a manner approved by the supervisor of the Division's Hobbs District Office.
- (5) The operator shall take all steps necessary to ensure that the injected fluids enter only the proposed injection interval and are not permitted to escape to other formations or onto the surface from injection, production, or plugged and abandoned wells.
- (6) Injection shall be accomplished through 2 7/8 inch internally plastic-lined tubing installed in a packer set at approximately 4,675 feet. The casing-tubing annulus shall be filled with an inert fluid and a gauge or approved leak-detection device shall be attached to the annulus in order to determine leakage in the casing, tubing, or packer.
- (7) The injection well or pressurization system shall be equipped with a pressure control device or acceptable substitute that will limit the surface injection pressure to no more than 950 psi.
- (8) The Division Director may administratively authorize a pressure limitation in excess of the above upon a showing by the operator that such higher pressure will not result in the fracturing of the injection formation or confining strata.
- (9) Prior to commencing injection operations and every five years thereafter, the casing shall be pressure tested throughout the interval from the surface down to the proposed packer setting depth to assure the integrity of such casing.
- (10) The operator shall give advance notice to the Supervisor of the Division's Hobbs District Office of the date and time (i) disposal equipment will be installed on the State "GA" Well No. 6; (ii) the mechanical integrity pressure test will be conducted on

the State "GA" Well No. 6; and (iii) remedial work will be performed on the M. Graham Well No. 1 and the State "GB" Well No. 1, so these operations may be witnessed.

(11) The operator shall immediately notify the Supervisor of the Division's Hobbs District Office of the failure of the tubing, casing or packer in the disposal well or the leakage of water, oil or gas from or around any producing or plugged and abandoned well within the area, and shall take all steps as may be timely and necessary to correct such failure or leakage.


(12) The operator shall obtain a native formation water sample from the San Andres formation and from the Glorieta formation during recompletion operations on the State "GA" Well No. 6. The operator shall cause these water samples to be analyzed and the results provided to the Santa Fe Office of the Division.

(13) The operator shall submit monthly reports of the disposal operations on Form C-120-A in accordance with Division Rules No. 706 and 1120.

(14) The injection authority granted herein for the State "GA" Well No. 6 shall terminate one year after the date of this order if the operator has not commenced injection operations into the well; provided, however, the Division, upon written request by the operator, may grant an extension for good cause.

(15) Jurisdiction is hereby retained for the entry of such further orders as the Division may deem necessary.

DONE at Santa Fe, New Mexico, on the day and year hereinabove designated.

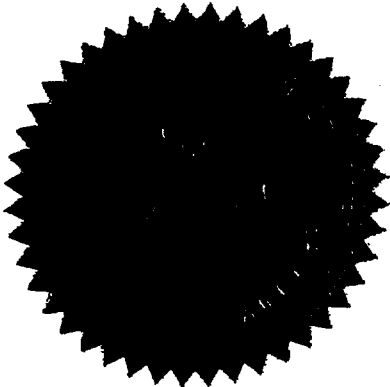

SEAL

STATE OF NEW MEXICO
OIL CONSERVATION DIVISION

Lori Wrotenbery
LORI WROTENBERY
Director