


EXHIBIT " A "

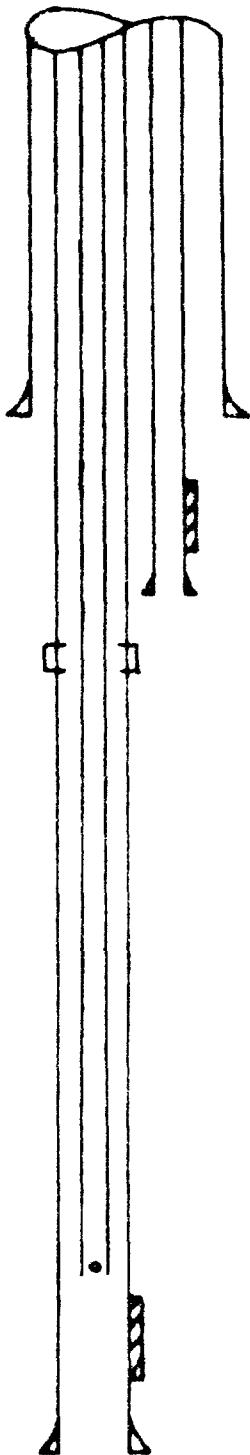

Surface casing: 13-3/8" set at 300', cement circulated

Pictured Cliffs perforations at 2550 - 2600' in
2-7/8" casing set at 2752' with 100 sacks cement

DV tool at 2800' cemented with 100 sacks cement

2752
350-
2402

2-3/8" tubing landed at 6850'

Pin collar

Dakota perforations at 6900 - 7025' in

4 1/2" casing set at 7161' with 300 sacks cement

All depths estimated


AZTEC OIL & GAS COMPANY

Hanks #16-D

T-28-N

R-10-W

R-9-W

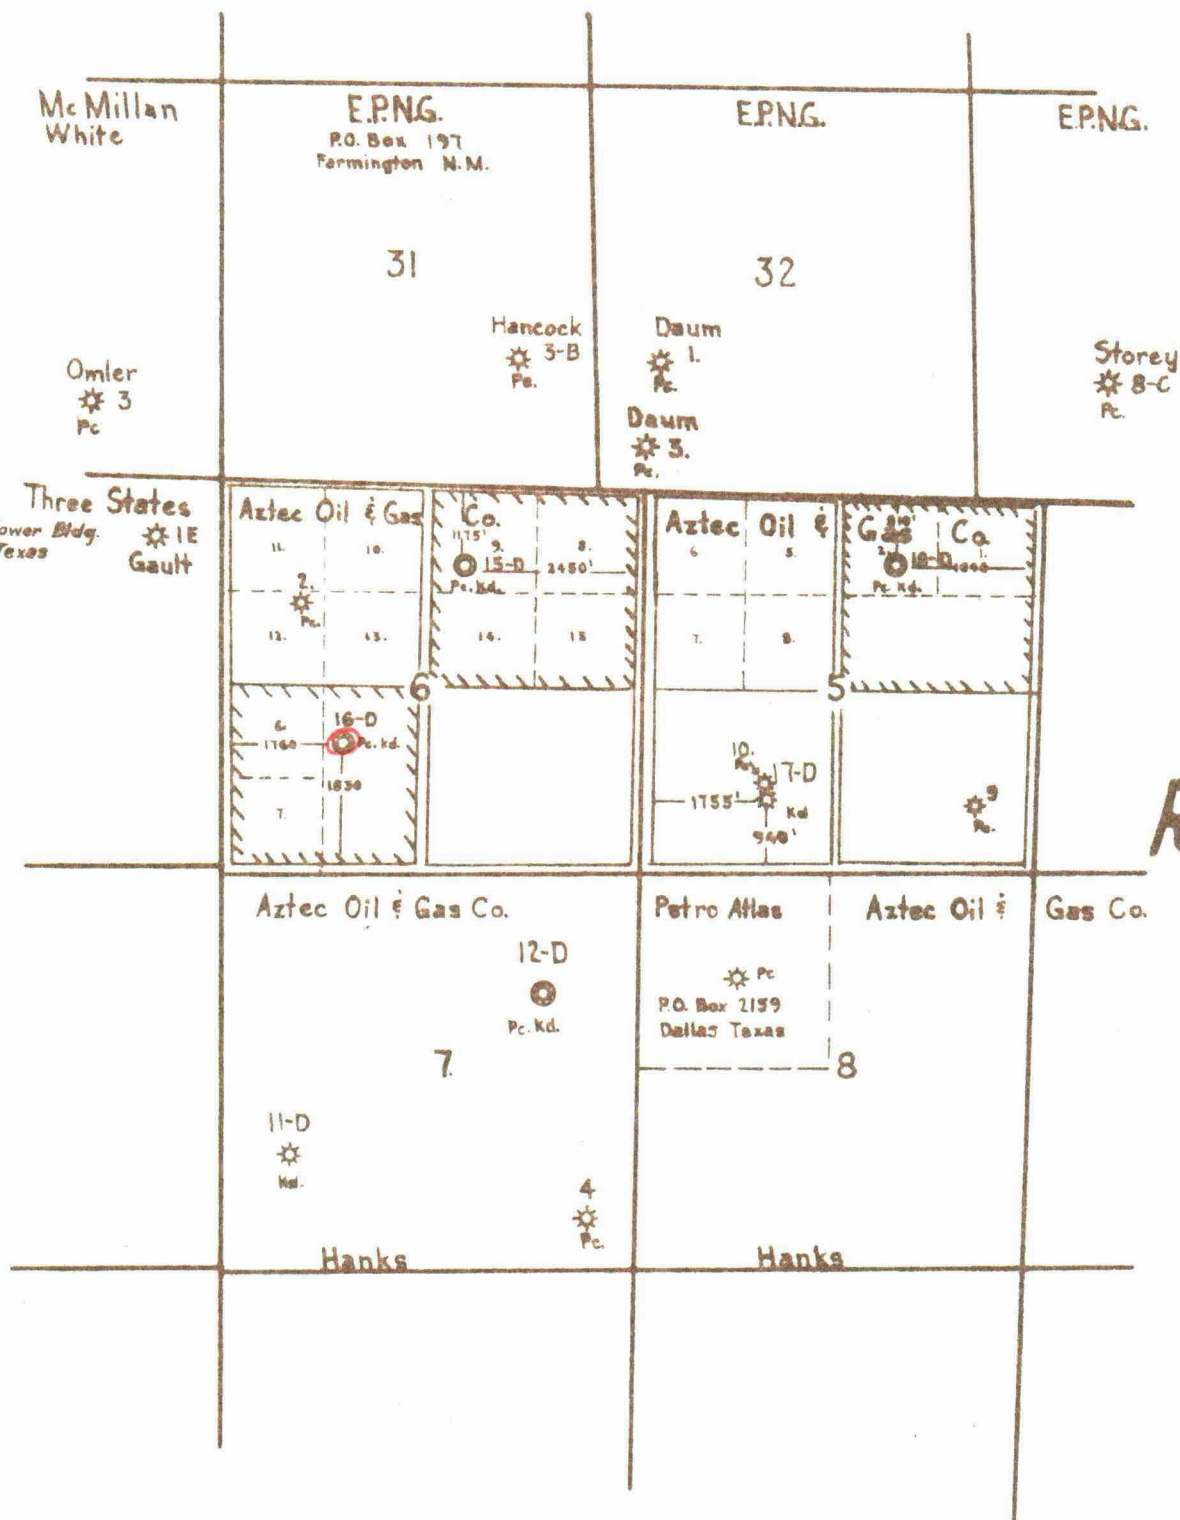

T-27-N

Single Comp. — *

Dual Comp. — ○

Exhibit - "B"