

**JICARILLA Apache 102#10 GALLUP-DAKOTA COMMINGLED  
WELLBORE: 890' FNL and 1030' FWL  
SEC. 4-T26N-R4W**

AMOCO PRODUCTION COMPANY

SURFACE CASING

Hole size: 13 3/4" to 197'  
 Casing: 10 3/4" 32.75# H-40  
 Casing set @ 197' w/140 SX  
 Top of Cement: Circulate to  
Surface

INTERMEDIATE CASING


Hole size: 9 7/8" to 4160'  
 Casing: 7 5/8" 26.4# J-55  
 Casing set @ 4160' w/140 SX  
 Top of Cement: 3500' (est.)

LINER HANGER

Hanger Type: \_\_\_\_\_  
 Hanger Top @ \_\_\_\_\_

( DHC 9-7-77 )

BEFORE EXAMINER STAMETS  
 OIL CONSERVATION DIVISION  
UTPC EXHIBIT NO. 3  
 CASE NO. 8104 & 8185  
 Submitted by HERRINGTON  
 Hearing Date 5-9-87

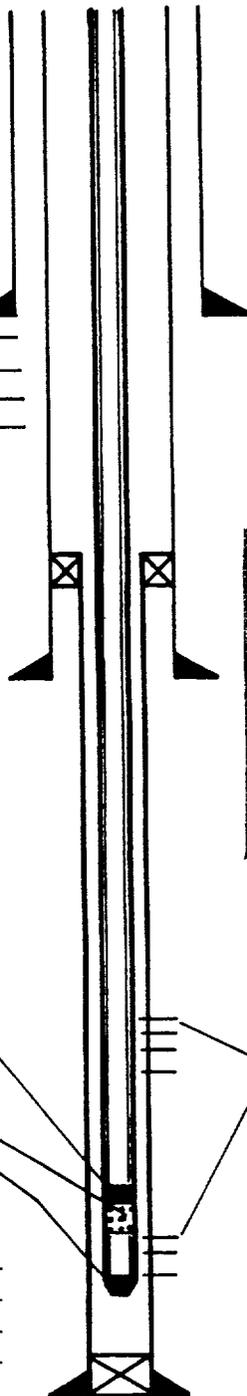

Seating Nipple  
 Perf sub  
 Mud Anchor

PERFORATIONS

Gallup: 7664'-7678'  
 Dakota: 8150'-8345'

PRODUCTION LINER

Hole Size: 6 3/4" (Gas Drilled)  
 Liner: 4 1/2" 10.5# K-55  
 Liner set @ 8375' w/500 SX  
 Top of Cement: Circulate (Est.)

PBTD 8360'  
 TD 8375'

GLE 7177'  
 KBE 7188'  
 KB 11'

**Rio Arriba County, New Mexico  
 Field: B.S. Mesa Gallup and Basin Dakota**