


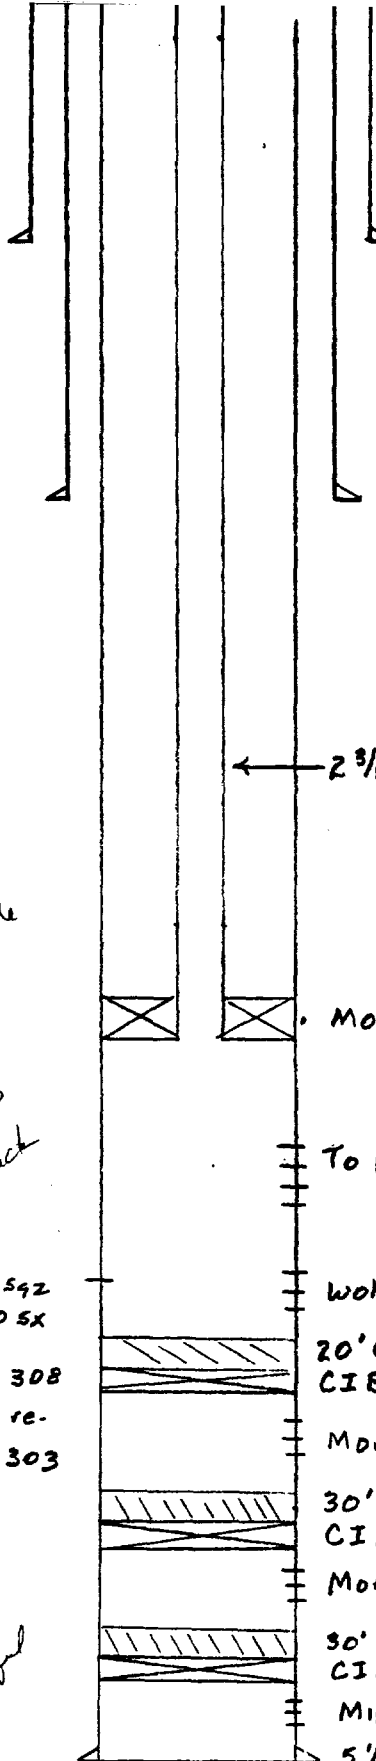

13 7/8 @ 423 w/500 sx, circ.

8 5/8 @ 4260 w/1400 sx, circ.

Spadded early 1980

← 2 3/8 EUE plastic lined tubing

Model "D" drillable packer - 10,030

To perf 10,082-88, 10,121-131 & 10,135-145 w/4 shots/ft

Wolfcamp perfs 10,298-308 - To reperf w/ 2 shots/ft

20' Cement
CIBP 11,250

Morrow perfs 11,676-11,684

30' Cement
CIBP 11,800

Morrow perfs 11,932-11,949, sqz w/40 sx

30' Cement
CIBP 12,050

Miss. perfs 12,090-12,102

5 1/2 @ 12,160 w/500 sx.

TD 12,160

Surface
Interval
Circulated

7 7/8" hole

TOC-9275
Calculated
7% fill - 100
6.2 ft/sack

1/83 Perf 10,240, sqz
w/100 sx

7/83 Perfs 10,298-308
sqz w/150 sx, re-
Perf 10,298-303

Economic
unsuccessful
zone

Dwight A. Tipton
Leaveville No. 1

Exhibit A