


WELL SKETCH
DRILLING WELLS COMMINGLED
DOWNHOLE
GETTY OIL COMPANY

PROPOSED

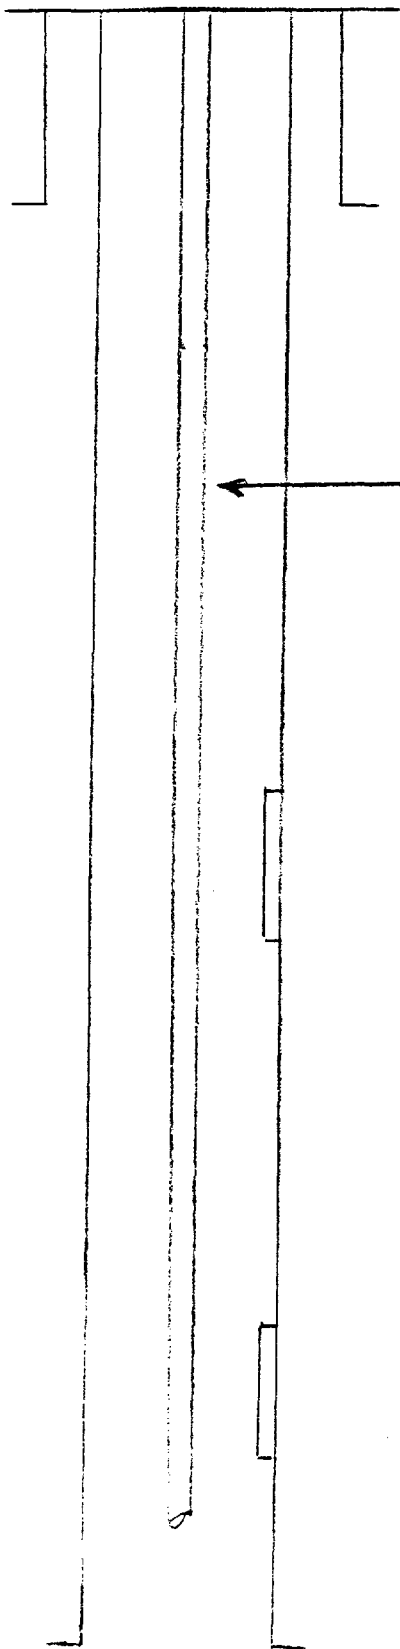

8 5/8", 28#, H-40 set @ \pm 700'.
Cement to surface.

← 2 3/8", 4.7#, J-55 tubing set @ \pm 3600'.

Fren-7-Rivers perms:
 \pm 2100' to \pm 2400' selectively.

BEFORE EXAMINER STOGNER

Oil Conservation Division

GETTY Exhibit No. 2

Case No. 8315

Grayburg Jackson Queen S.A.:
 \pm 3100' to \pm 3600' selectively.

5 1/2", 15.5#, K-55 casing set @ 3900'.
Cement to surface or into surface casing.