

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

REC'D NMOCD

12/09/2020

Form C-103
Revised July 18, 2013

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-34222
1. Type of Well: Oil Well ☐ Gas Well ☒ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator Devon Energy Production Company, LP		6. State Oil & Gas Lease No.
3. Address of Operator 333 W. Sheridan Avenue, Oklahoma City, OK 73102		7. Lease Name or Unit Agreement Name Spud 16 State
4. Well Location Unit Letter O:2320 feet from the South line and 660 feet from the East line Section 16 Township 23S Range 29E NMPM Eddy County, NM		8. Well Number 5
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 2962' KB		9. OGRID Number 6137
		10. Pool name or Wildcat Laguna Salado; Atoka (gas)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			
CLOSED-LOOP SYSTEM ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. MIRU P&A Unit.
2. TOH 2-7/8" tubing.
3. Circ 10# Mud. Set CIBP @ 12100'.
4. Spot ~~20' x CI C~~ cmt 12000'-12100'. **Spot 25 sx CI H cmt - WOC & tag**
5. Spot 50 sx ~~CI C~~ cmt 9900'-10500'. WOC & Tag. (Liner top 10142', T. Wolfcamp 10070) **CI H cmt**
6. Spot 100 sx CI C 6500-7000. (T. Bone Spring 6687')
7. Spot 700 sx CI C 292-3600. WOC and Tag. (Shoes 342, 2948, T Bell Canyon 3035', B Salt 2775, T Salt 378, R-111P)
8. ~~Spot 10 sx CI C 3' 33'~~. **Spot 25 sx Cmt 100' to surface**
9. Cut WH off 3' BGL, Set dry hole marker.

Must use Closed Loop System - no fluids on ground

Spud Date: ******SEE ATTACHED COA's****** 10/24/2005 Rig Release Date: **MUST BE PLUGGED BY 12/9/2021** 12/13/2005

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE  TITLE Production Engineer DATE 12/9/2020
Type or print name Armon Radfar E-mail address: armon.radfar@dmv.com PHONE: 405-552-5014
For State Use Only

APPROVED BY:  TITLE Staff Manager DATE 12/9/2020
Conditions of Approval (if any):

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: SPUD 16 ST 5				Field: Potato Basin			
Location: 2320 FSL 660 FEL SEC 16-T23S-R29E				County: Eddy		State: New Mexico	
Elevation: 2962' GL				Spud Date: 10/24/2005		Compl Date: 3/1/2006	
API#: 30-015-34222		Prepared by: Max Lubitz		Date: 9/27/18		Rev:	

CURRENT WELLBORE

17-1/2" Hole
13-3/8", 48#, H-40 @ 353
 Cmt'd w/400 sx to surface

Base of Salt 2775
 Lamar Limestone 2993
 Bell Canyon 3035
 Cherry Canyon 3865
 Bone Spring 6687
 3rd Bone Spring Sand 9496
 Wolfcamp 10070
 Strawn 11535
 Atoka 11771

11" Hole
9-5/8", 40#, J55, @ 2948'
 Cmt'd w/1051 sx to surface

DV Tool @ 3500

2-7/8" tubing to 12024'

Perforations 12139-12165

8-3/4" Hole
7", 26#, P-110, @ 10500'
 Cmt'd w/1760 sx CI C cmt to SURF

6-1/8" hole
4-1/2" 13.5# P-110 Liner from 10142-12500
 Cmt'd with 330 sx CI H cmt

12500' TVD

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: SPUD 16 ST 5				Field: Potato Basin			
Location: 2320 FSL 660 FEL SEC 16-T23S-R29E				County: Eddy		State: New Mexico	
Elevation: 2962' GL				Spud Date: 10/24/2005		Compl Date: 3/1/2006	
API#: 30-015-34222		Prepared by: Max Lubitz		Date: 9/27/18		Rev:	

PROPOSED WELLBORE


17-1/2" Hole
13-3/8", 48#, H-40 @ 353
 Cmt'd w/400 sx to surface

11" Hole
9-5/8", 40#, J55, @ 2948'
 Cmt'd w/1051 sx to surface

Perforations
 12139-12165

8-3/4" Hole
7", 26#, P-110, @ 10500'
 Cmt'd w/1760 sx CI C

6-1/8" hole
4-1/2" 13.5# P-110 Liner from 10142-12500
 Cmt'd with 330 sx CI H cmt

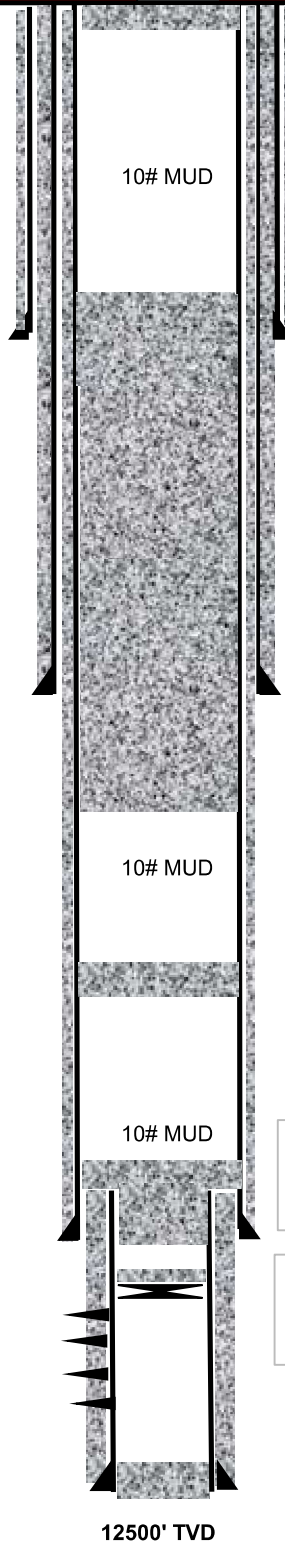

Proposed:
 1. Spot 10 sx CI C 3'-33'.
 2. Cut WH off 3' BGL, Set dry hole marker.

Proposed:
 Spot 700 sx CI C 292-3600. WOC and Tag.
 (Shoes 342, 2948, T Bell Canyon 3035', B Salt 2775, T Salt 378, R-111P)

Proposed:
 Spot 100 sx CI C 6500-7000.
 (T. Bone Spring 6687')

Proposed:
 1. Spot 50 sx CI C cmt 9900'-10500'. WOC & Tag
 (Liner top 10142', T. Wolfcamp 10070)

Proposed:
 1. Set CIBP @ 12100'.
 2. Spot 20 sx CI C cmt 12000'-12100'.

12500' TVD