





REPEAT PASS

Database File 6_22_21_rcbl.db
Dataset Pathname pass1
Presentation Format wc_rcbl
Dataset Creation Wed Jun 23 09:05:56 2021
Charted by Depth in Feet scaled 1:240


400	TT (usec)	200	0	AMP (mV)	100	-5	AMPS1	150	200	VDL (usec)	1200	1	Cement Map	8
0	GR (GAPI)	200	0	AMPx10 (mV)	10	-5	AMPS2	150						
5	CCL	0				-5	AMPS3	150						
						-5	AMPS4	150						
						-5	AMPS5	150						
						-5	AMPS6	150						
						-5	AMPS7	150						
						-5	AMPS8	150						
							GCT_TEMP							
						75	(degF)	150						
							GCT_Temp							
							(degF)							

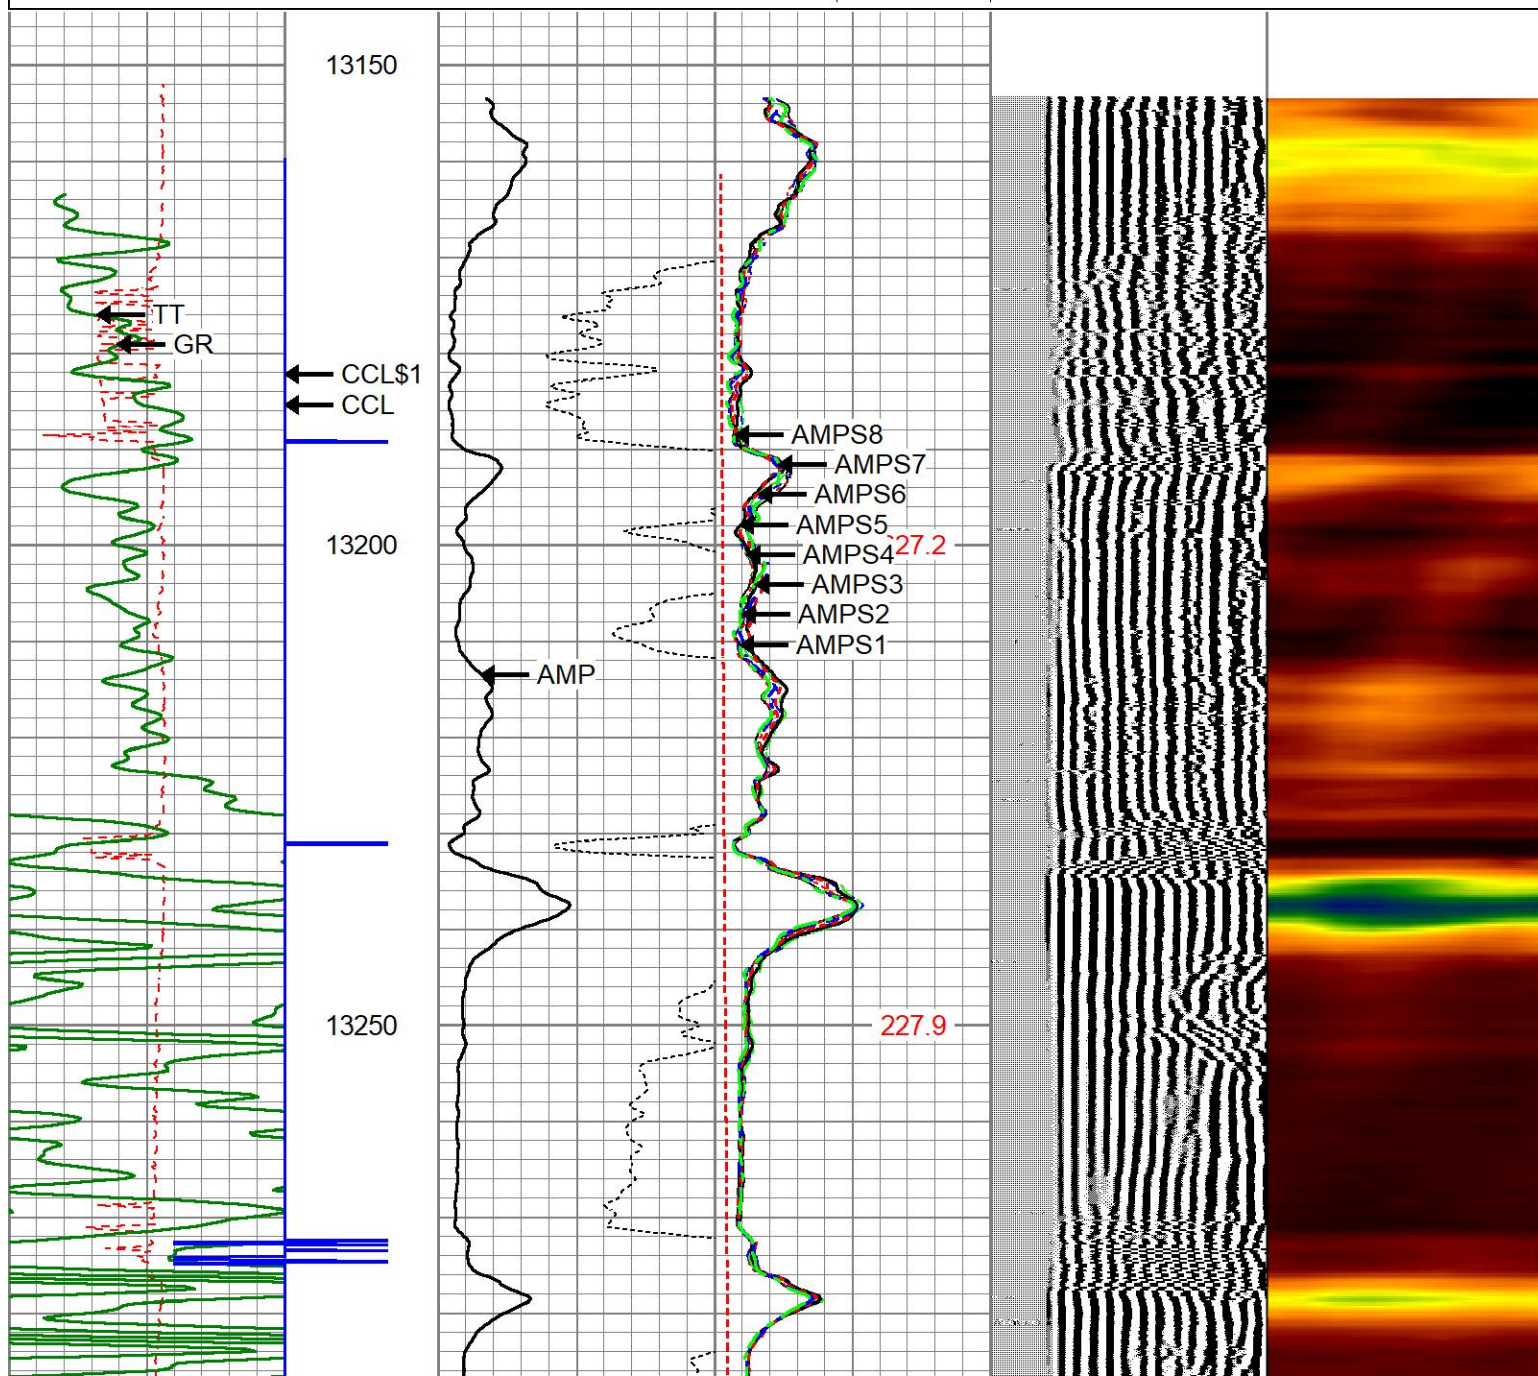

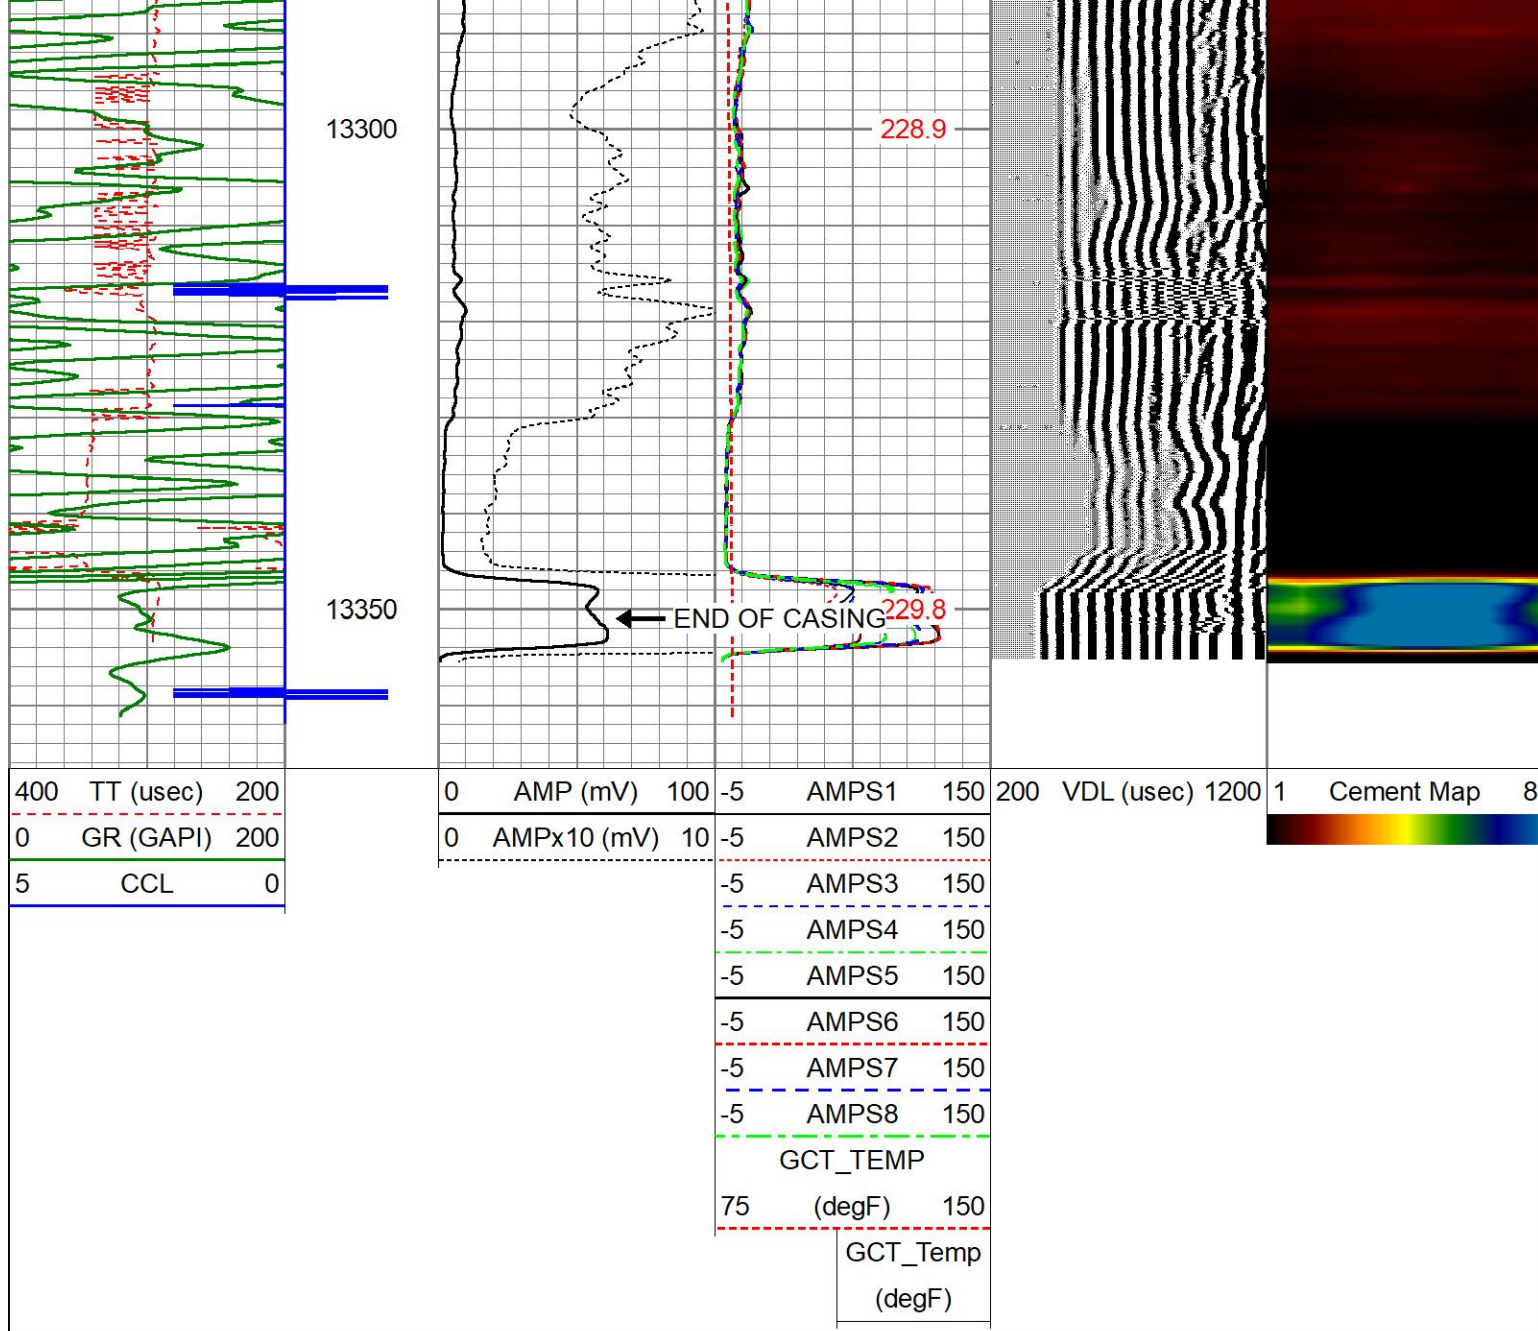



MAIN PASS


Database File 6_22_21_rcbl.db
 Dataset Pathname pass2
 Presentation Format wc_rcbl
 Dataset Creation Wed Jun 23 09:10:32 2021
 Charted by Depth in Feet scaled 1:240

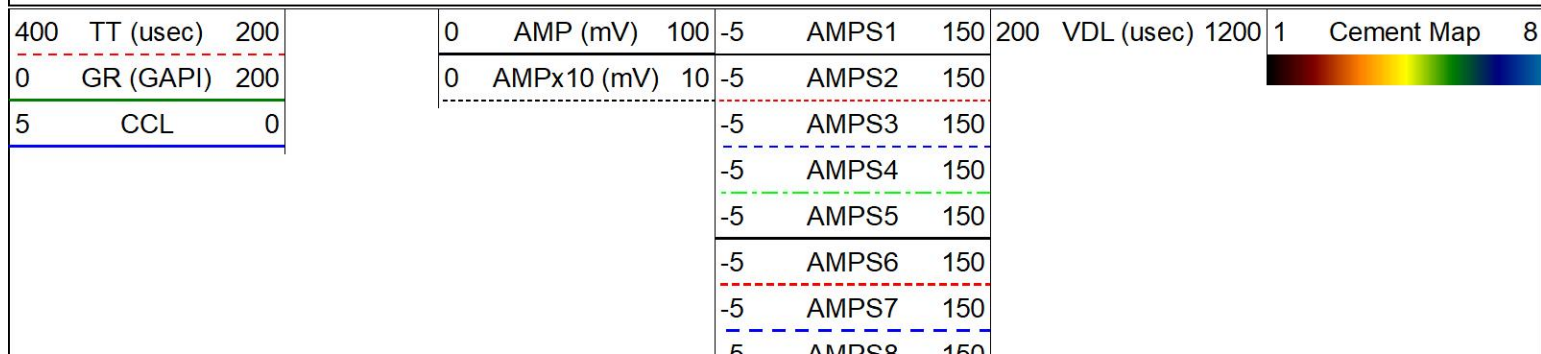



75 (degF) 150
GCT_TEMP
(degF)

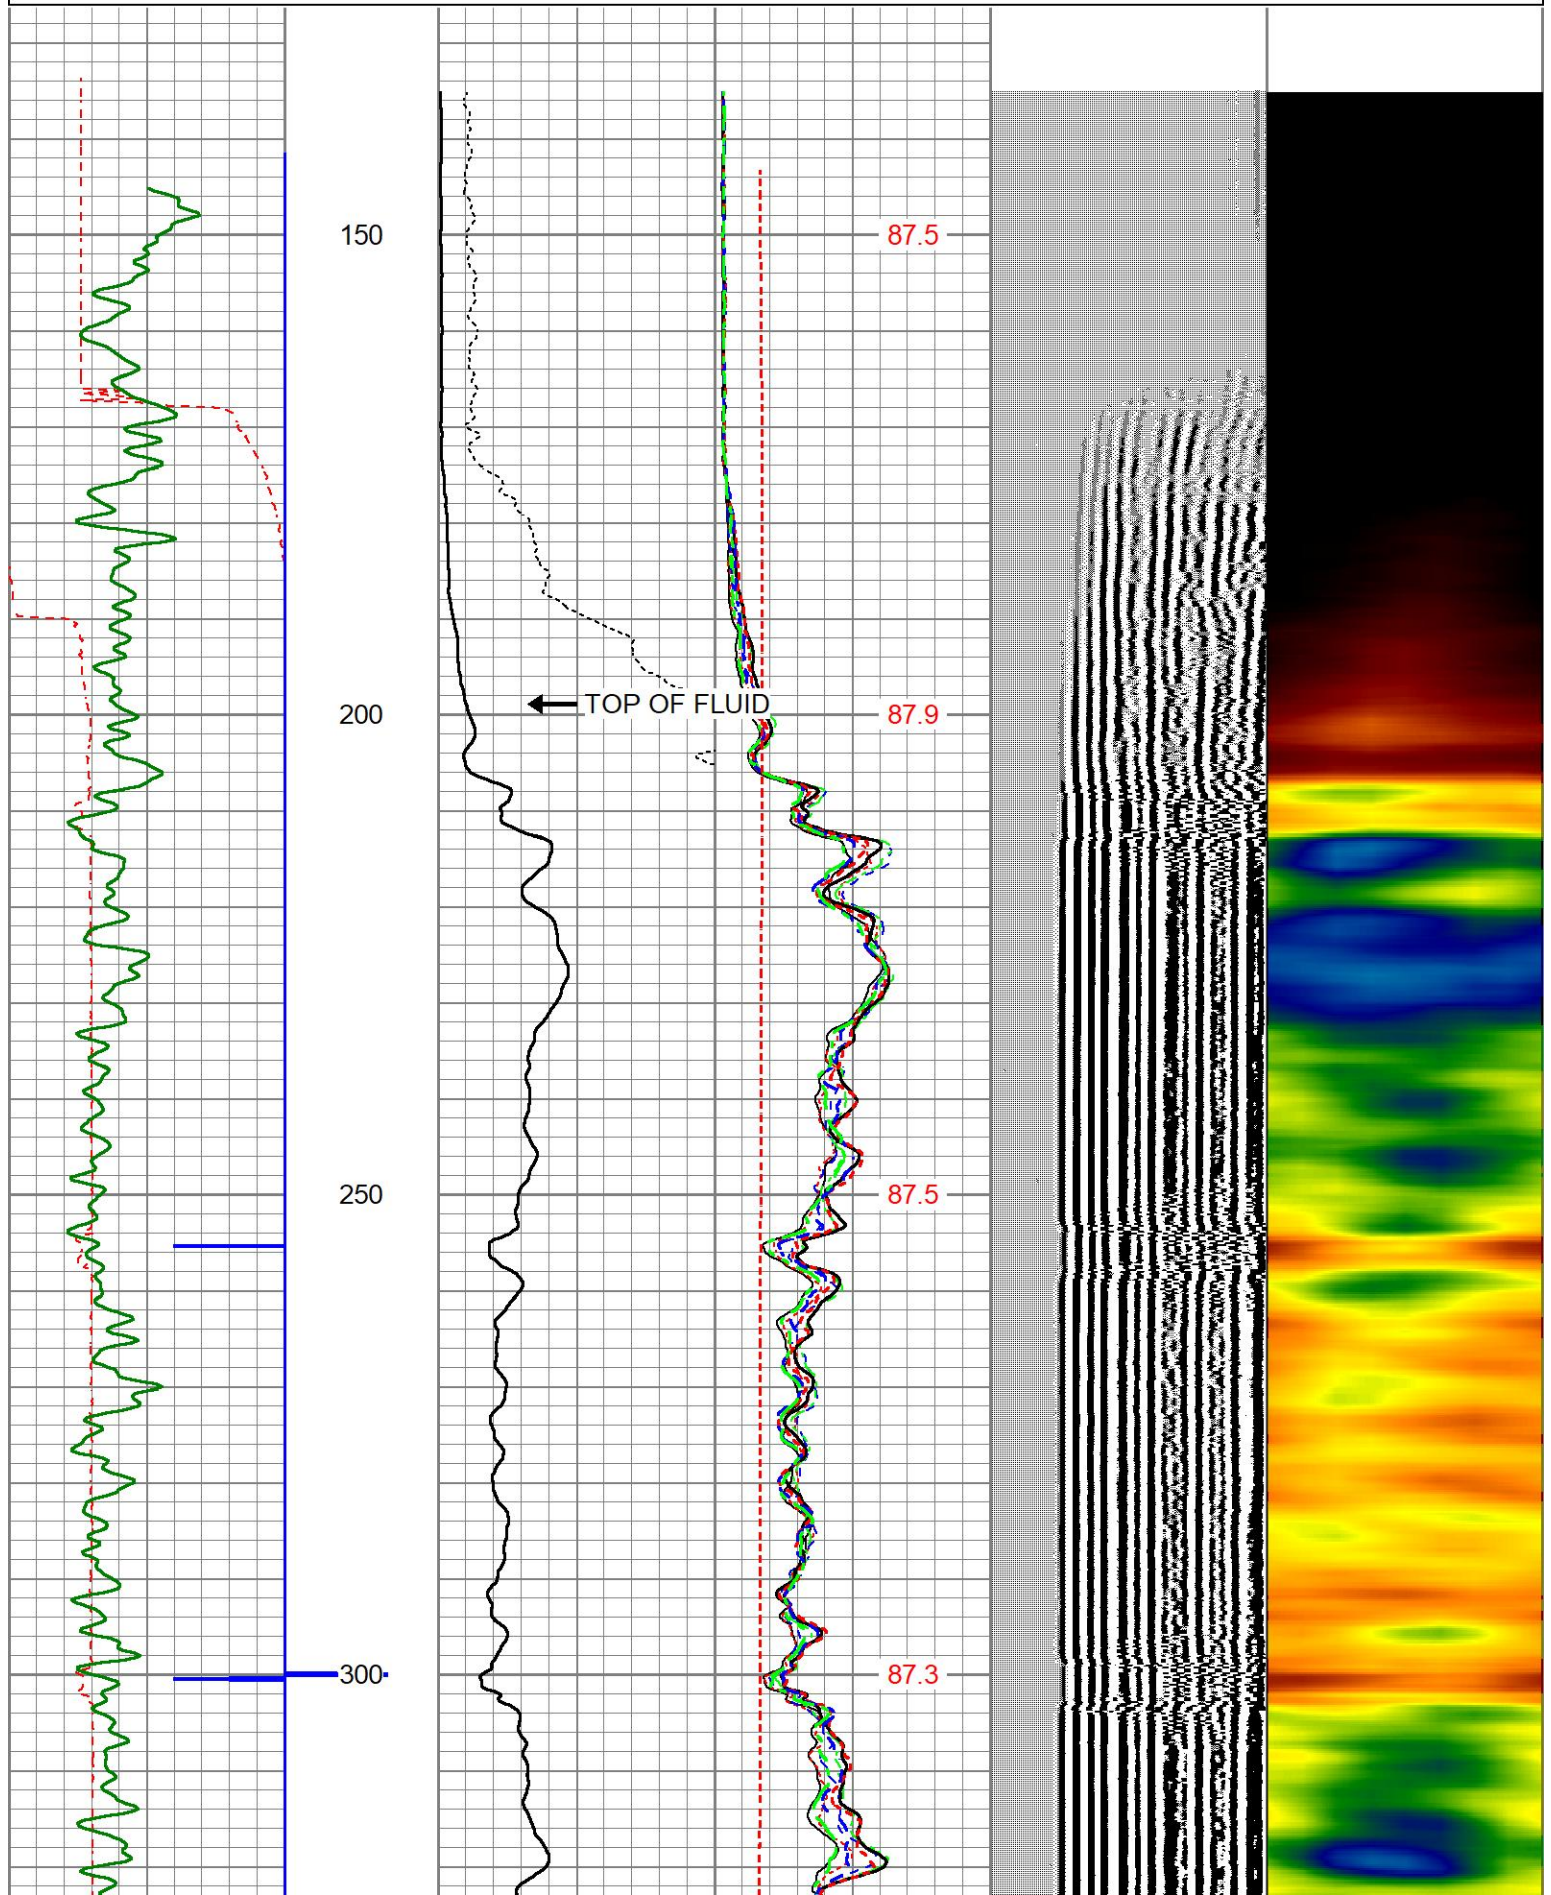


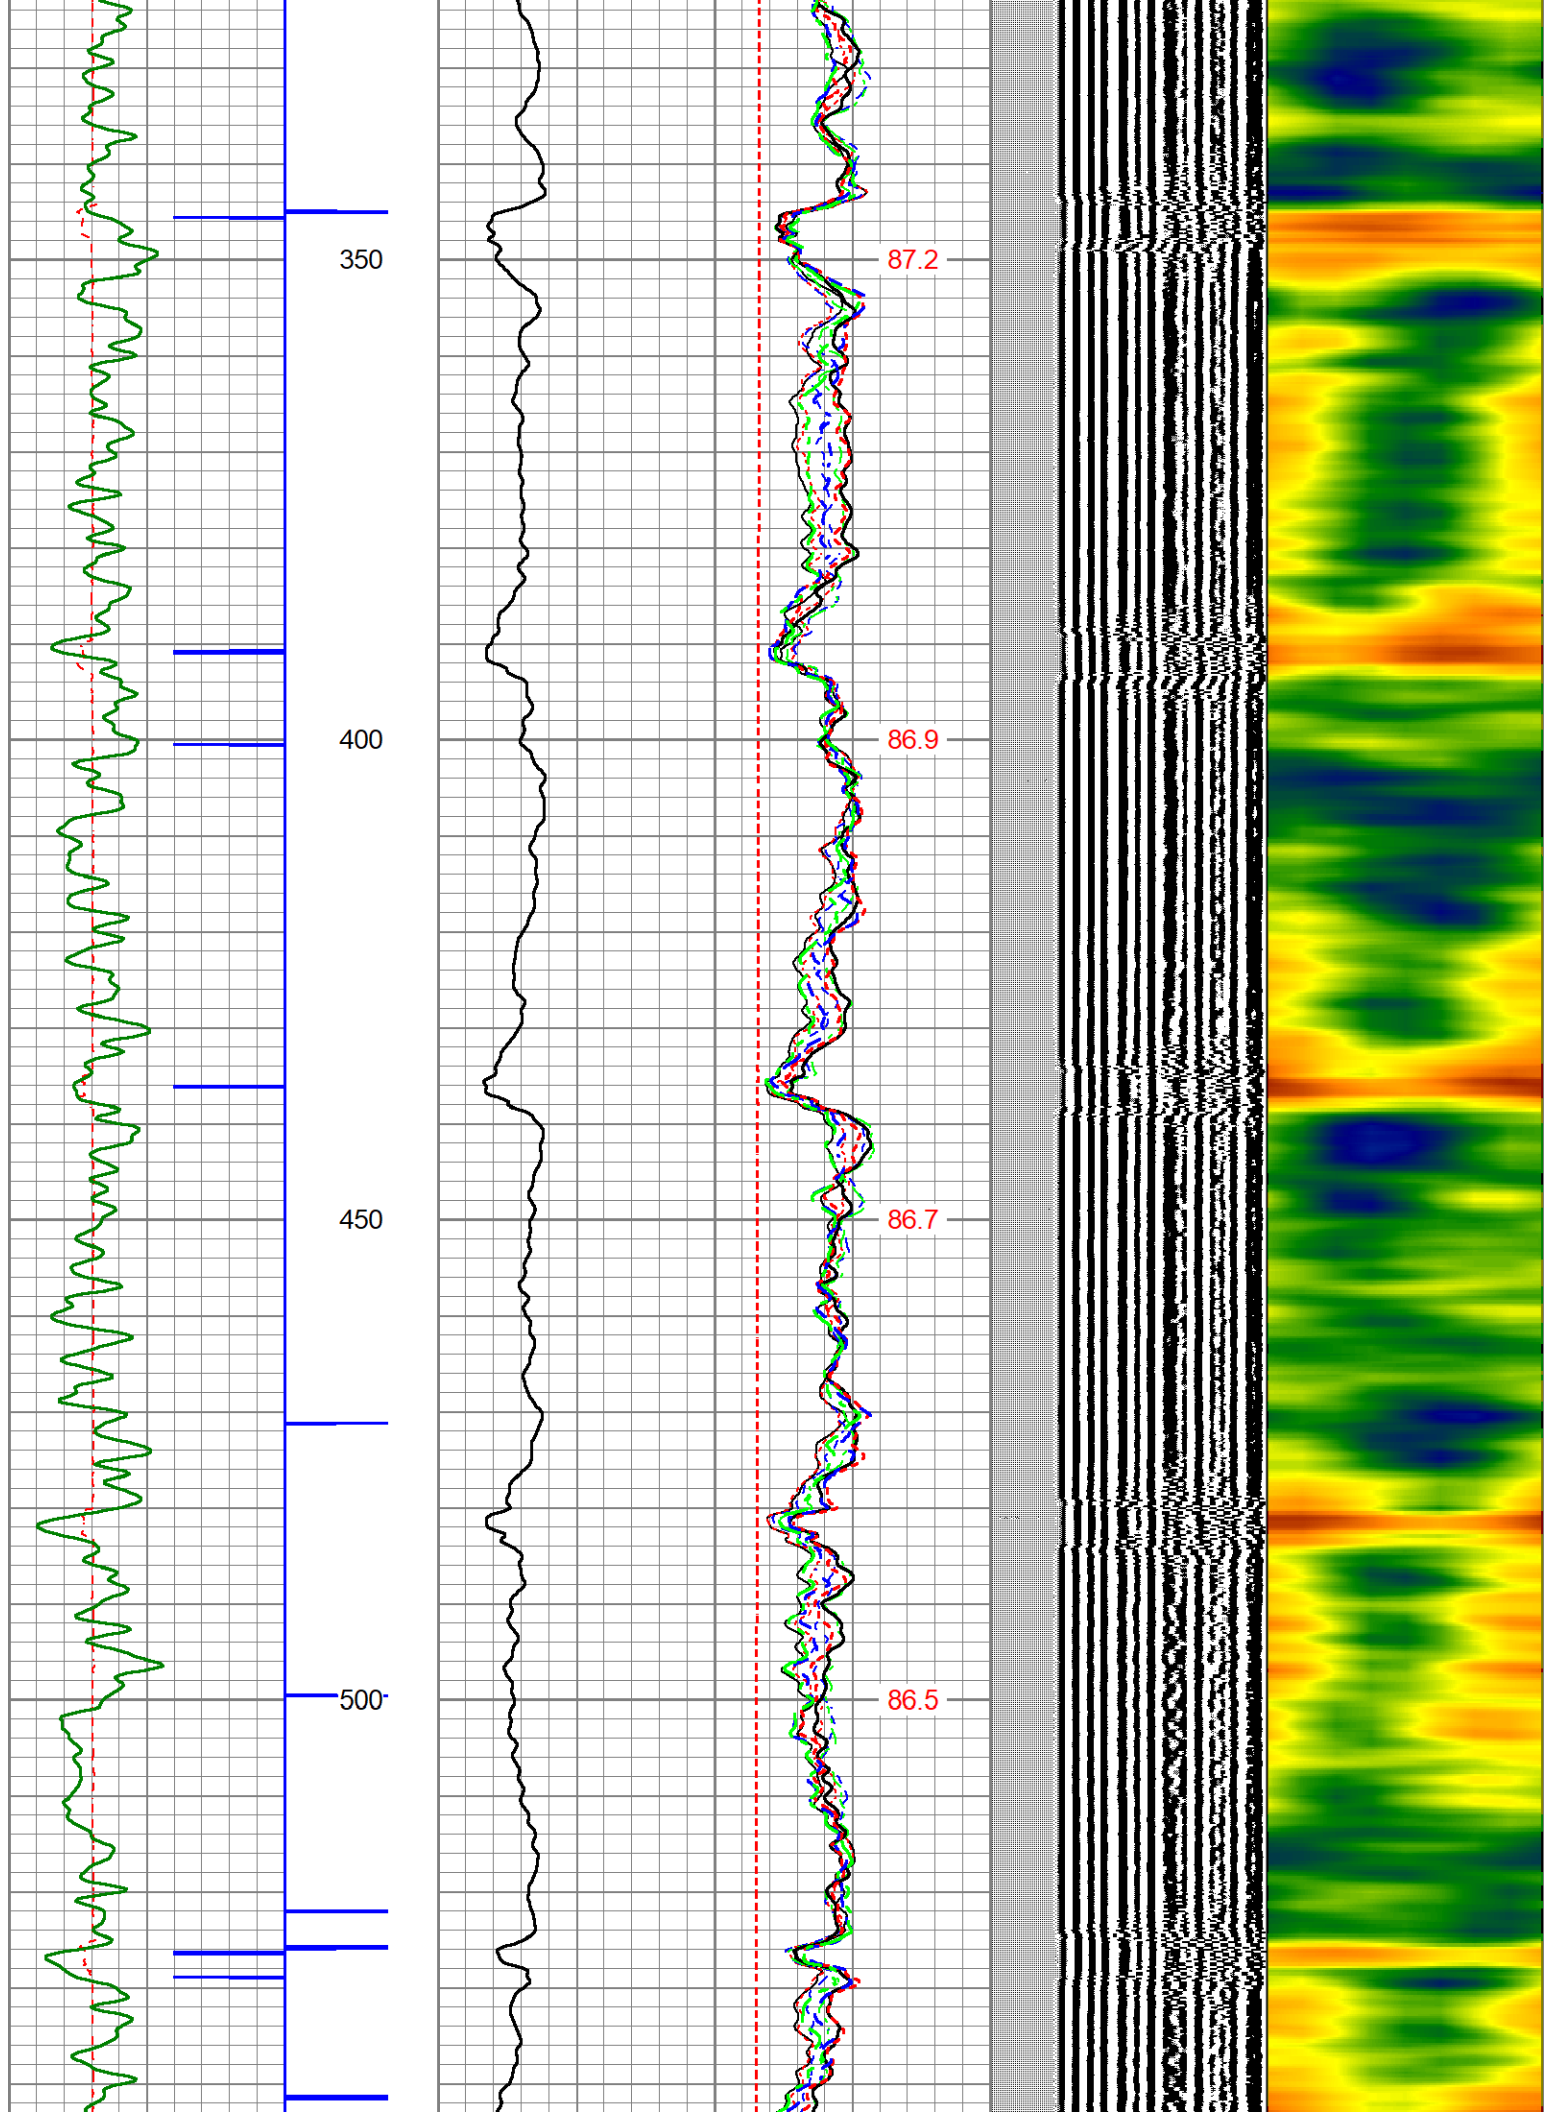


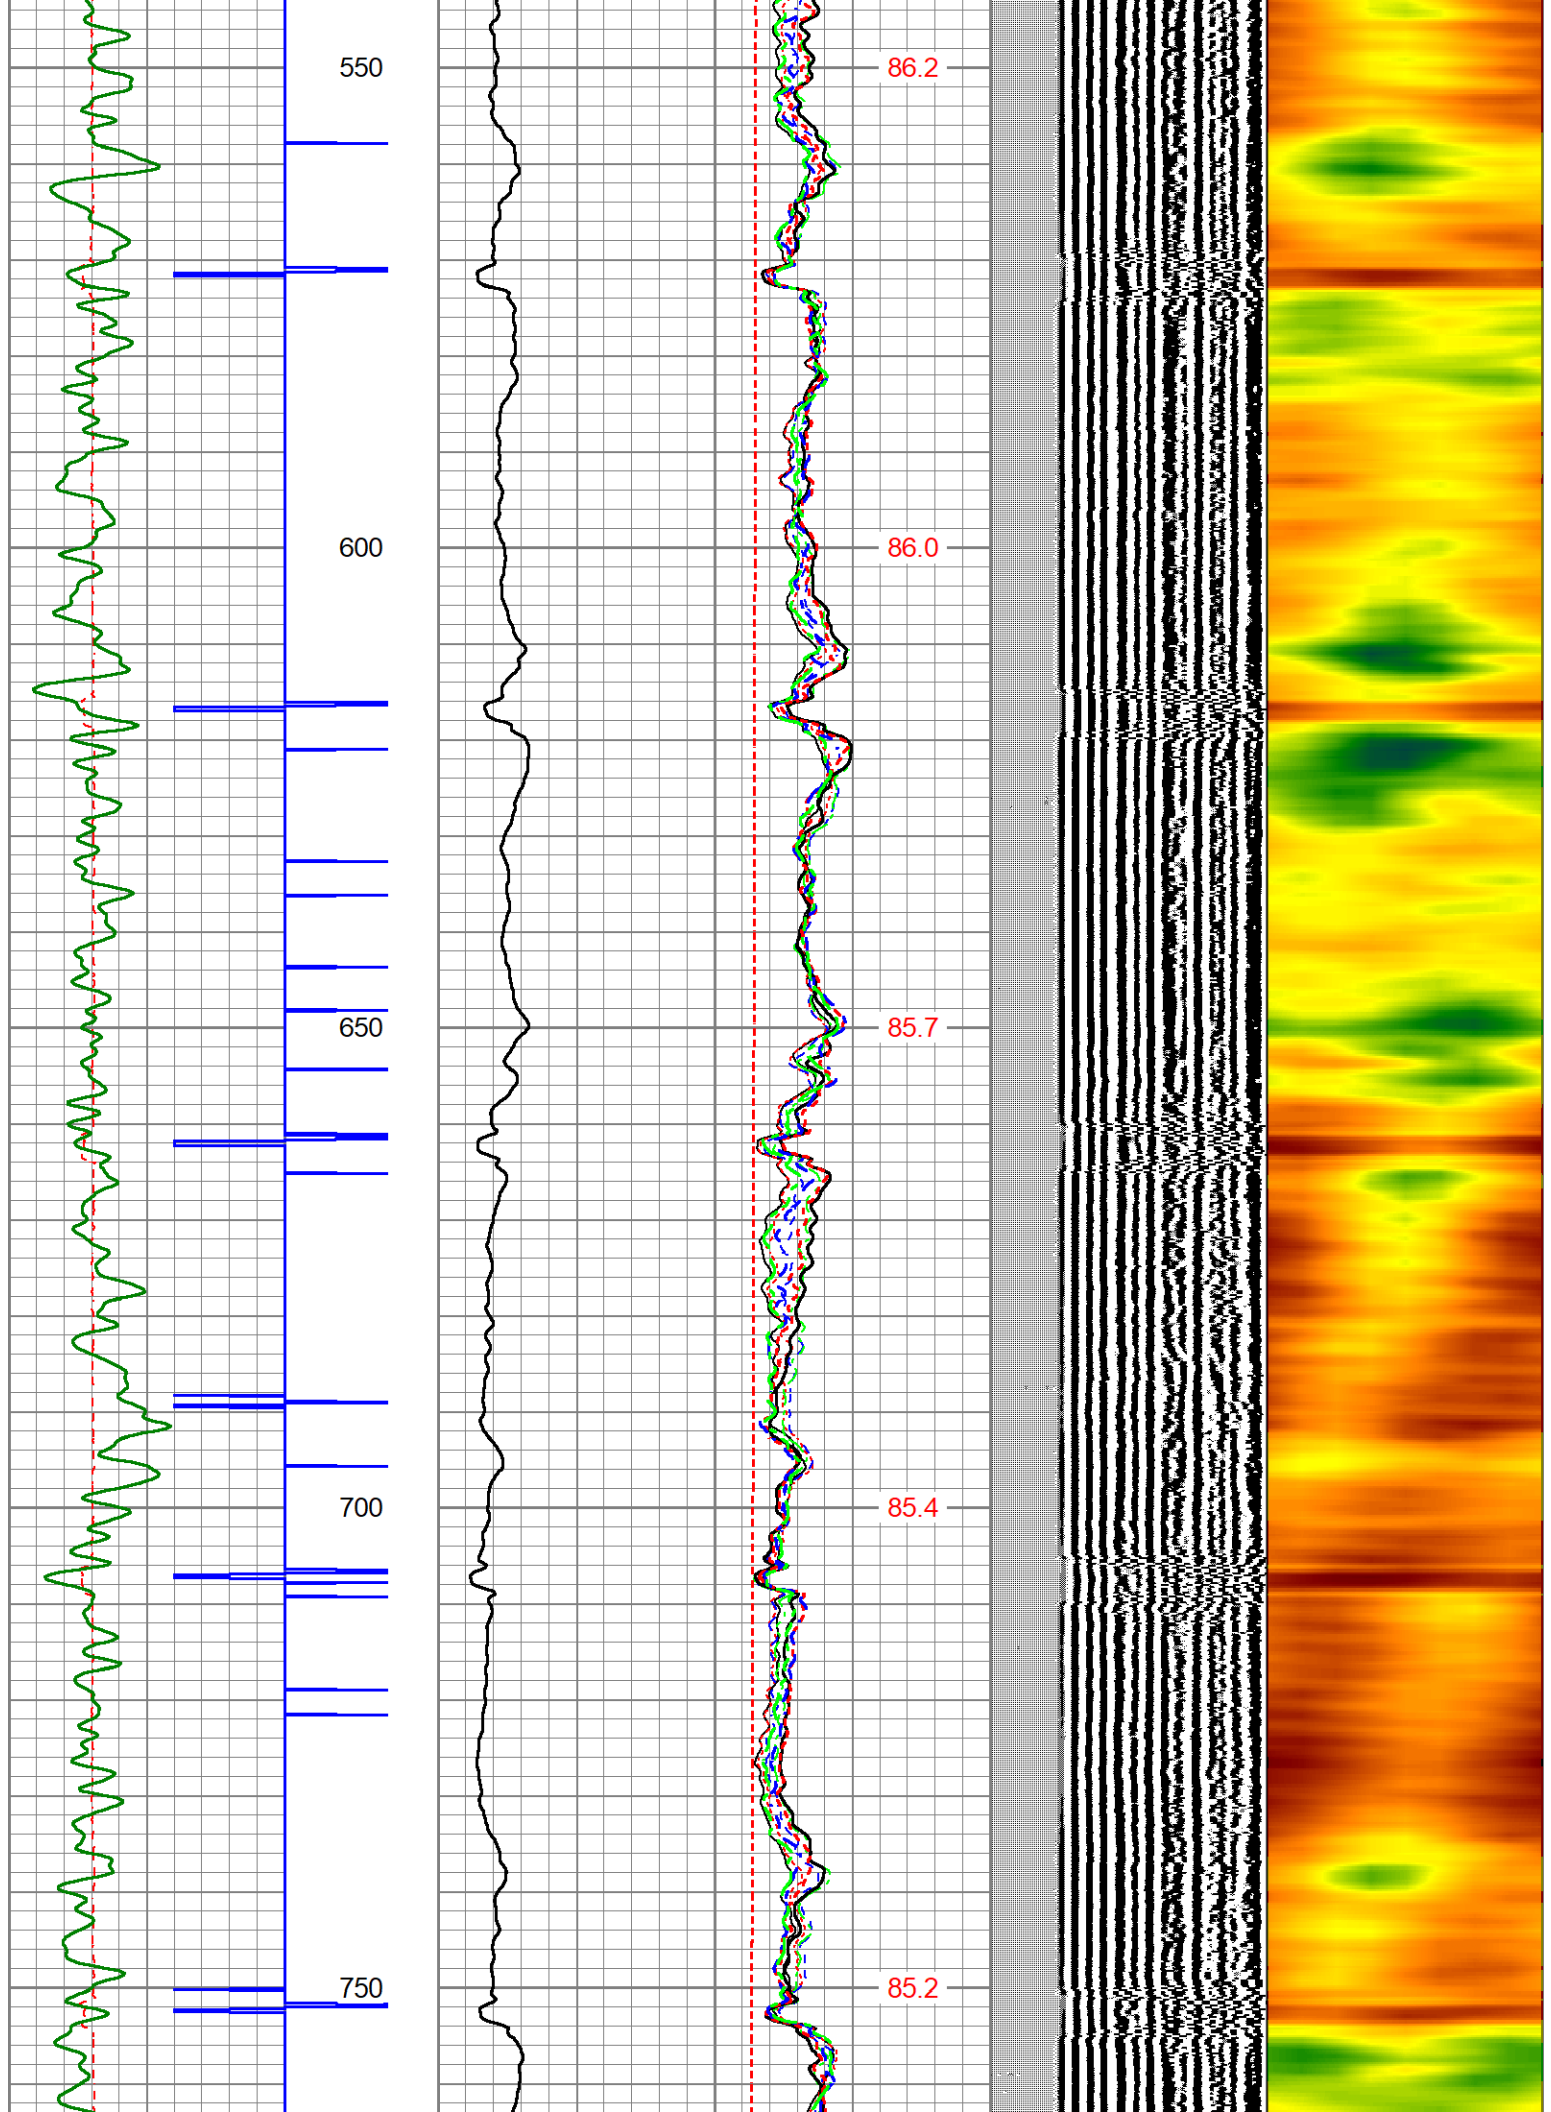


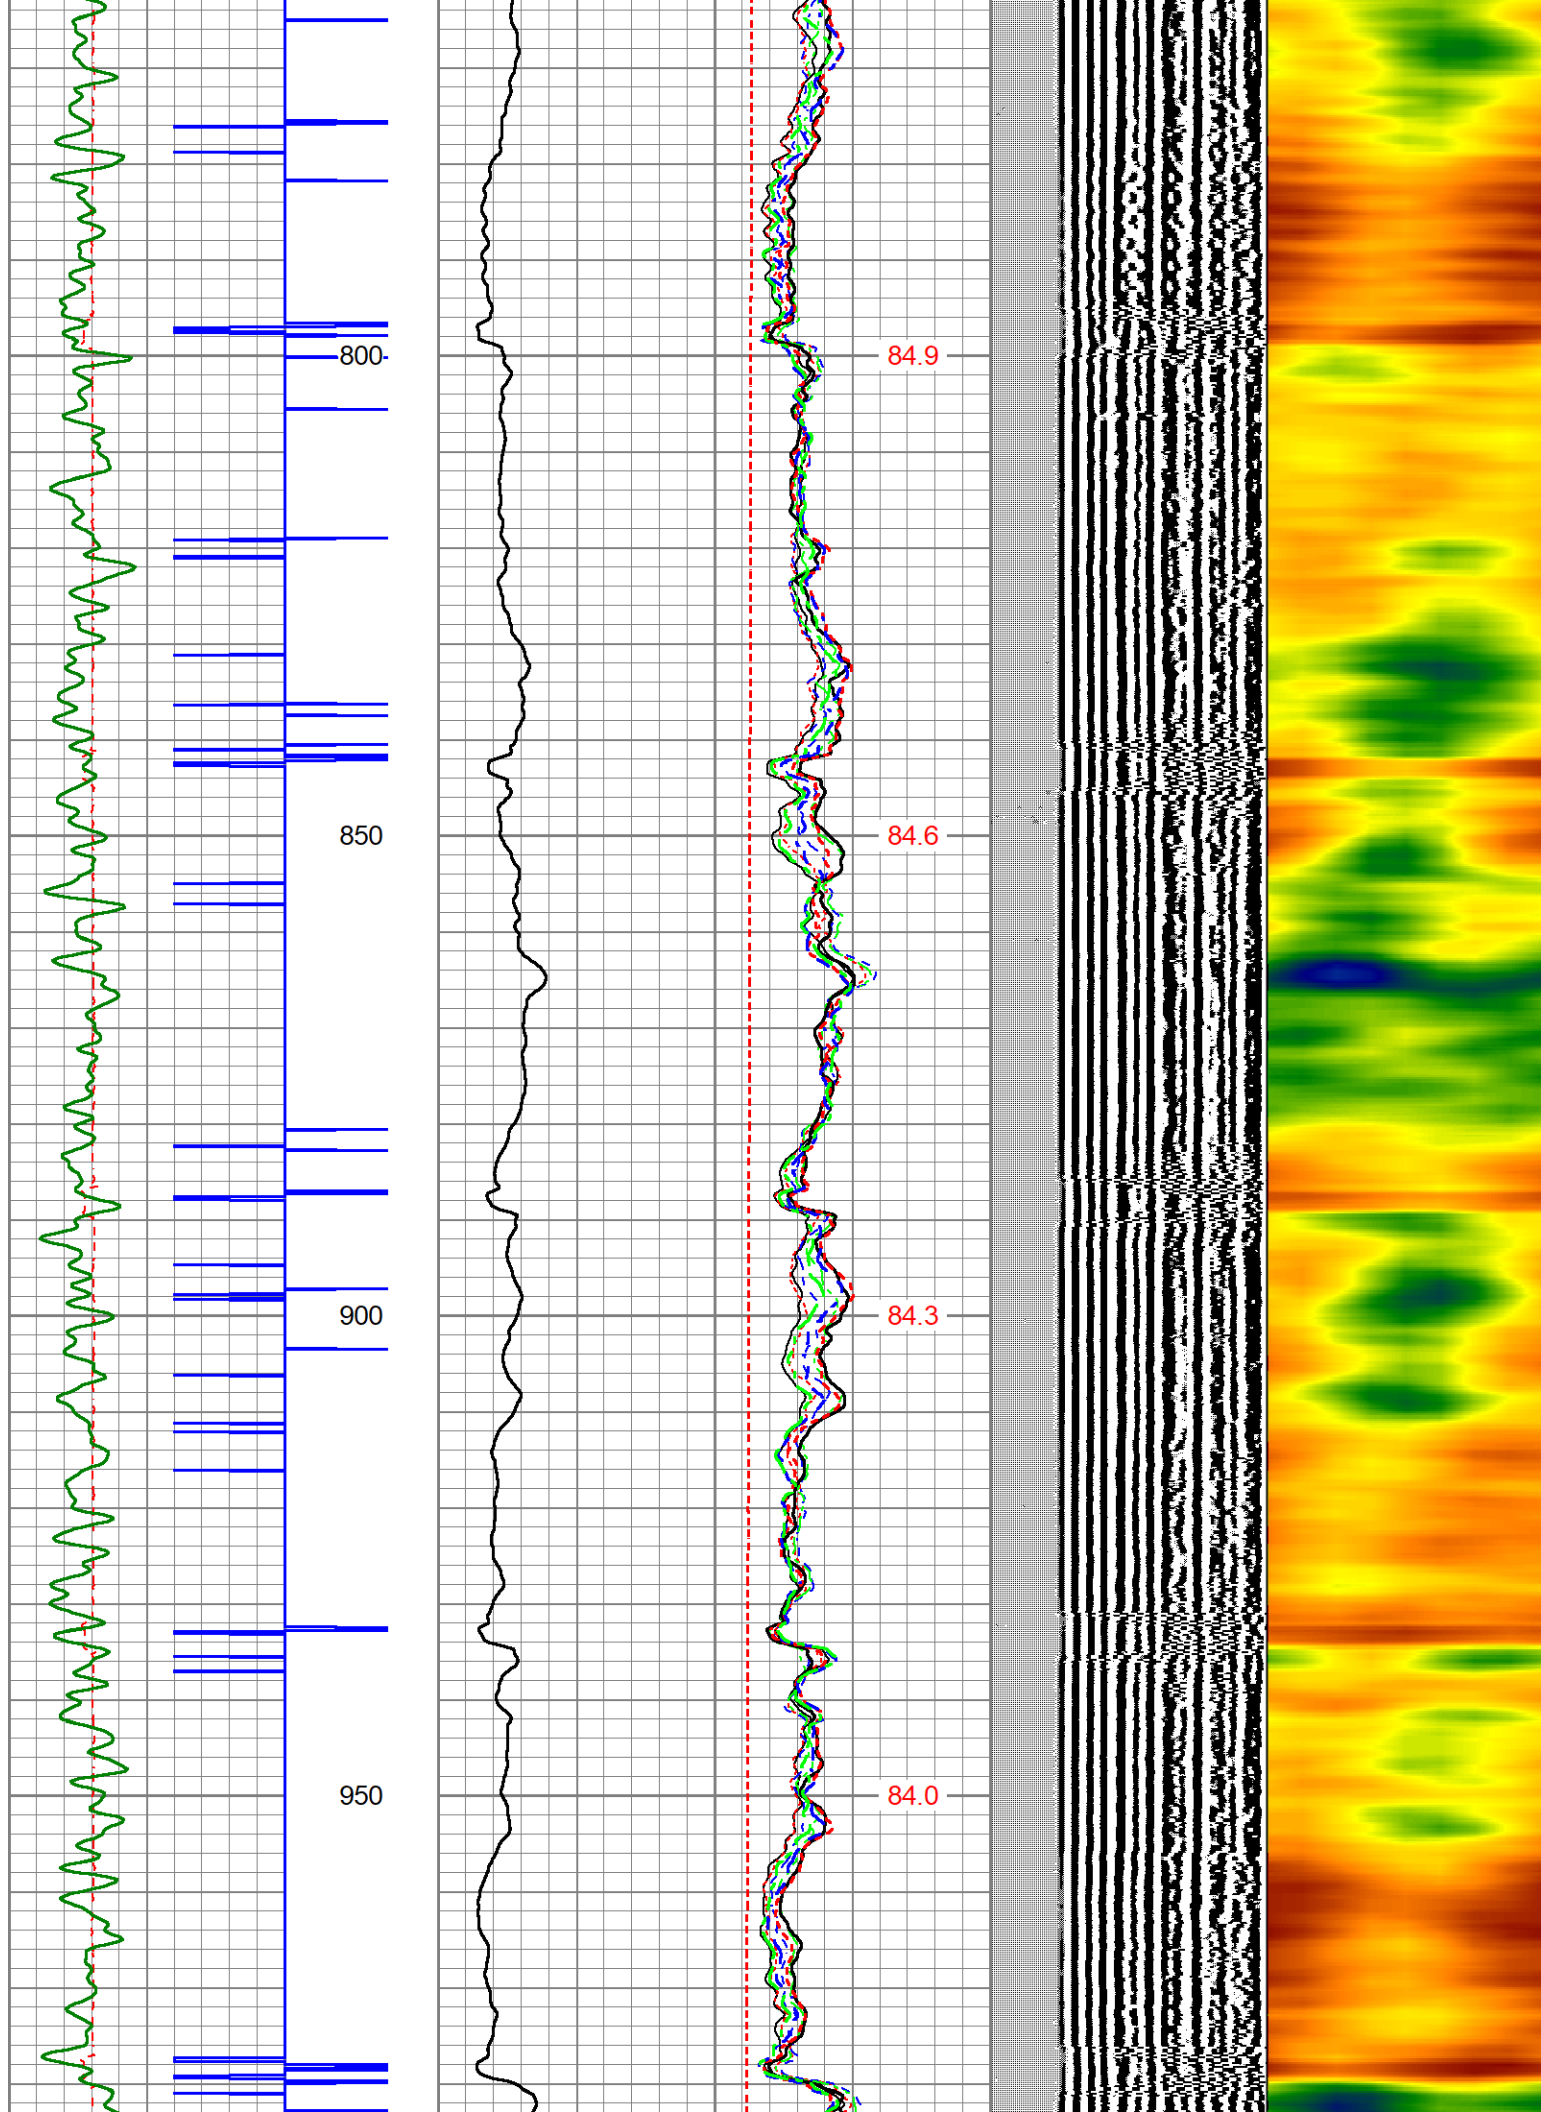


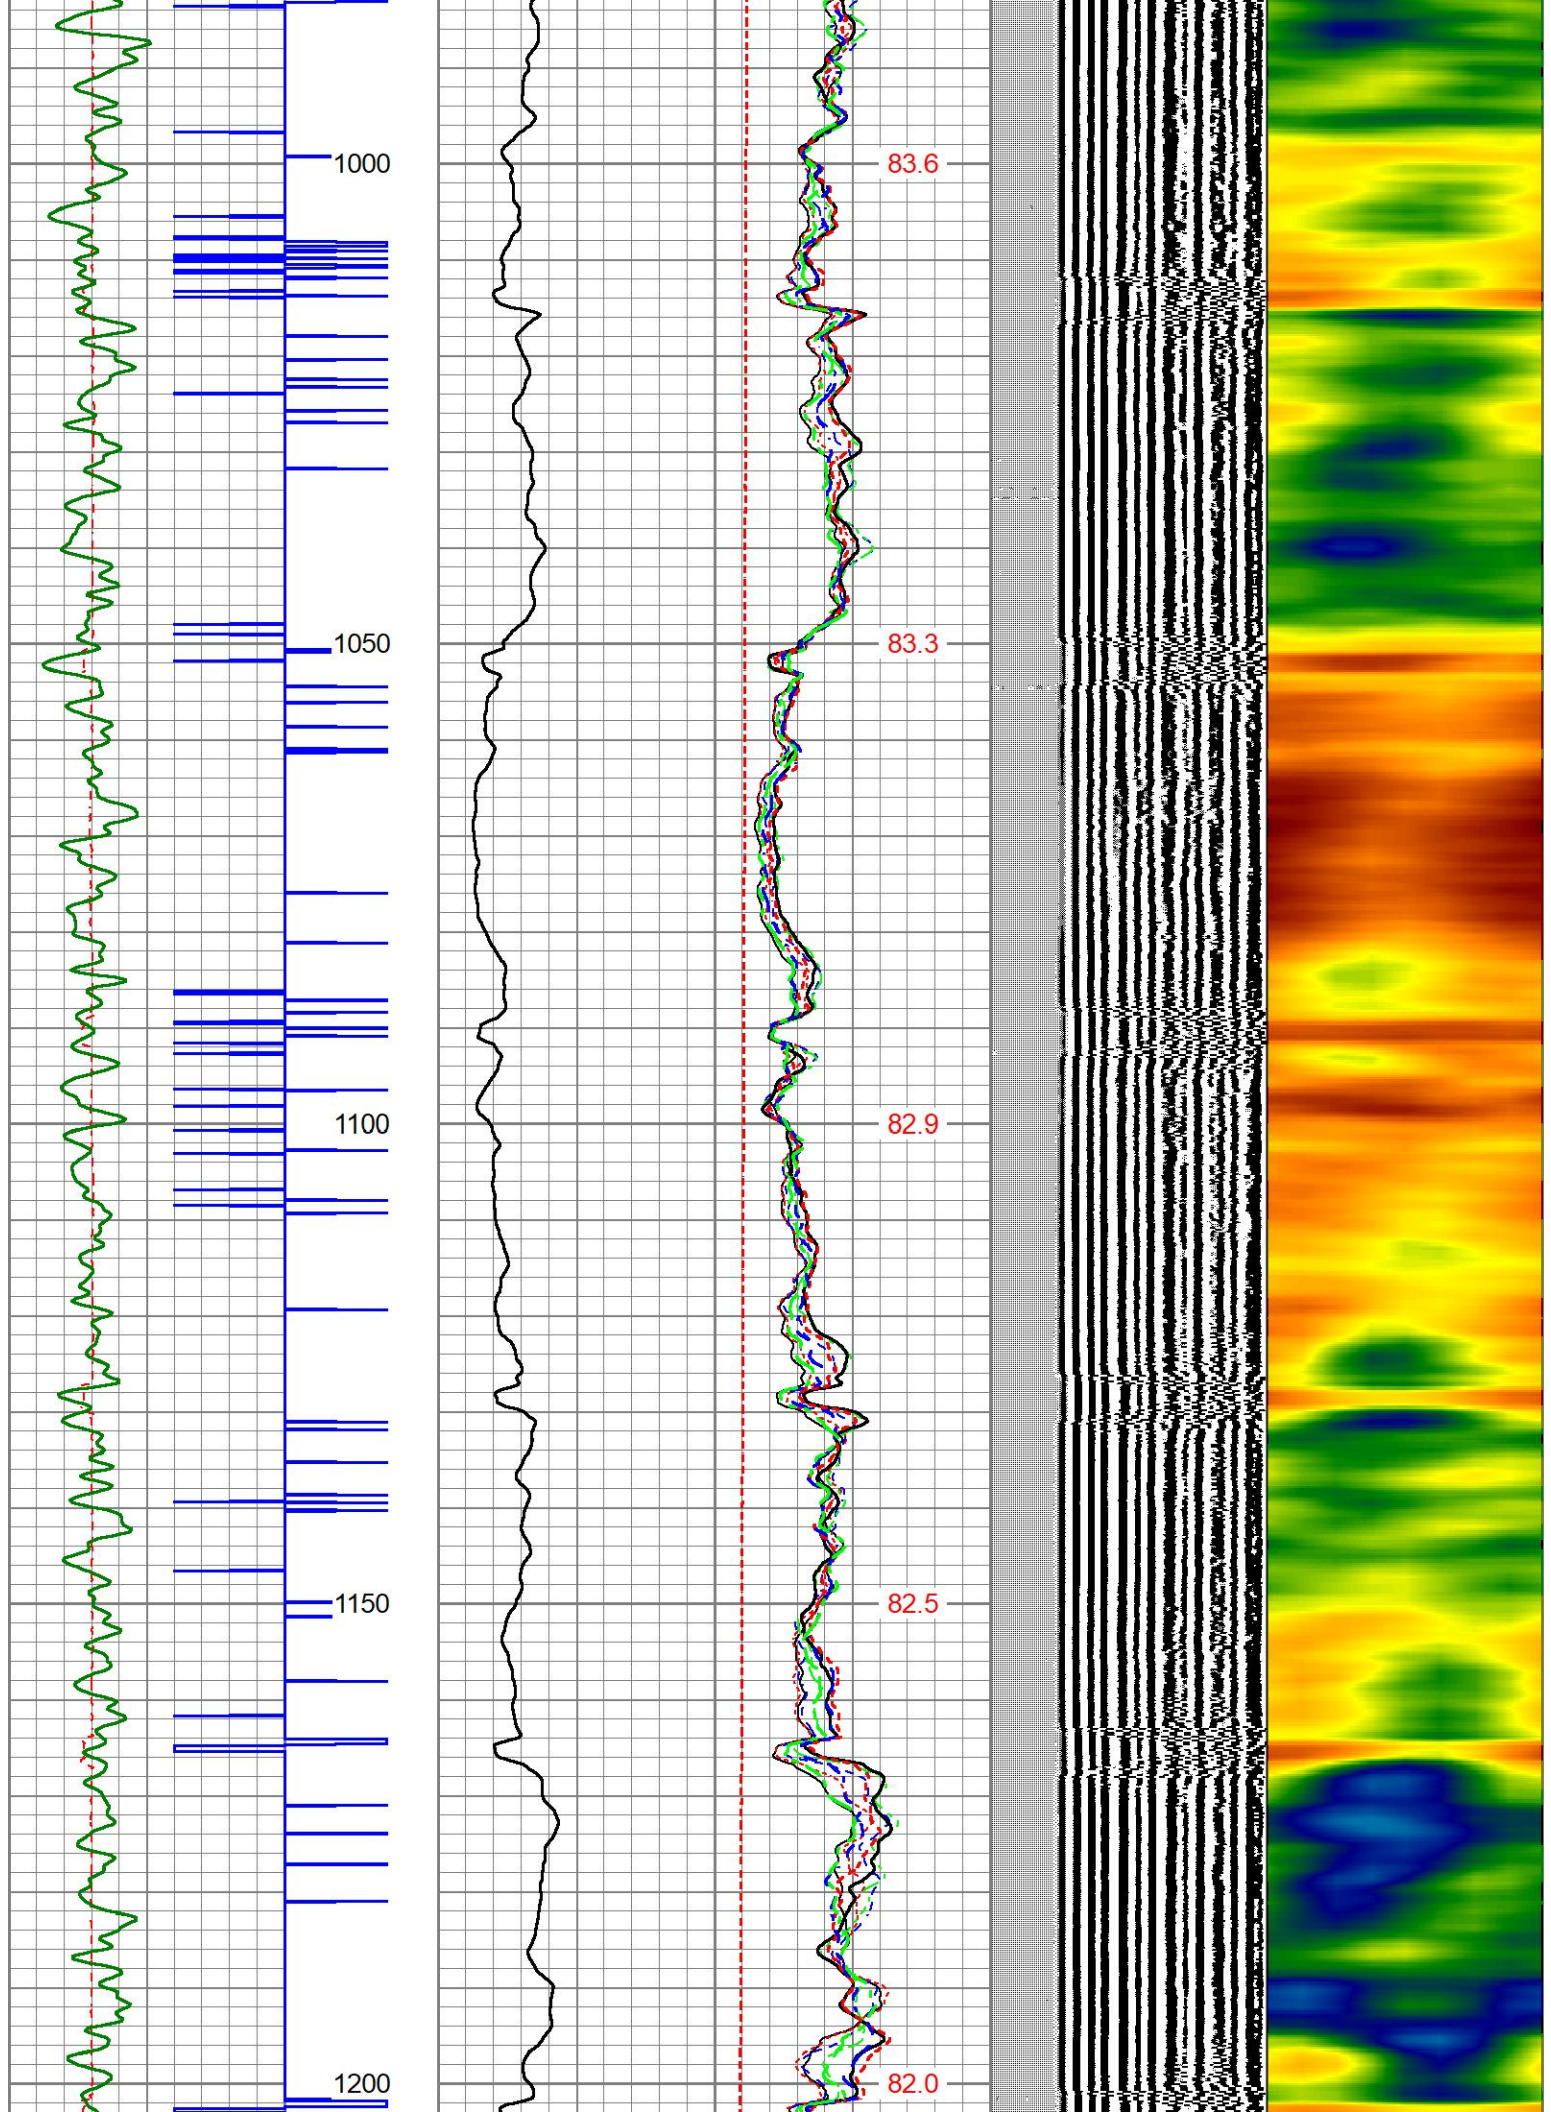


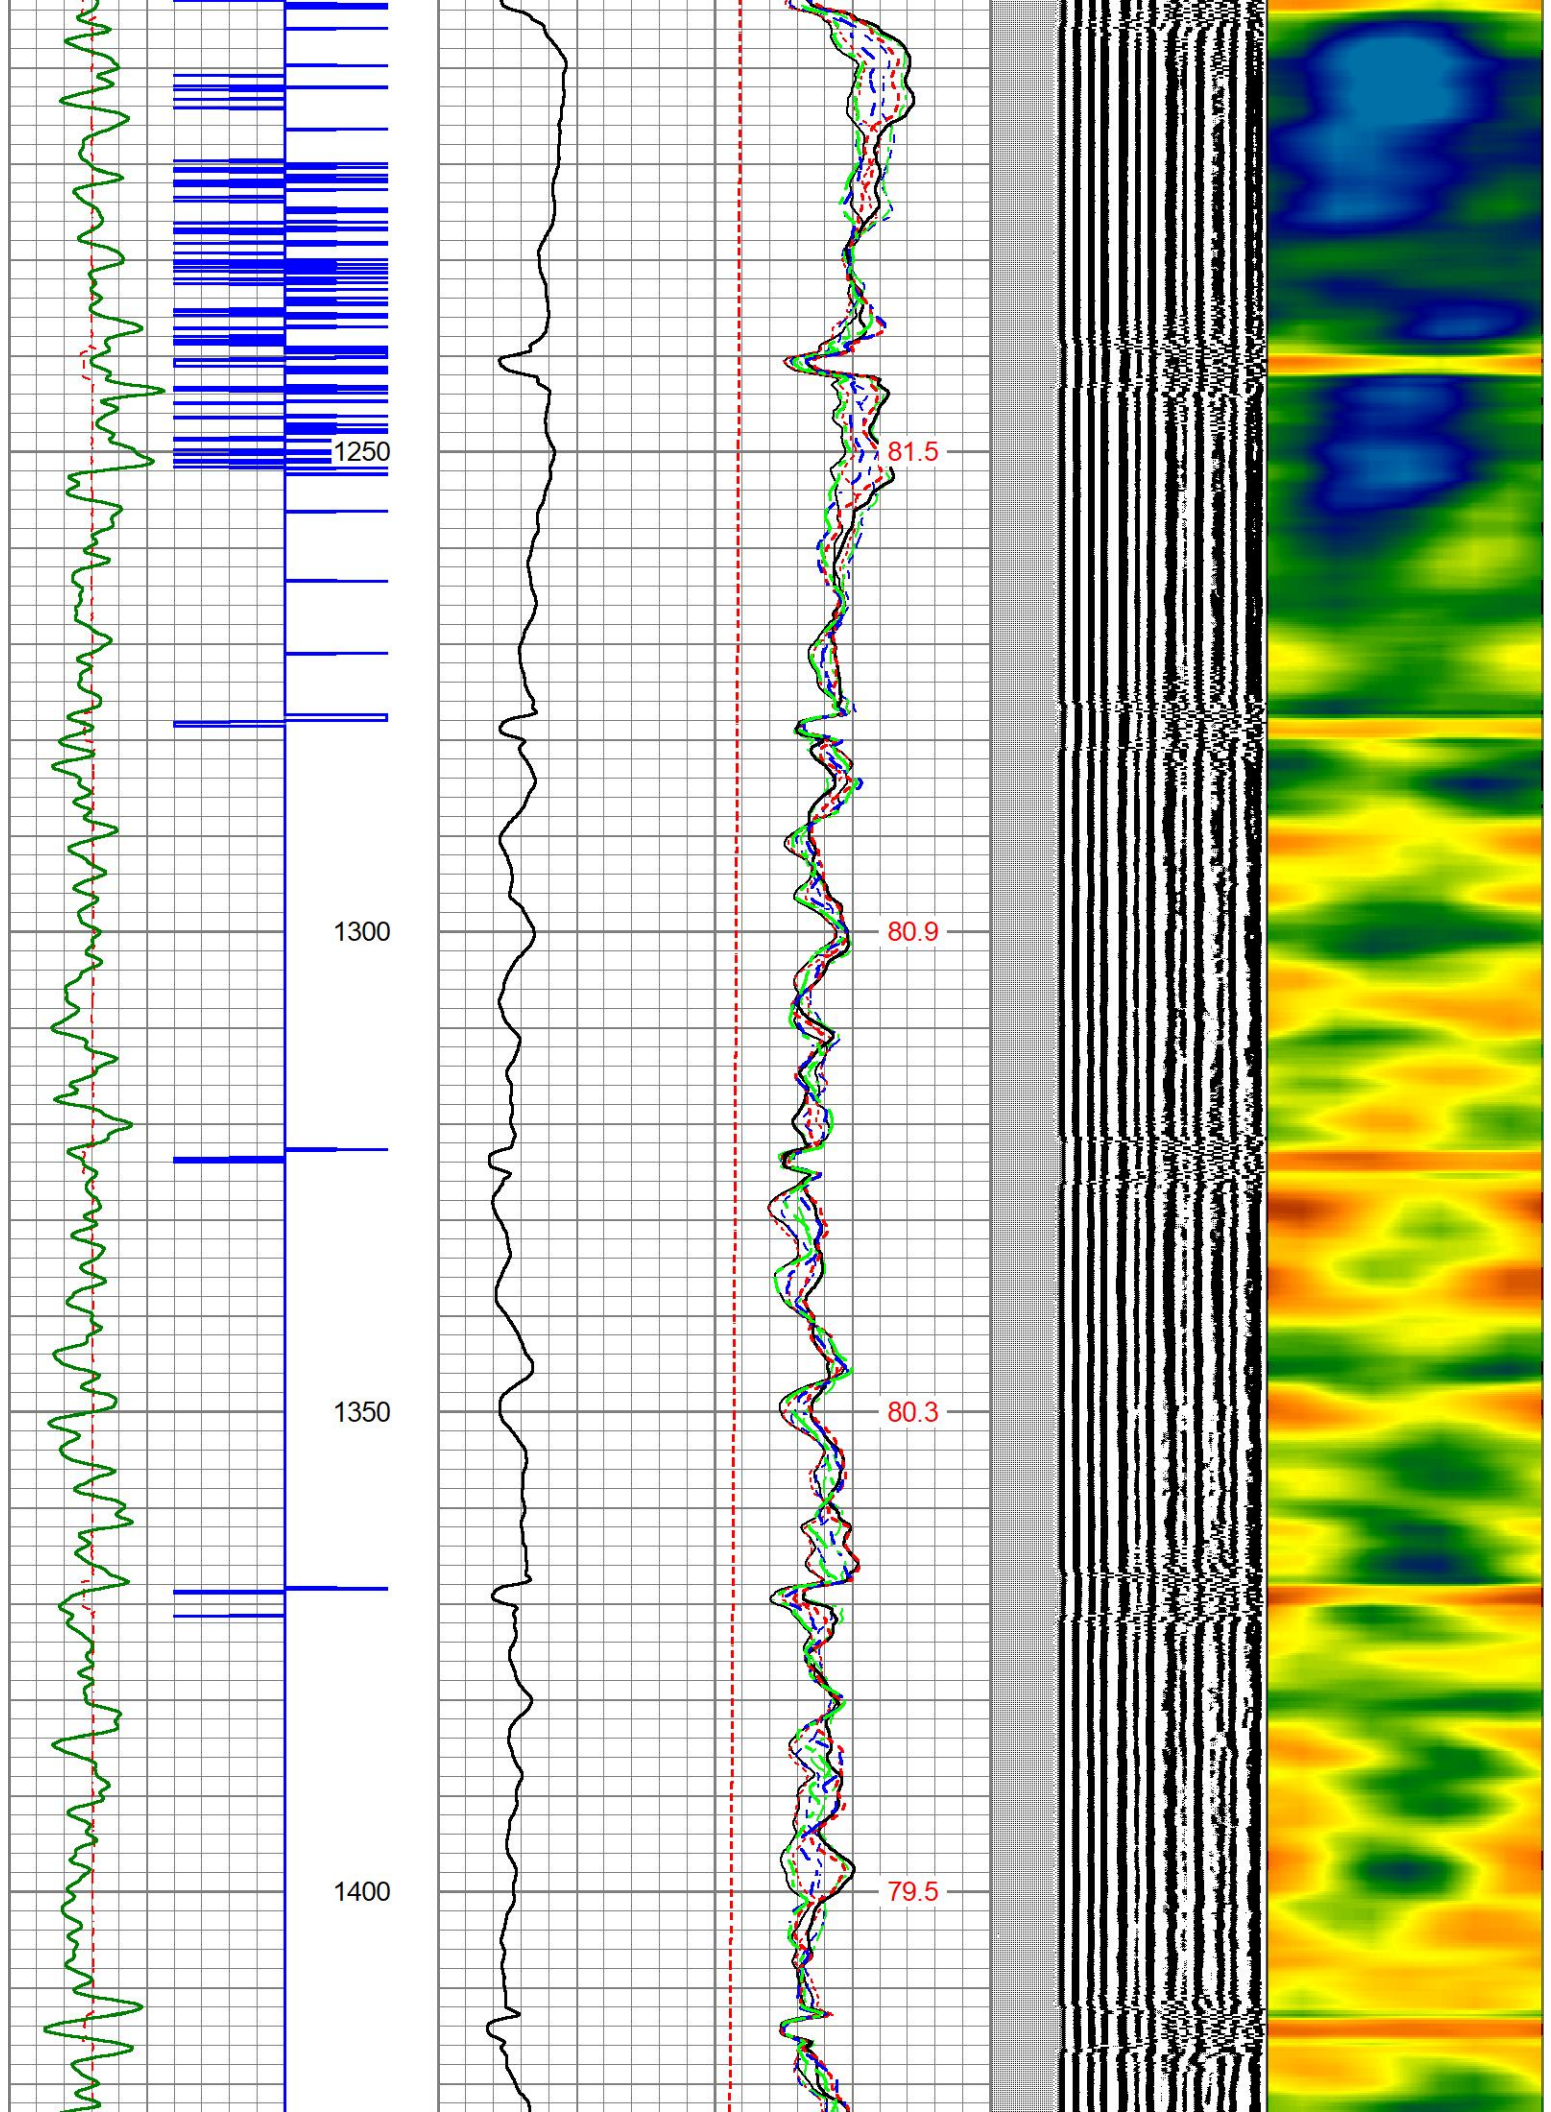


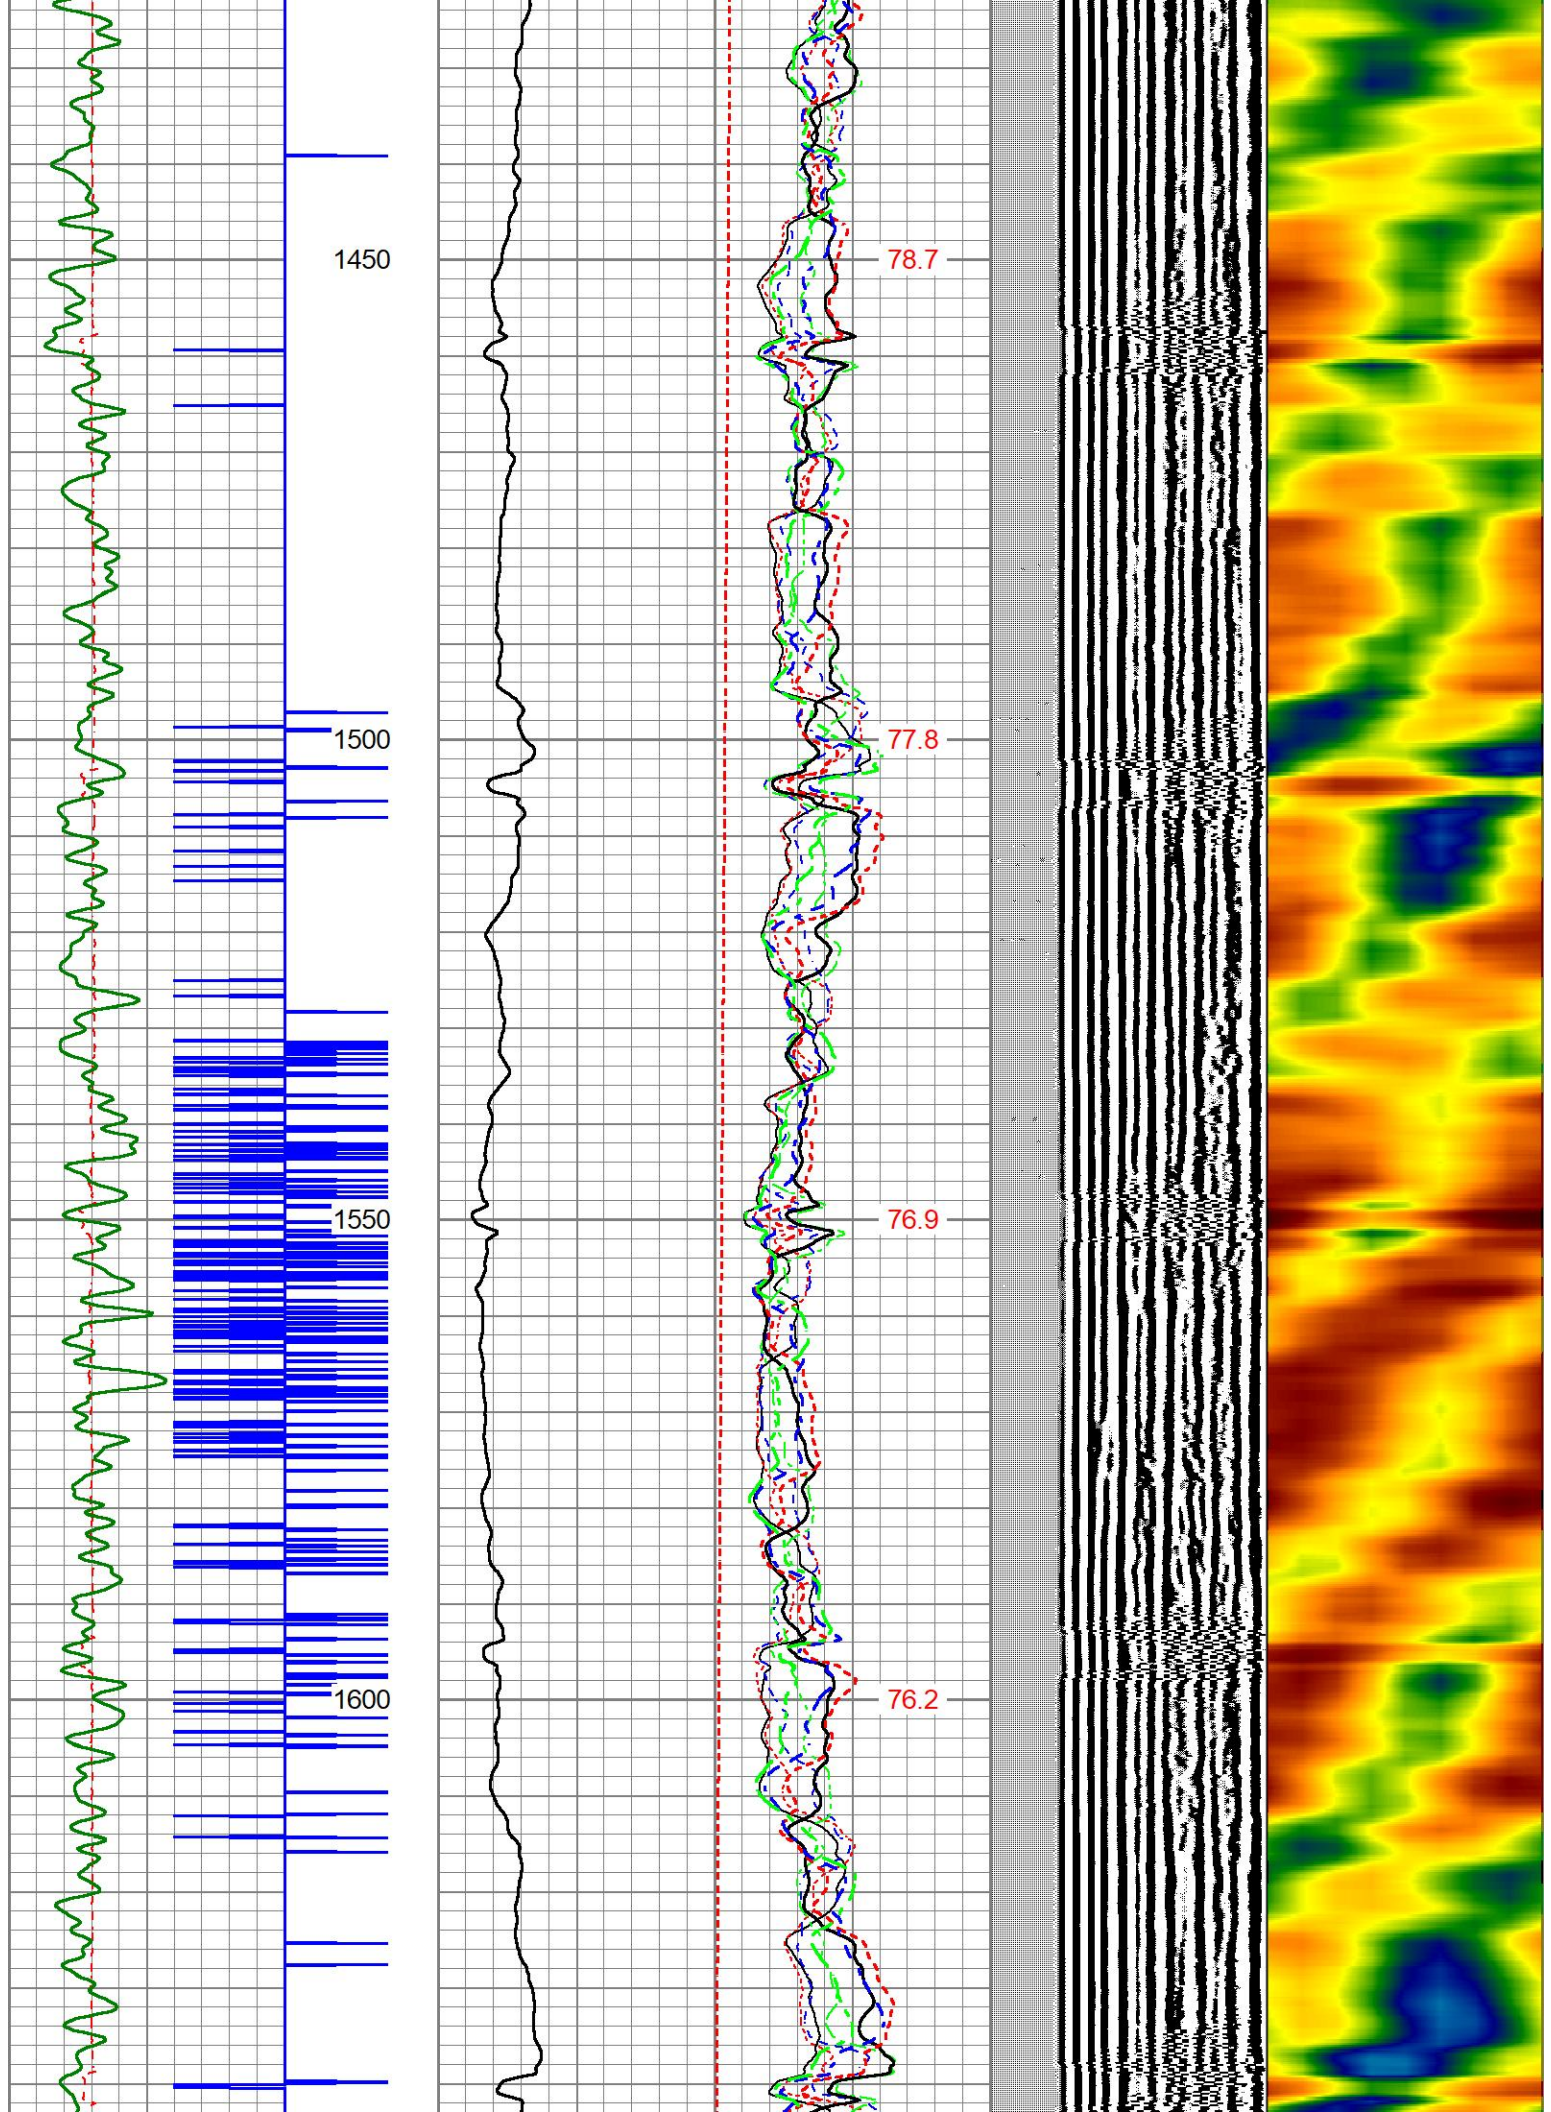


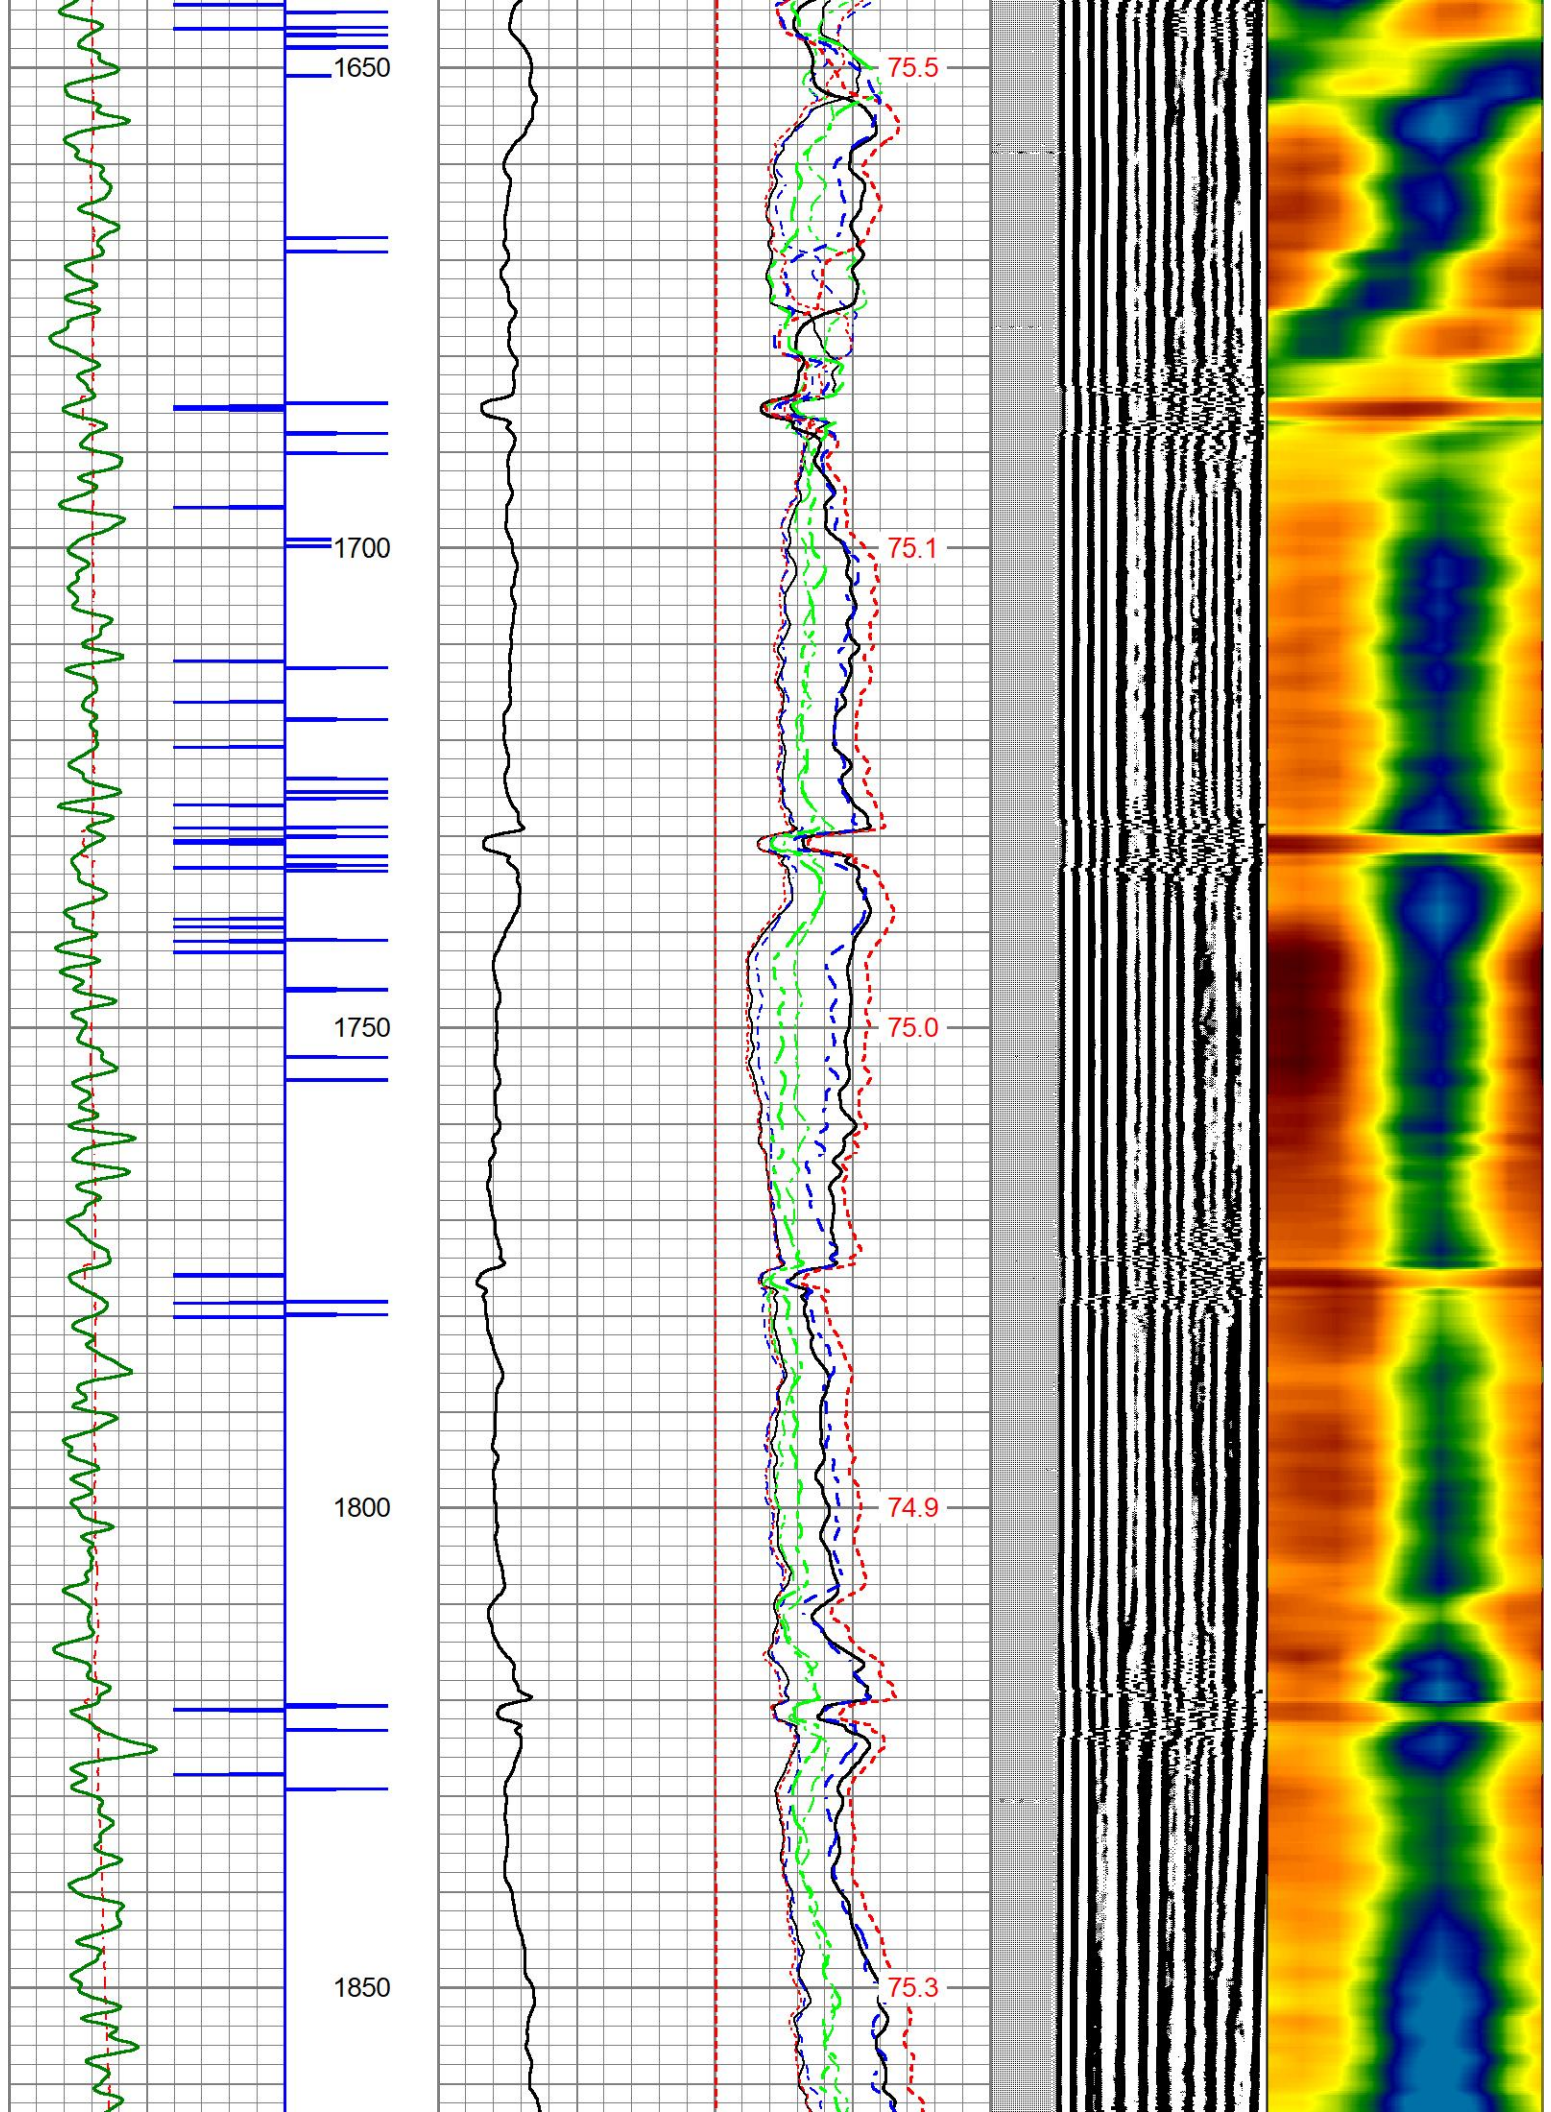




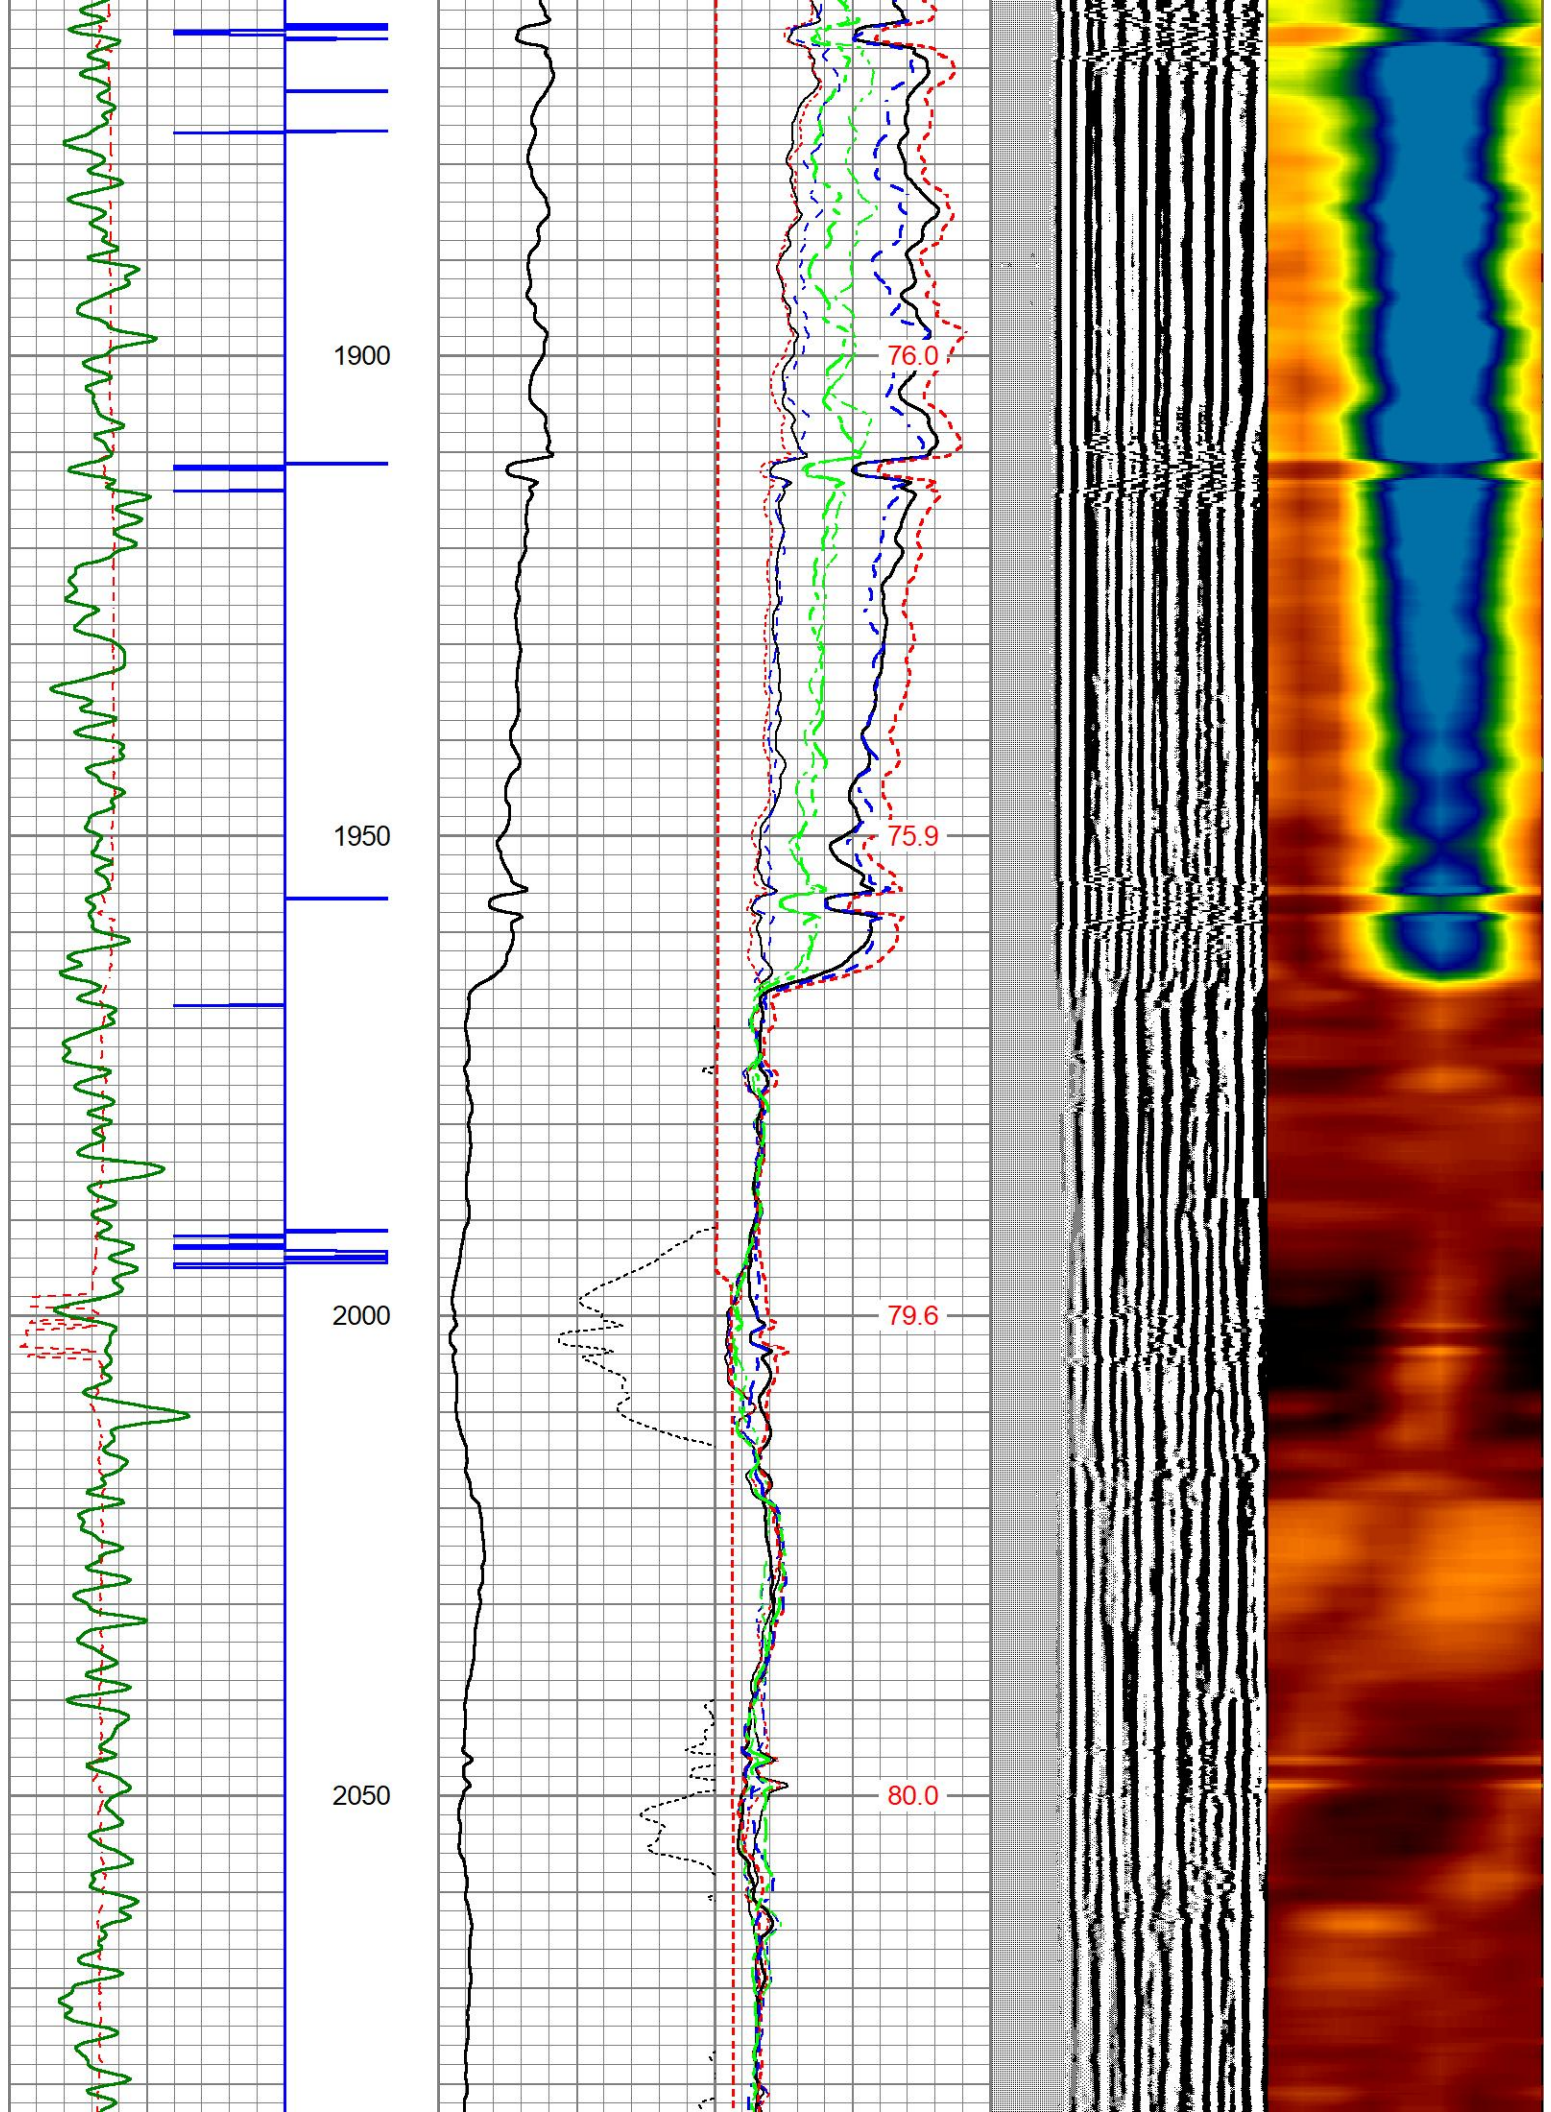




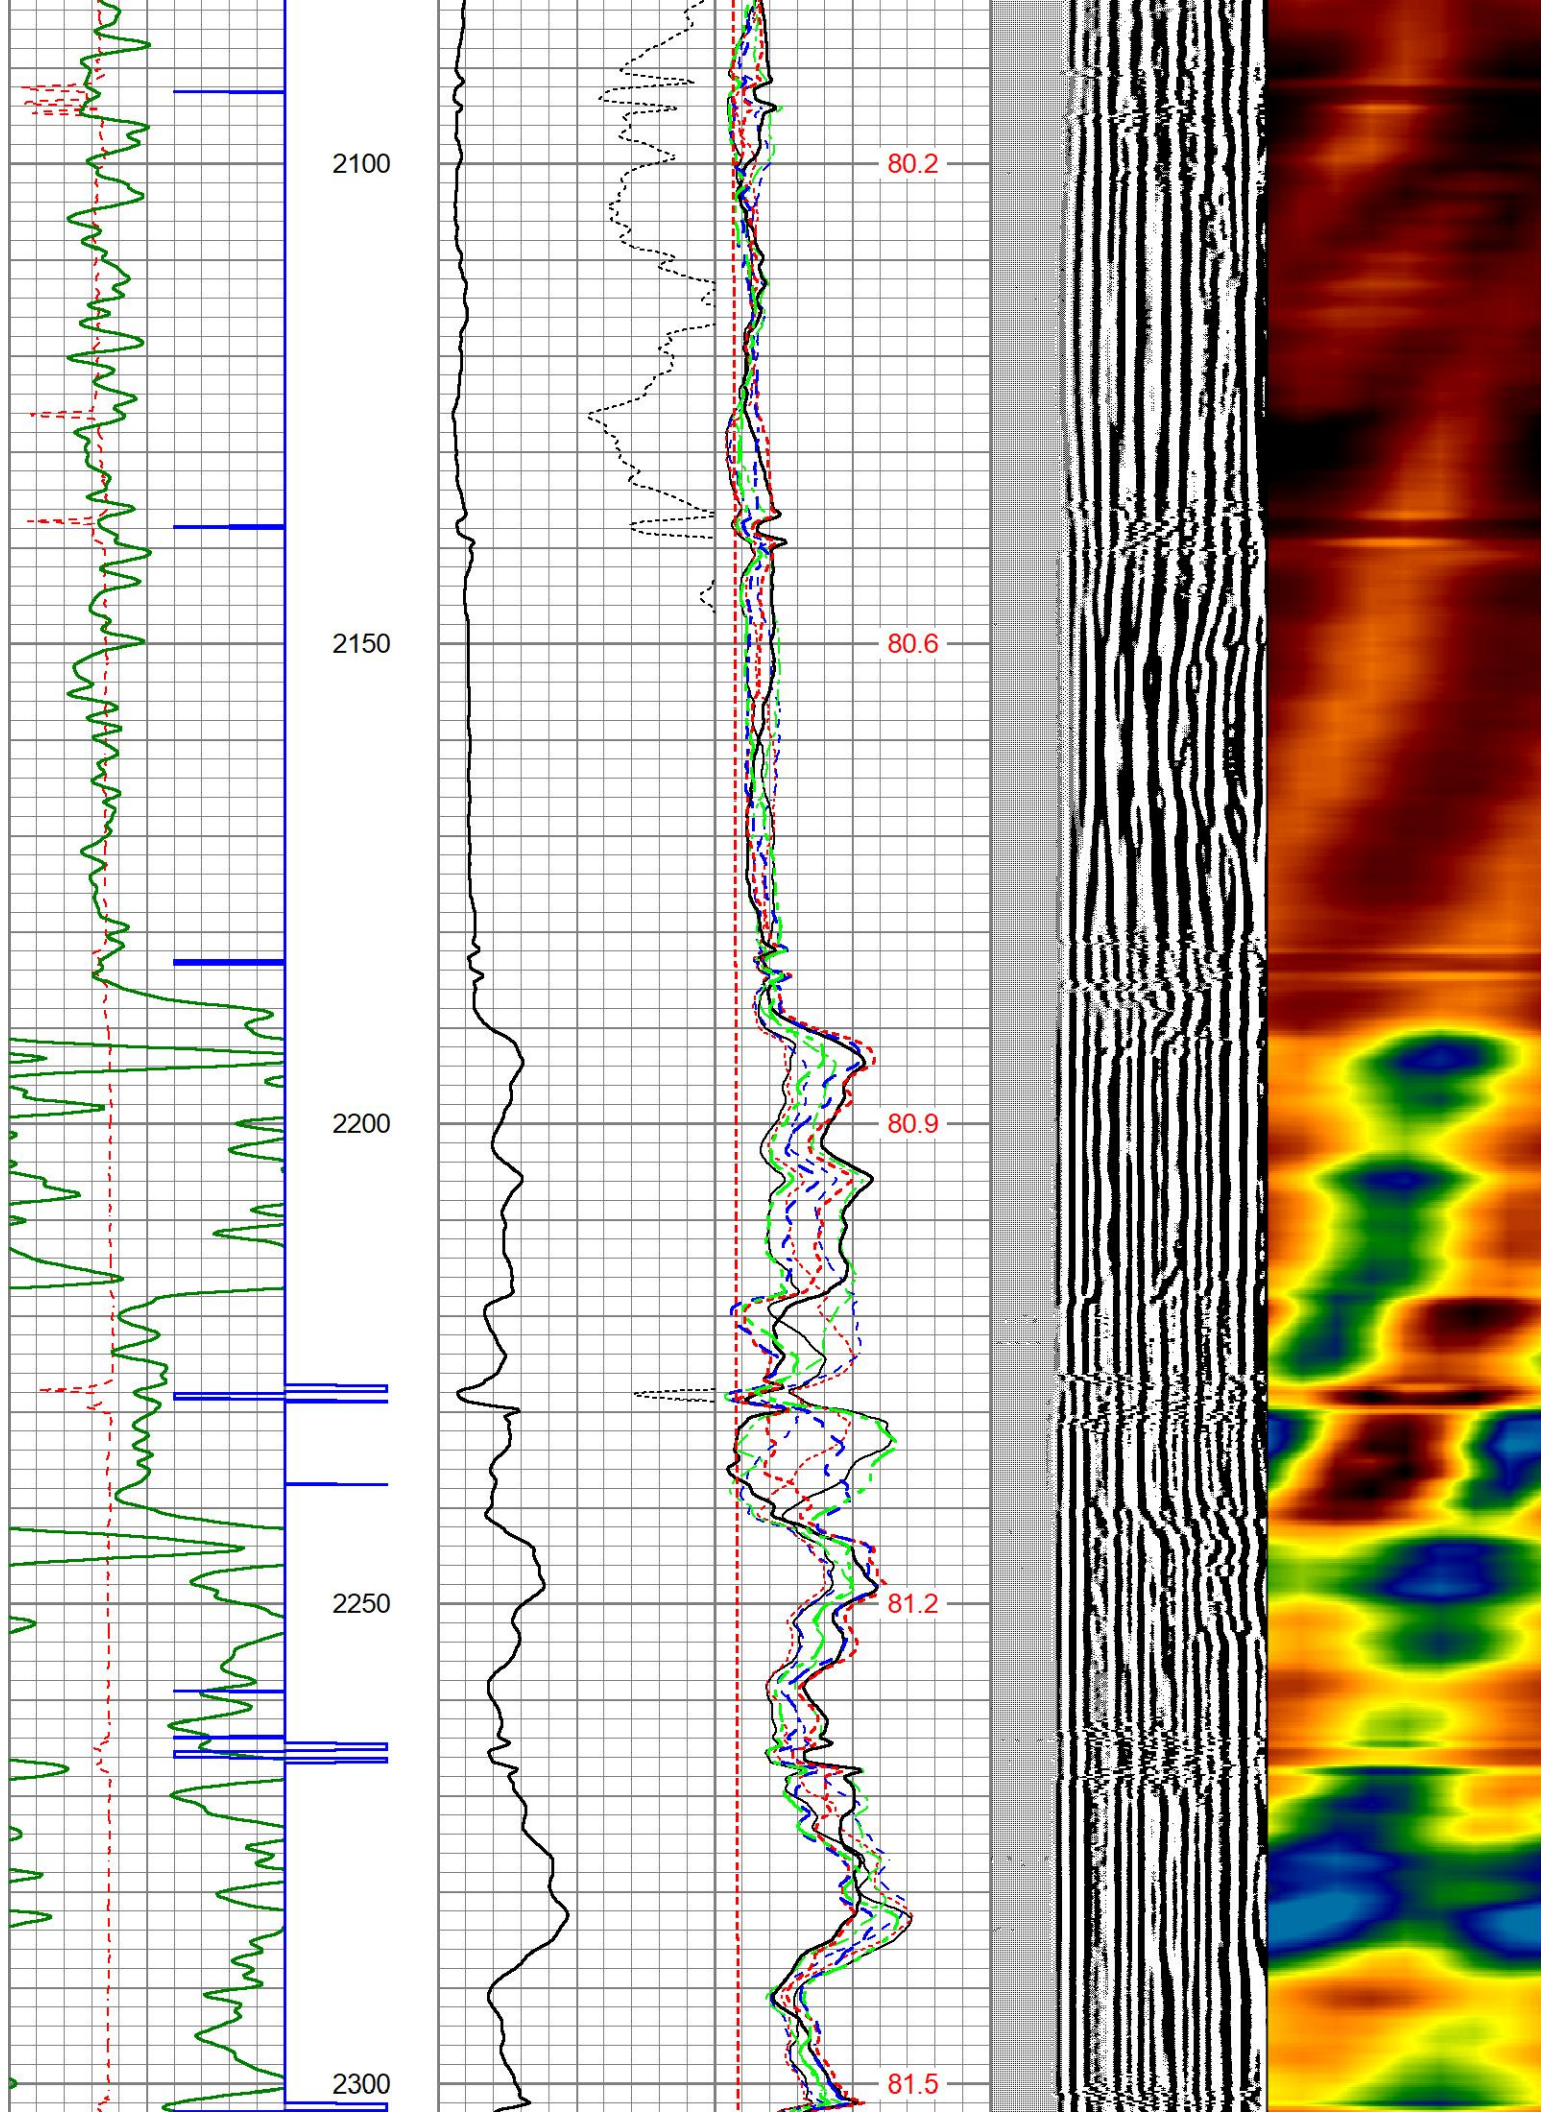




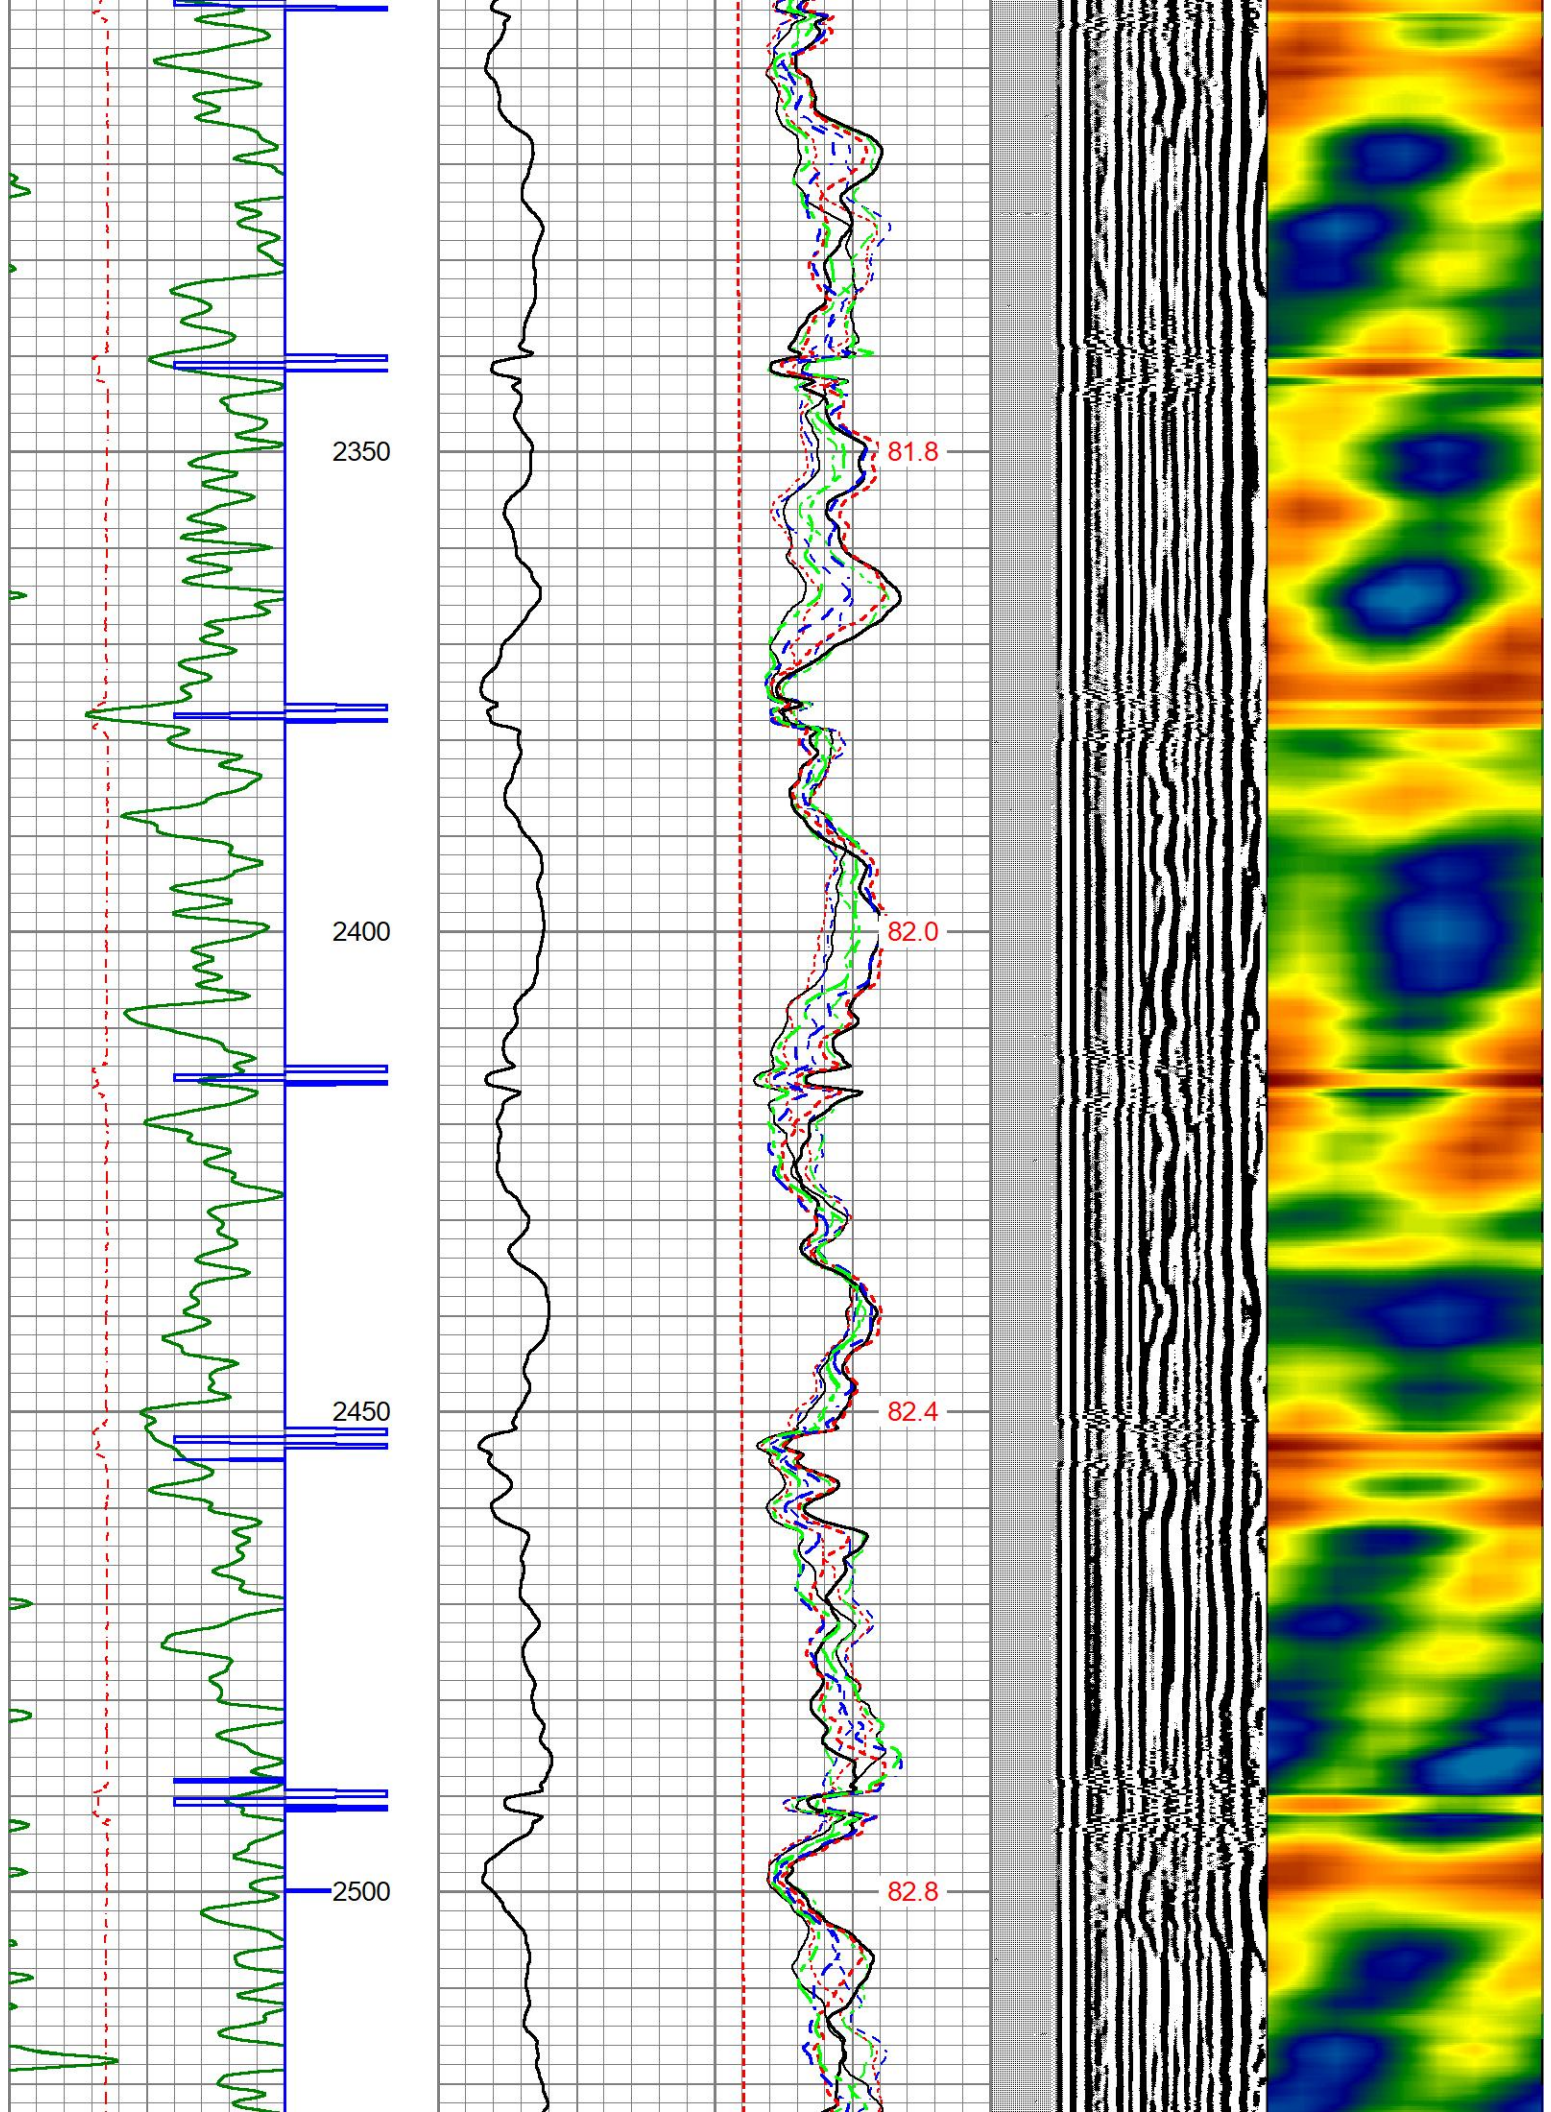


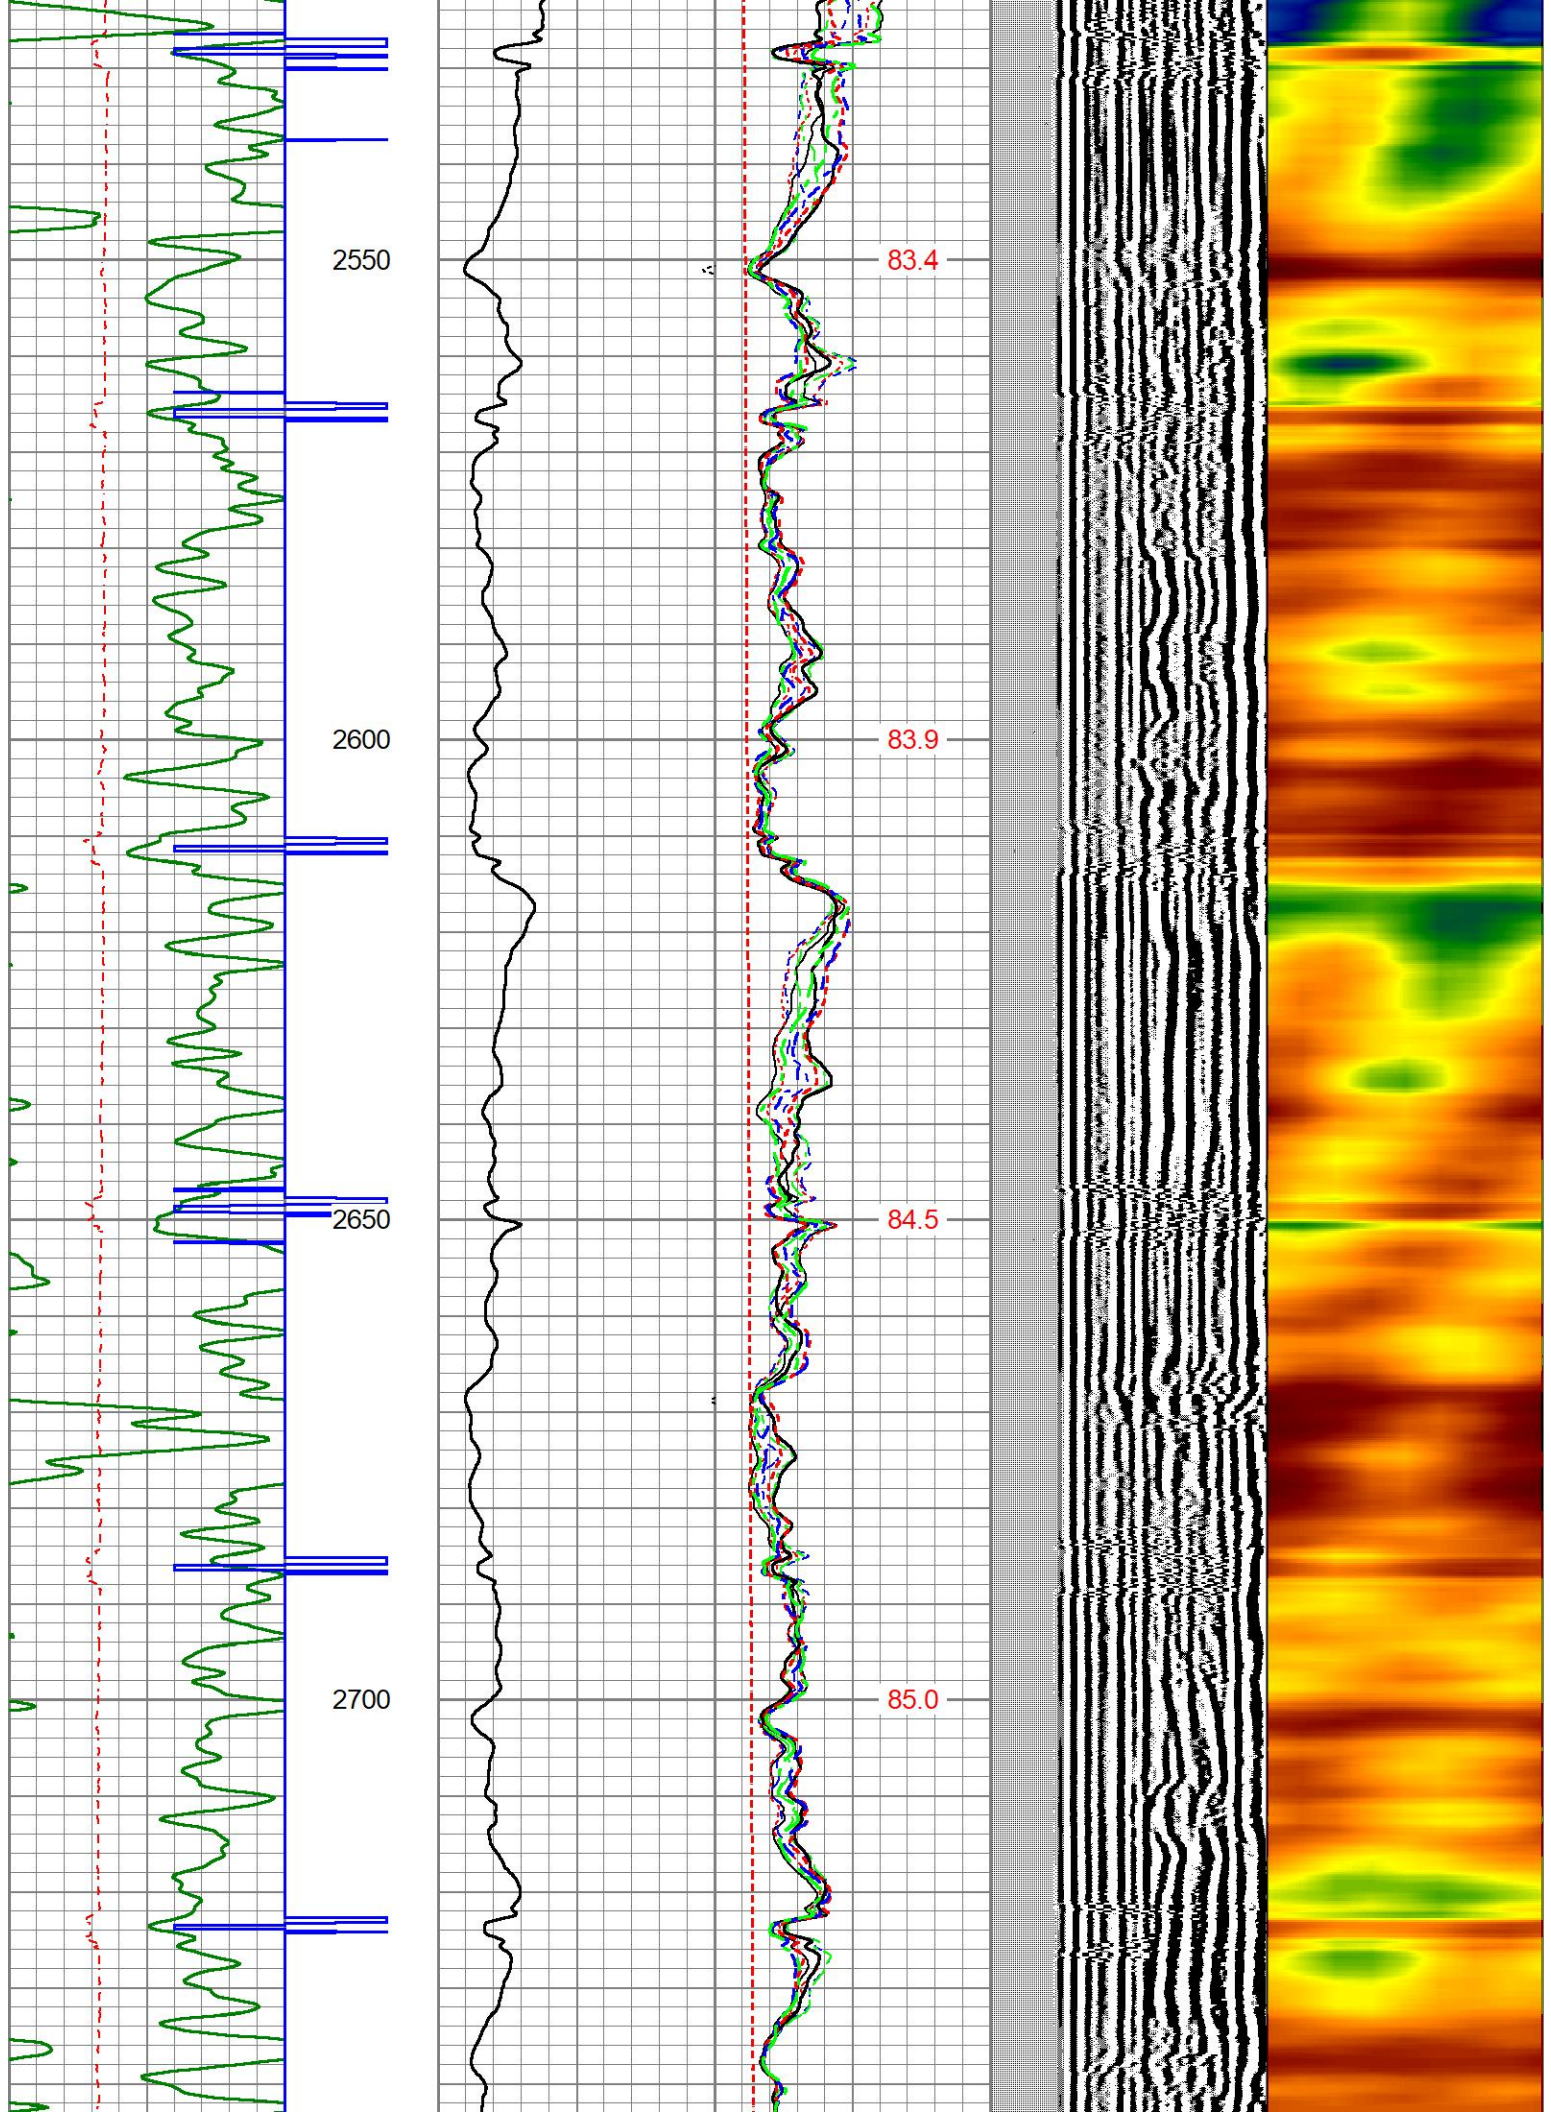




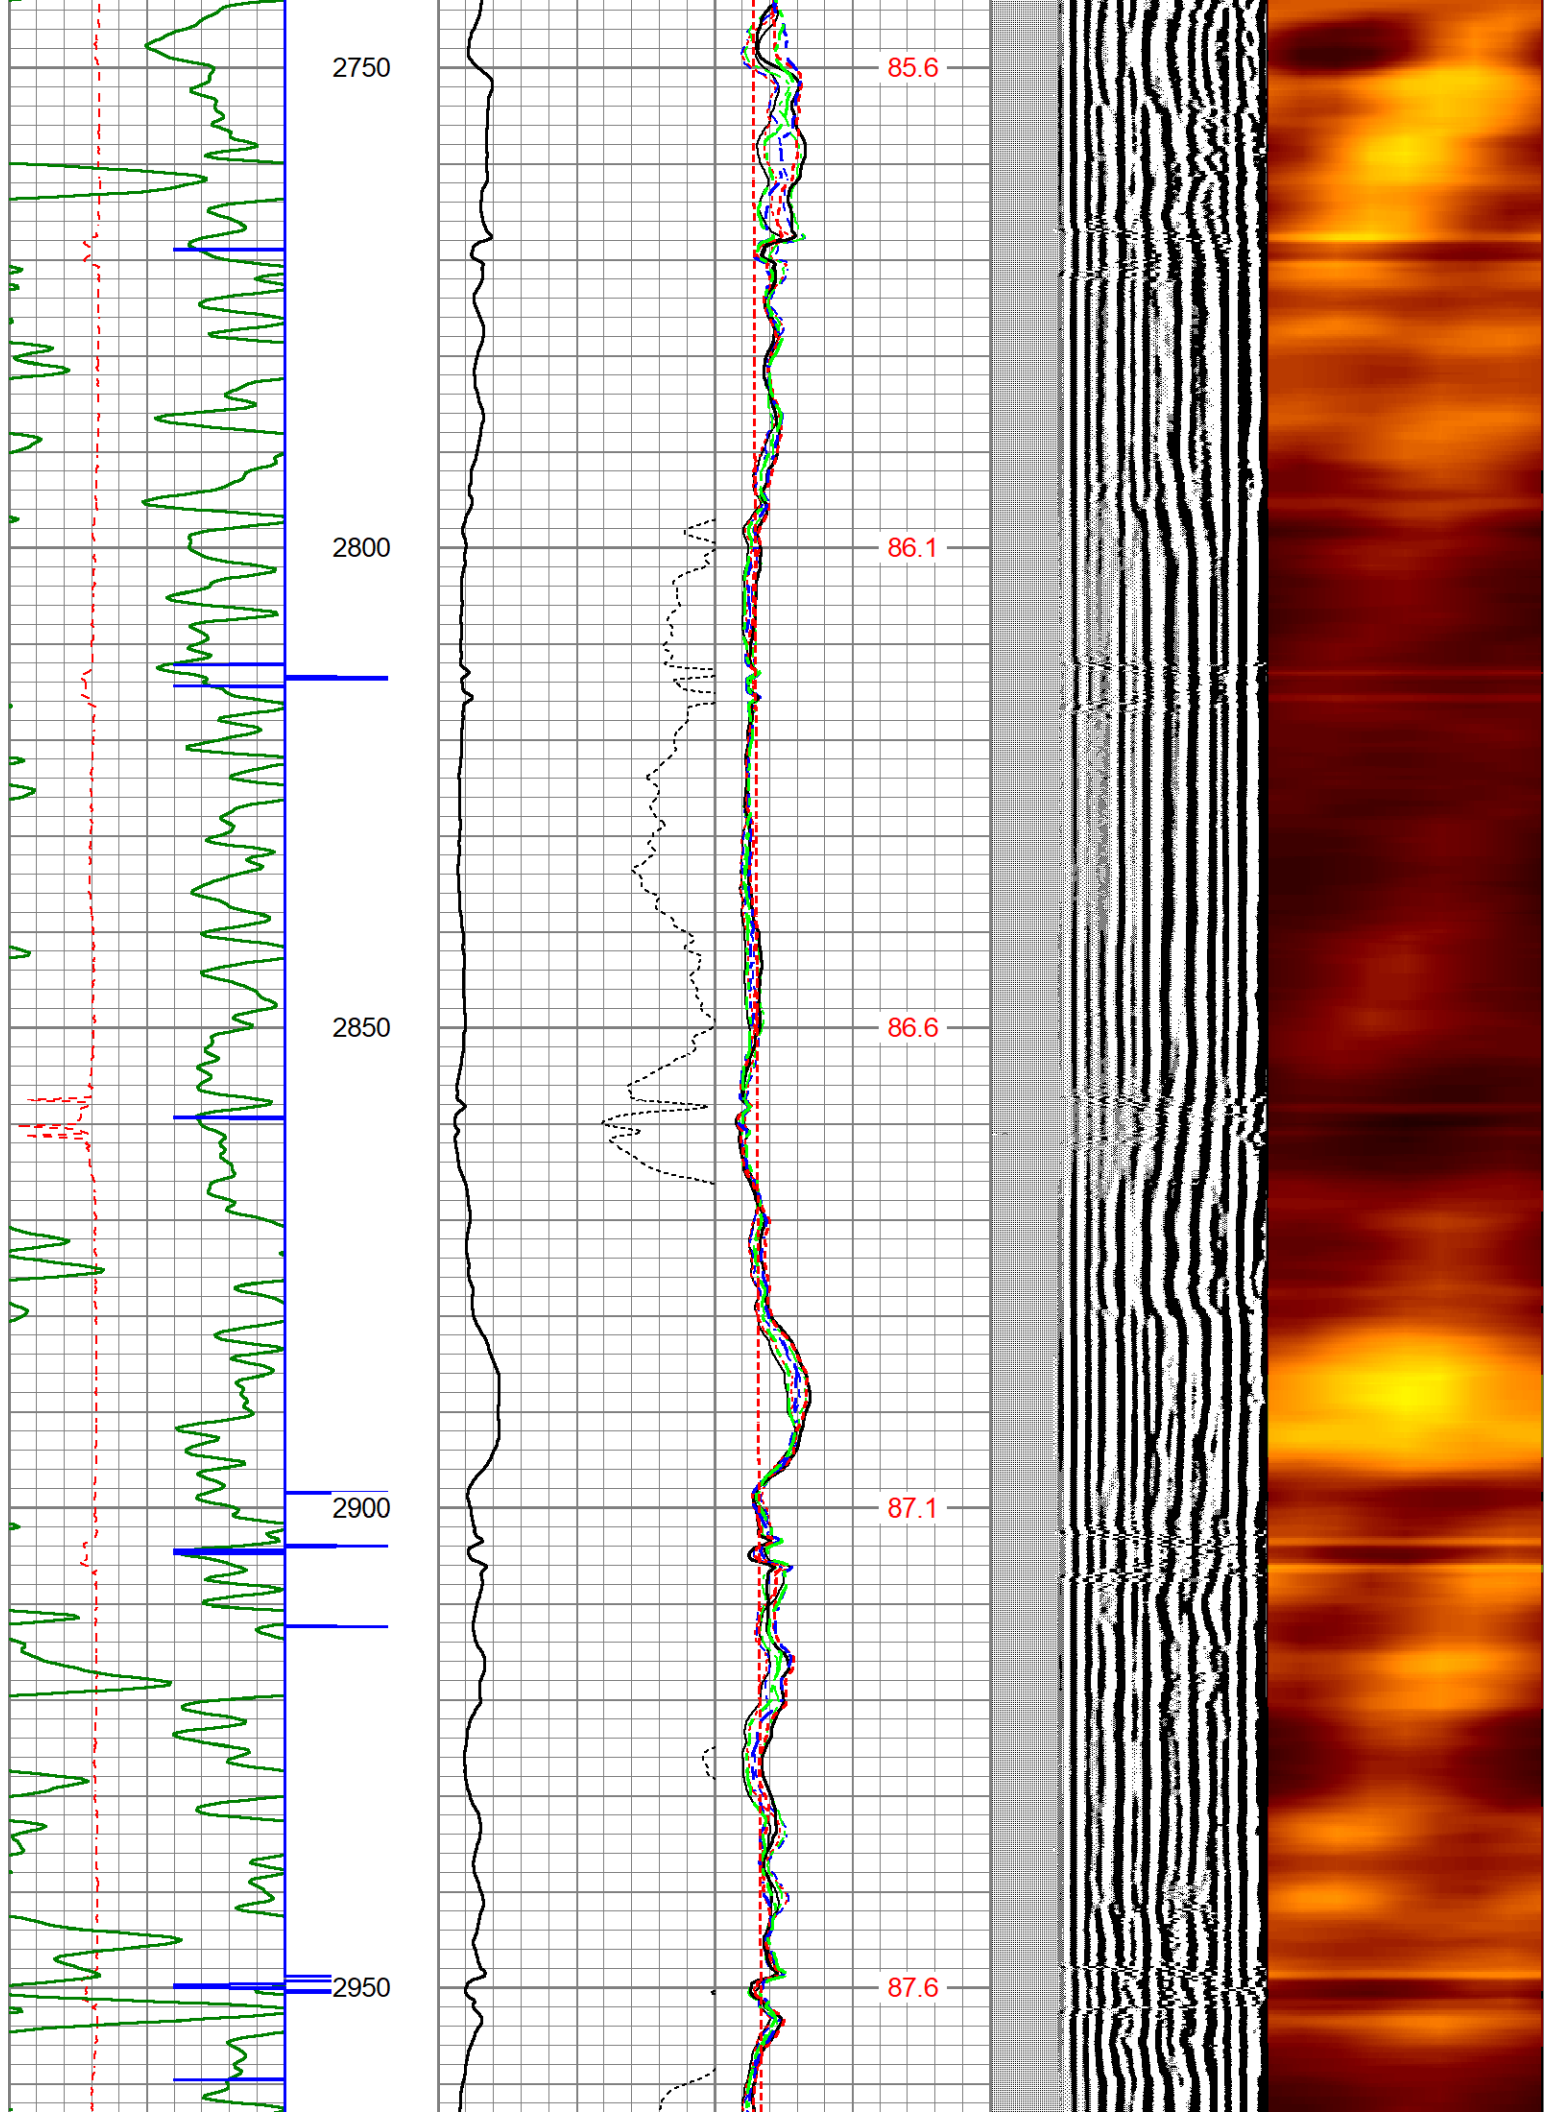


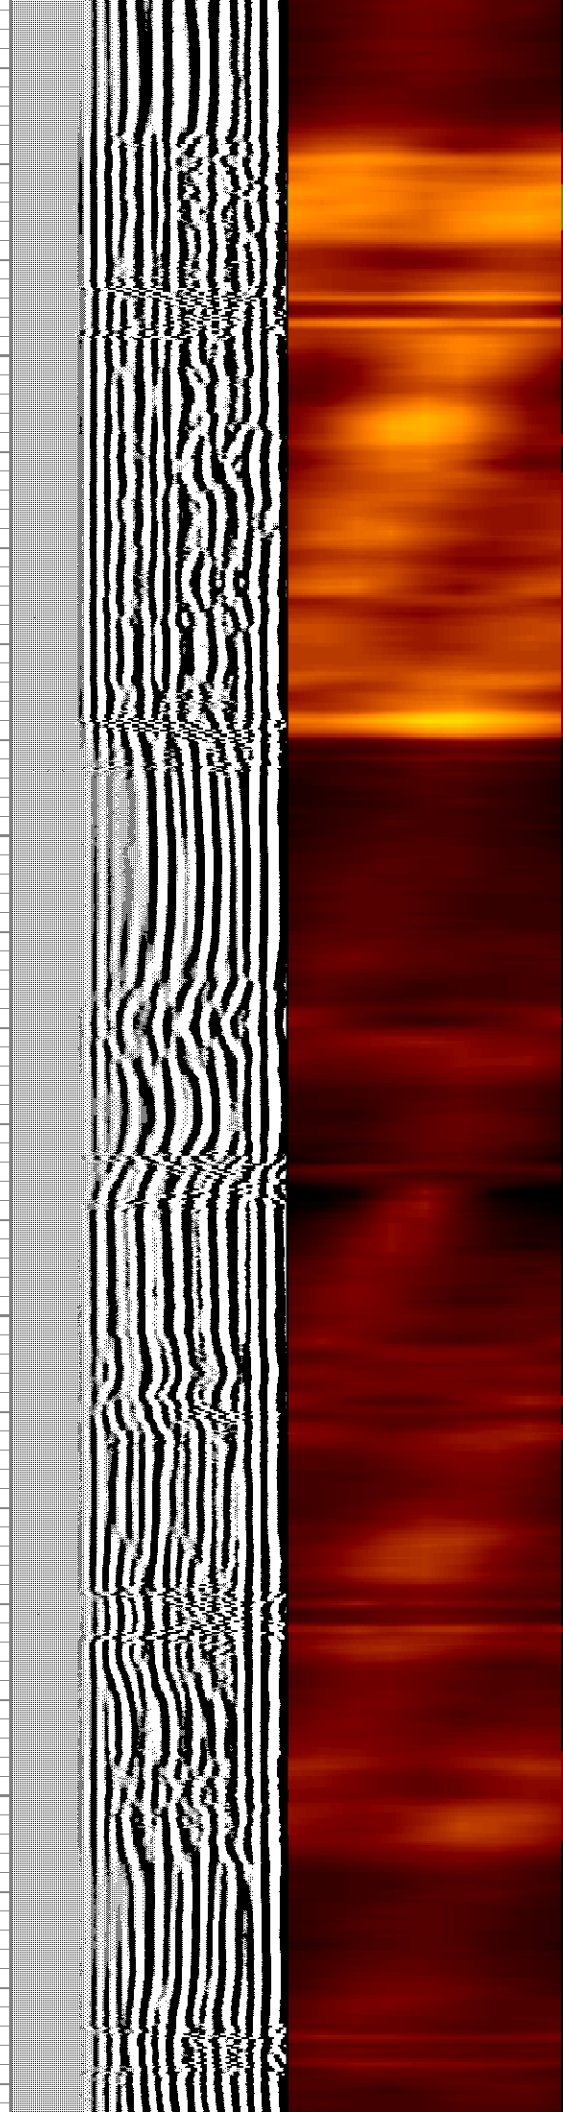
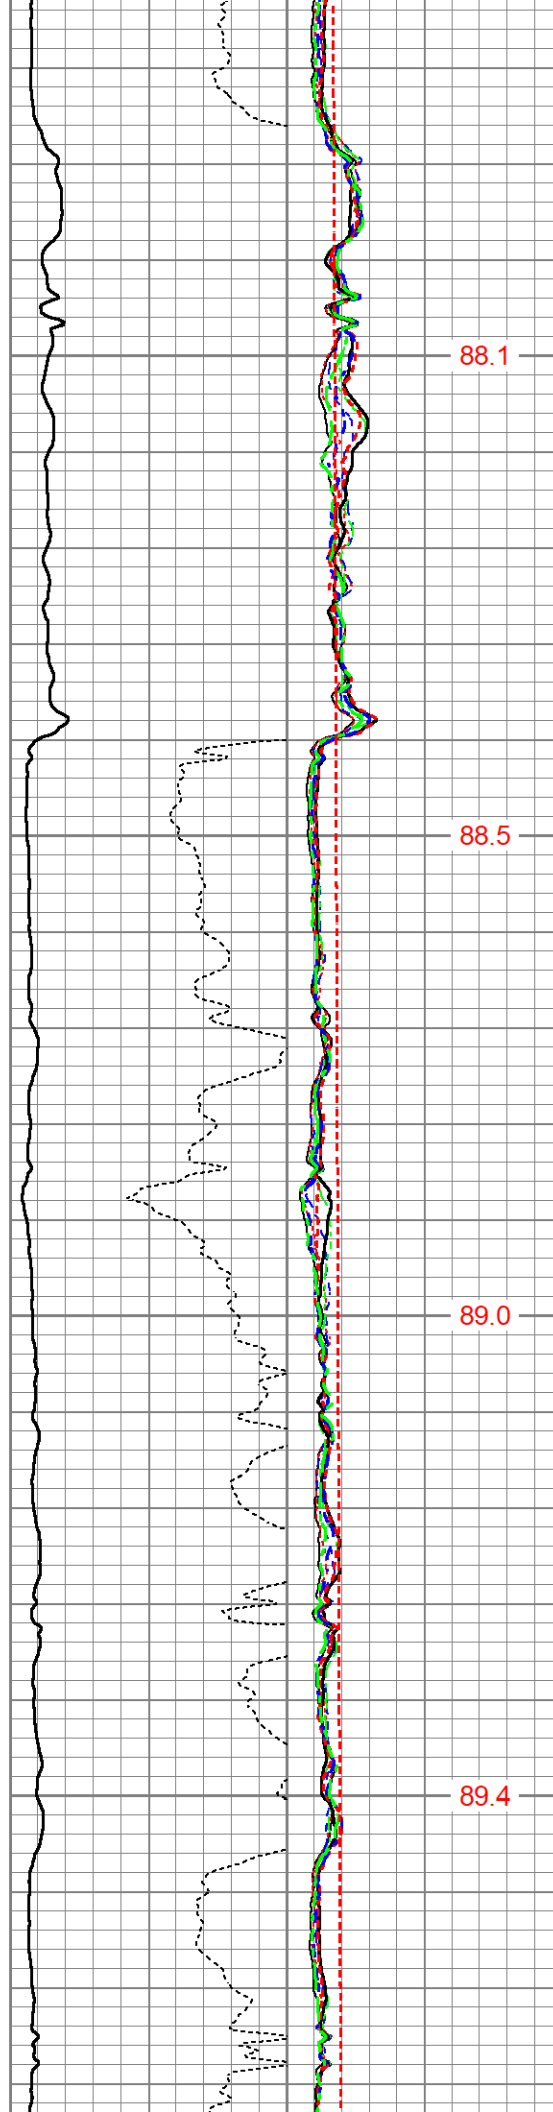
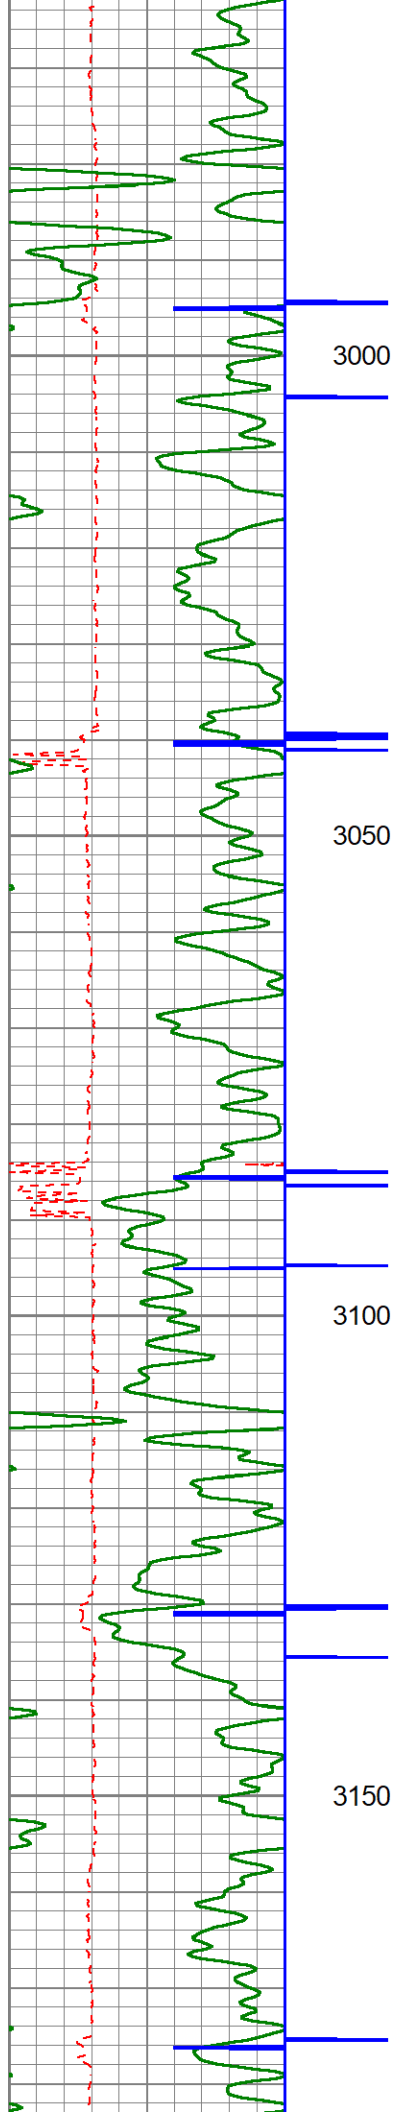


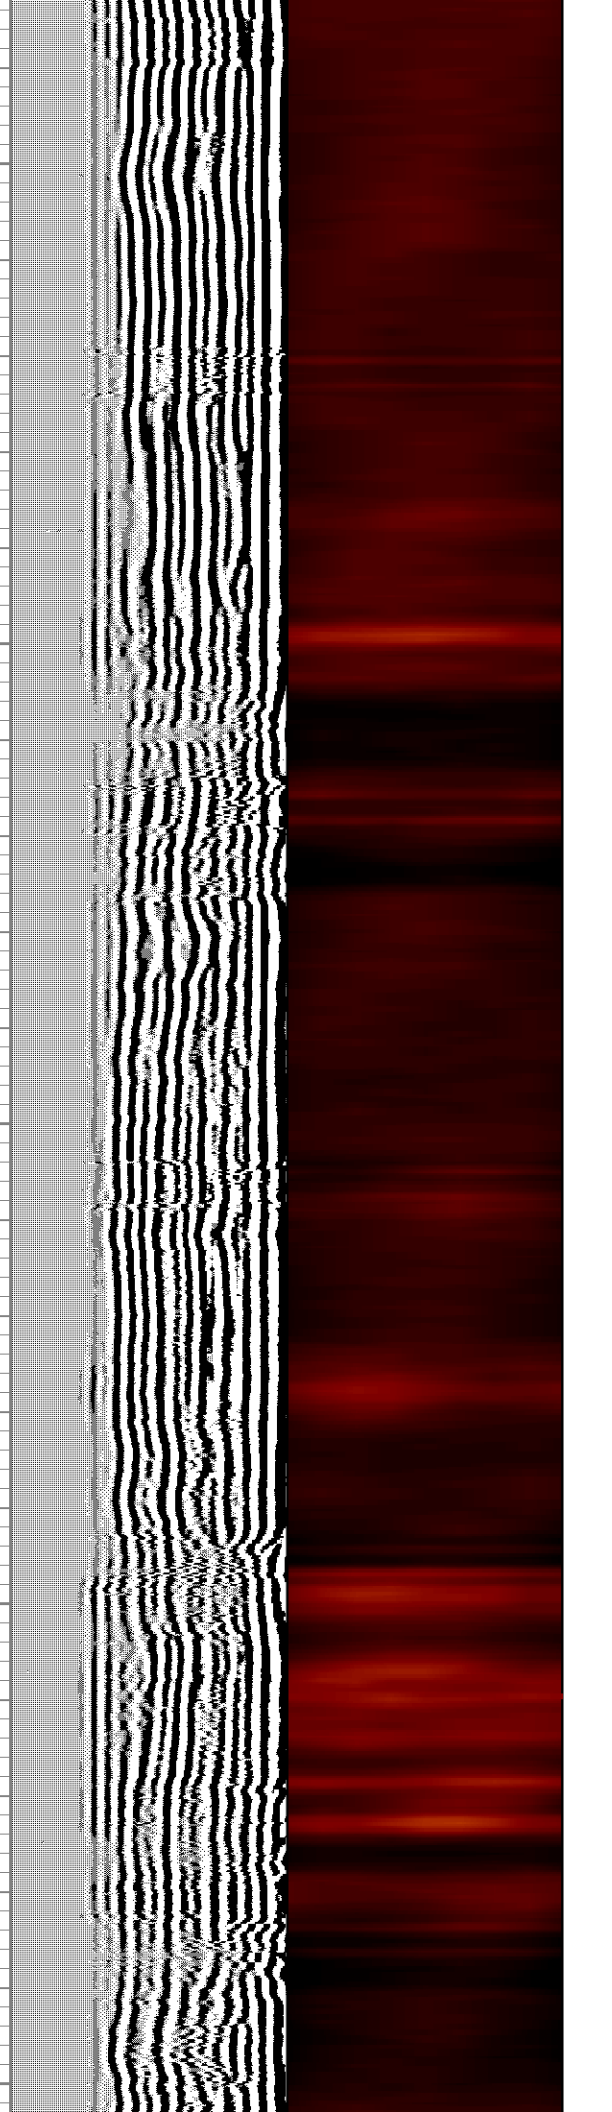
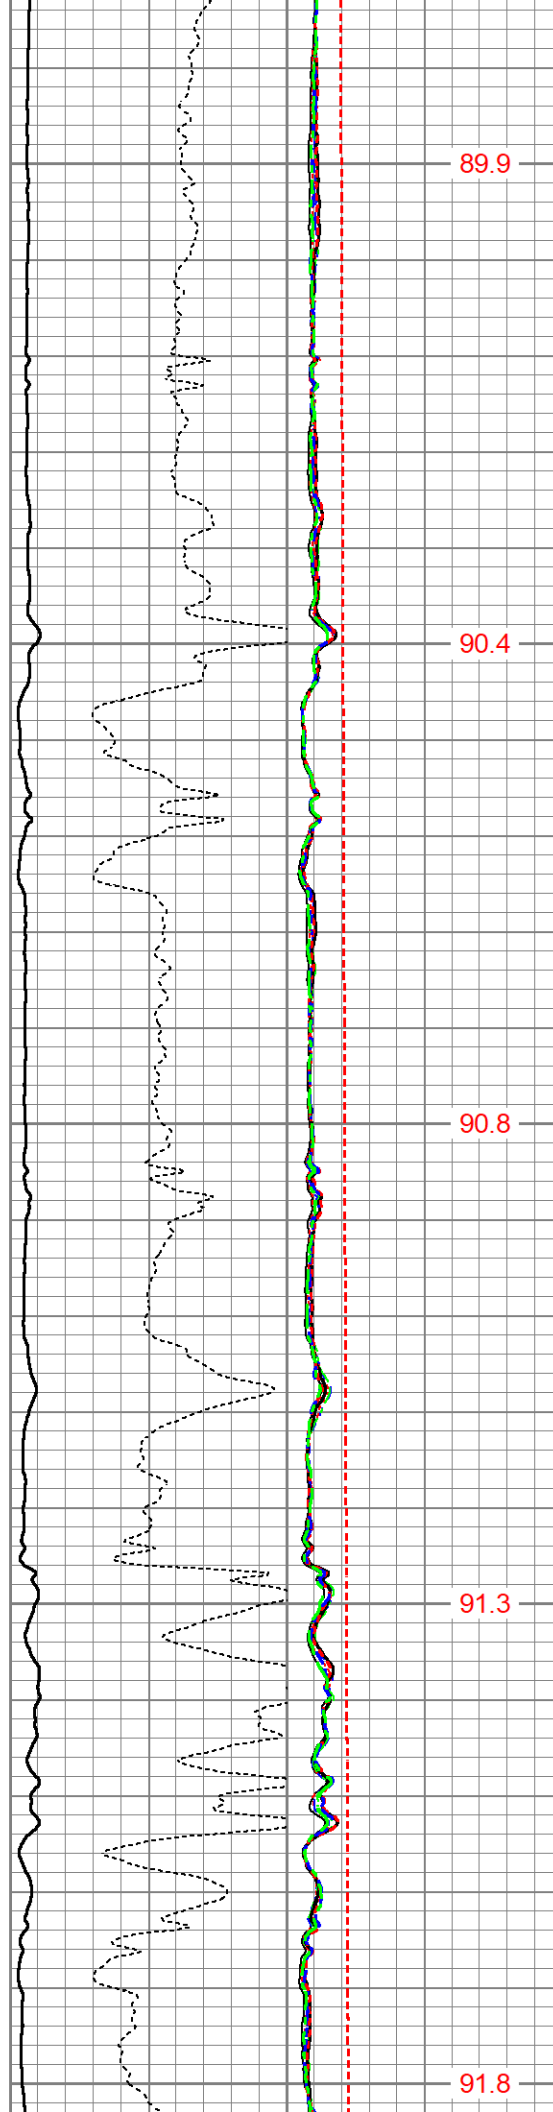
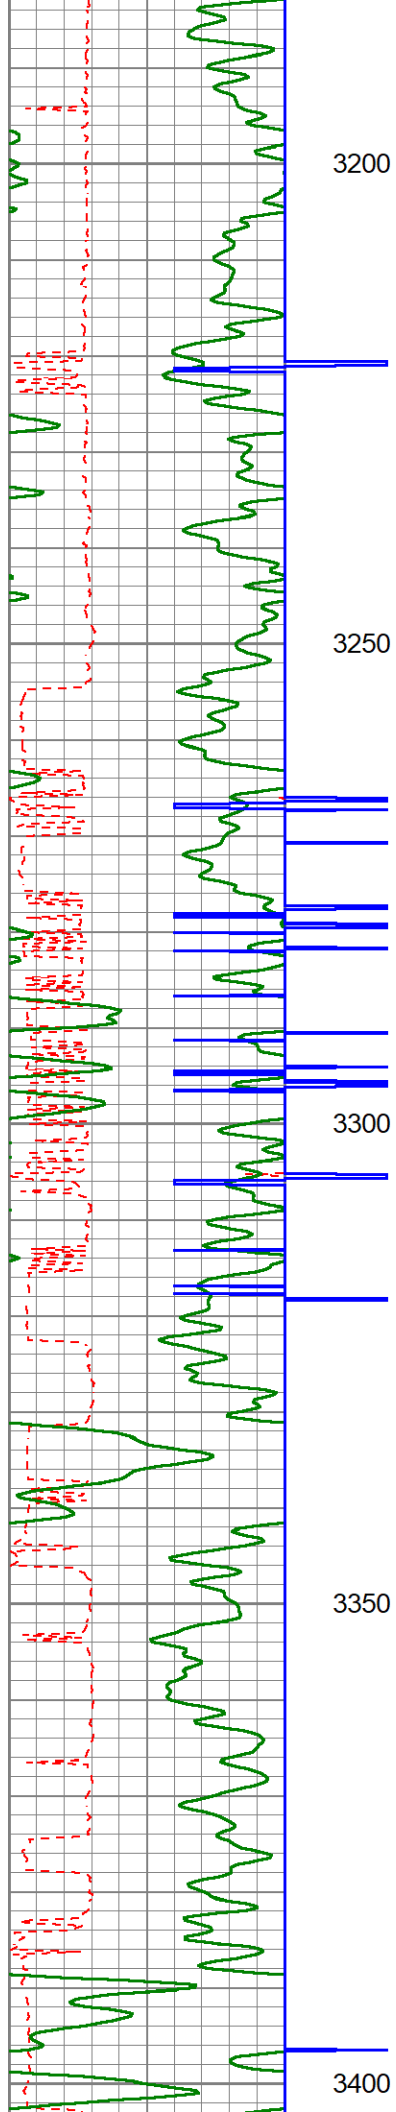


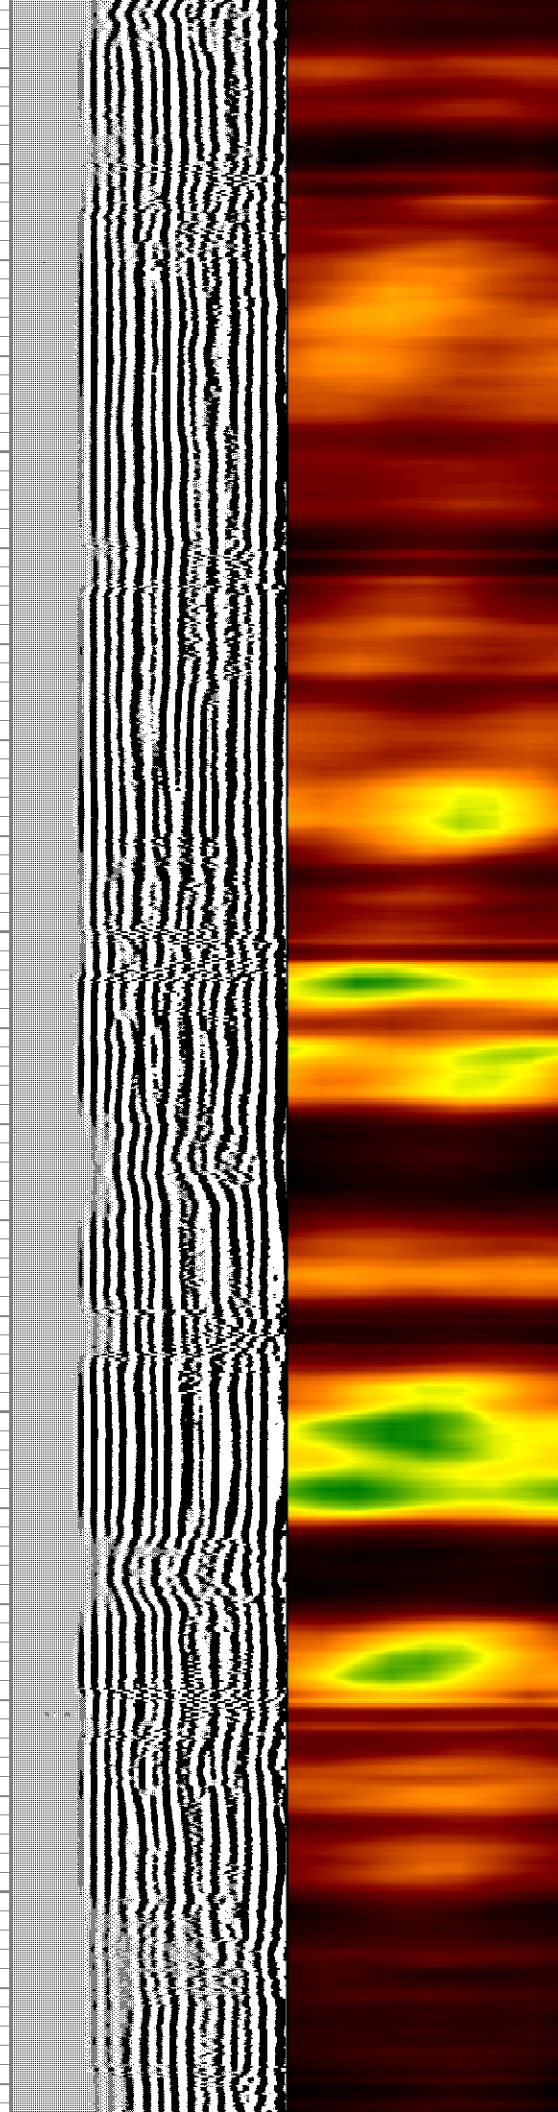
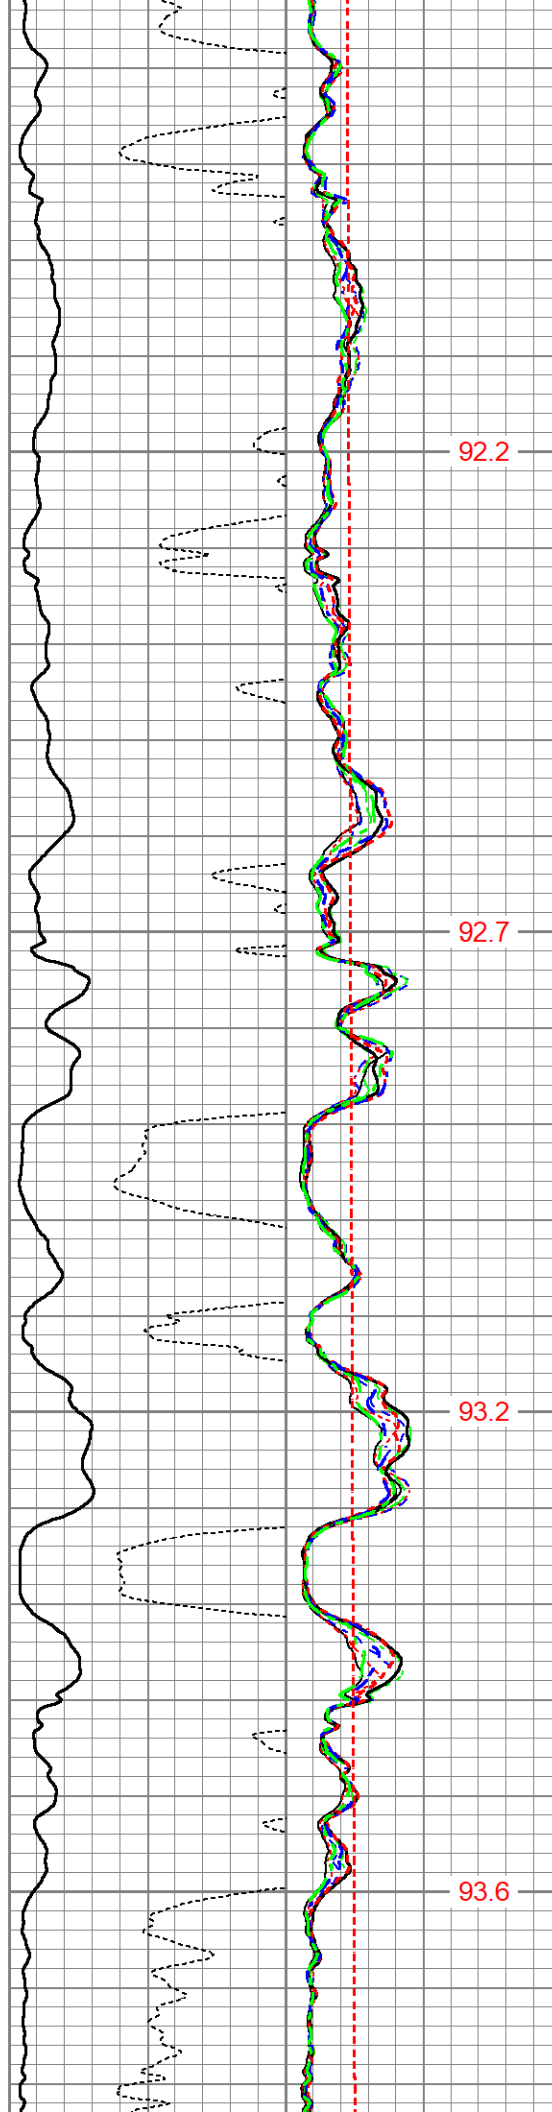
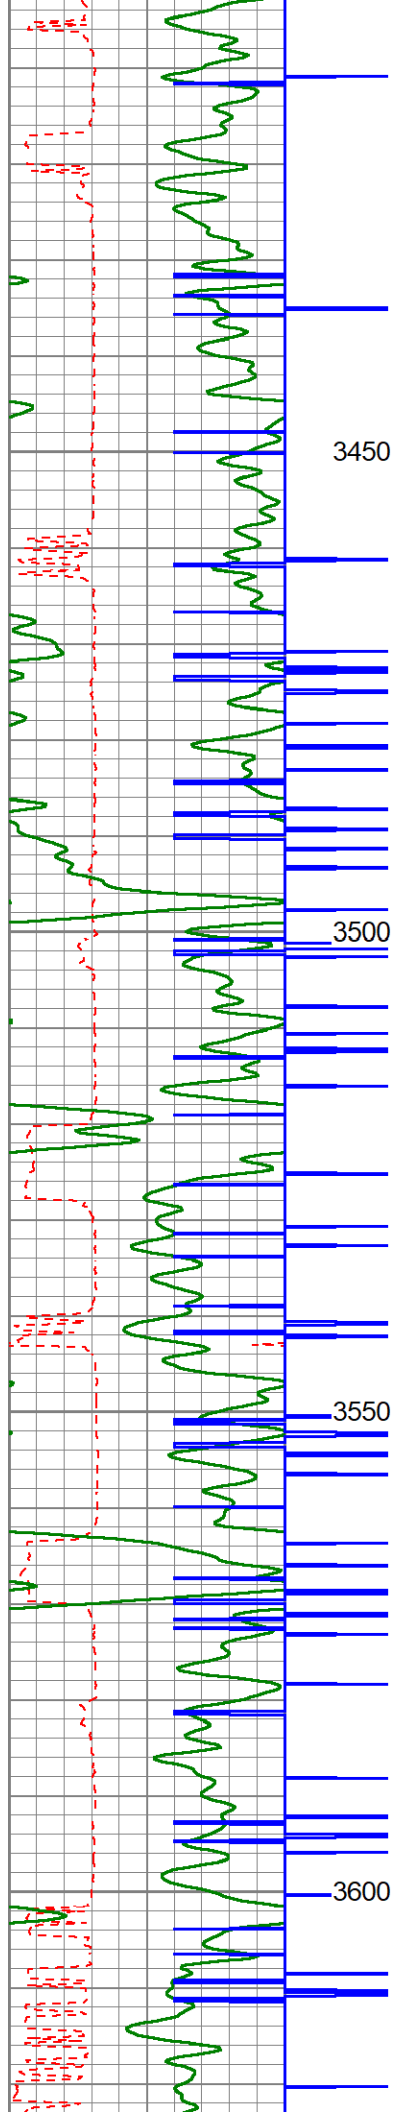




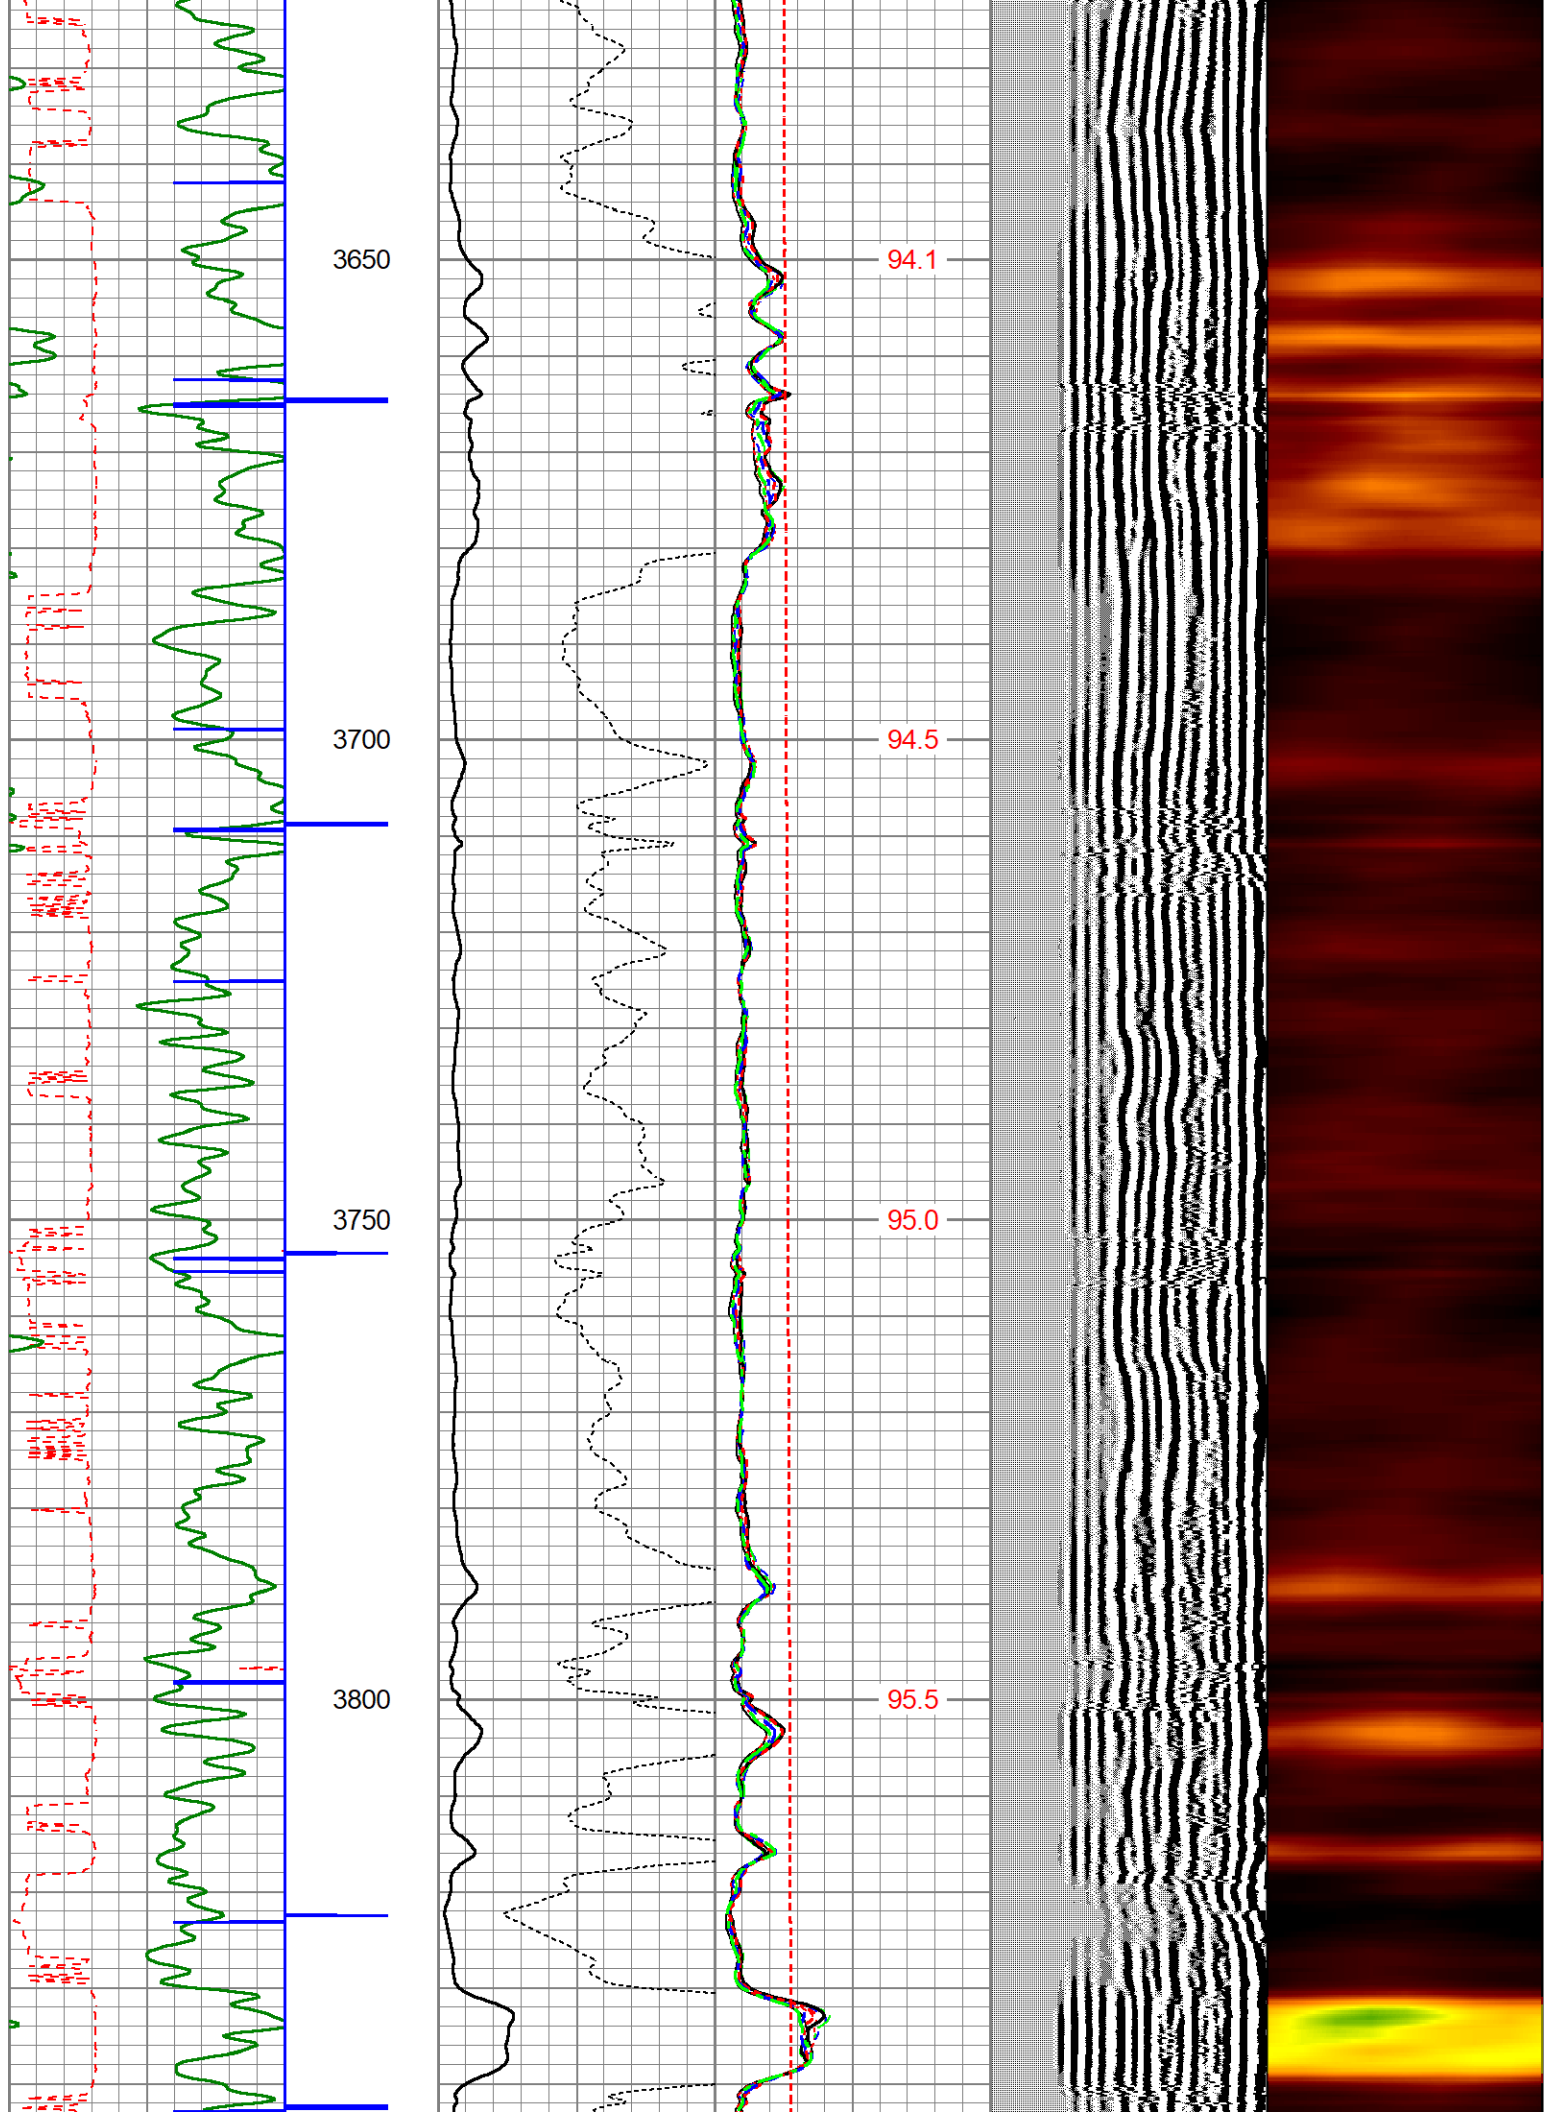


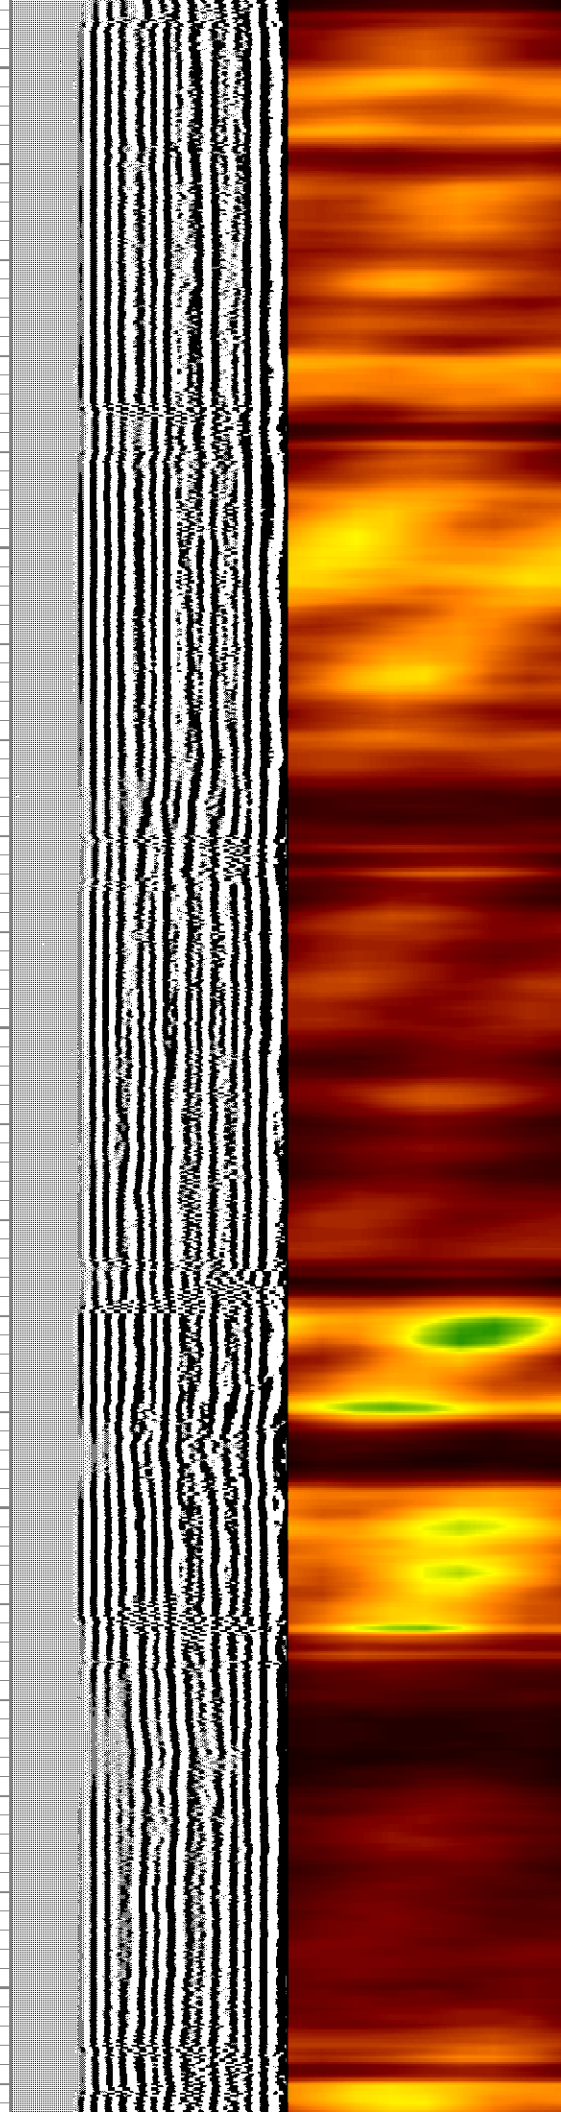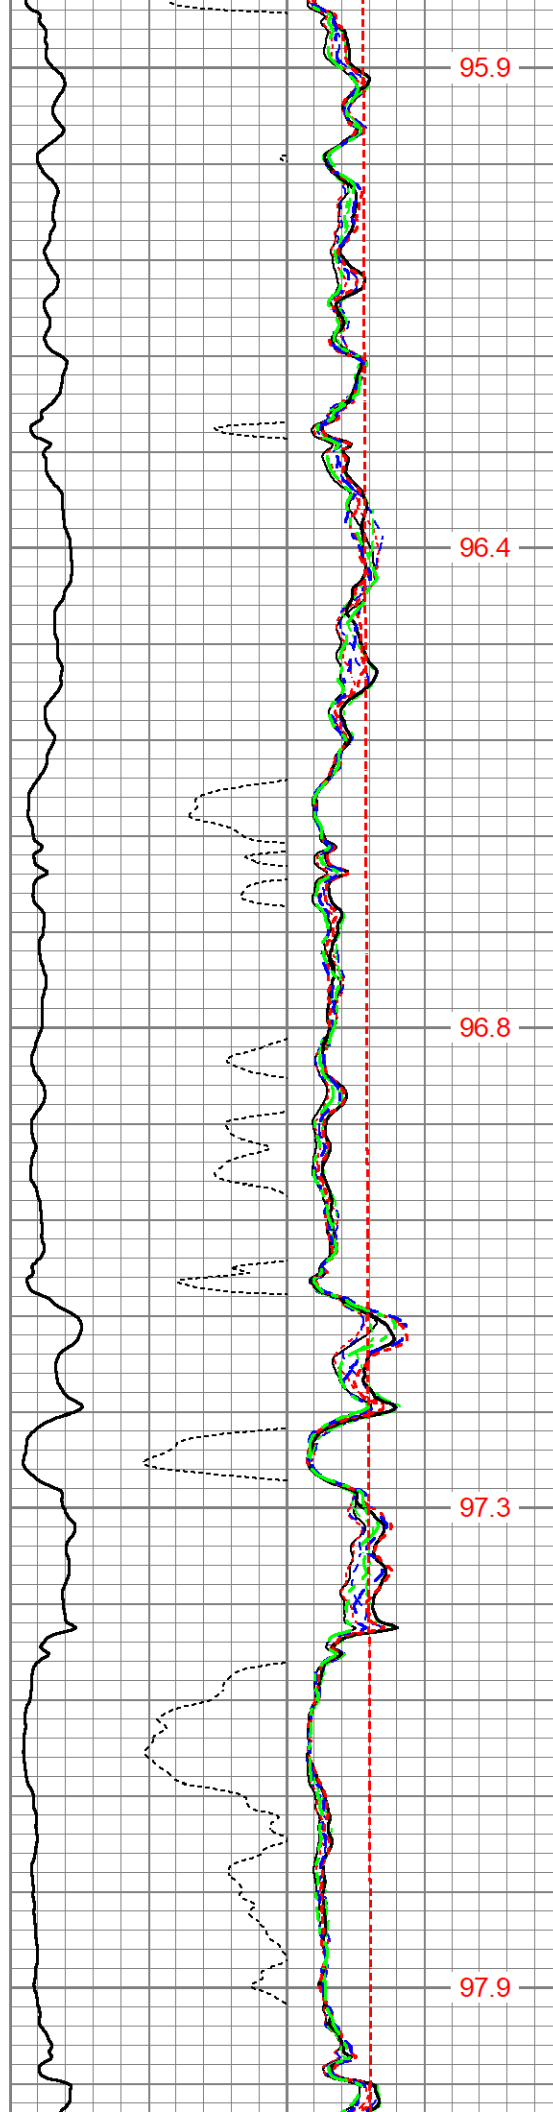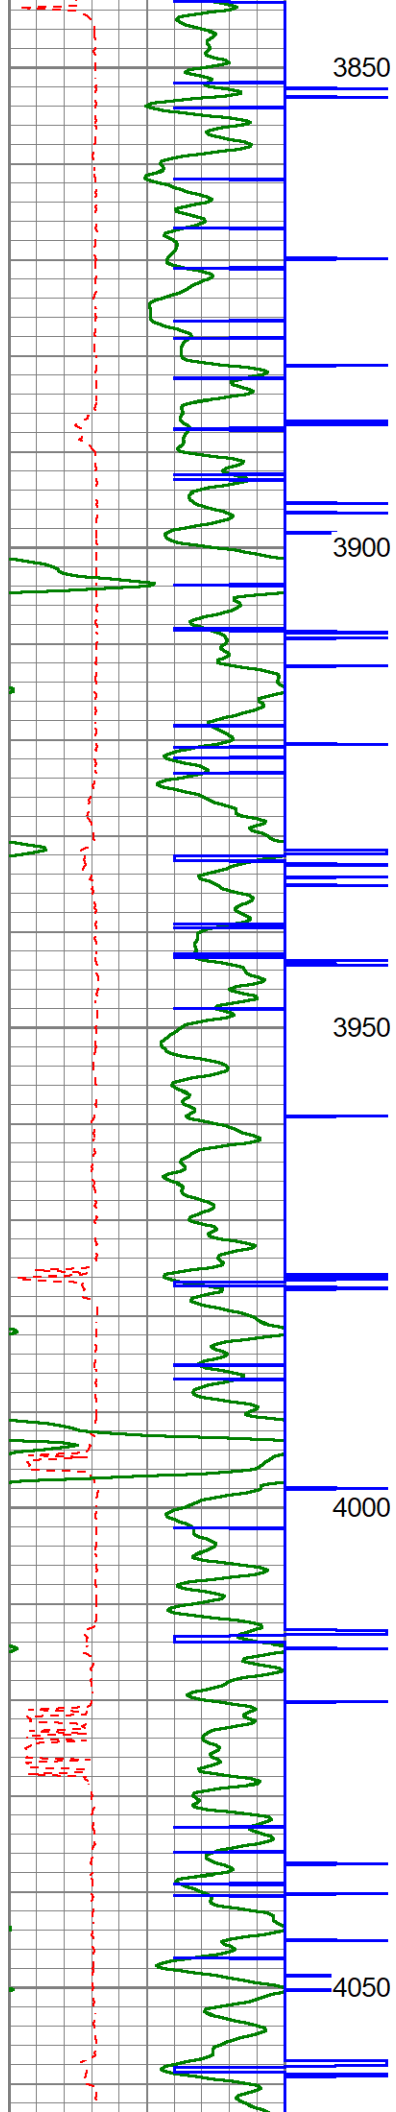


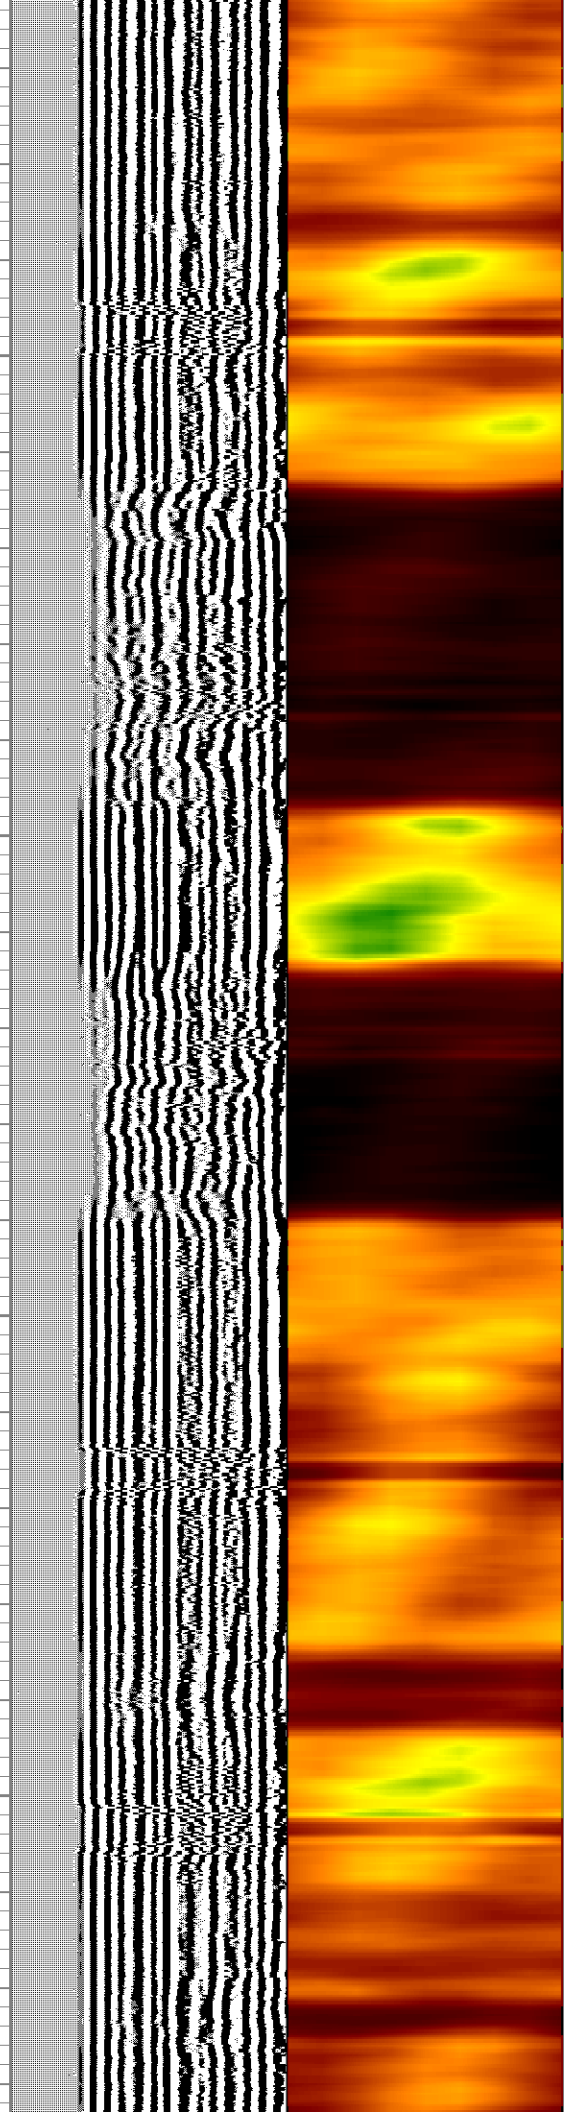
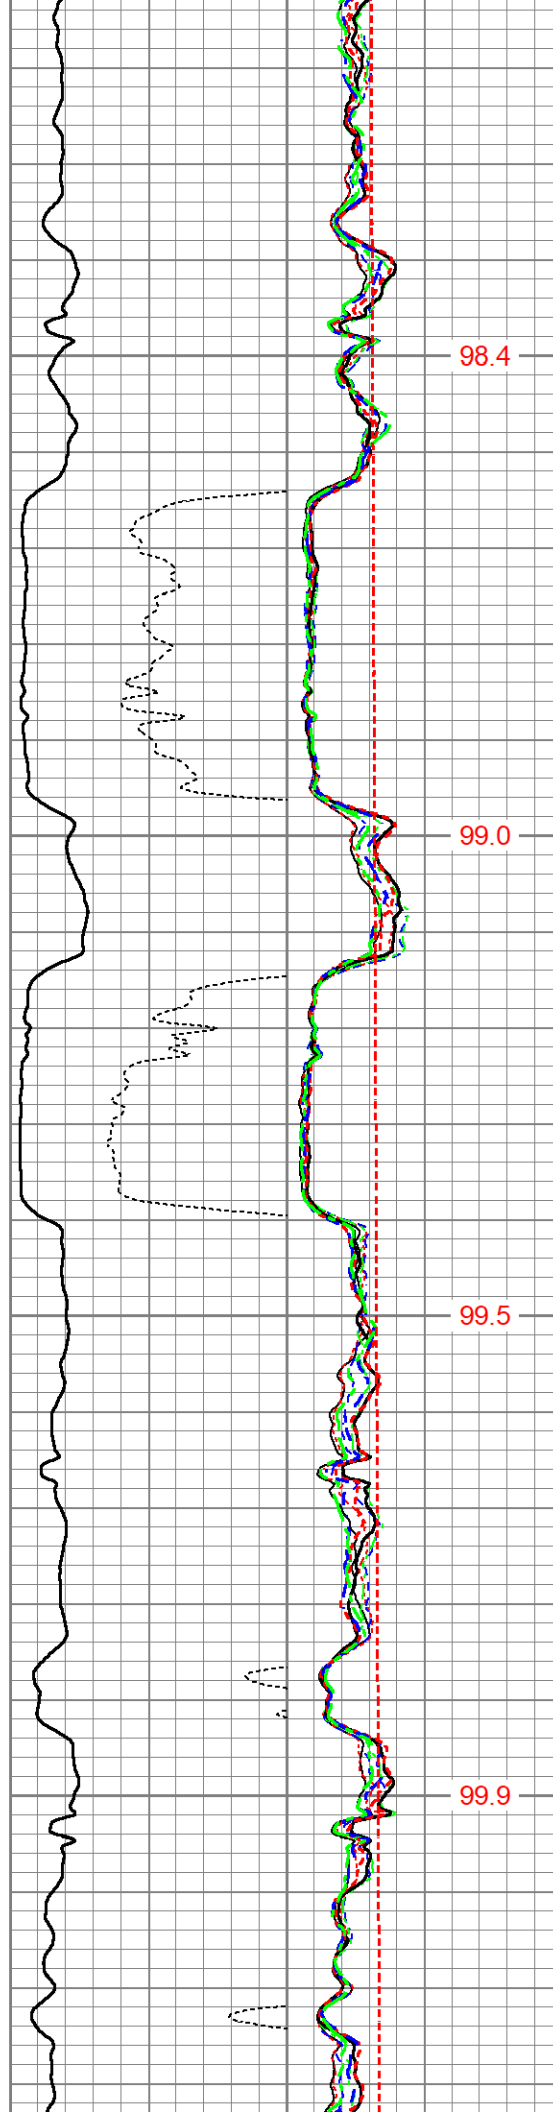
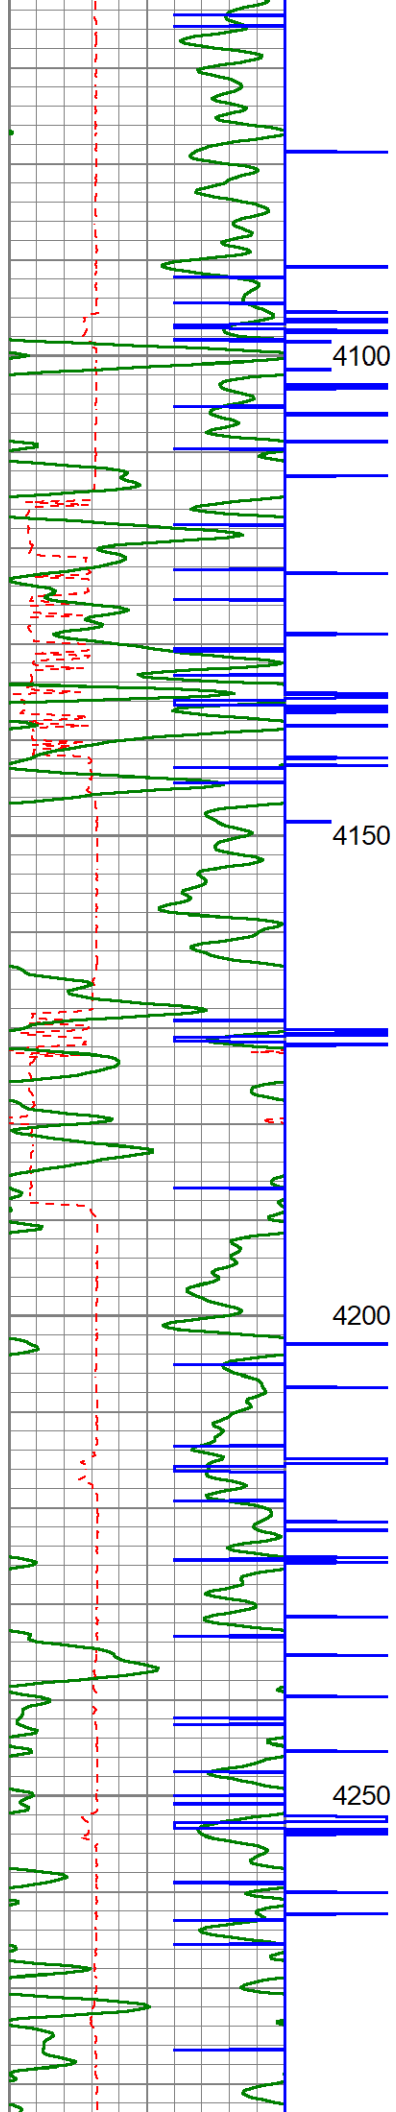


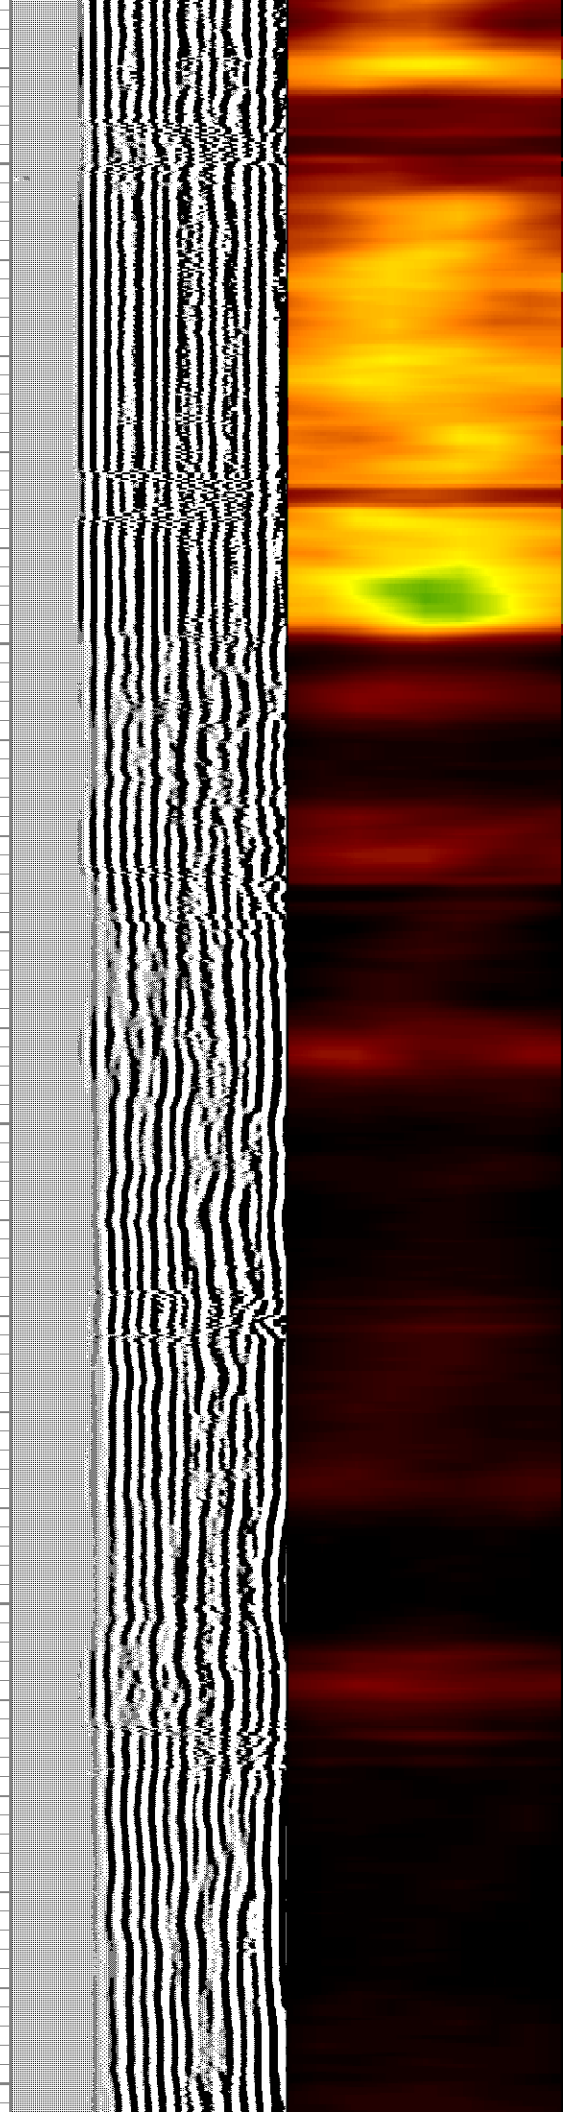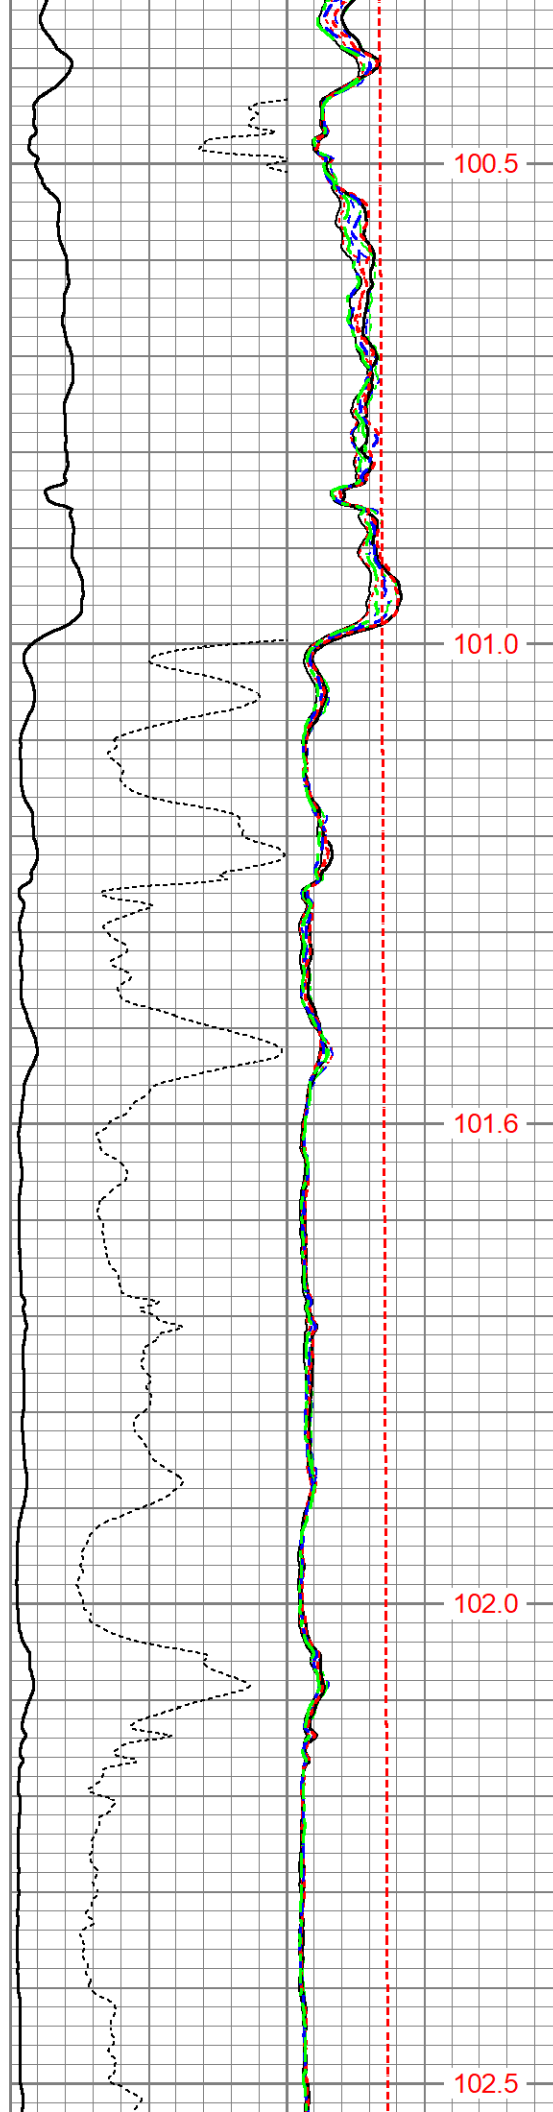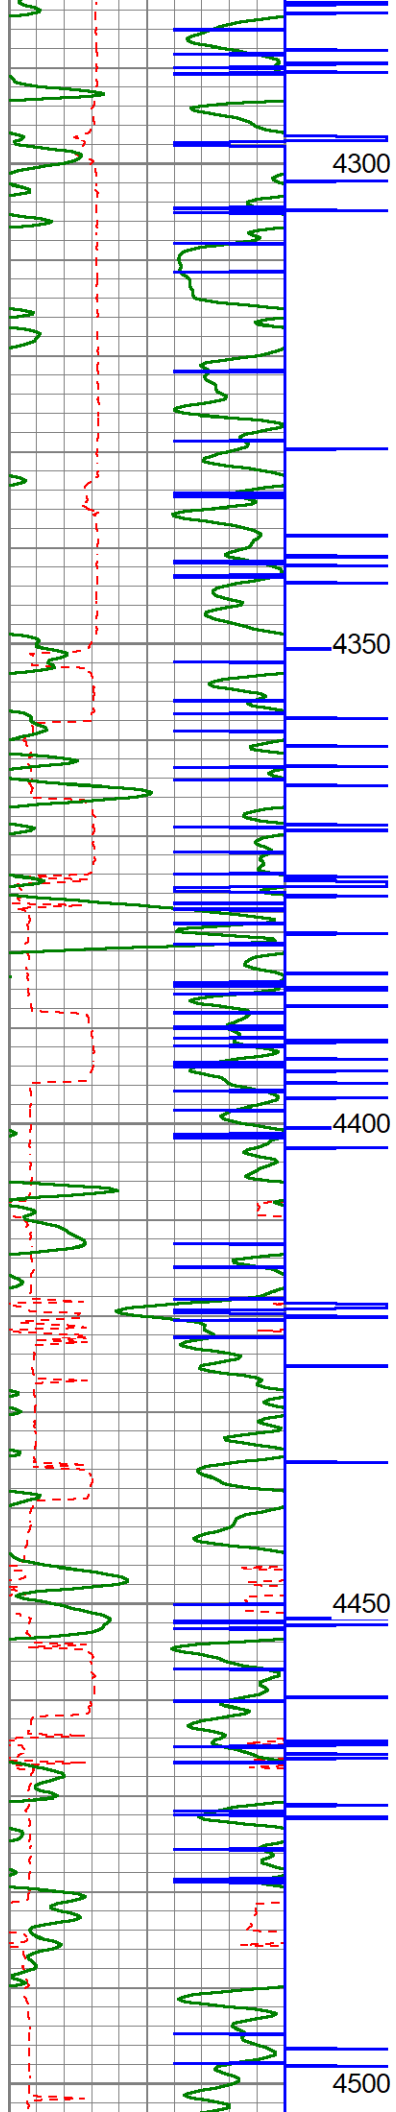


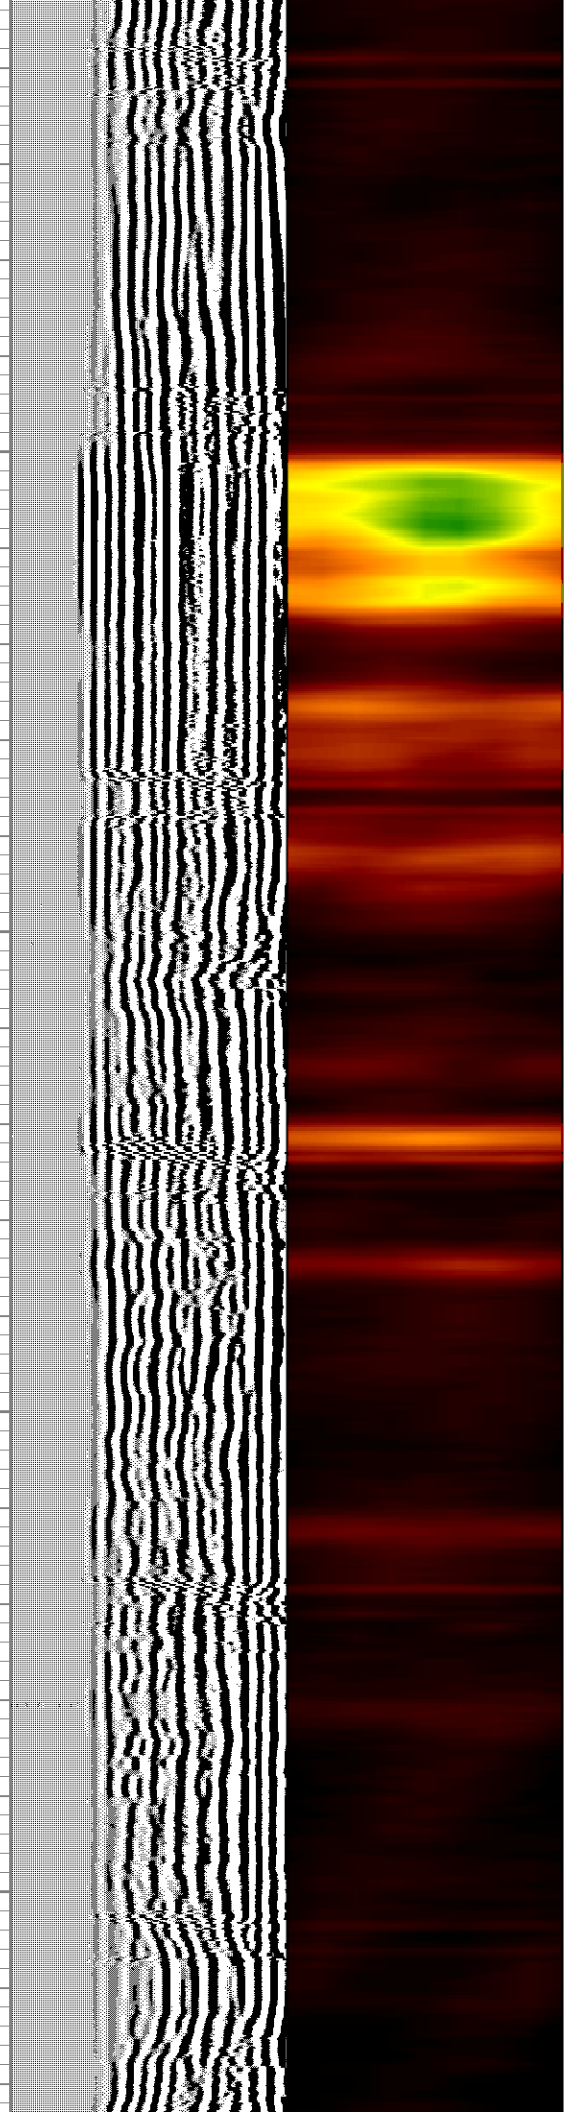
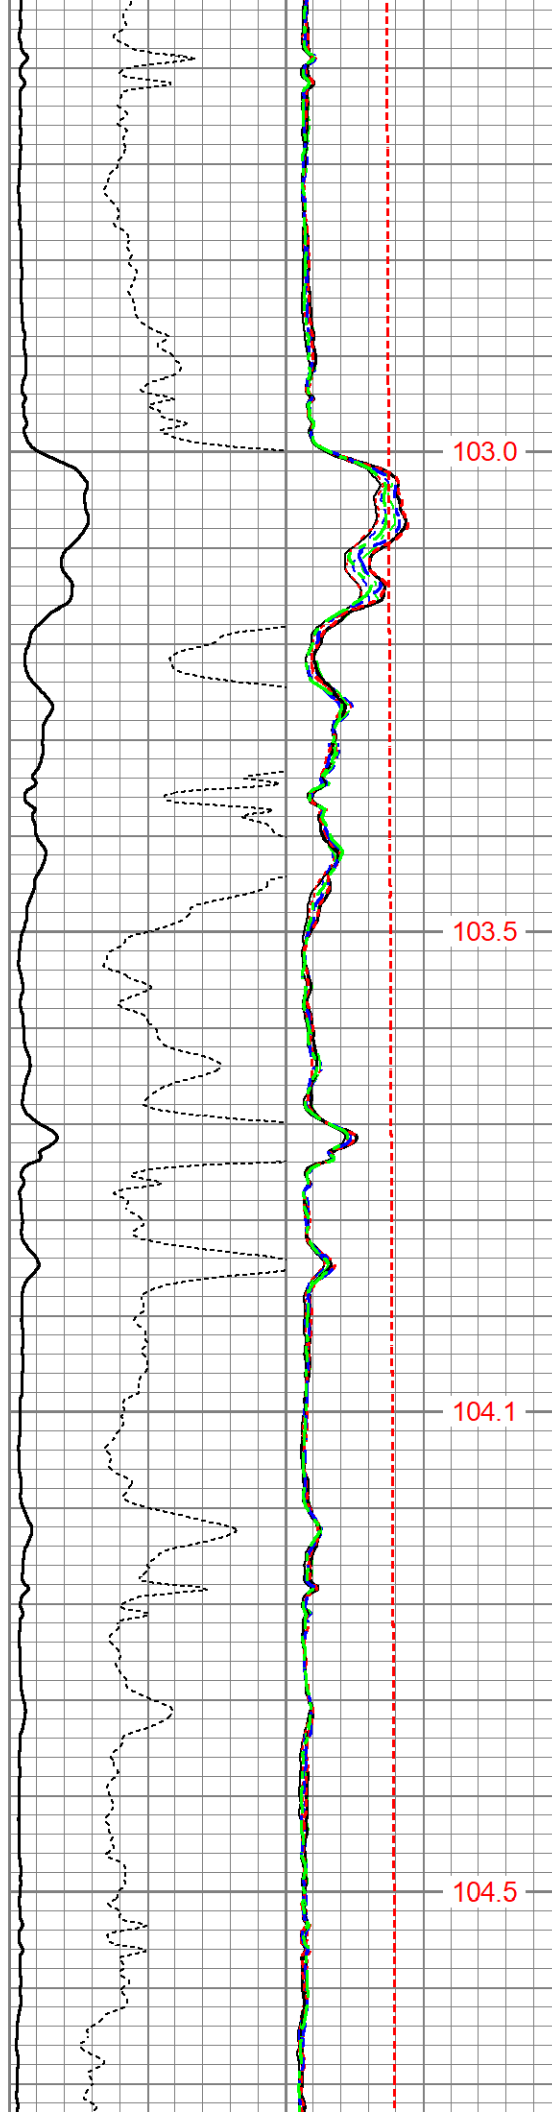
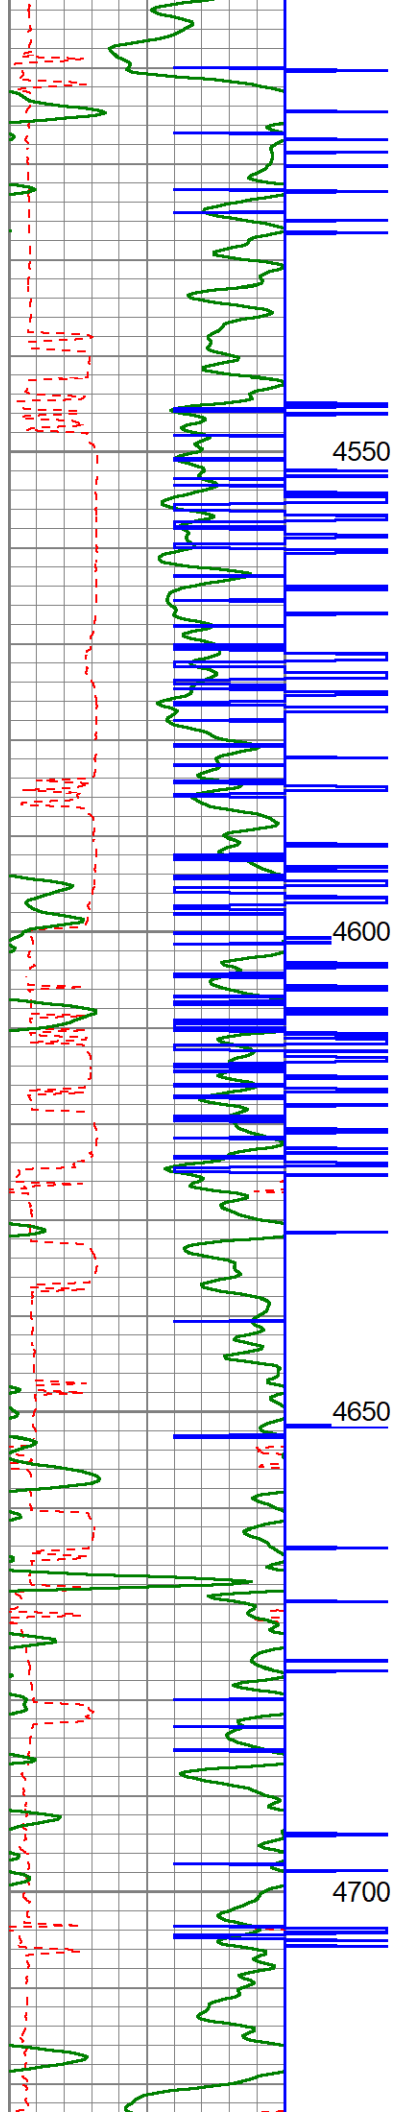


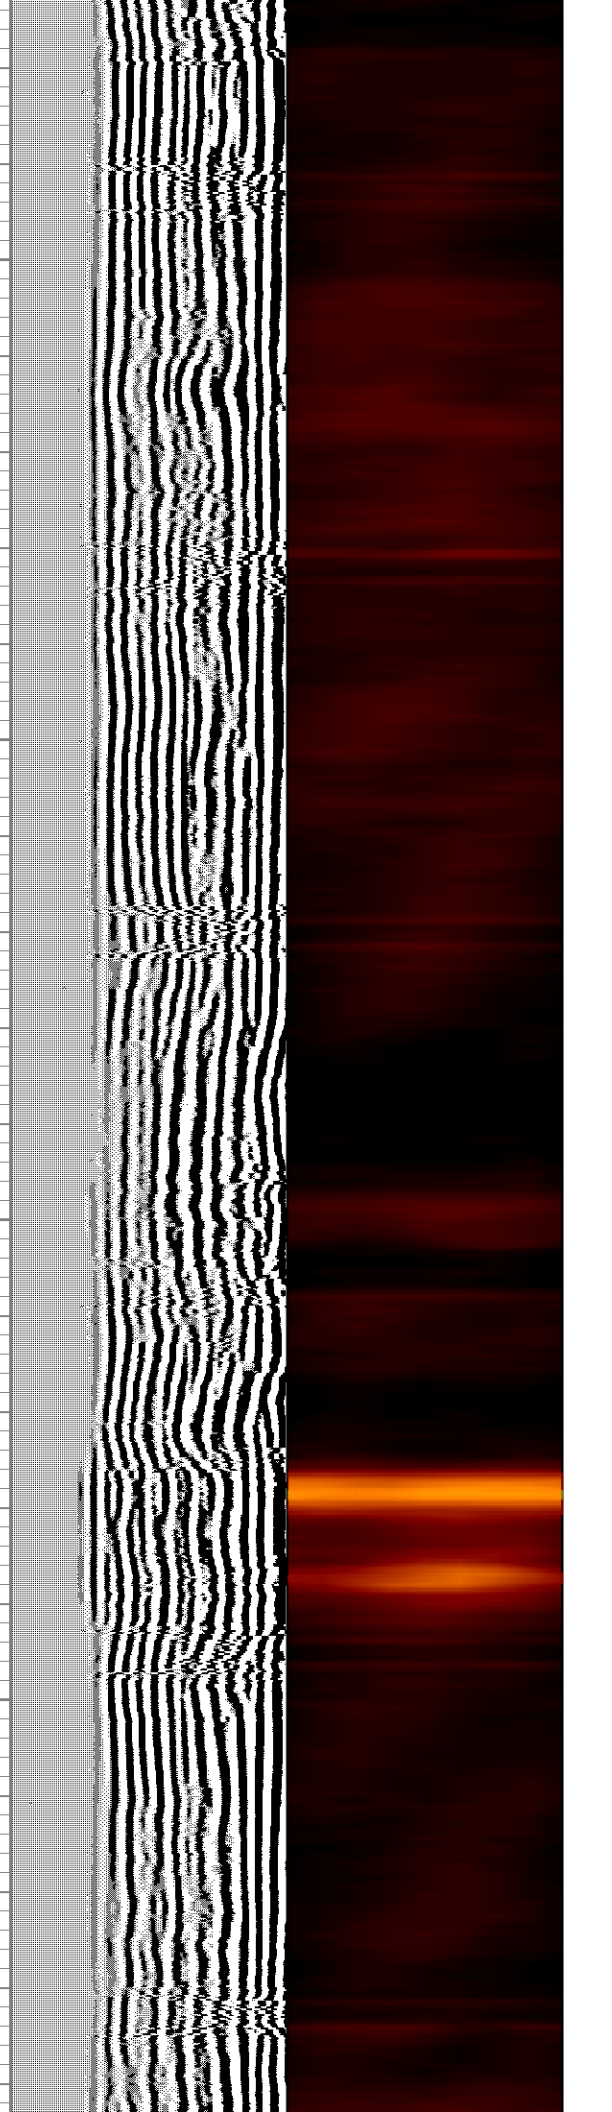
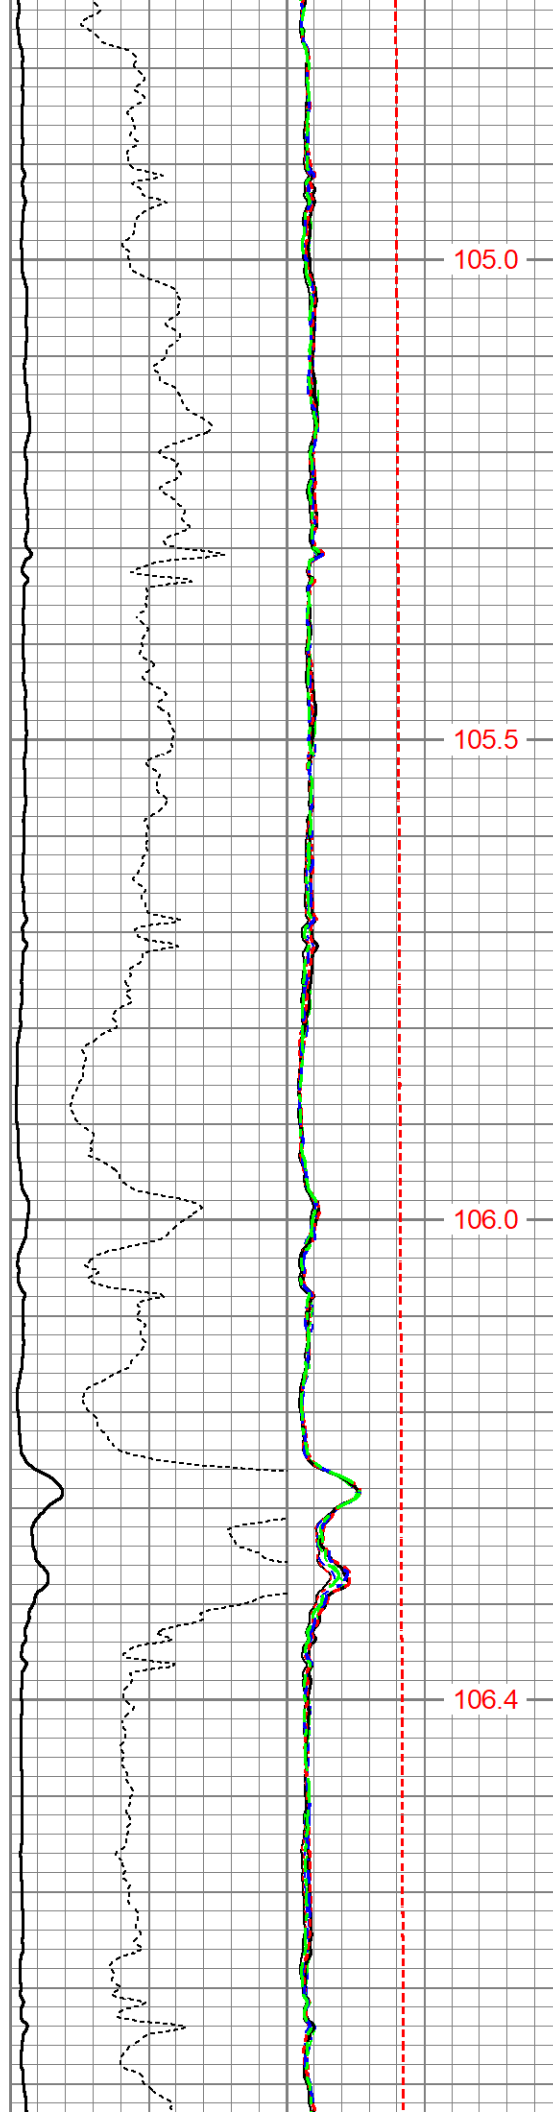
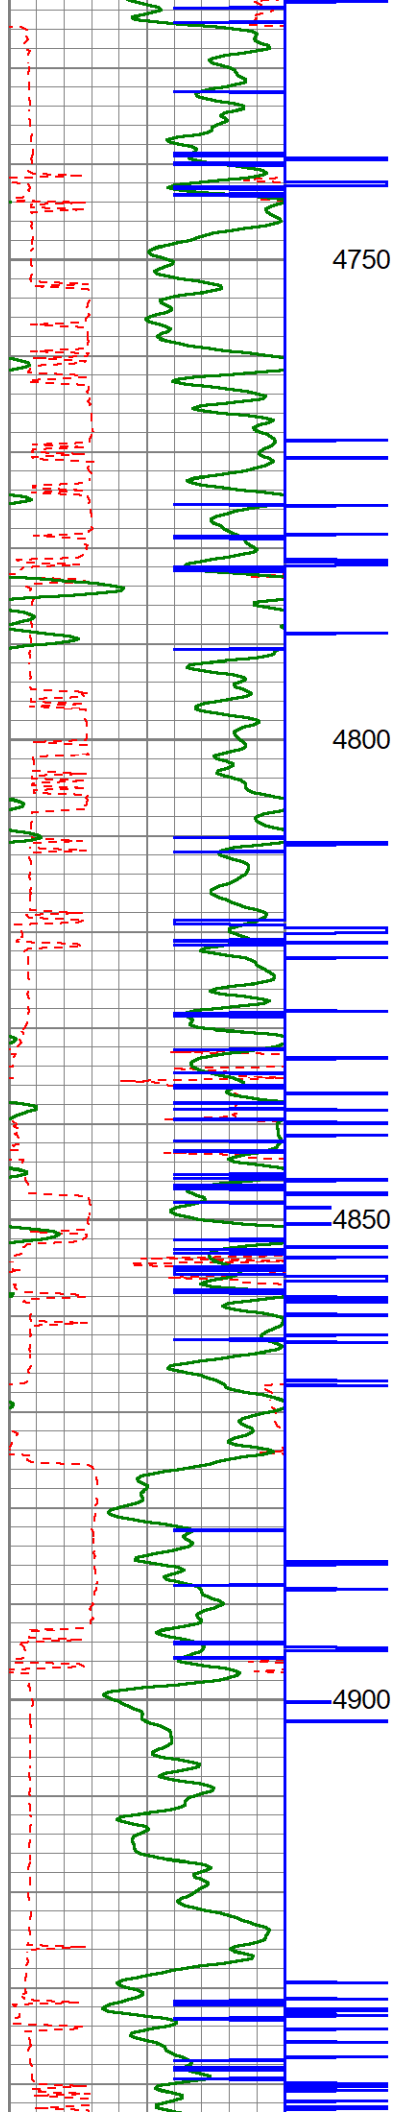


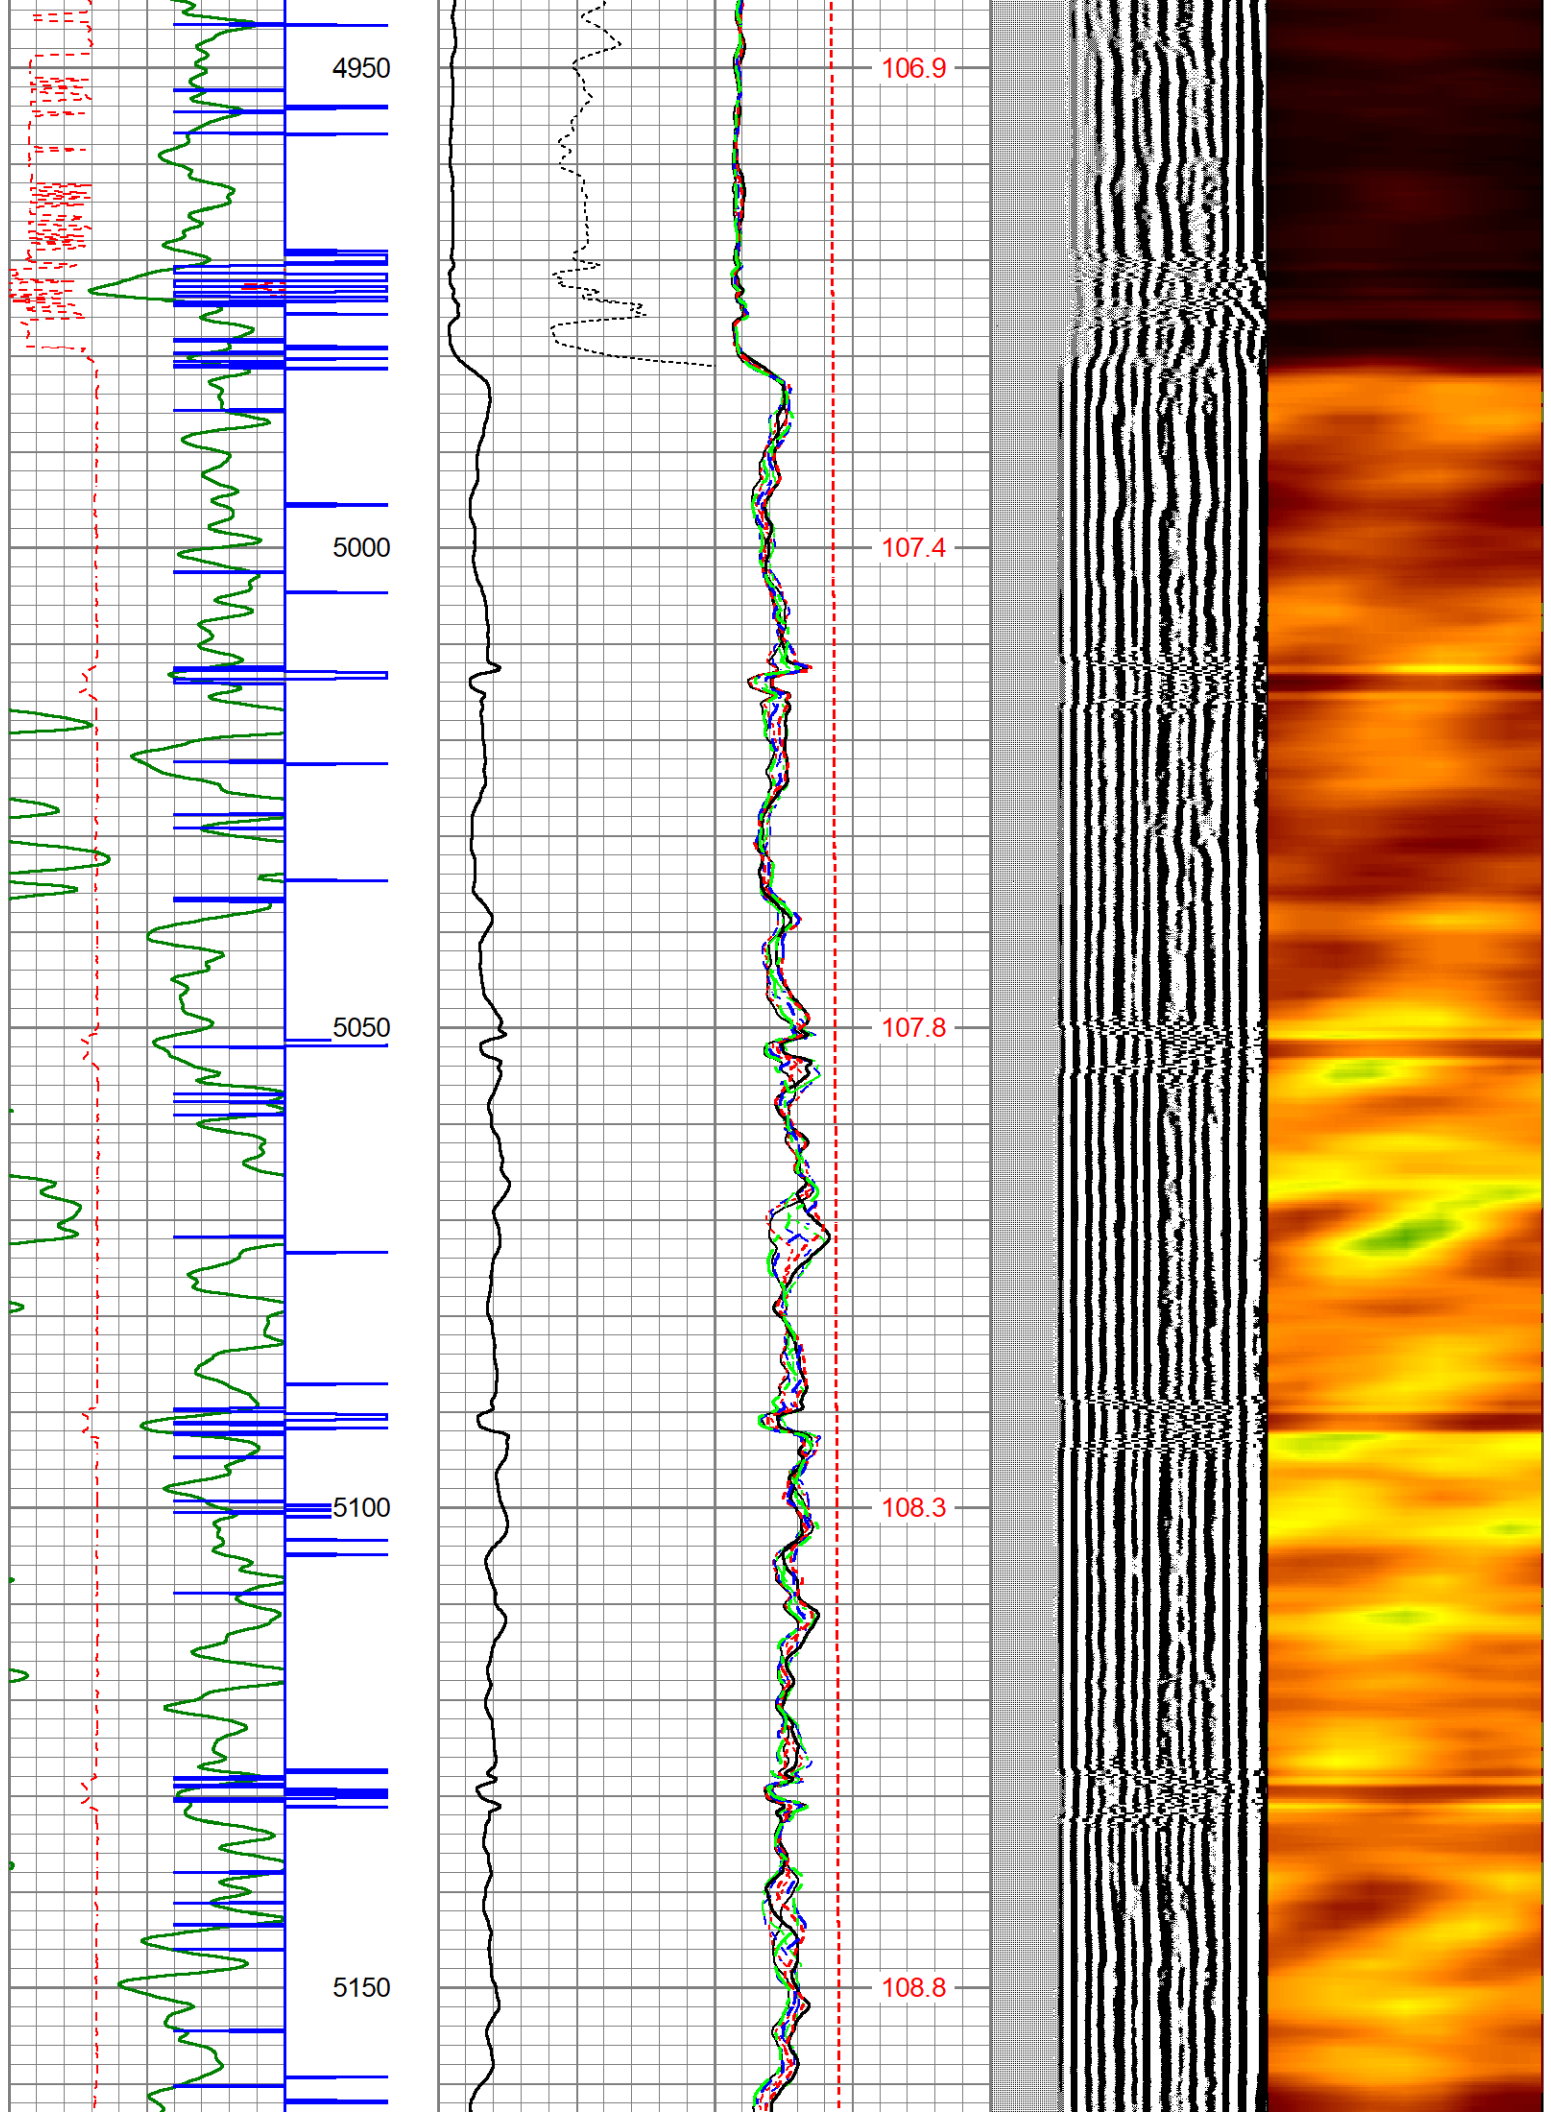


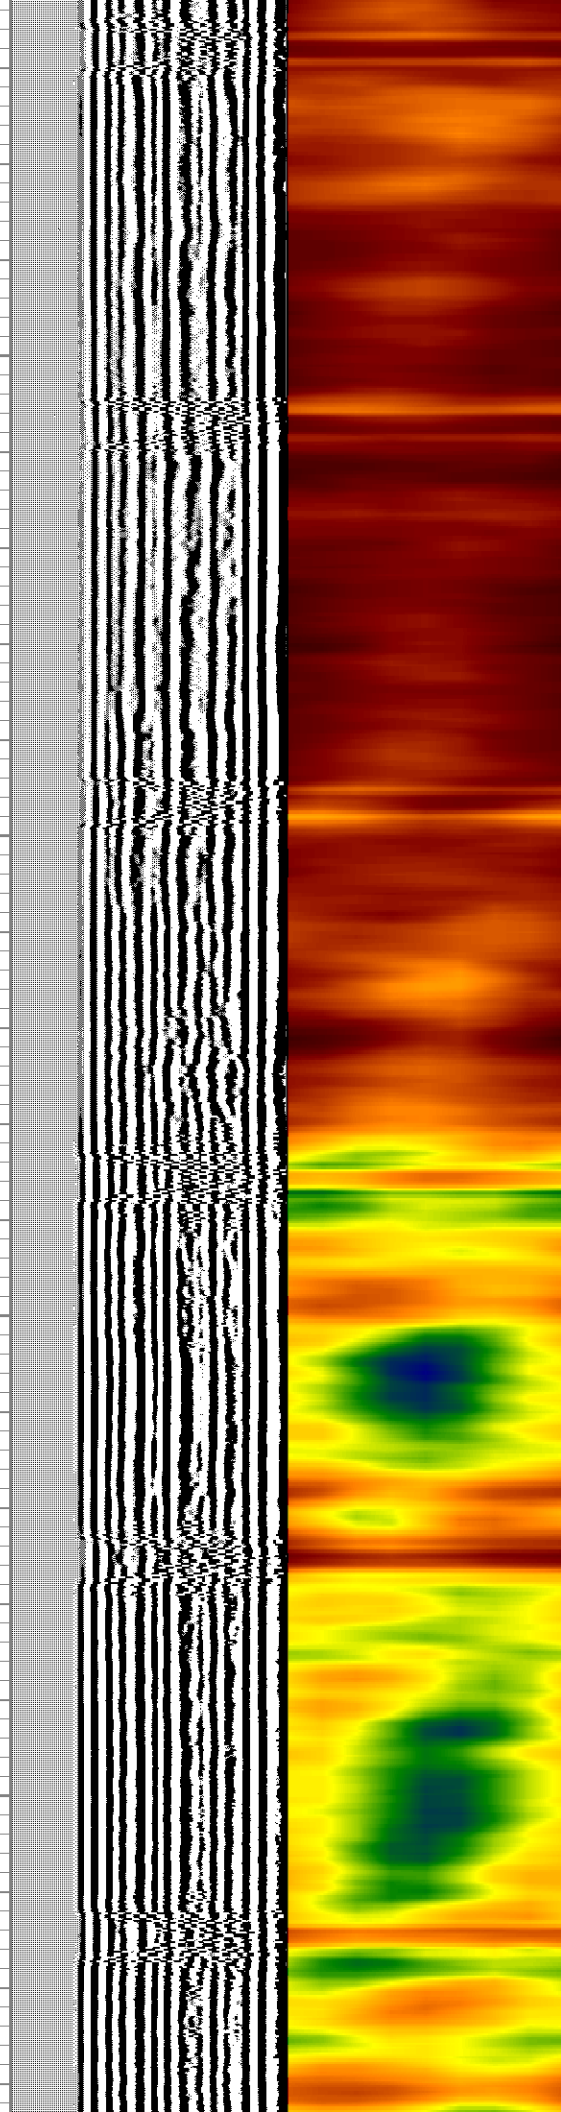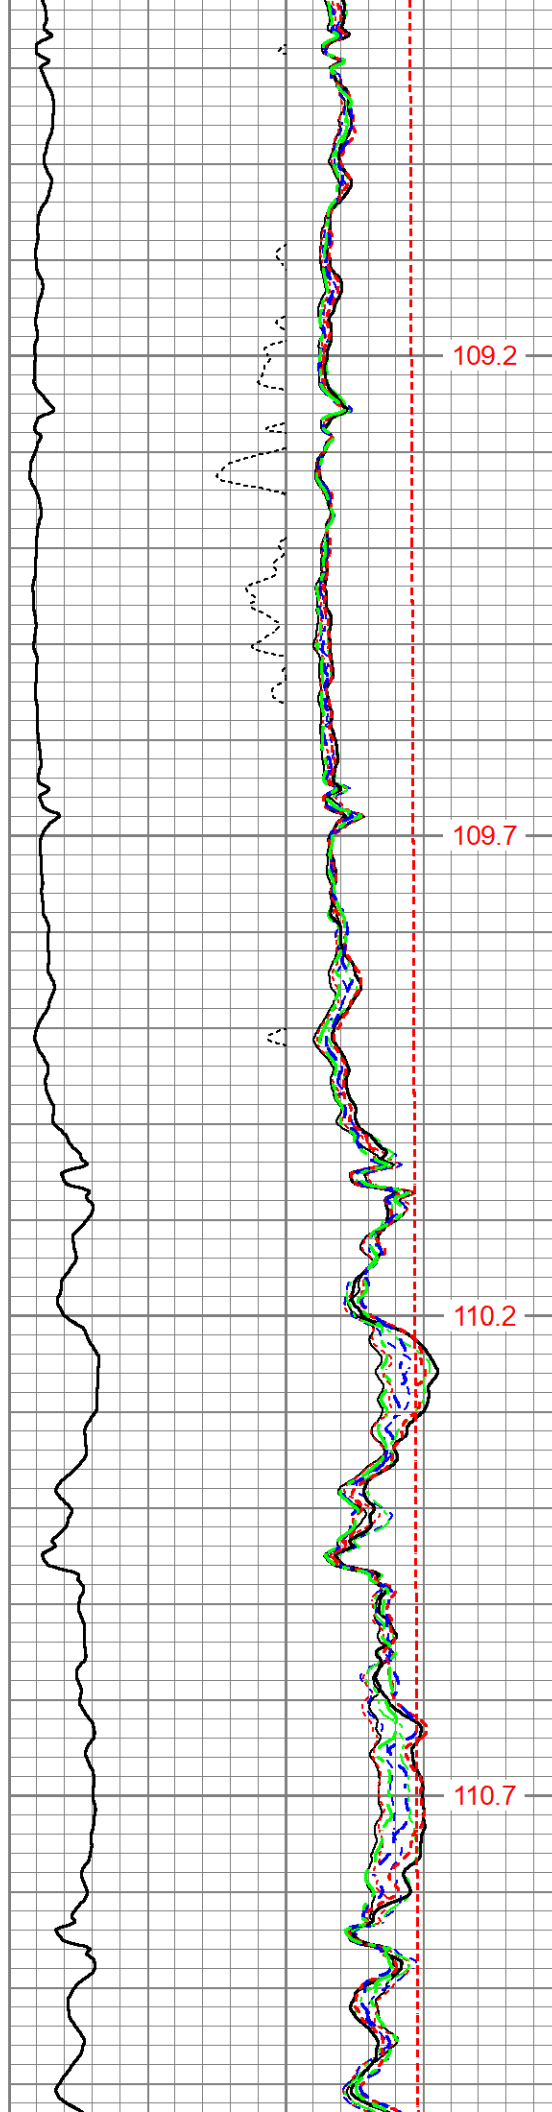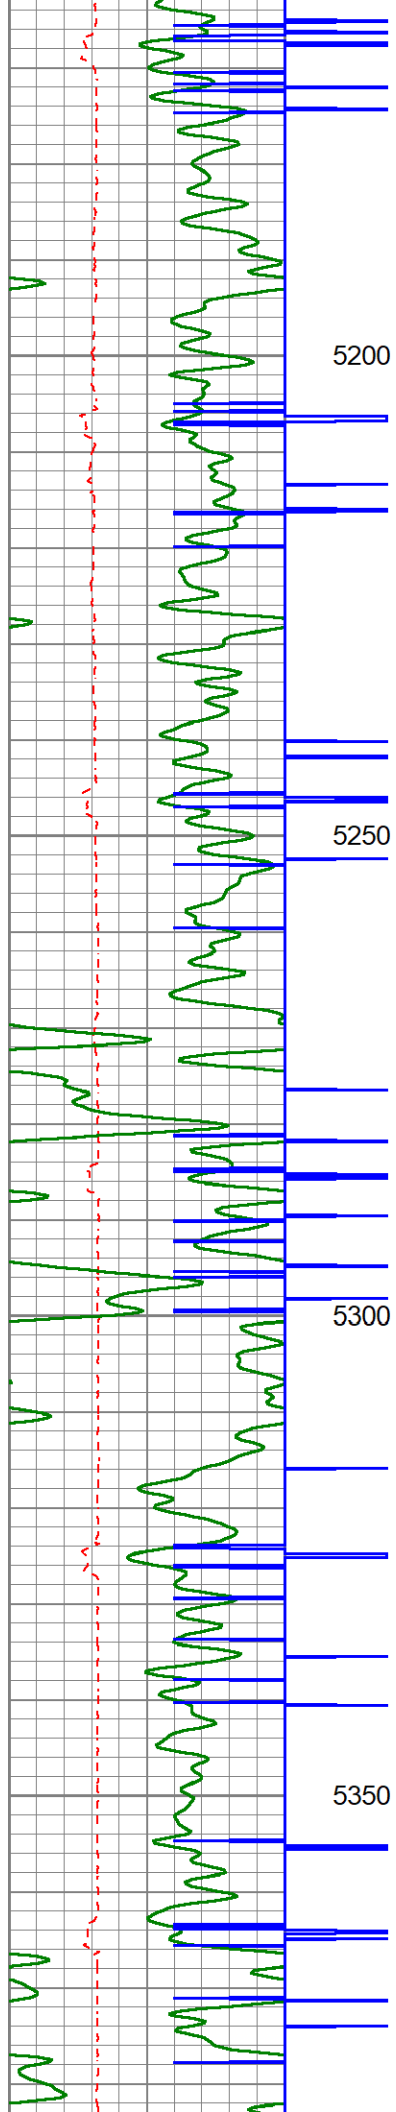


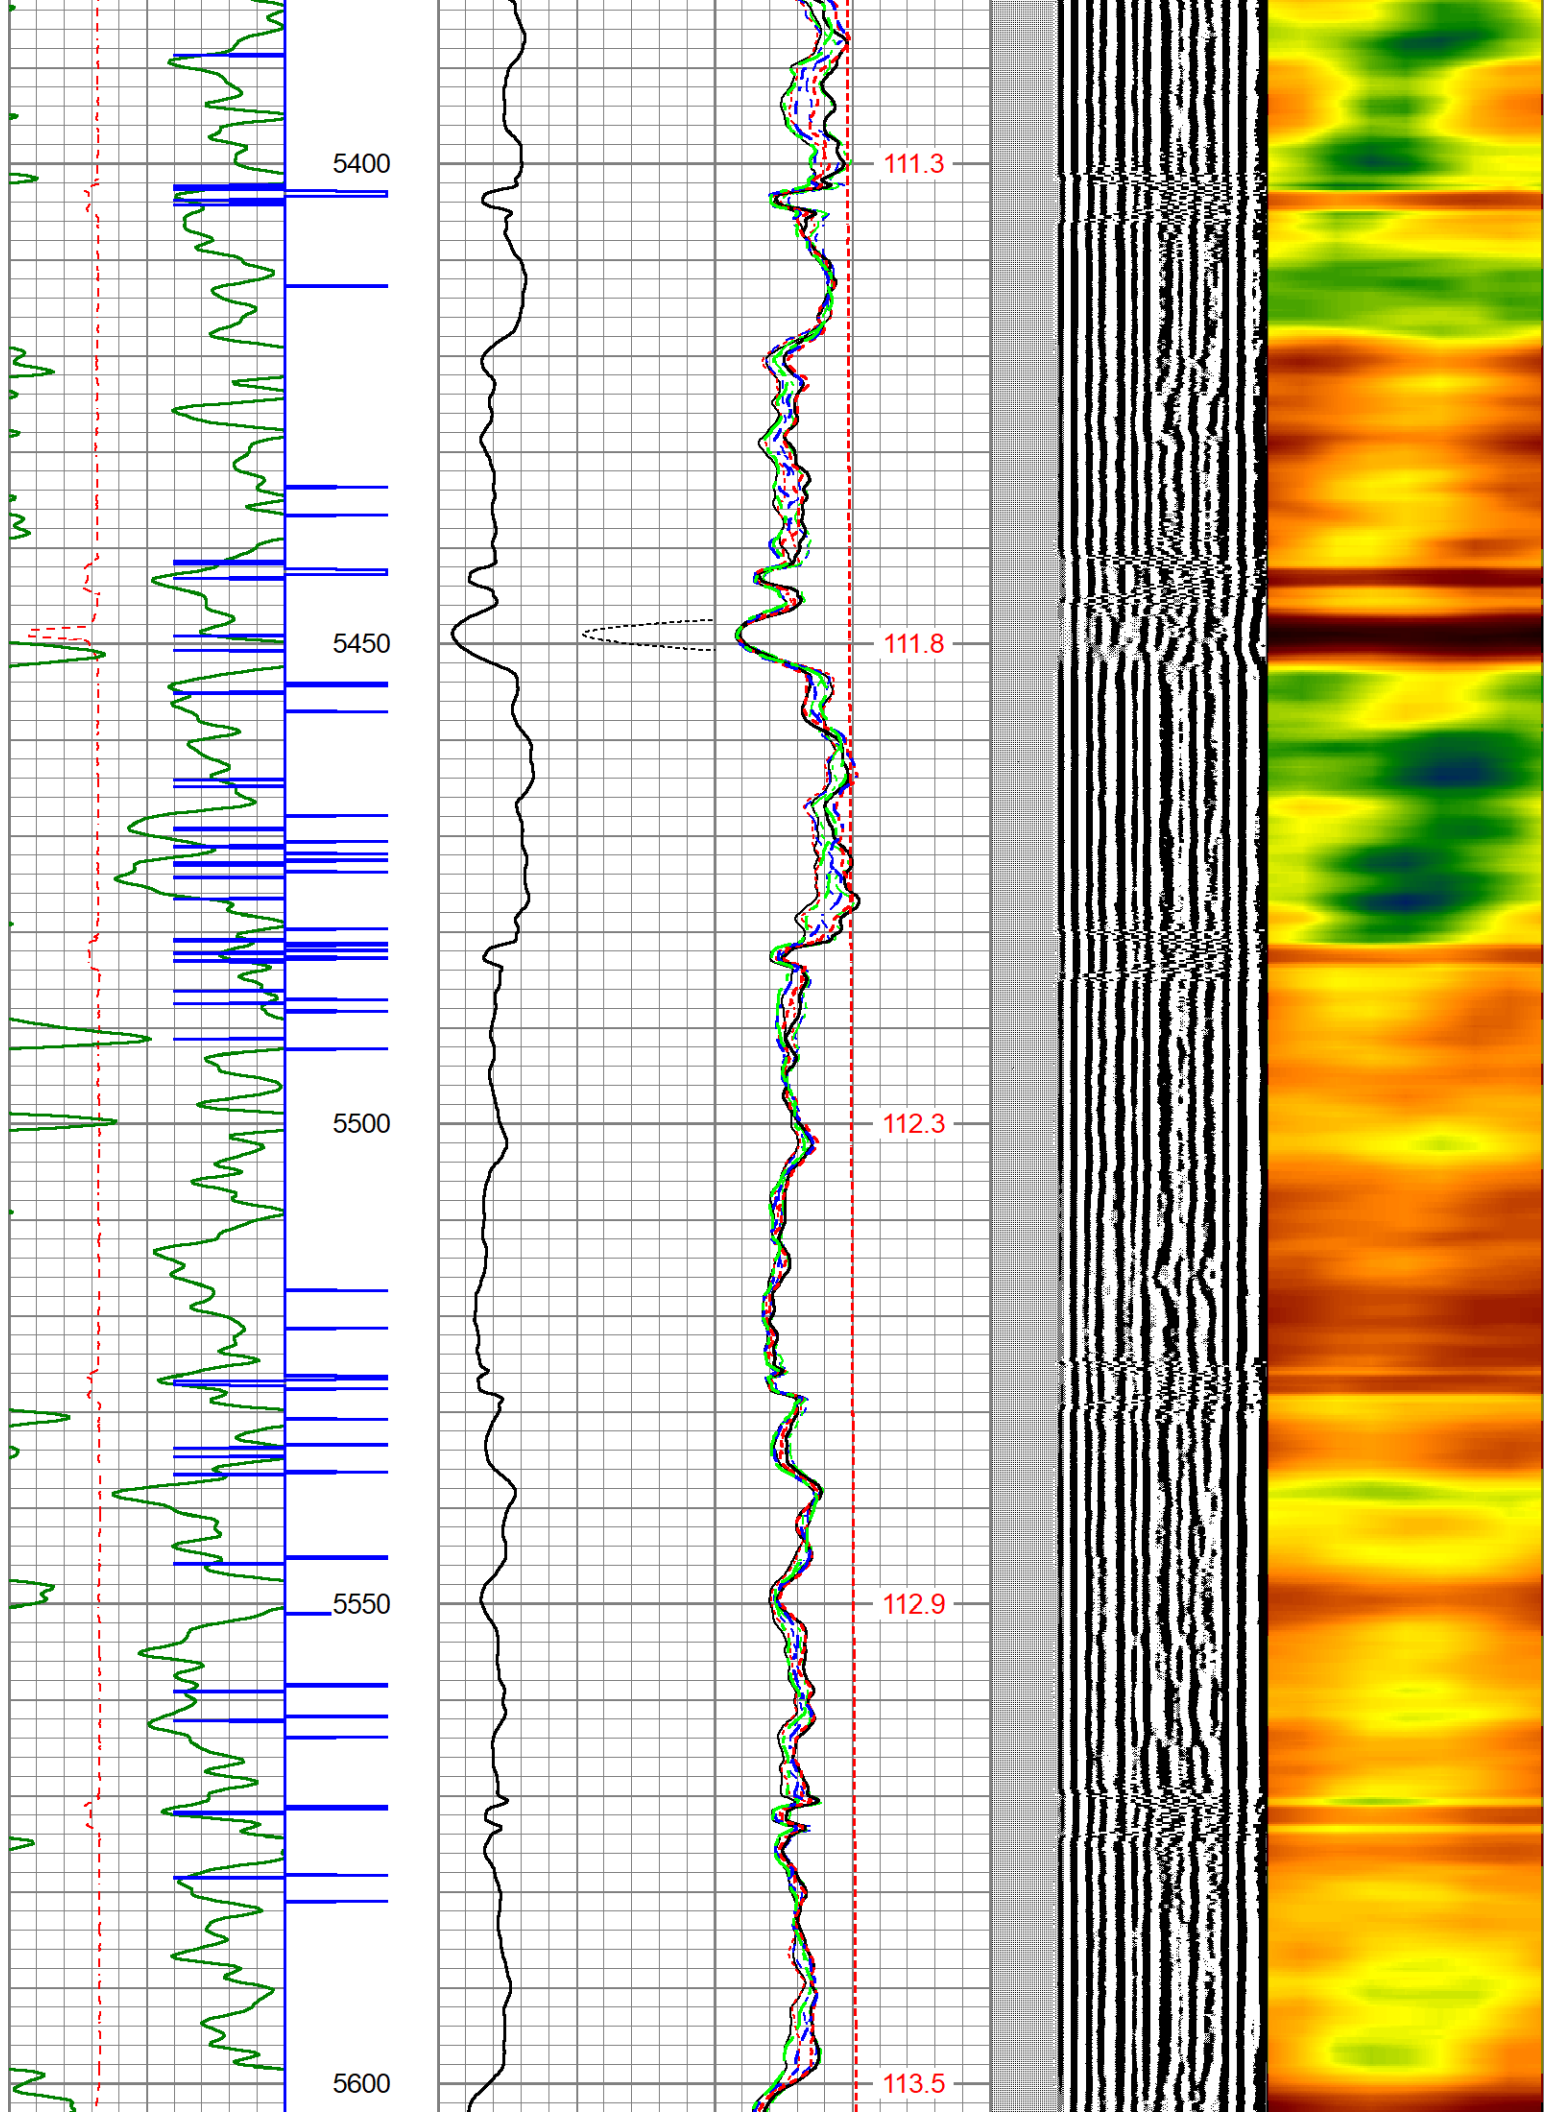


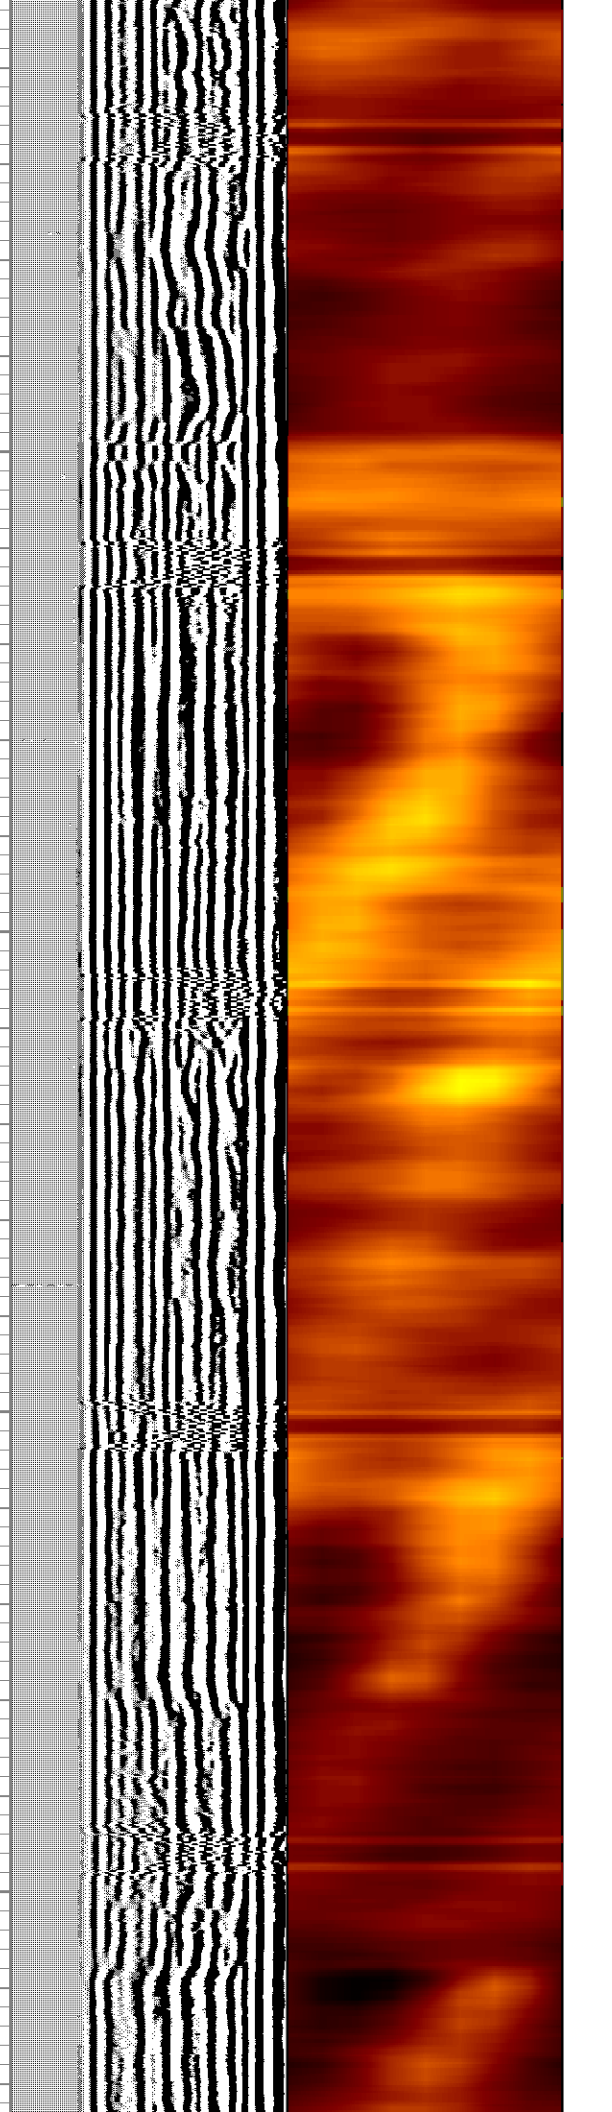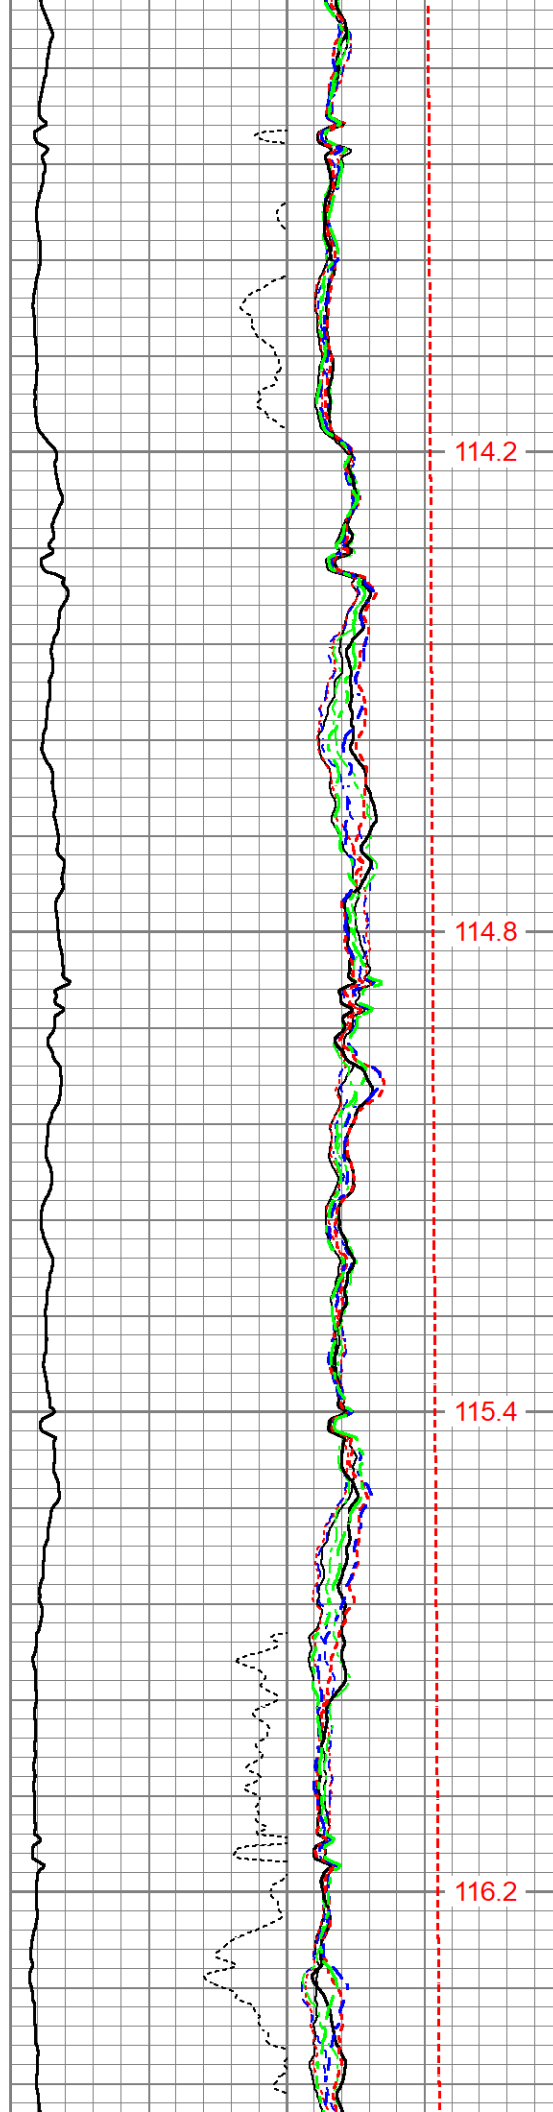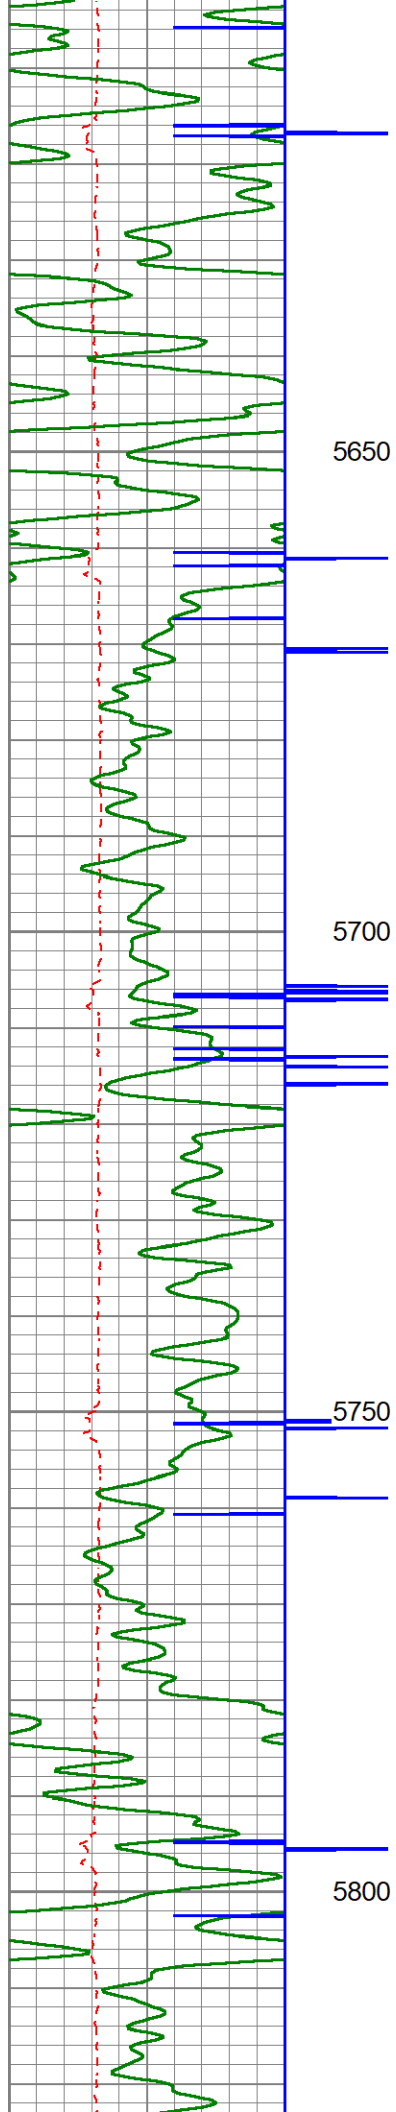


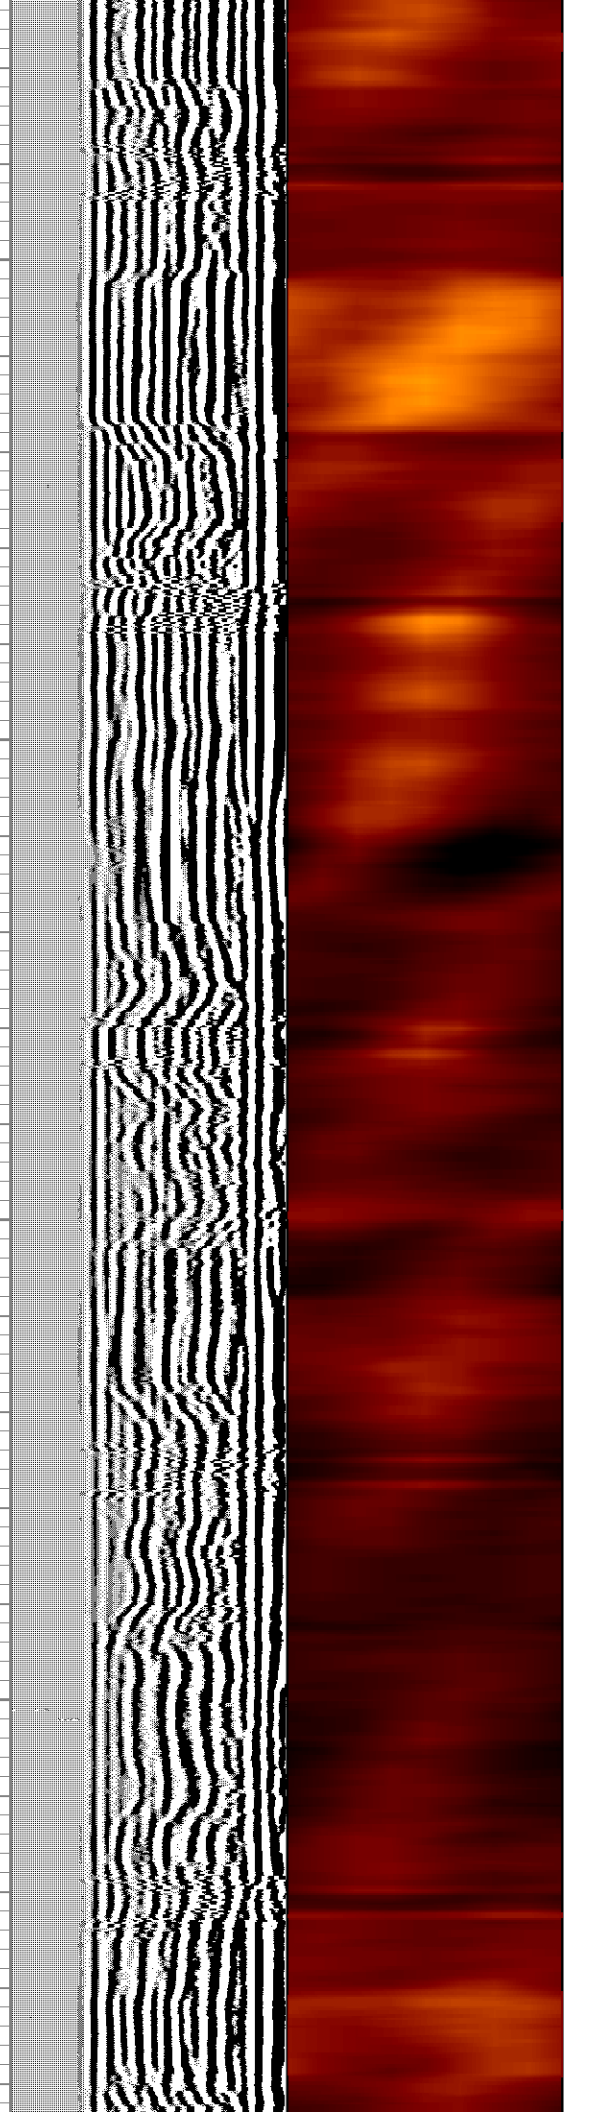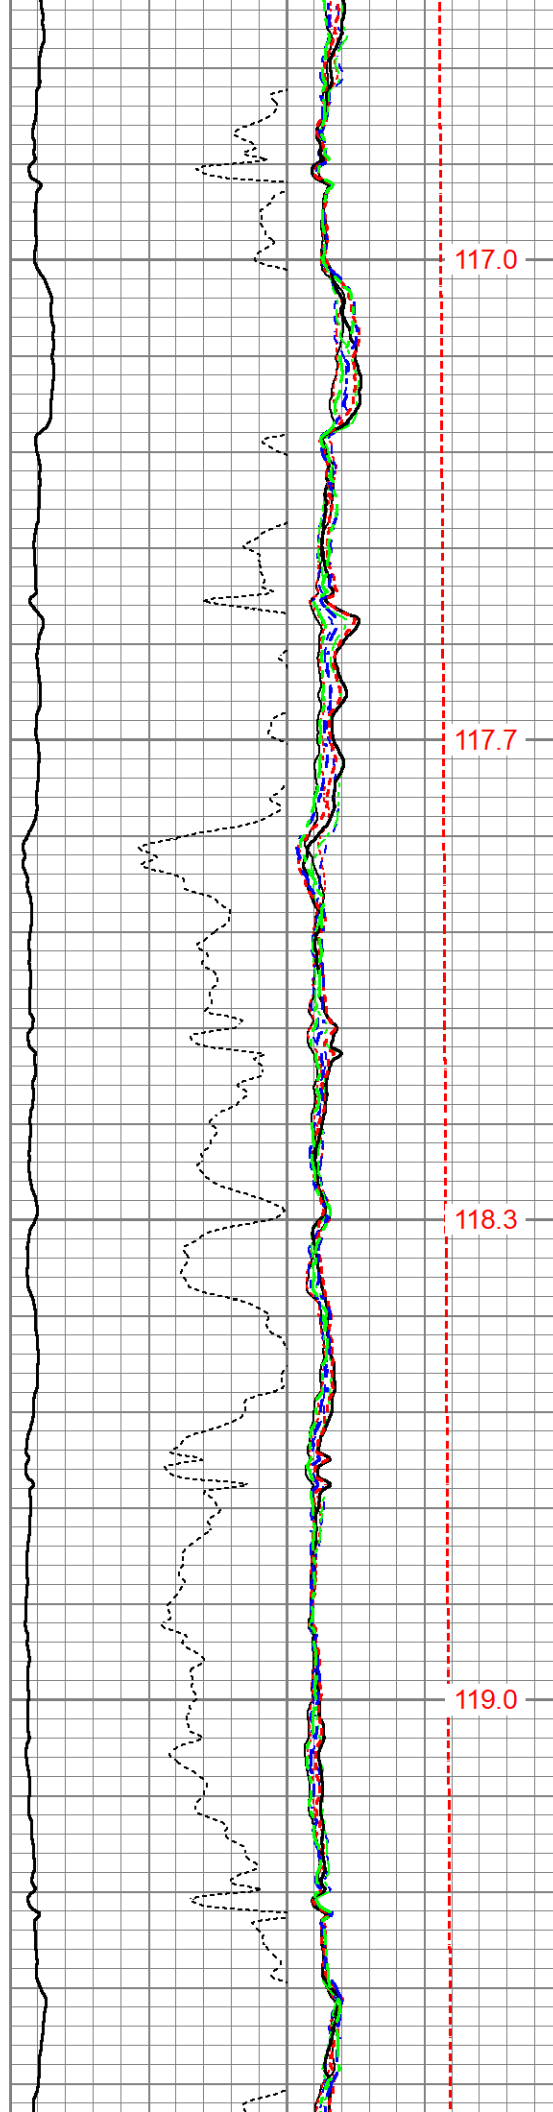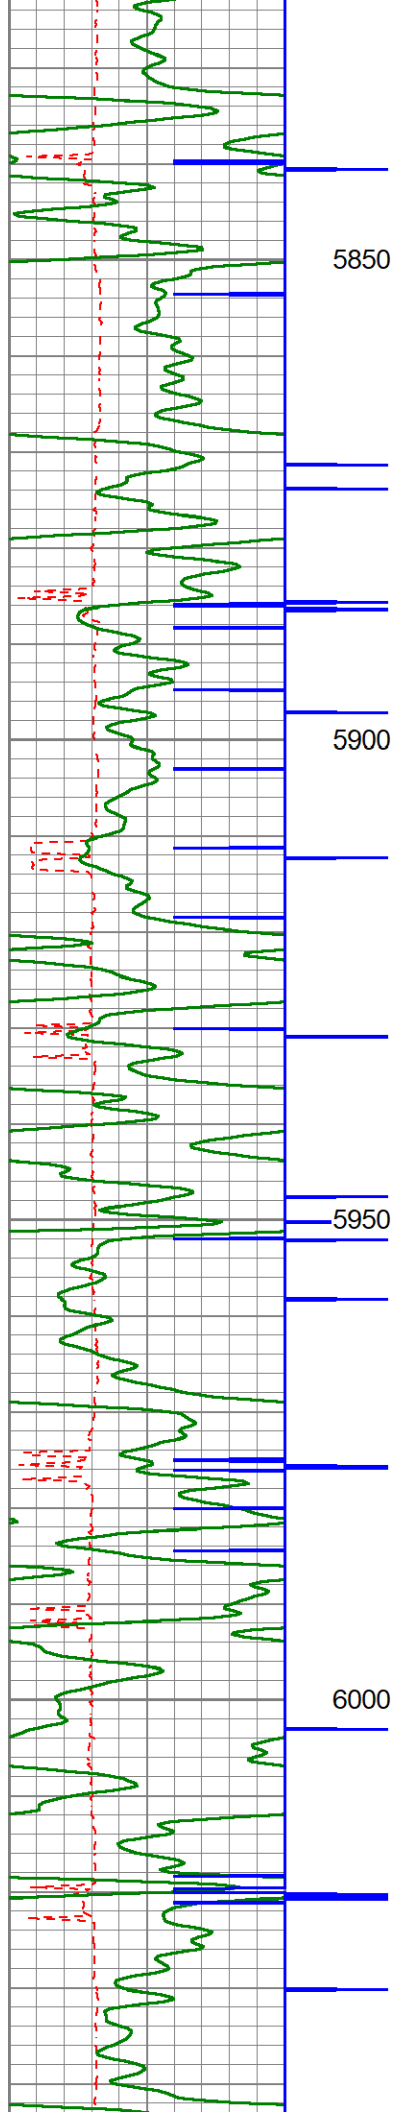


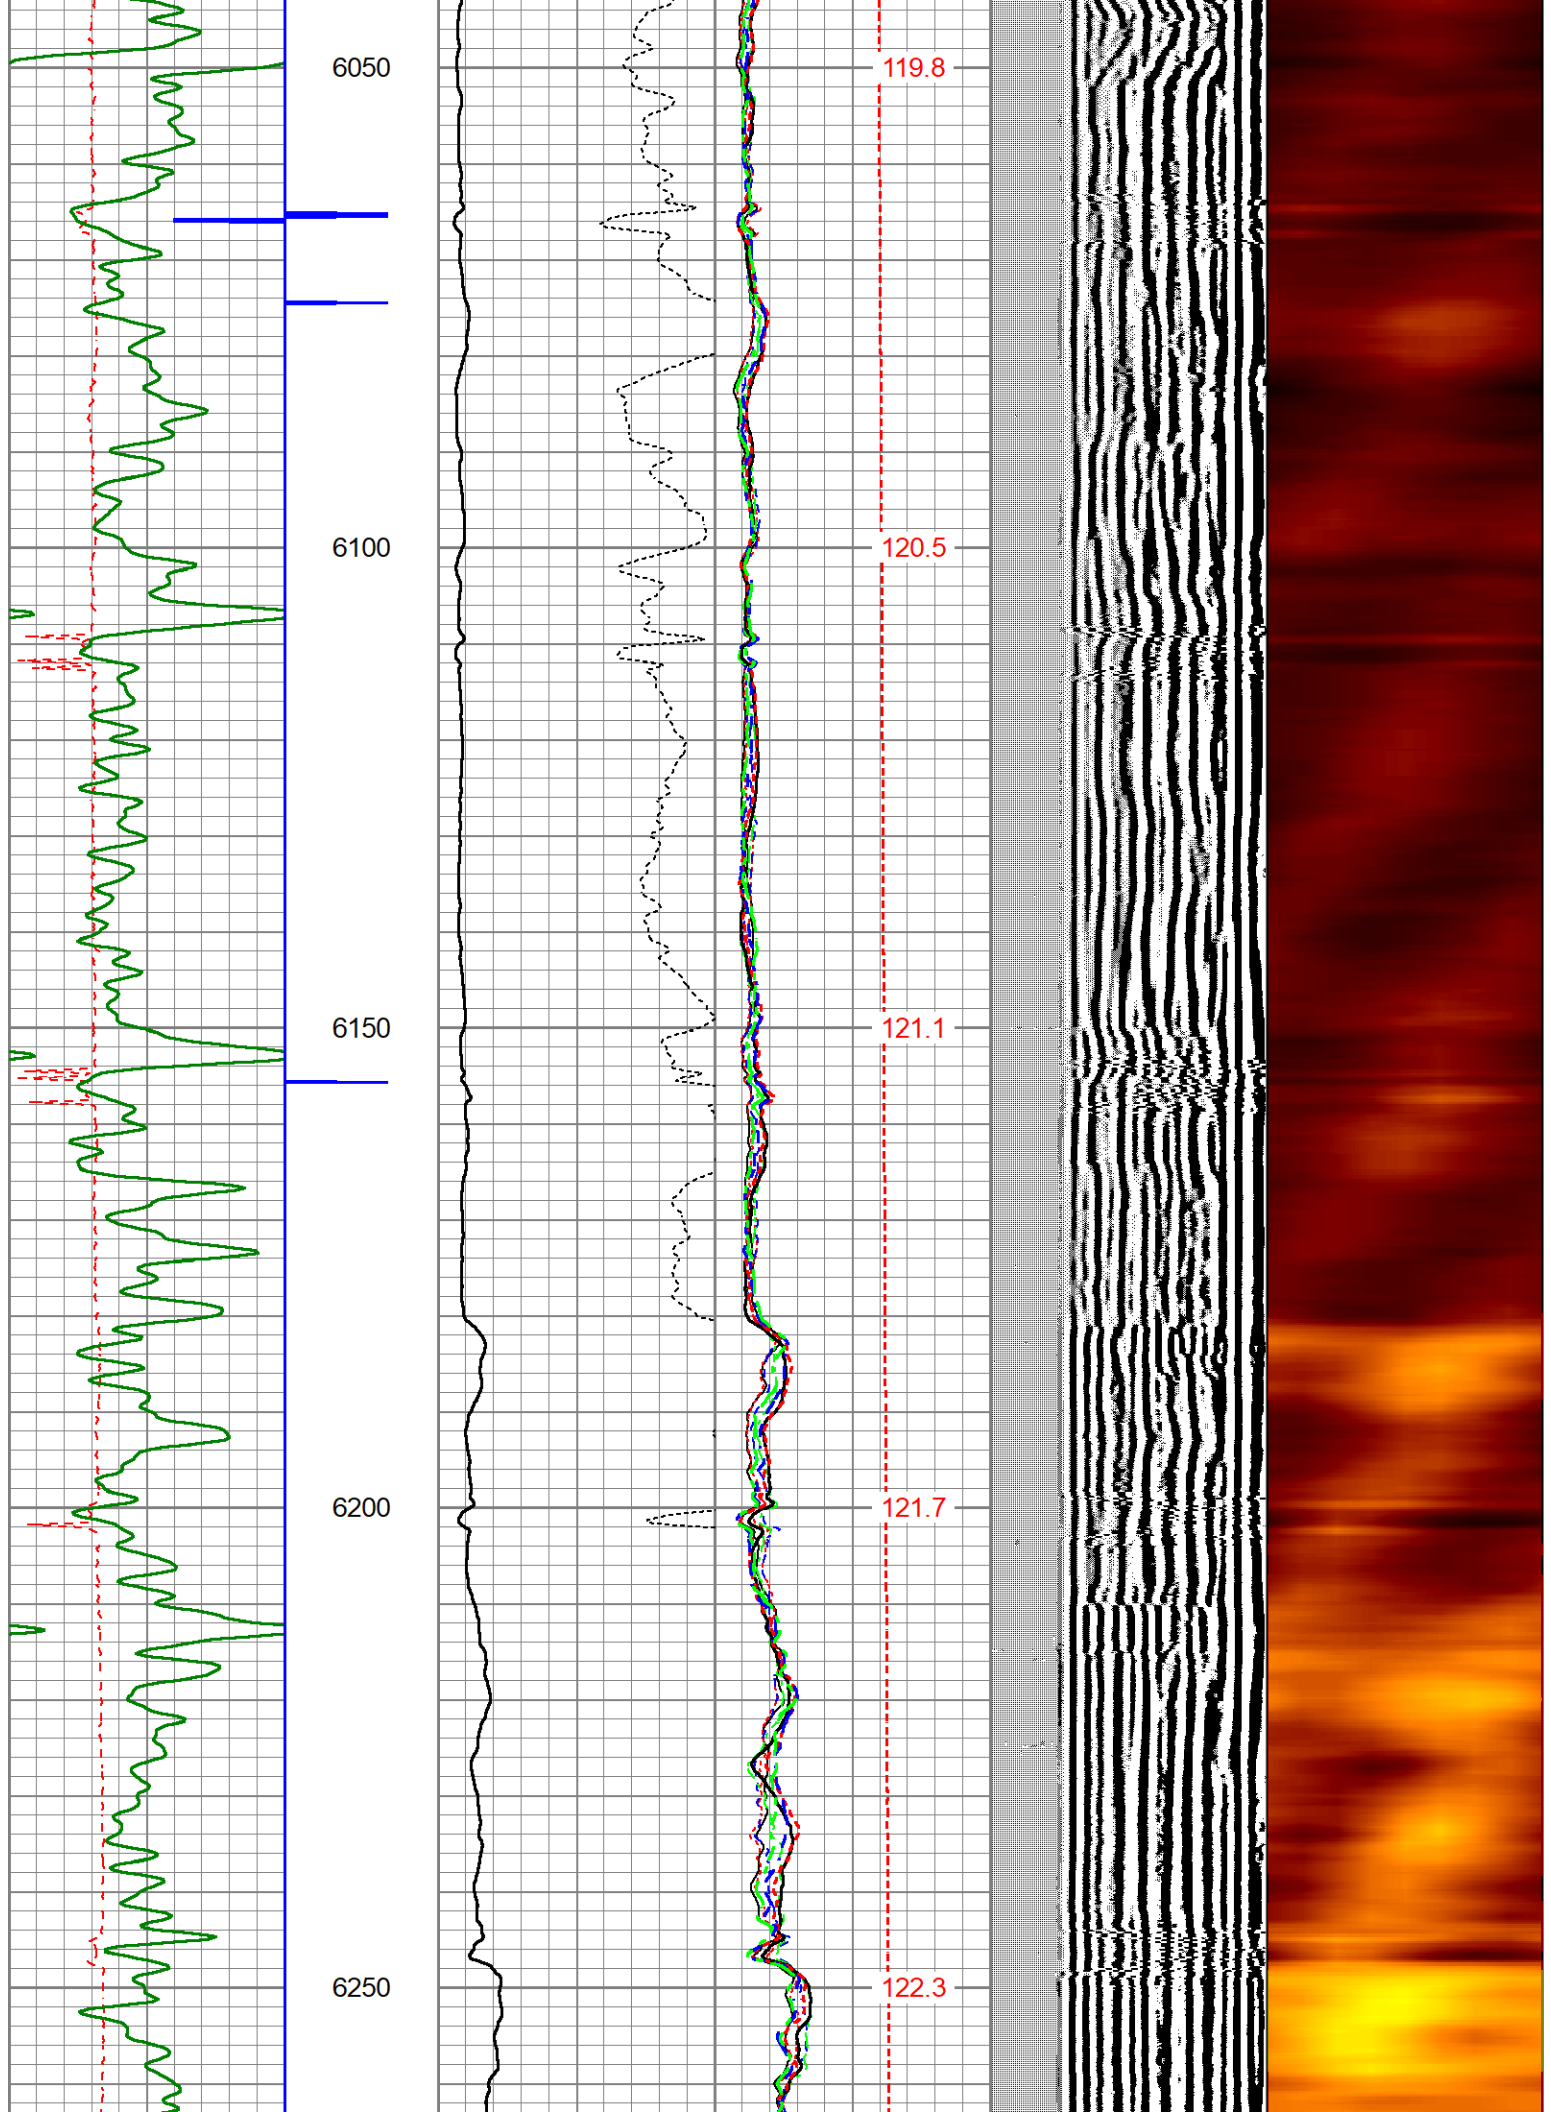


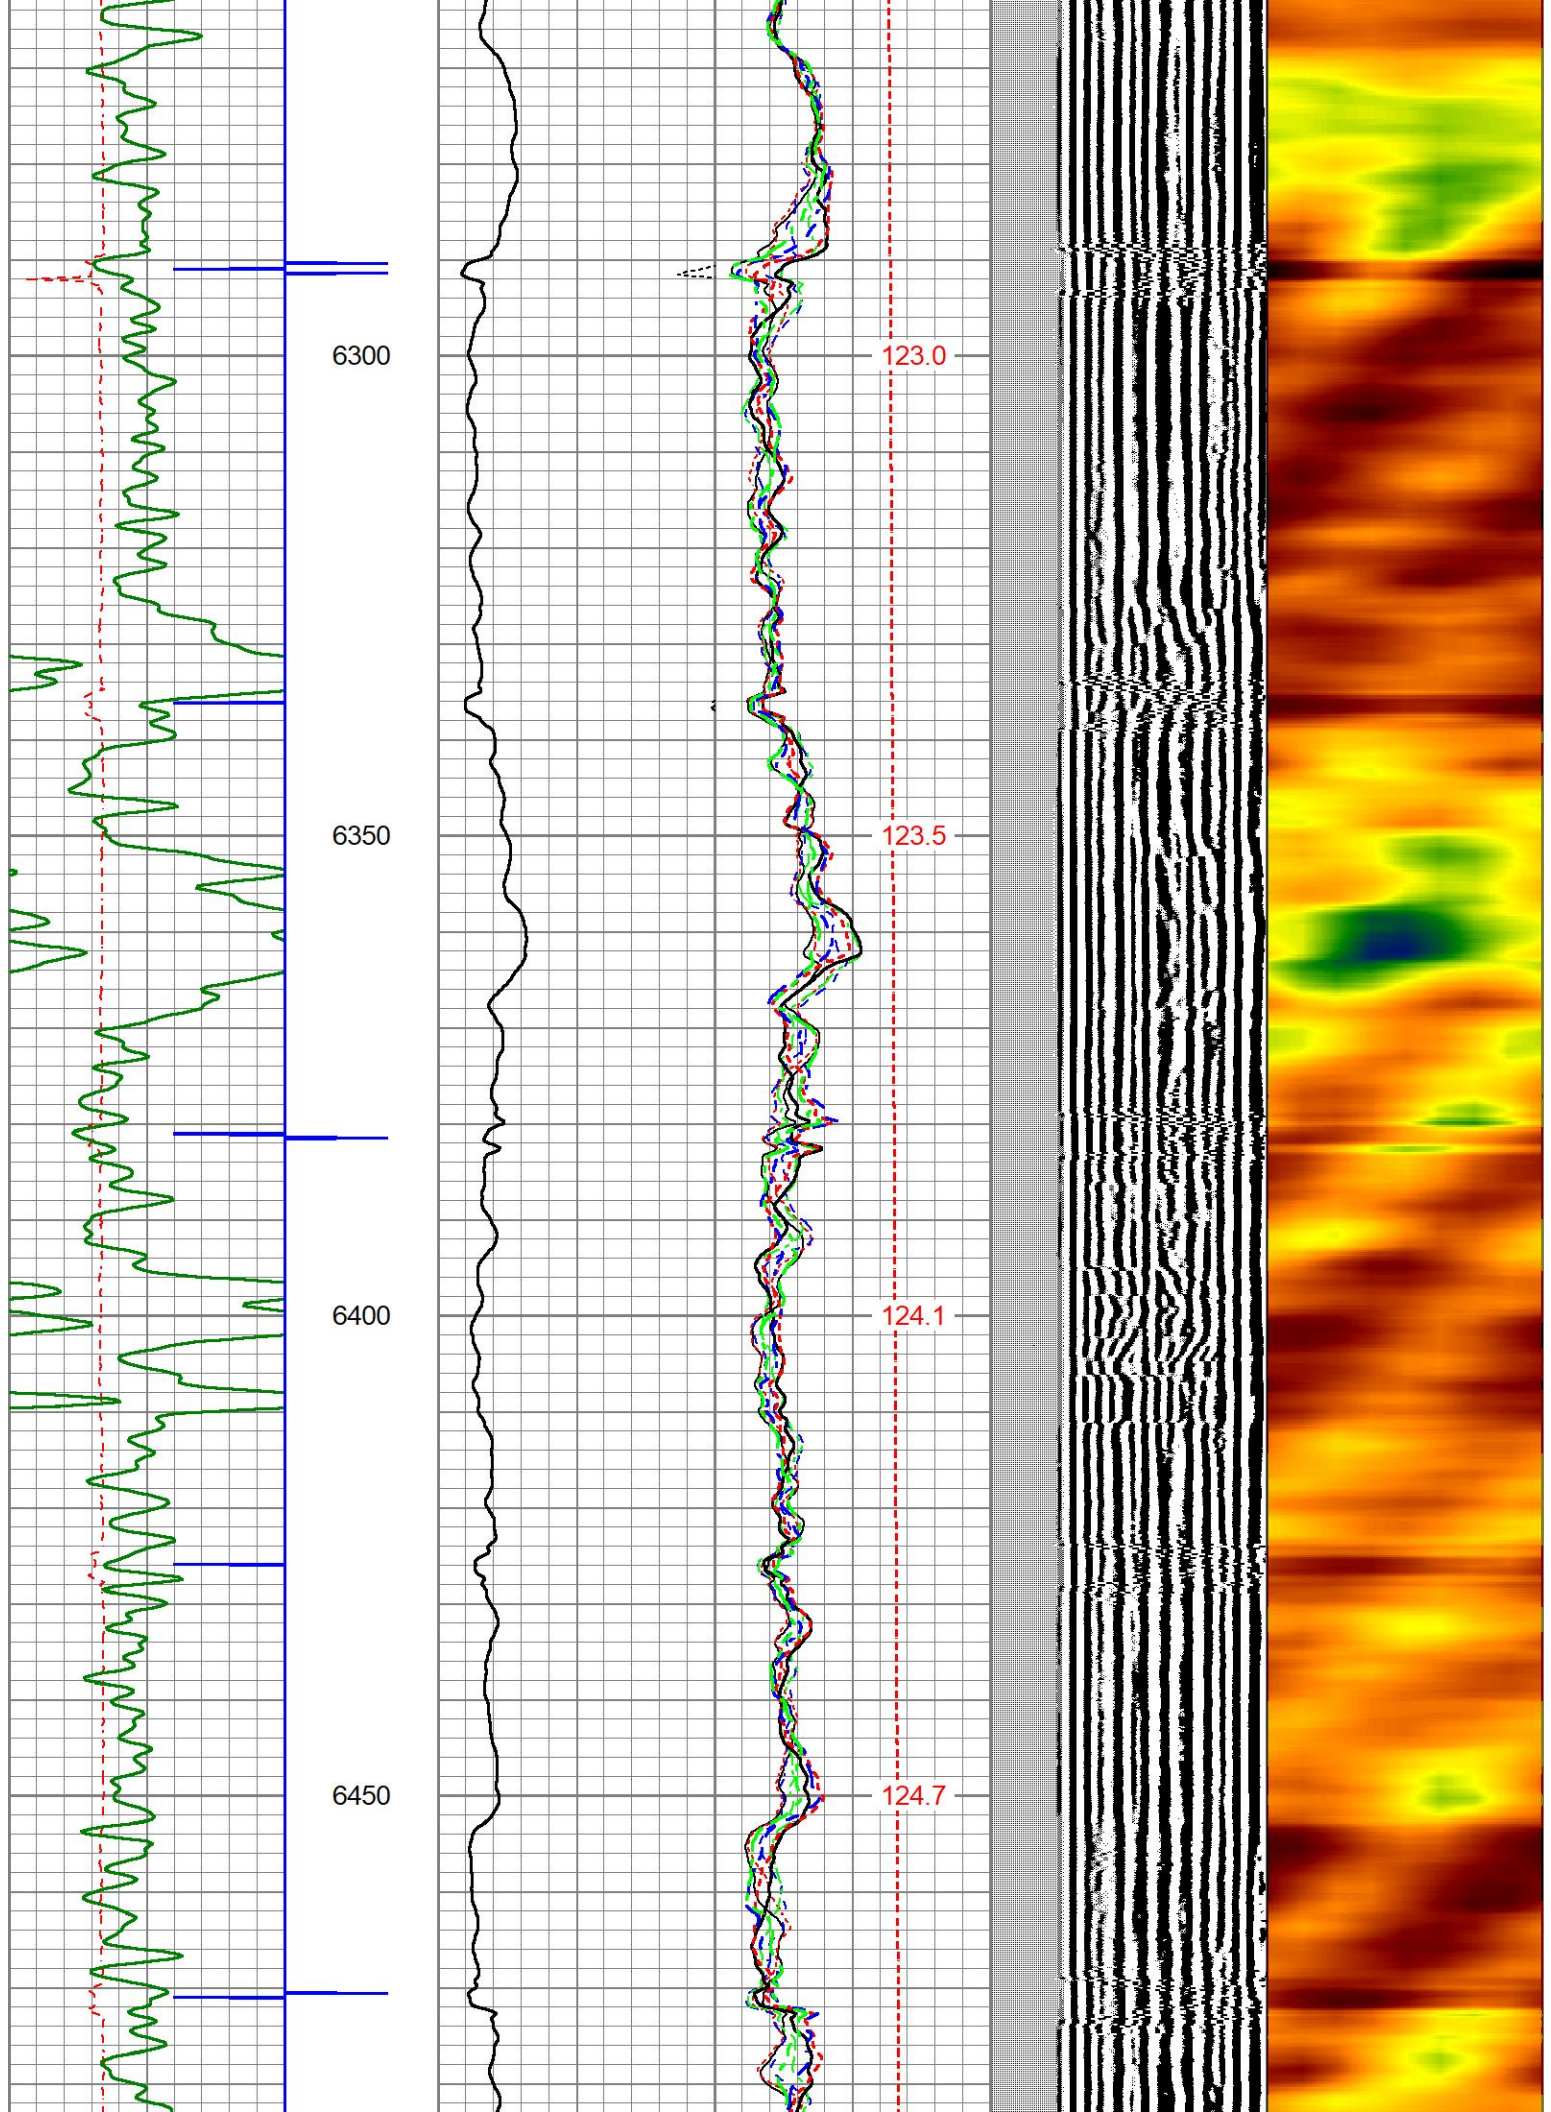


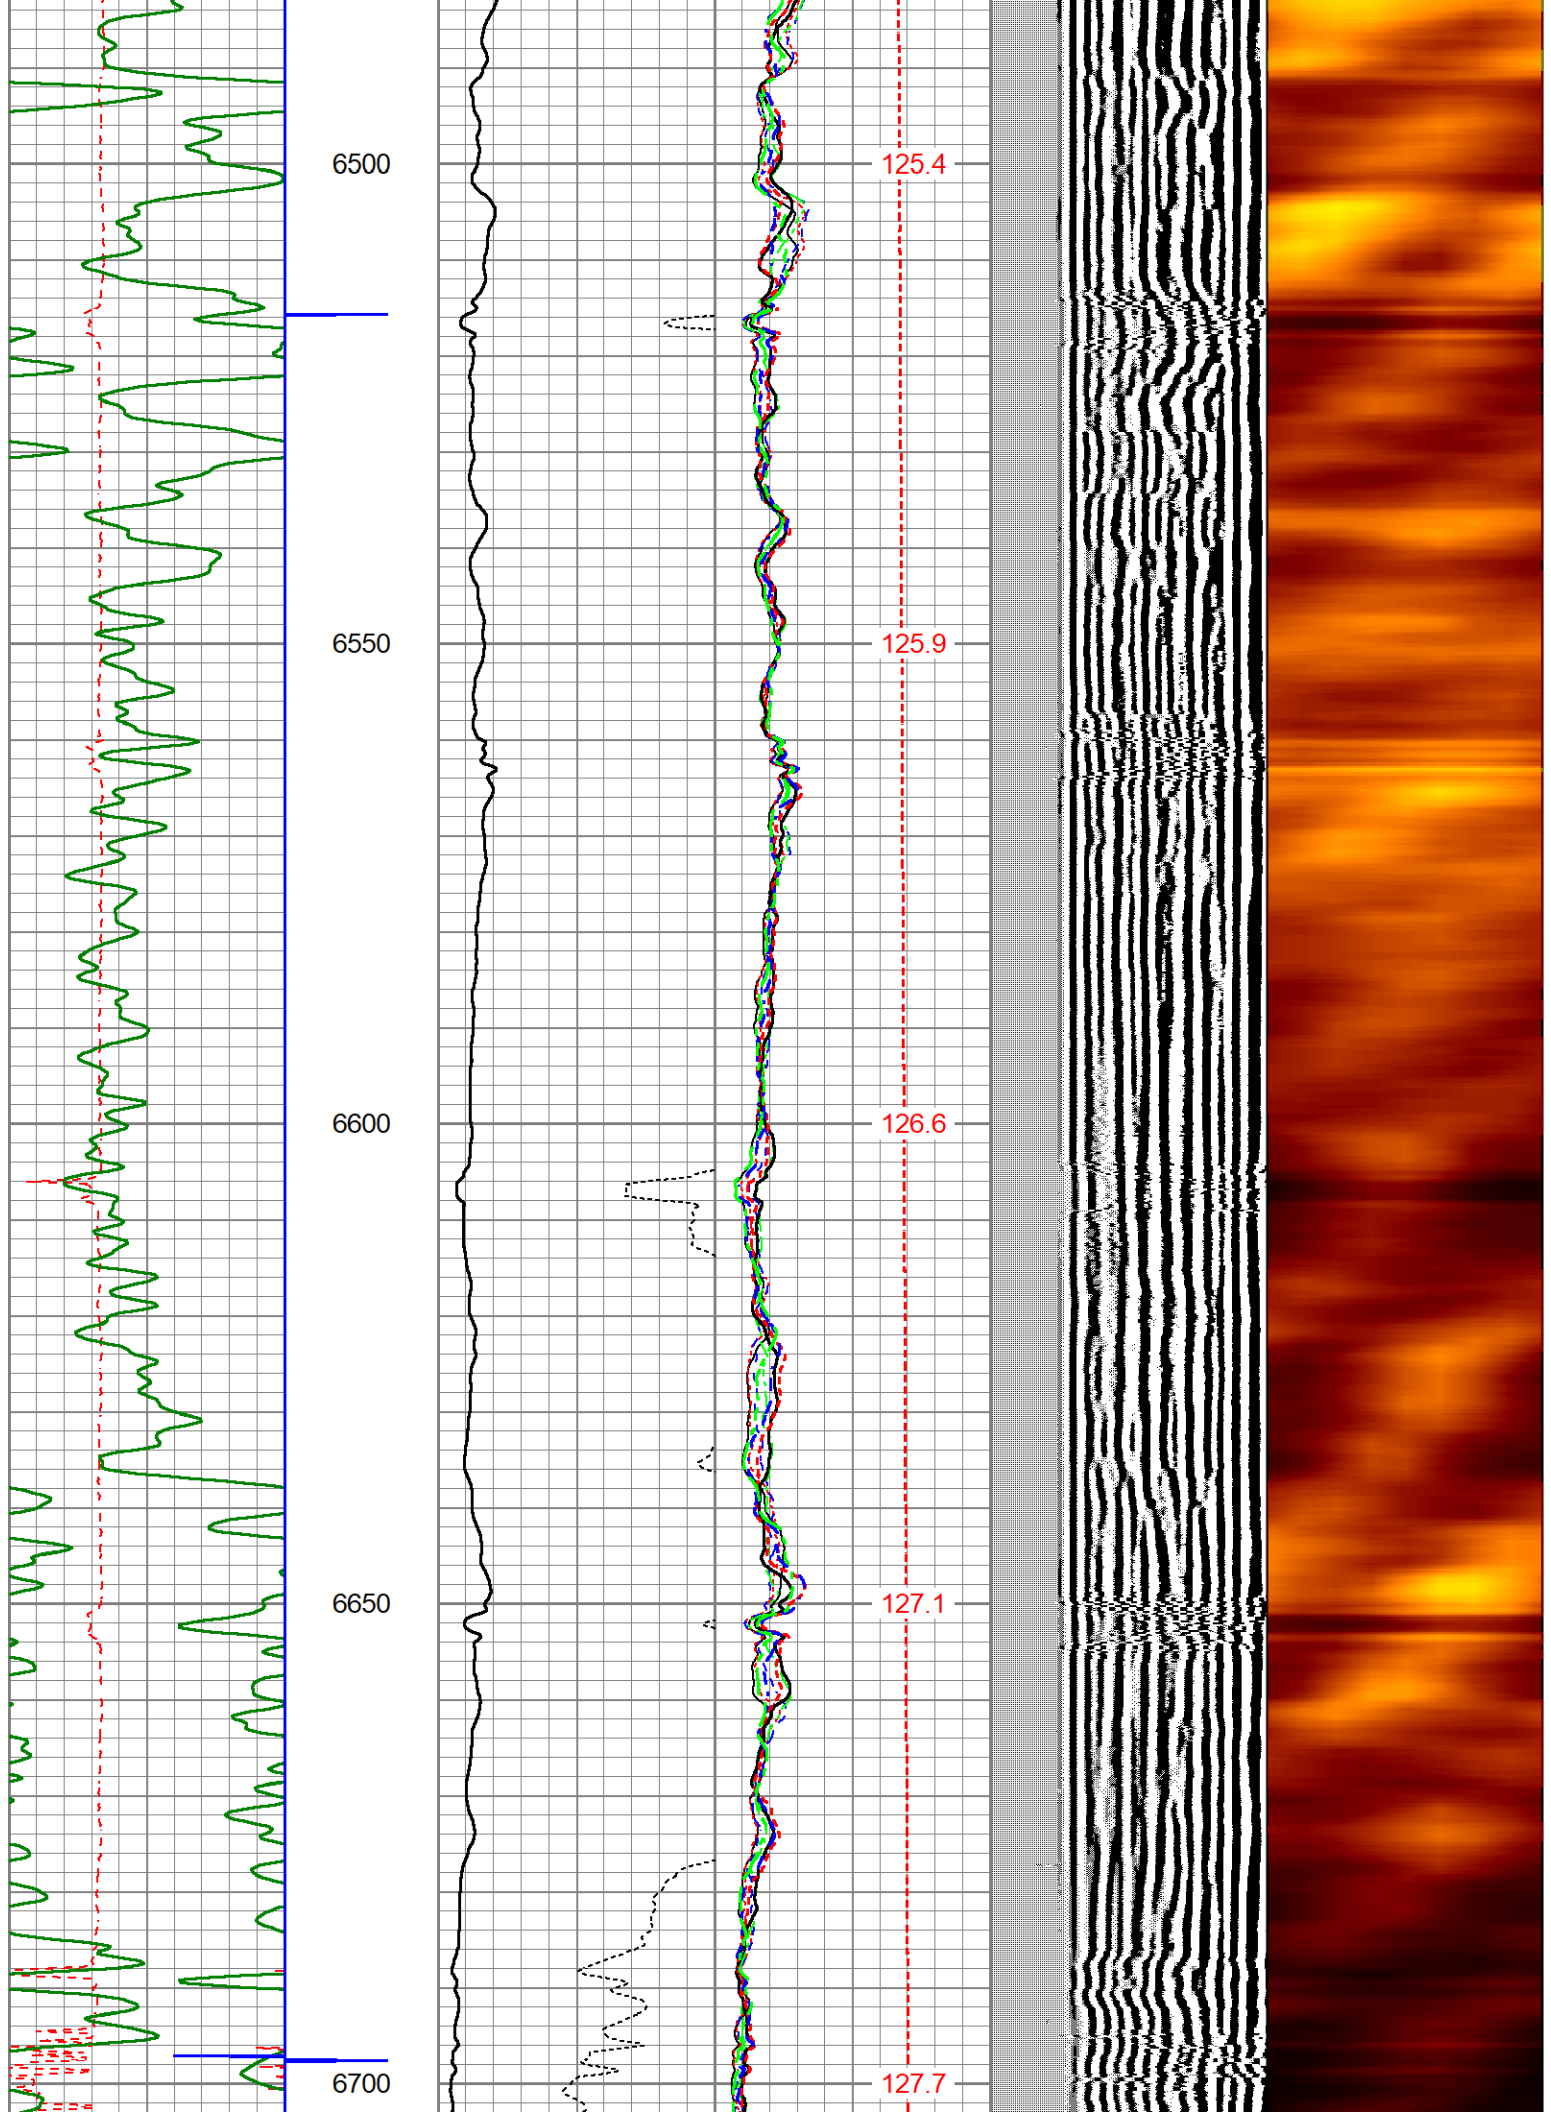


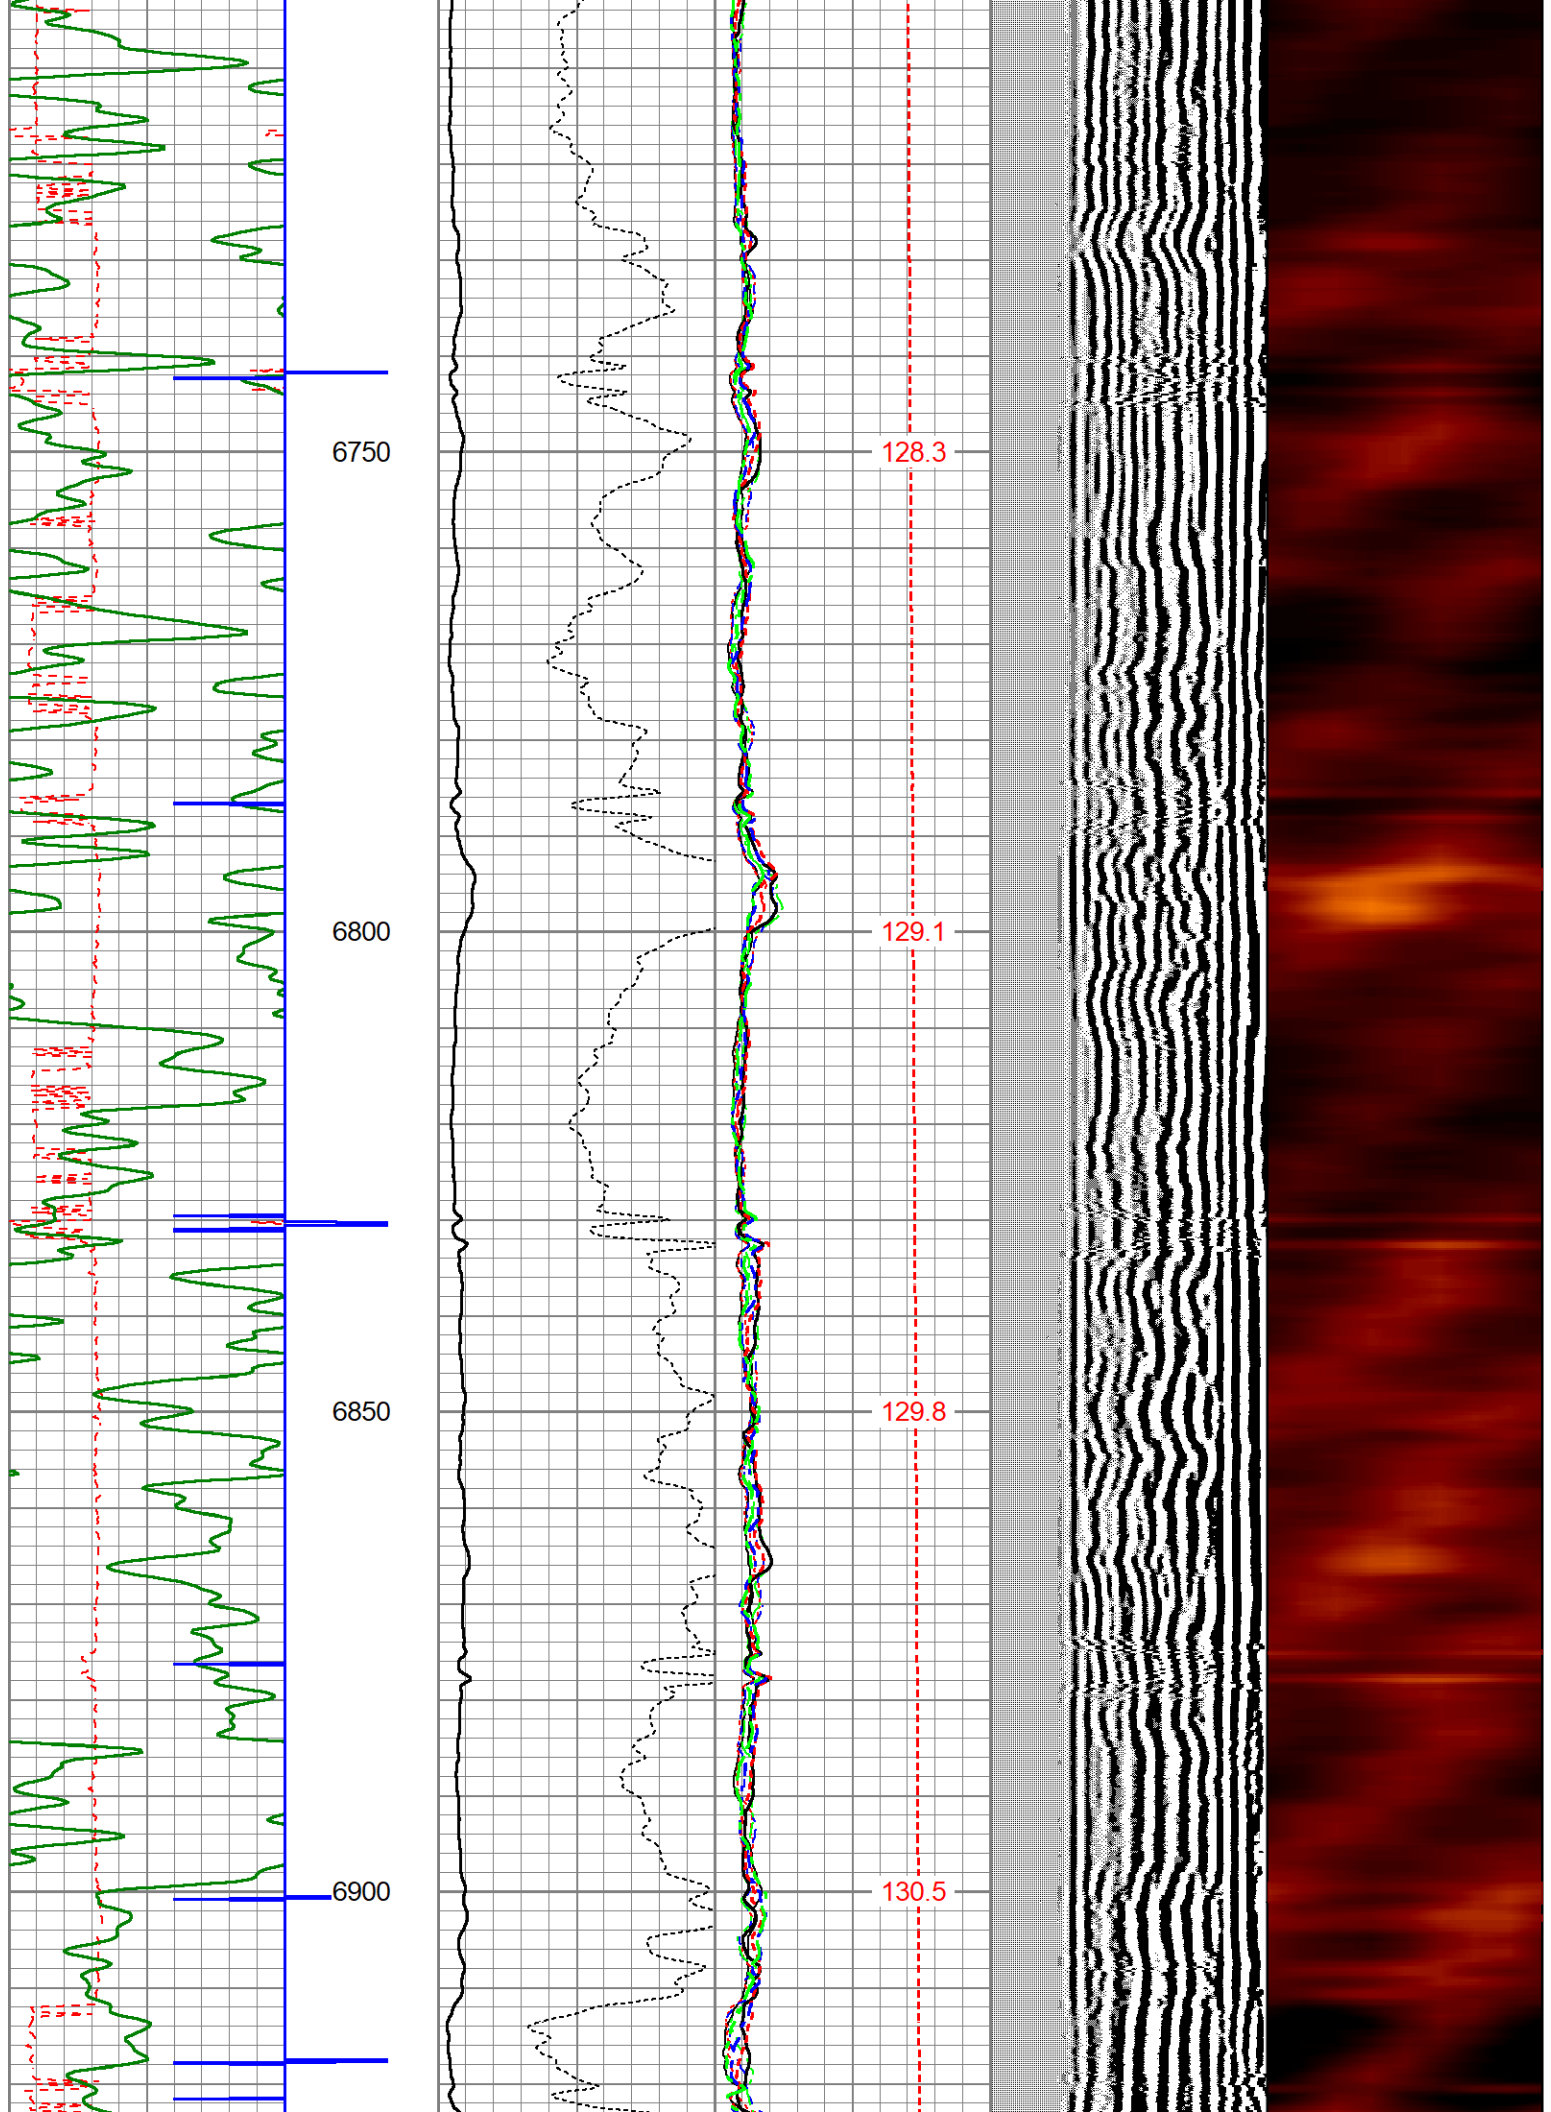


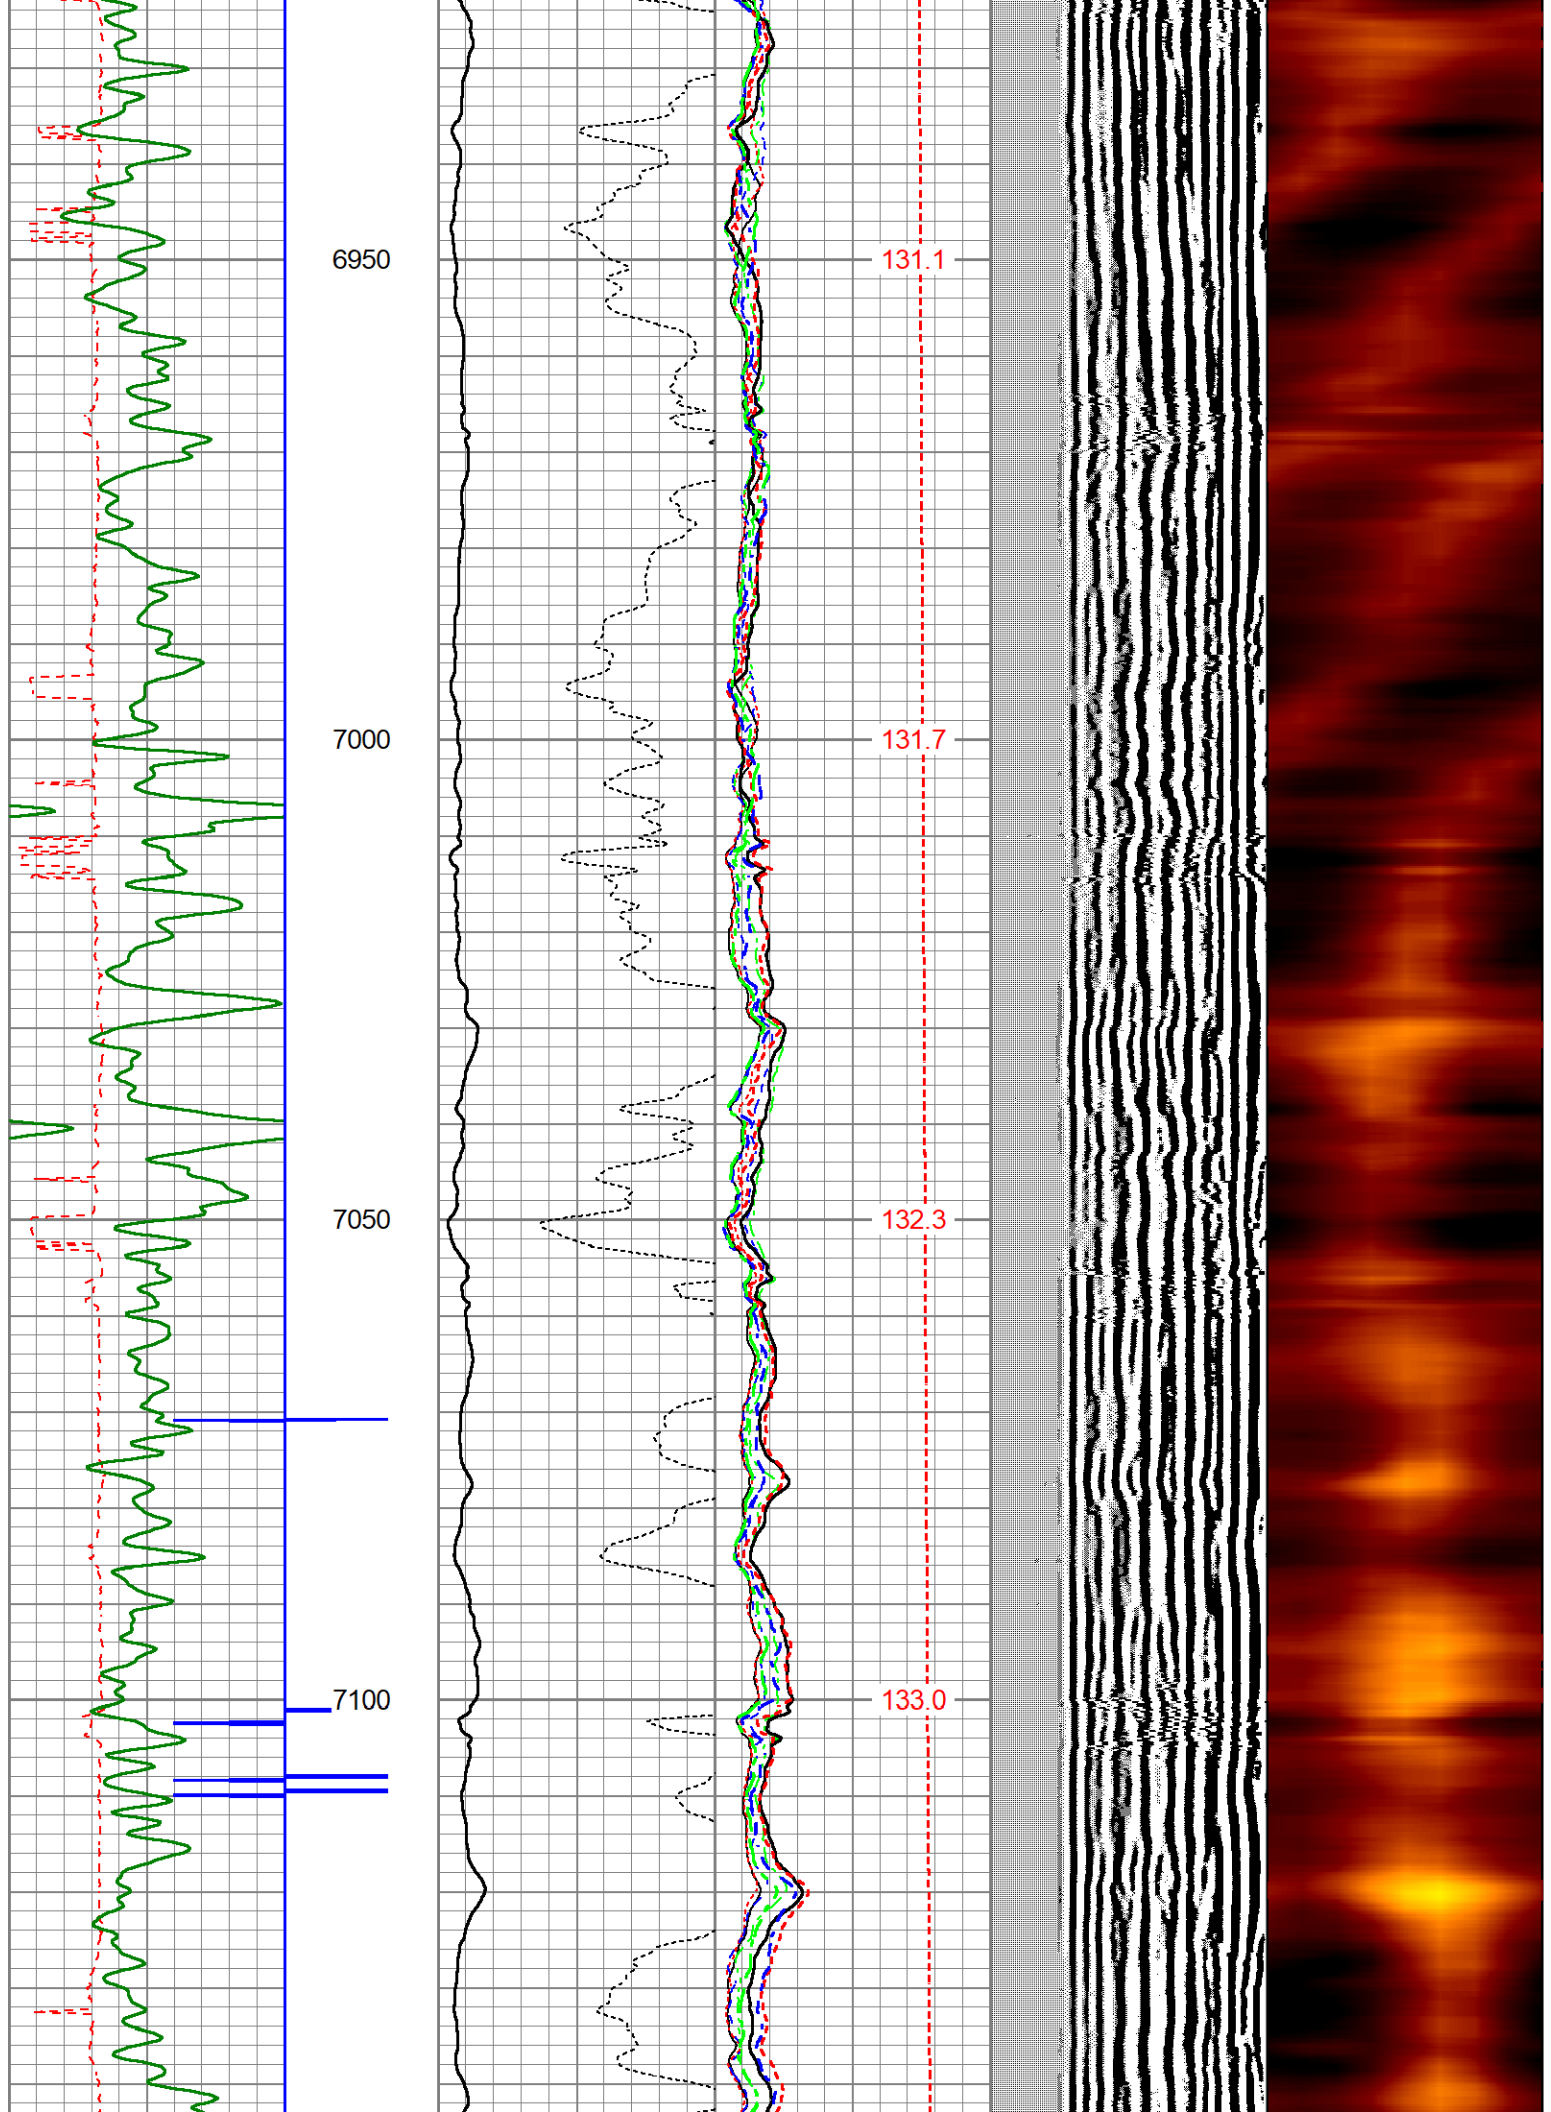


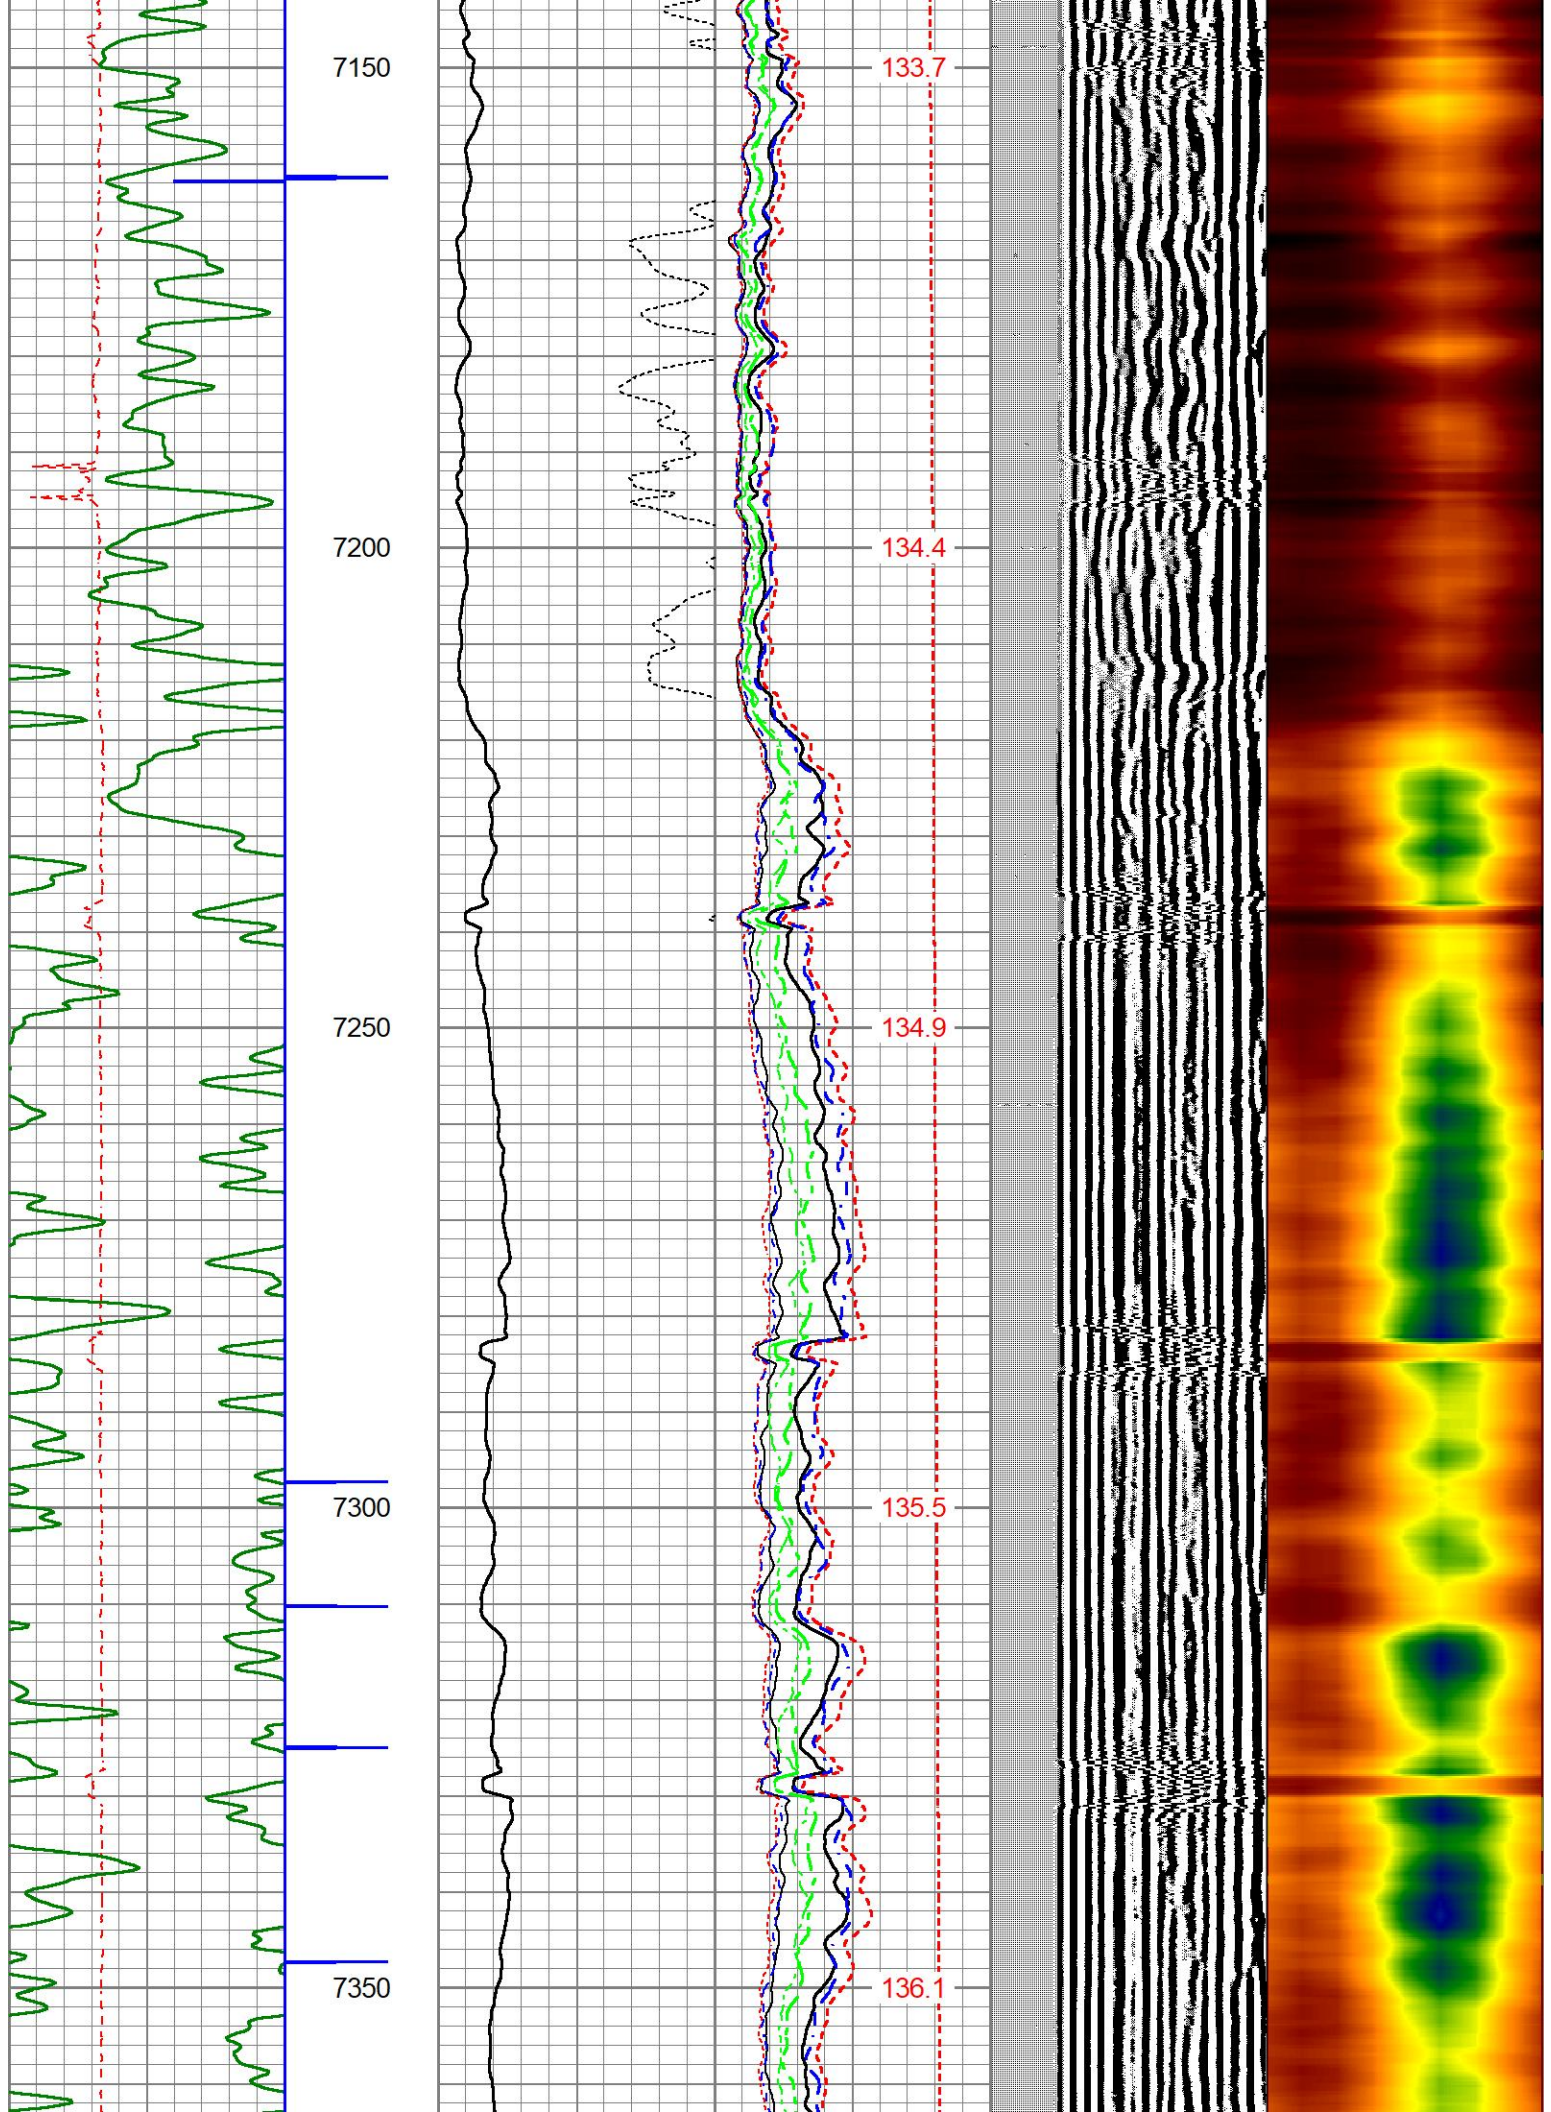


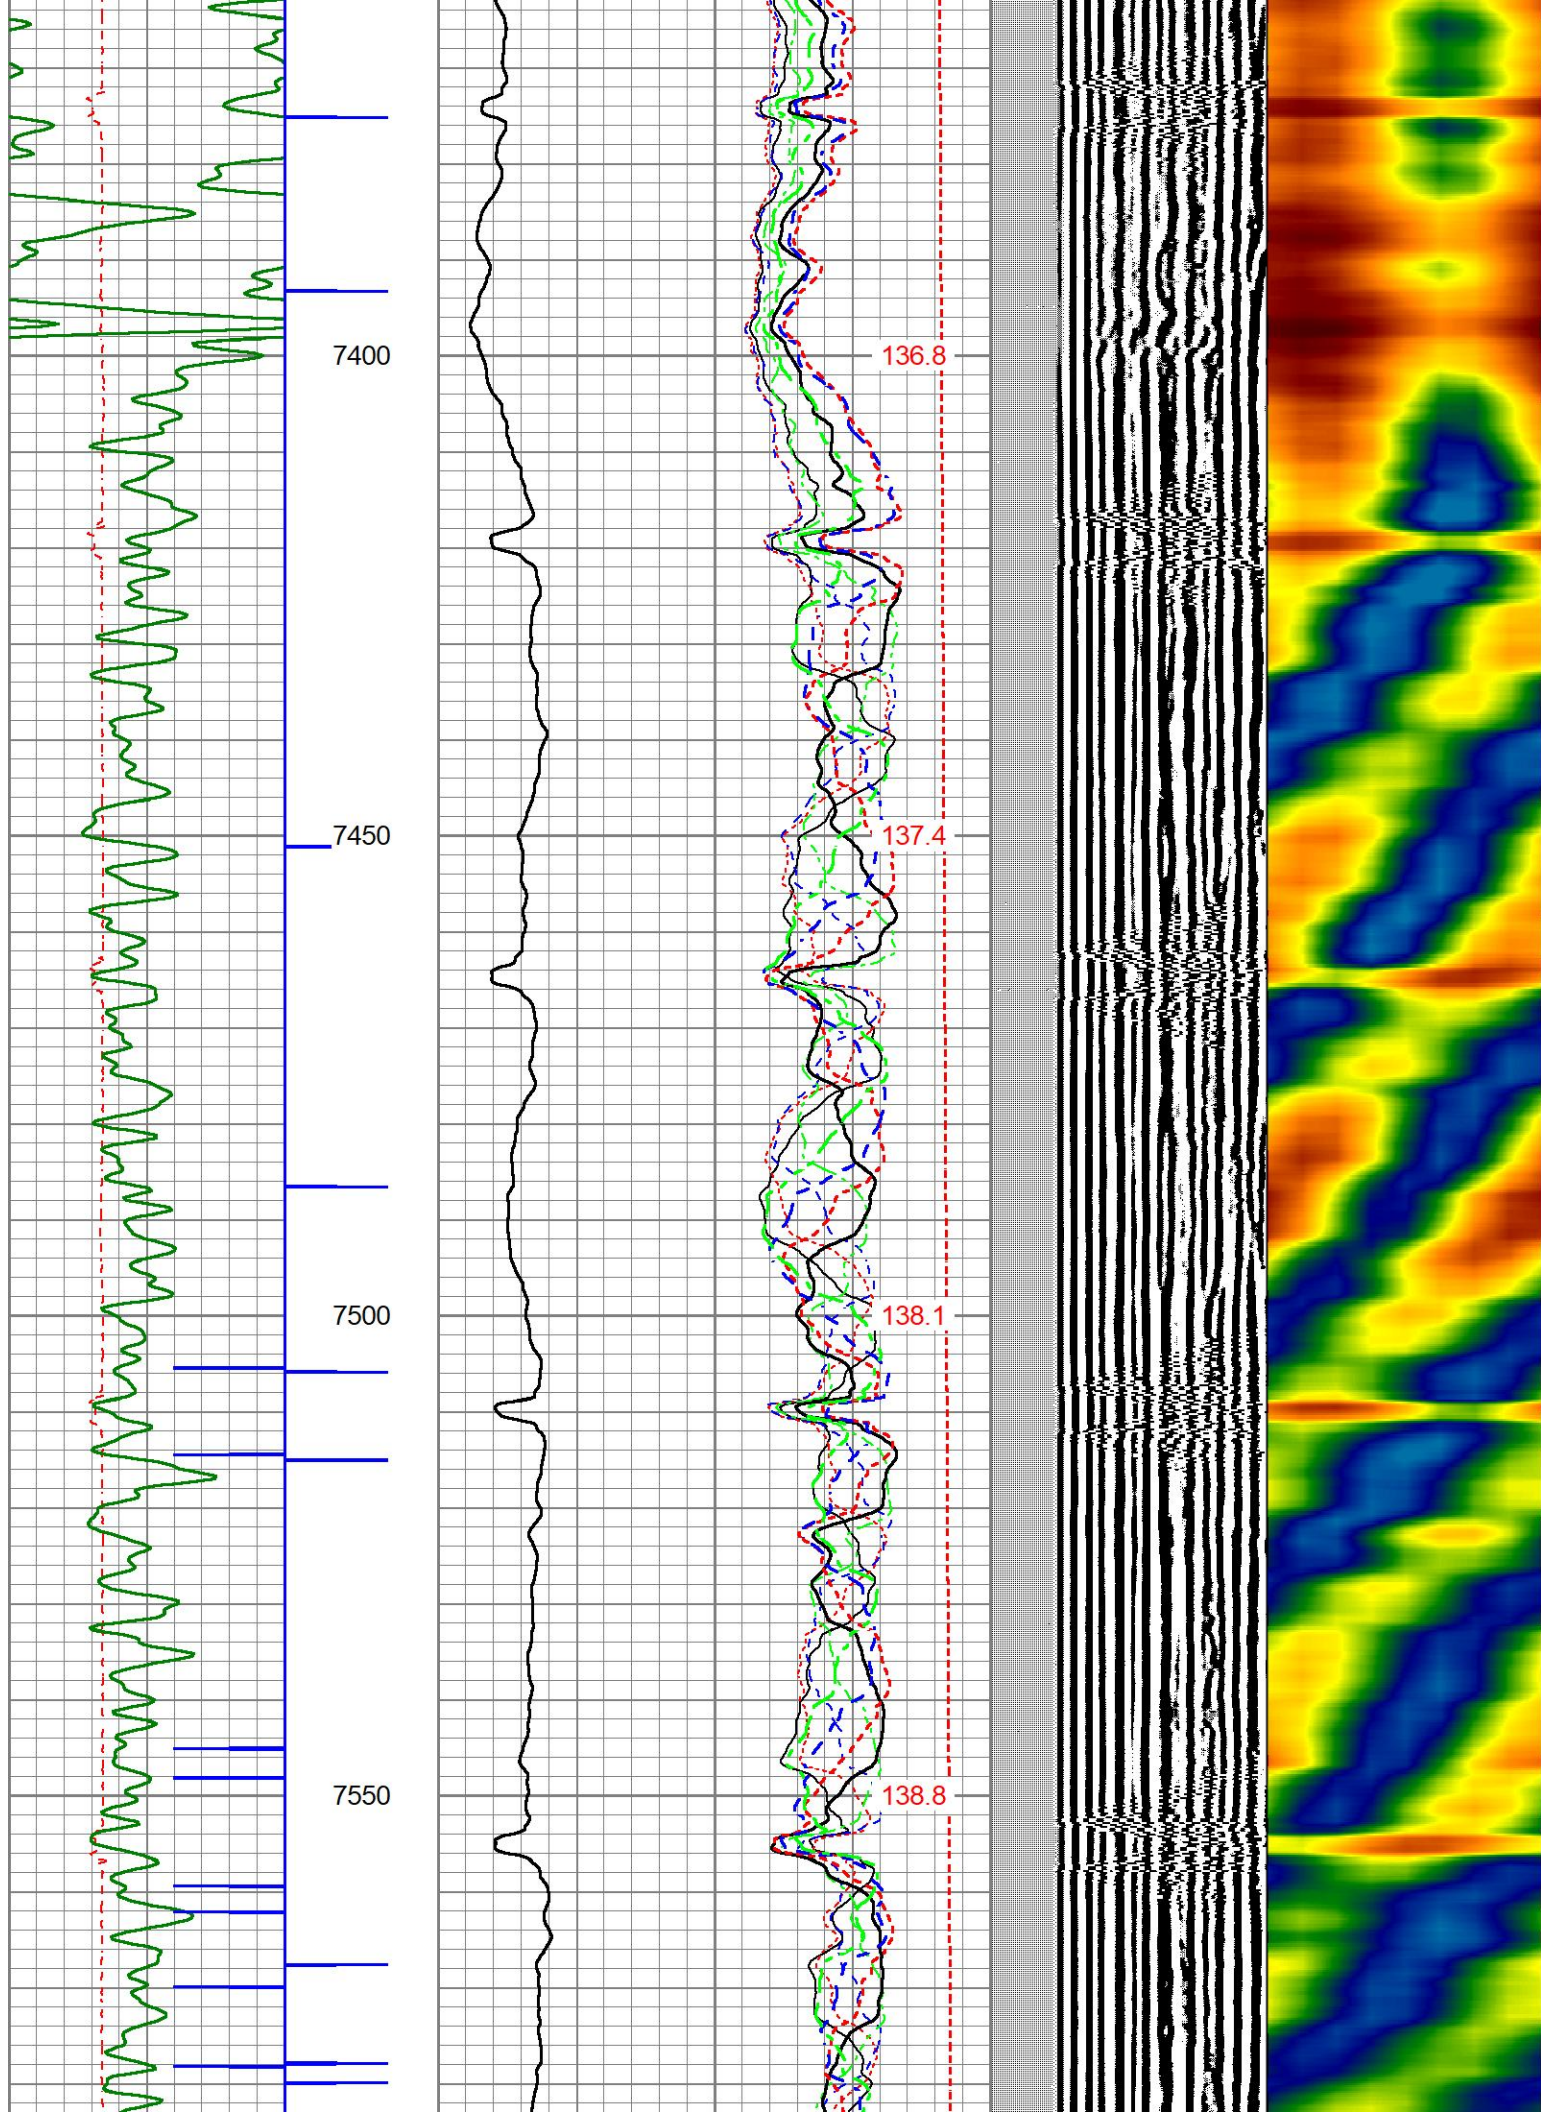




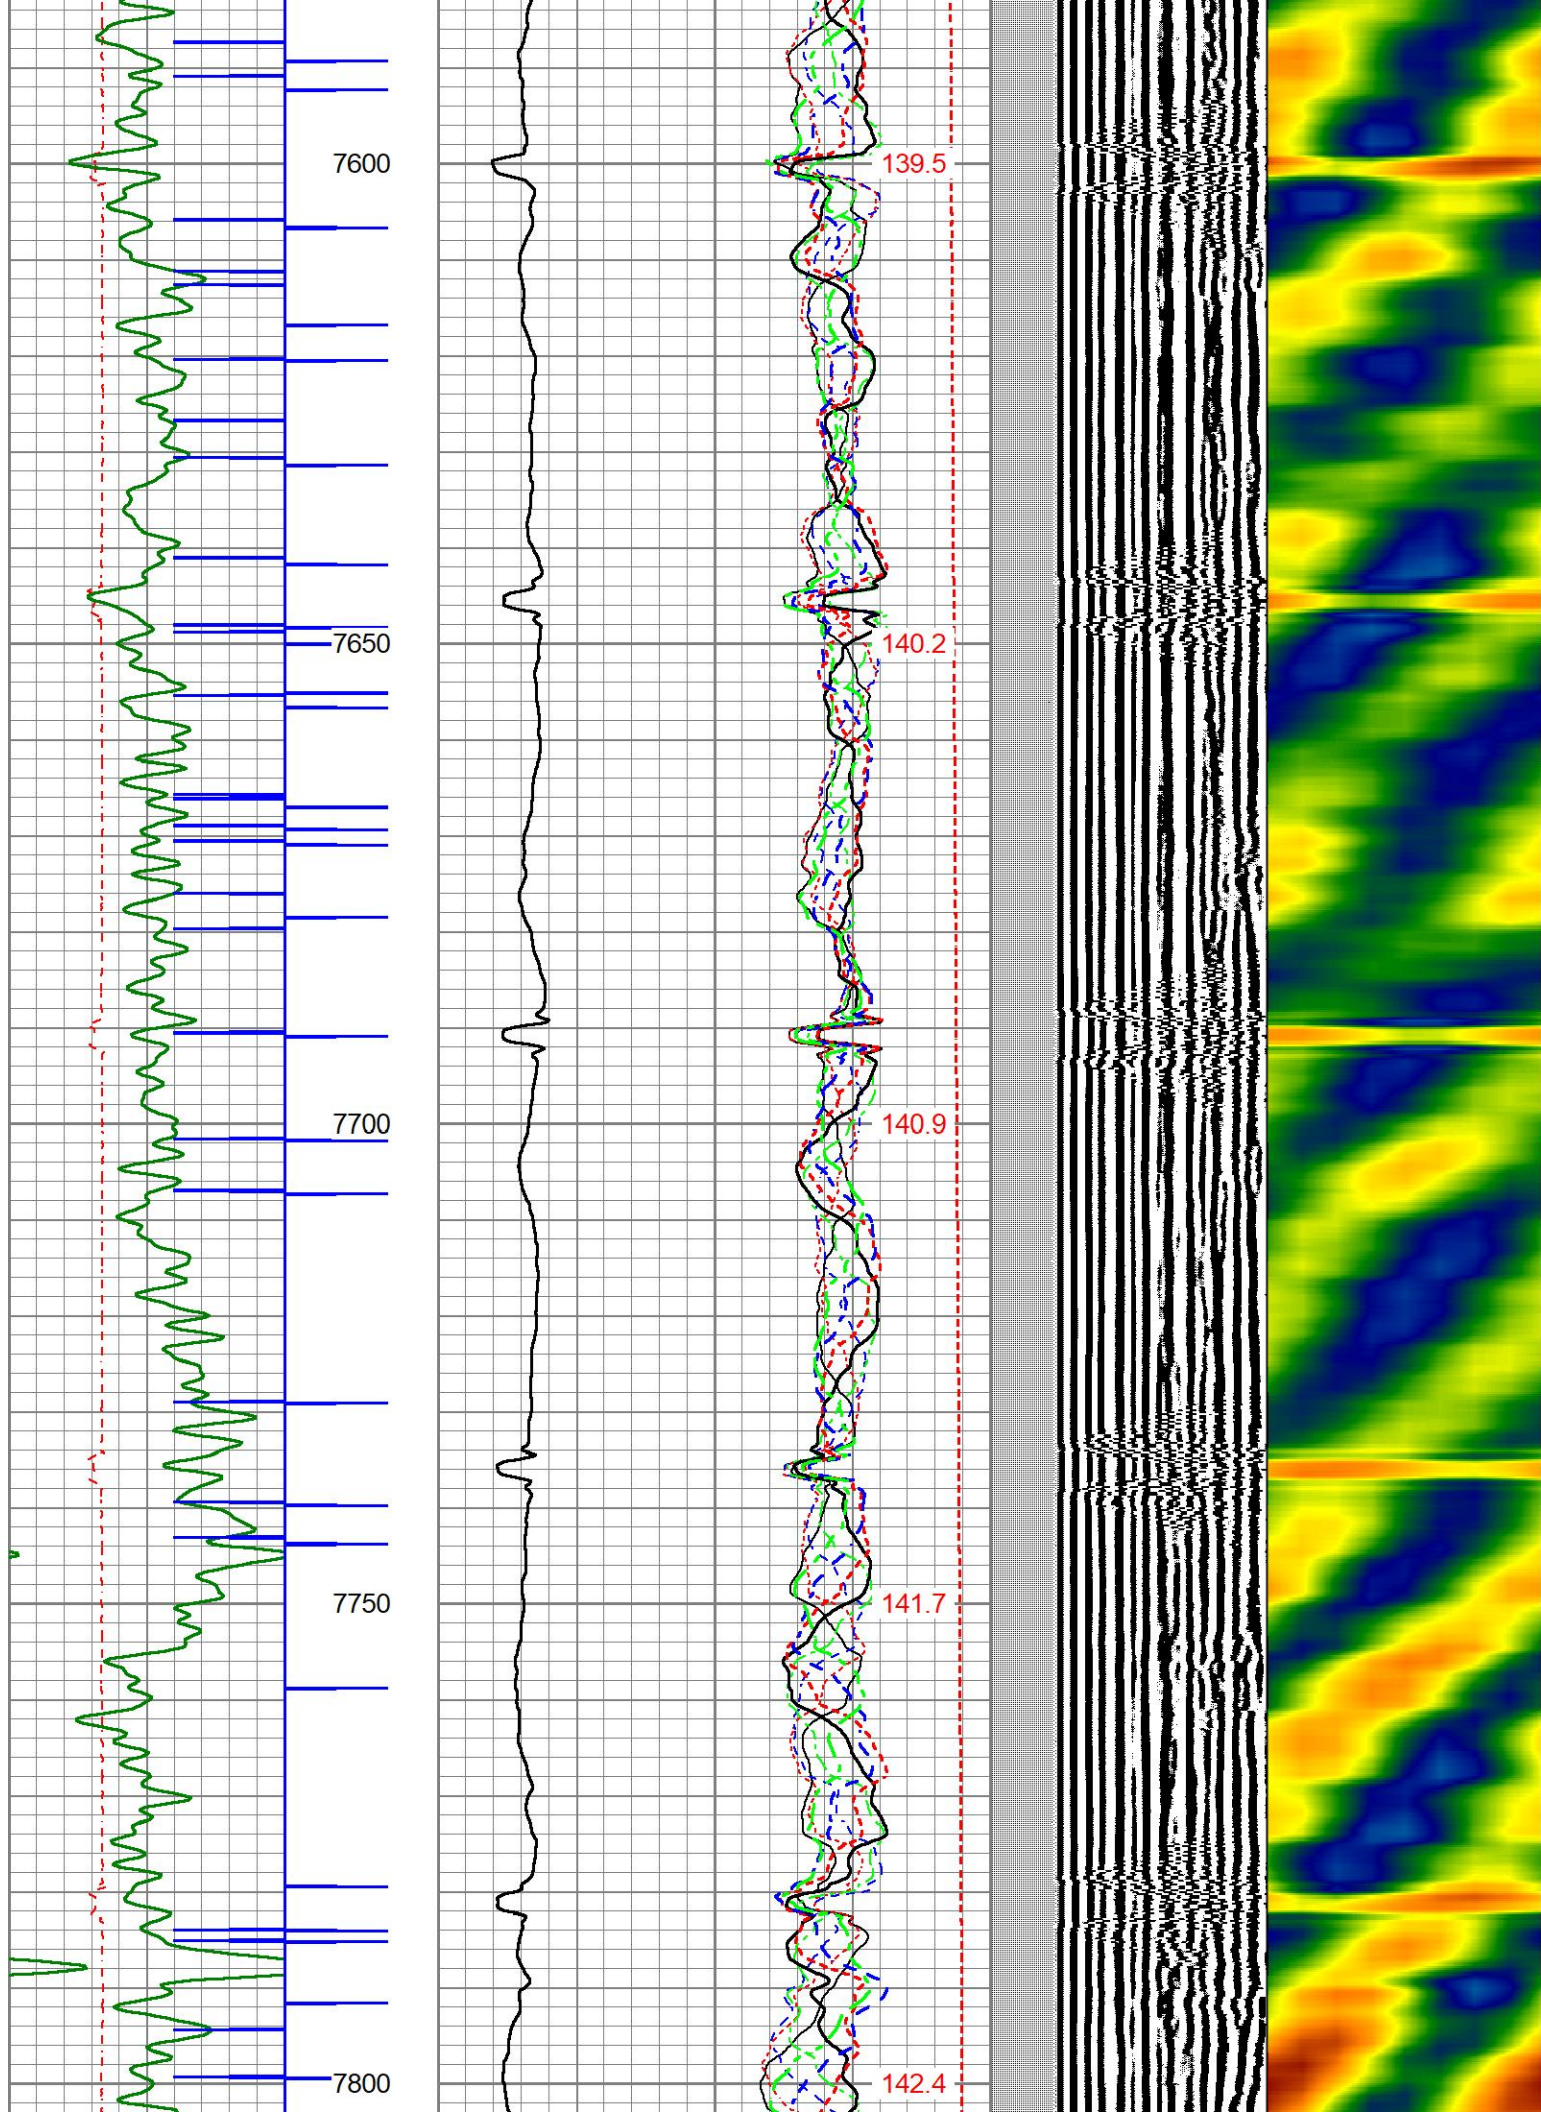


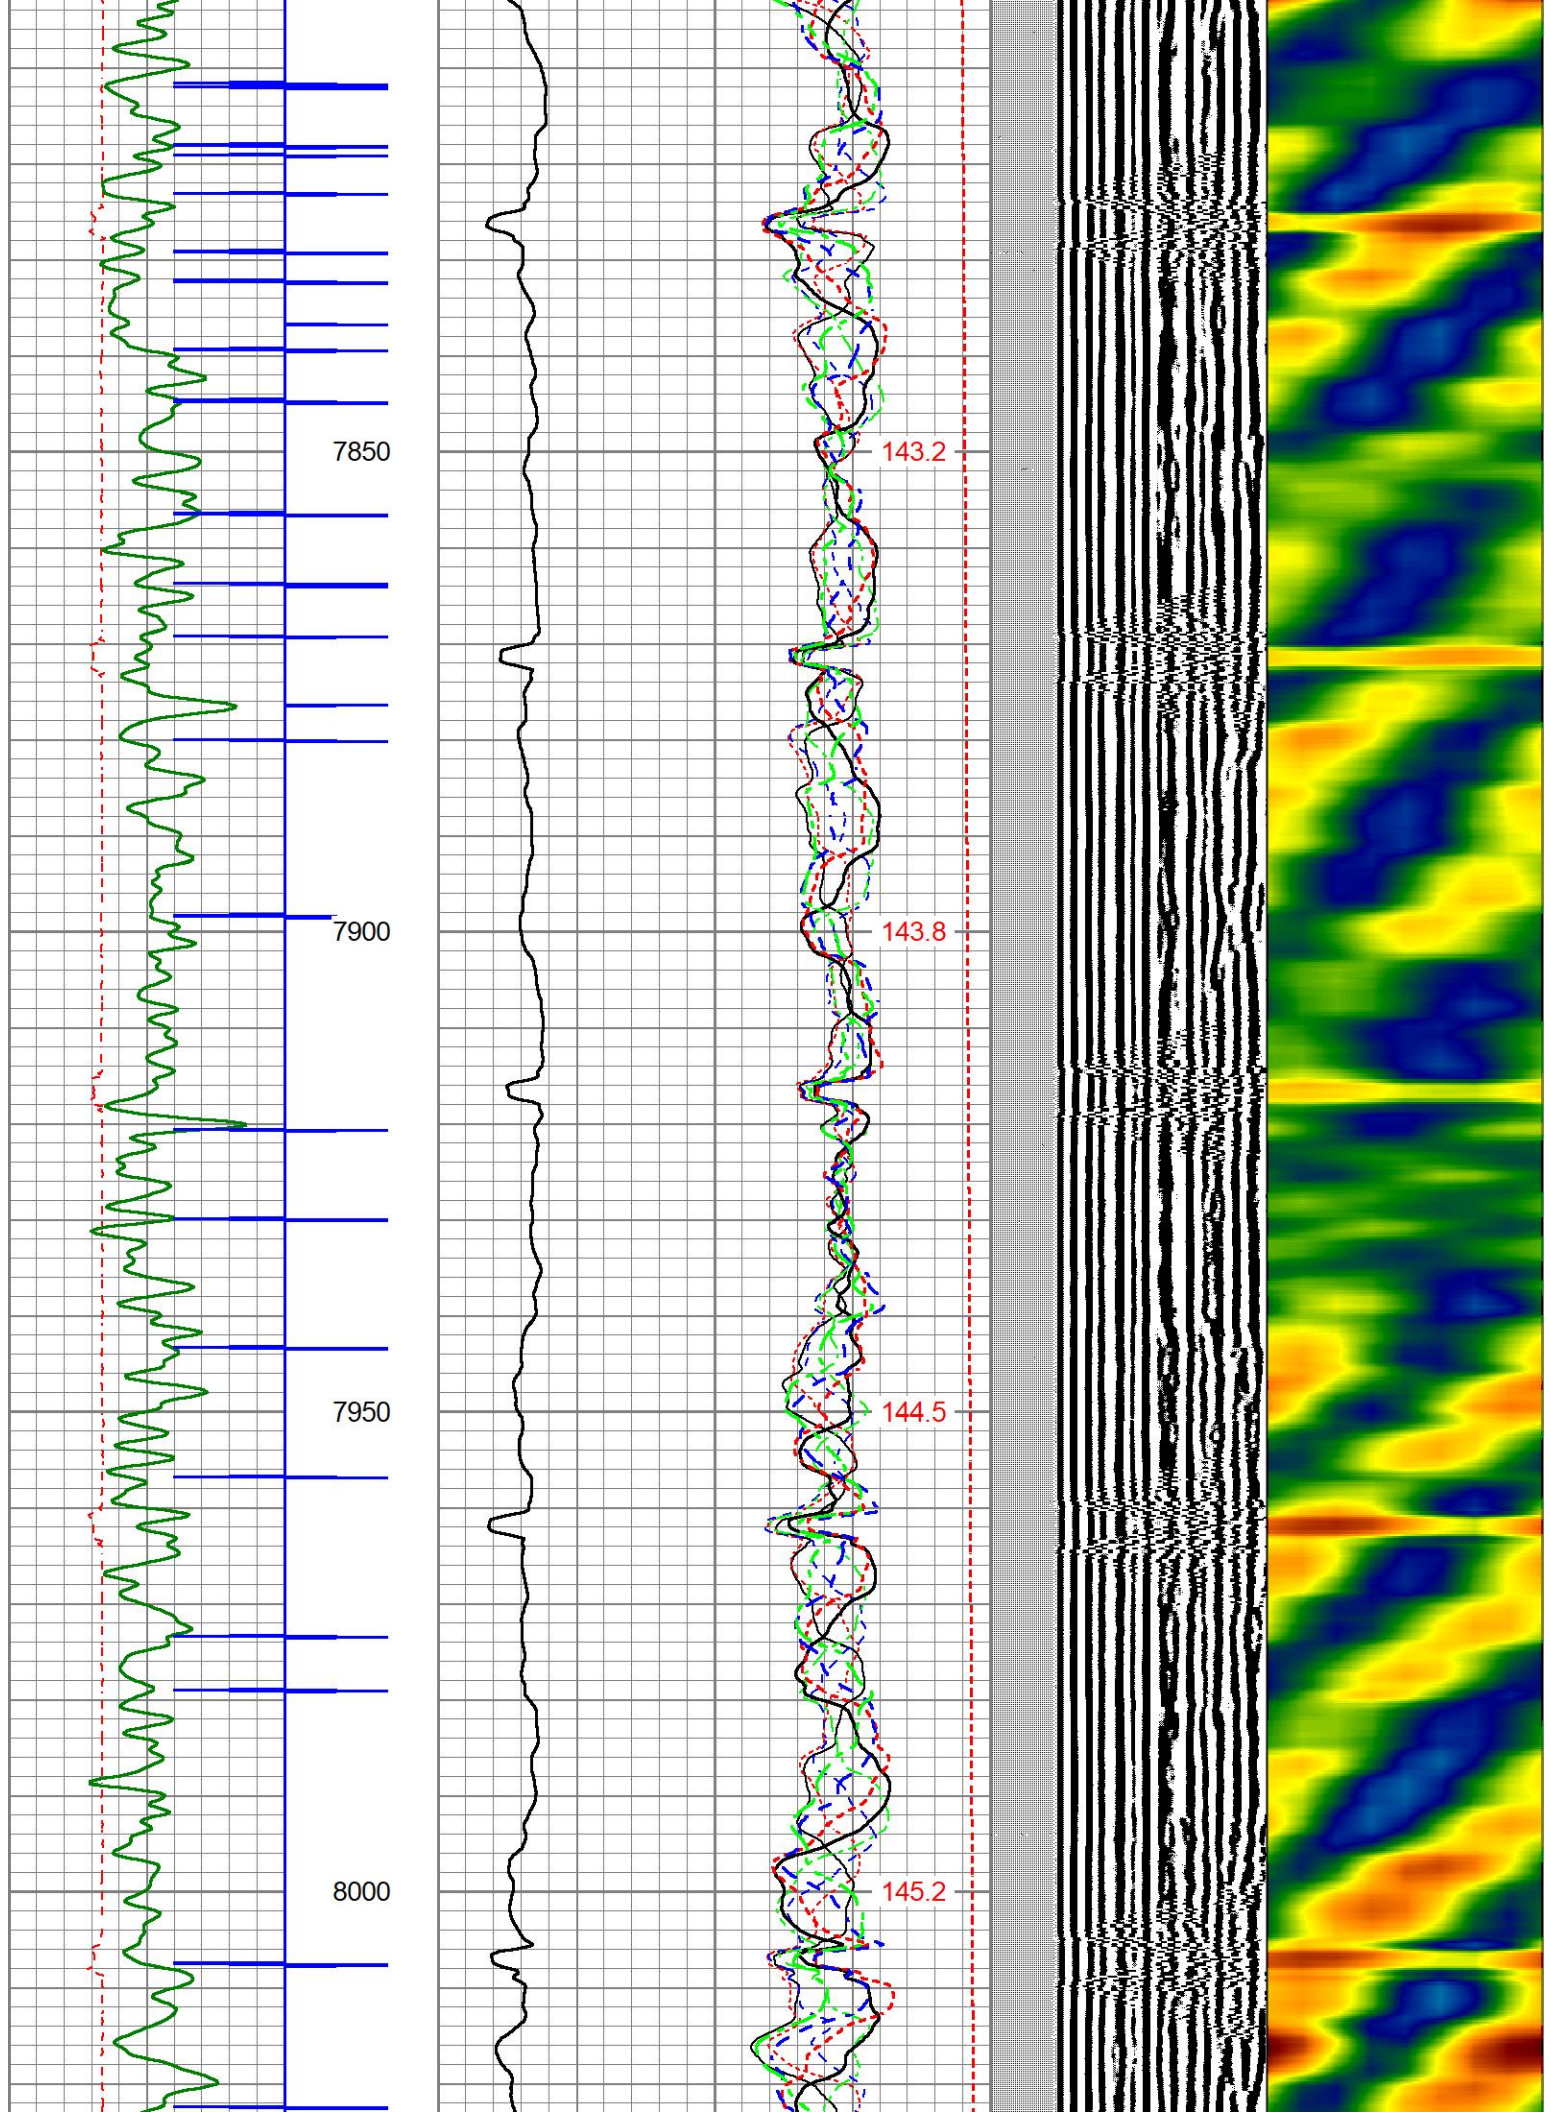


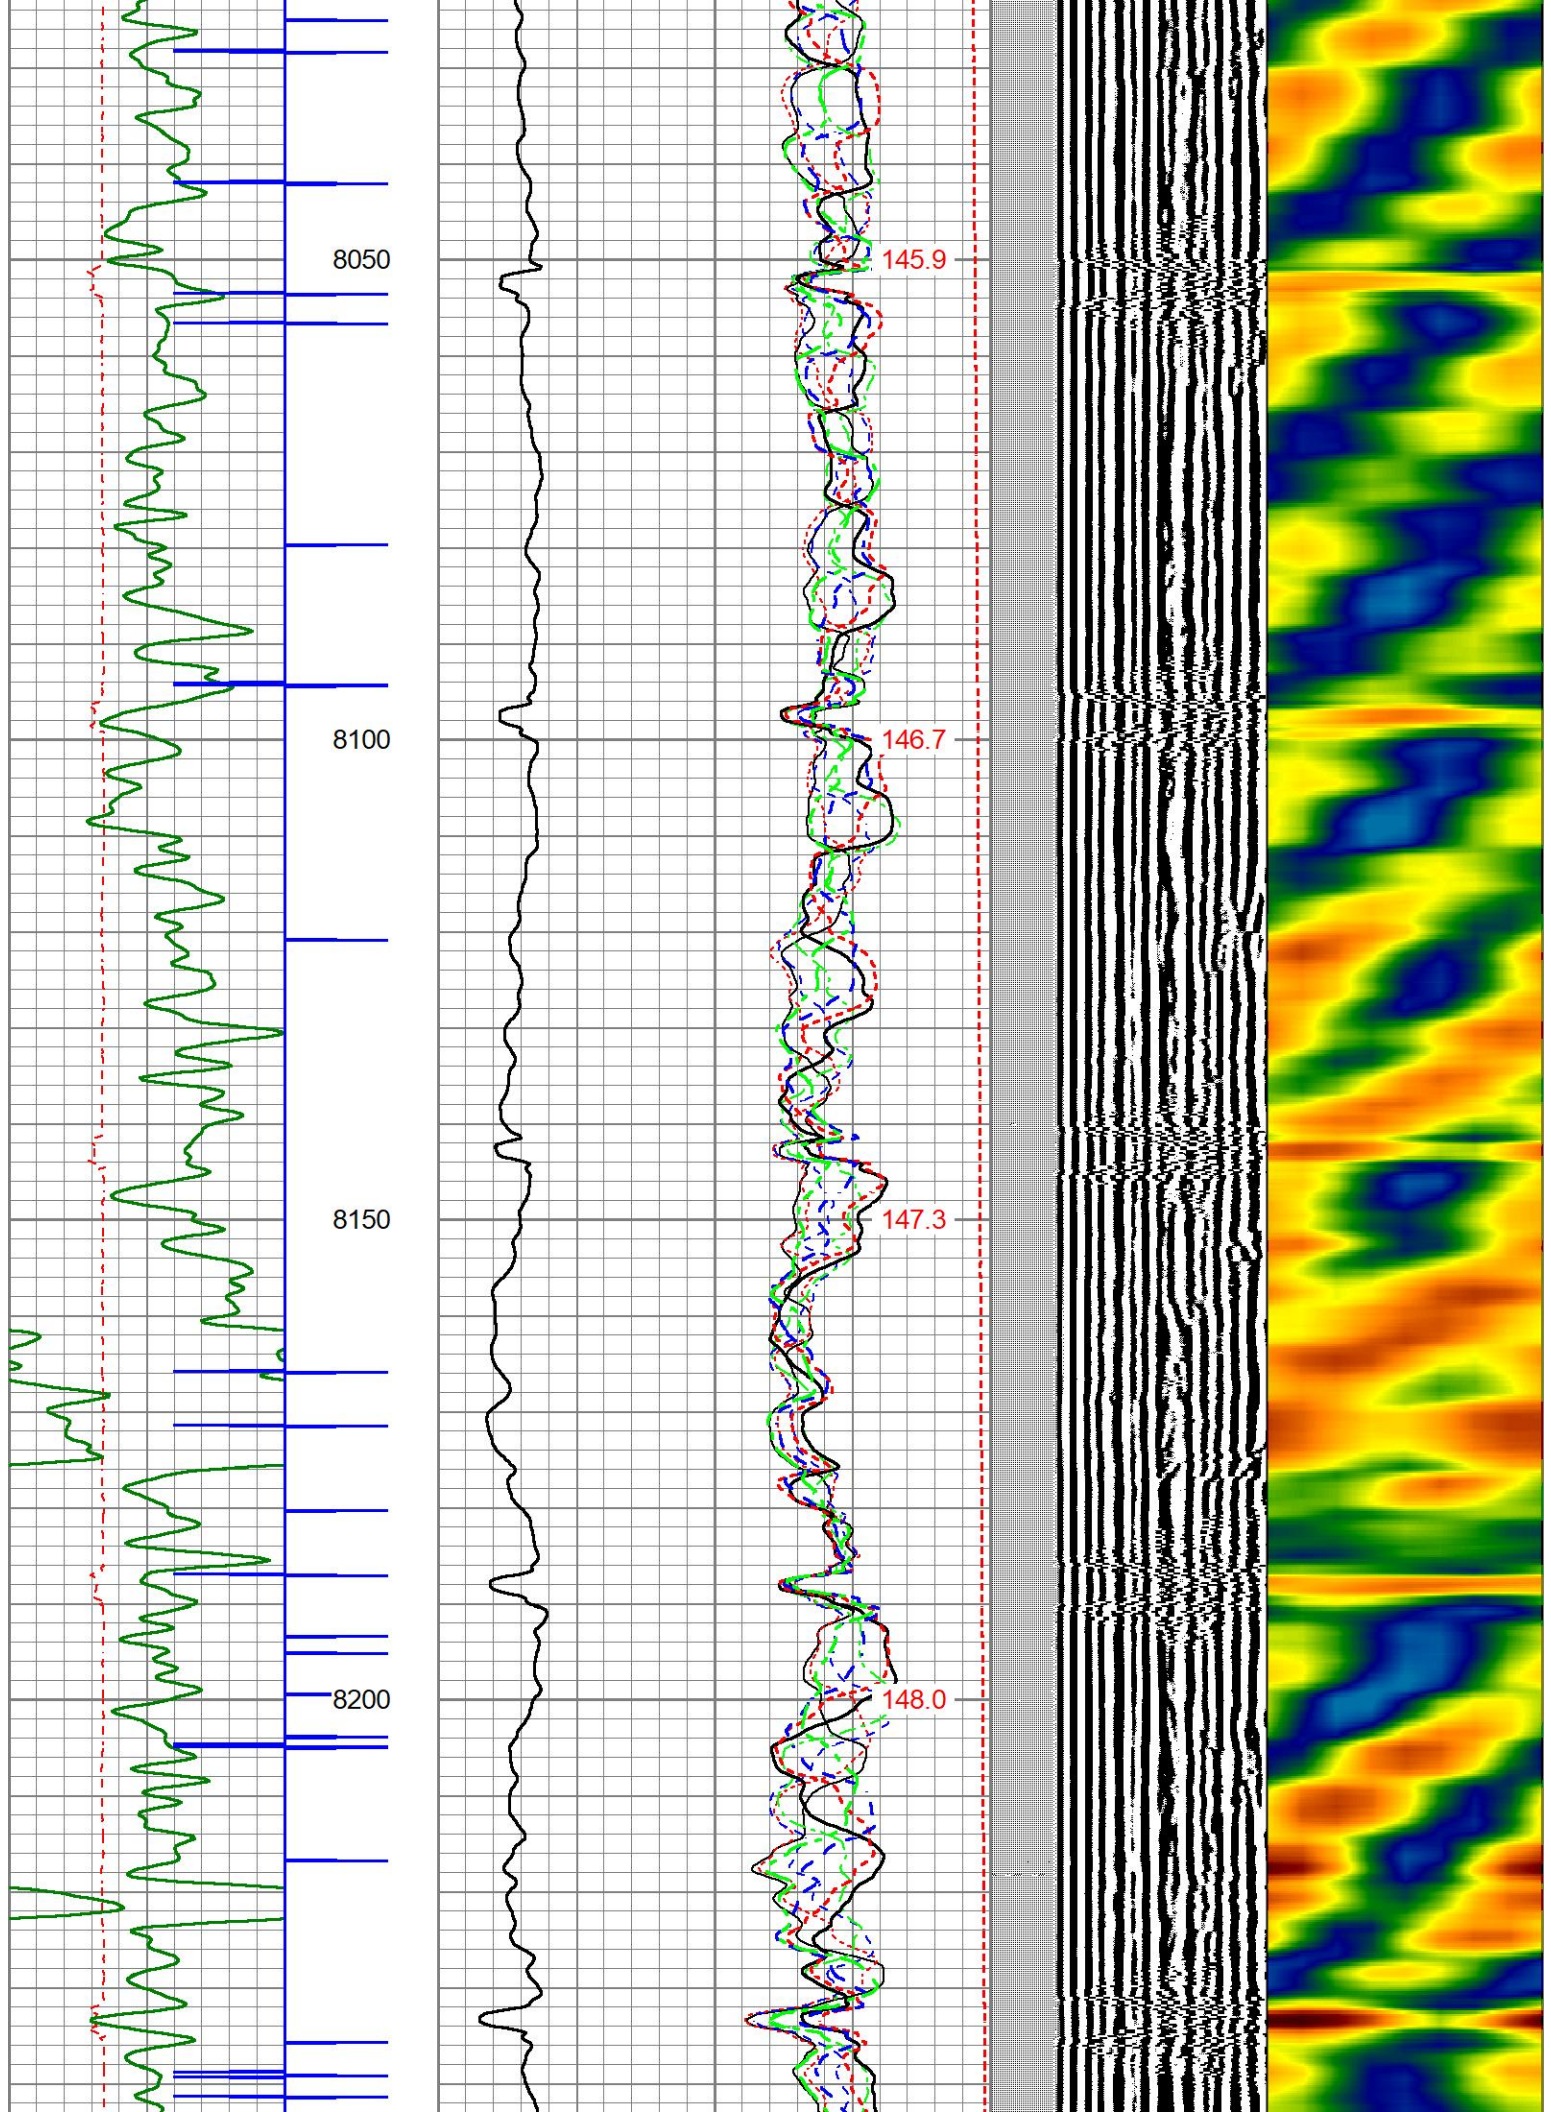

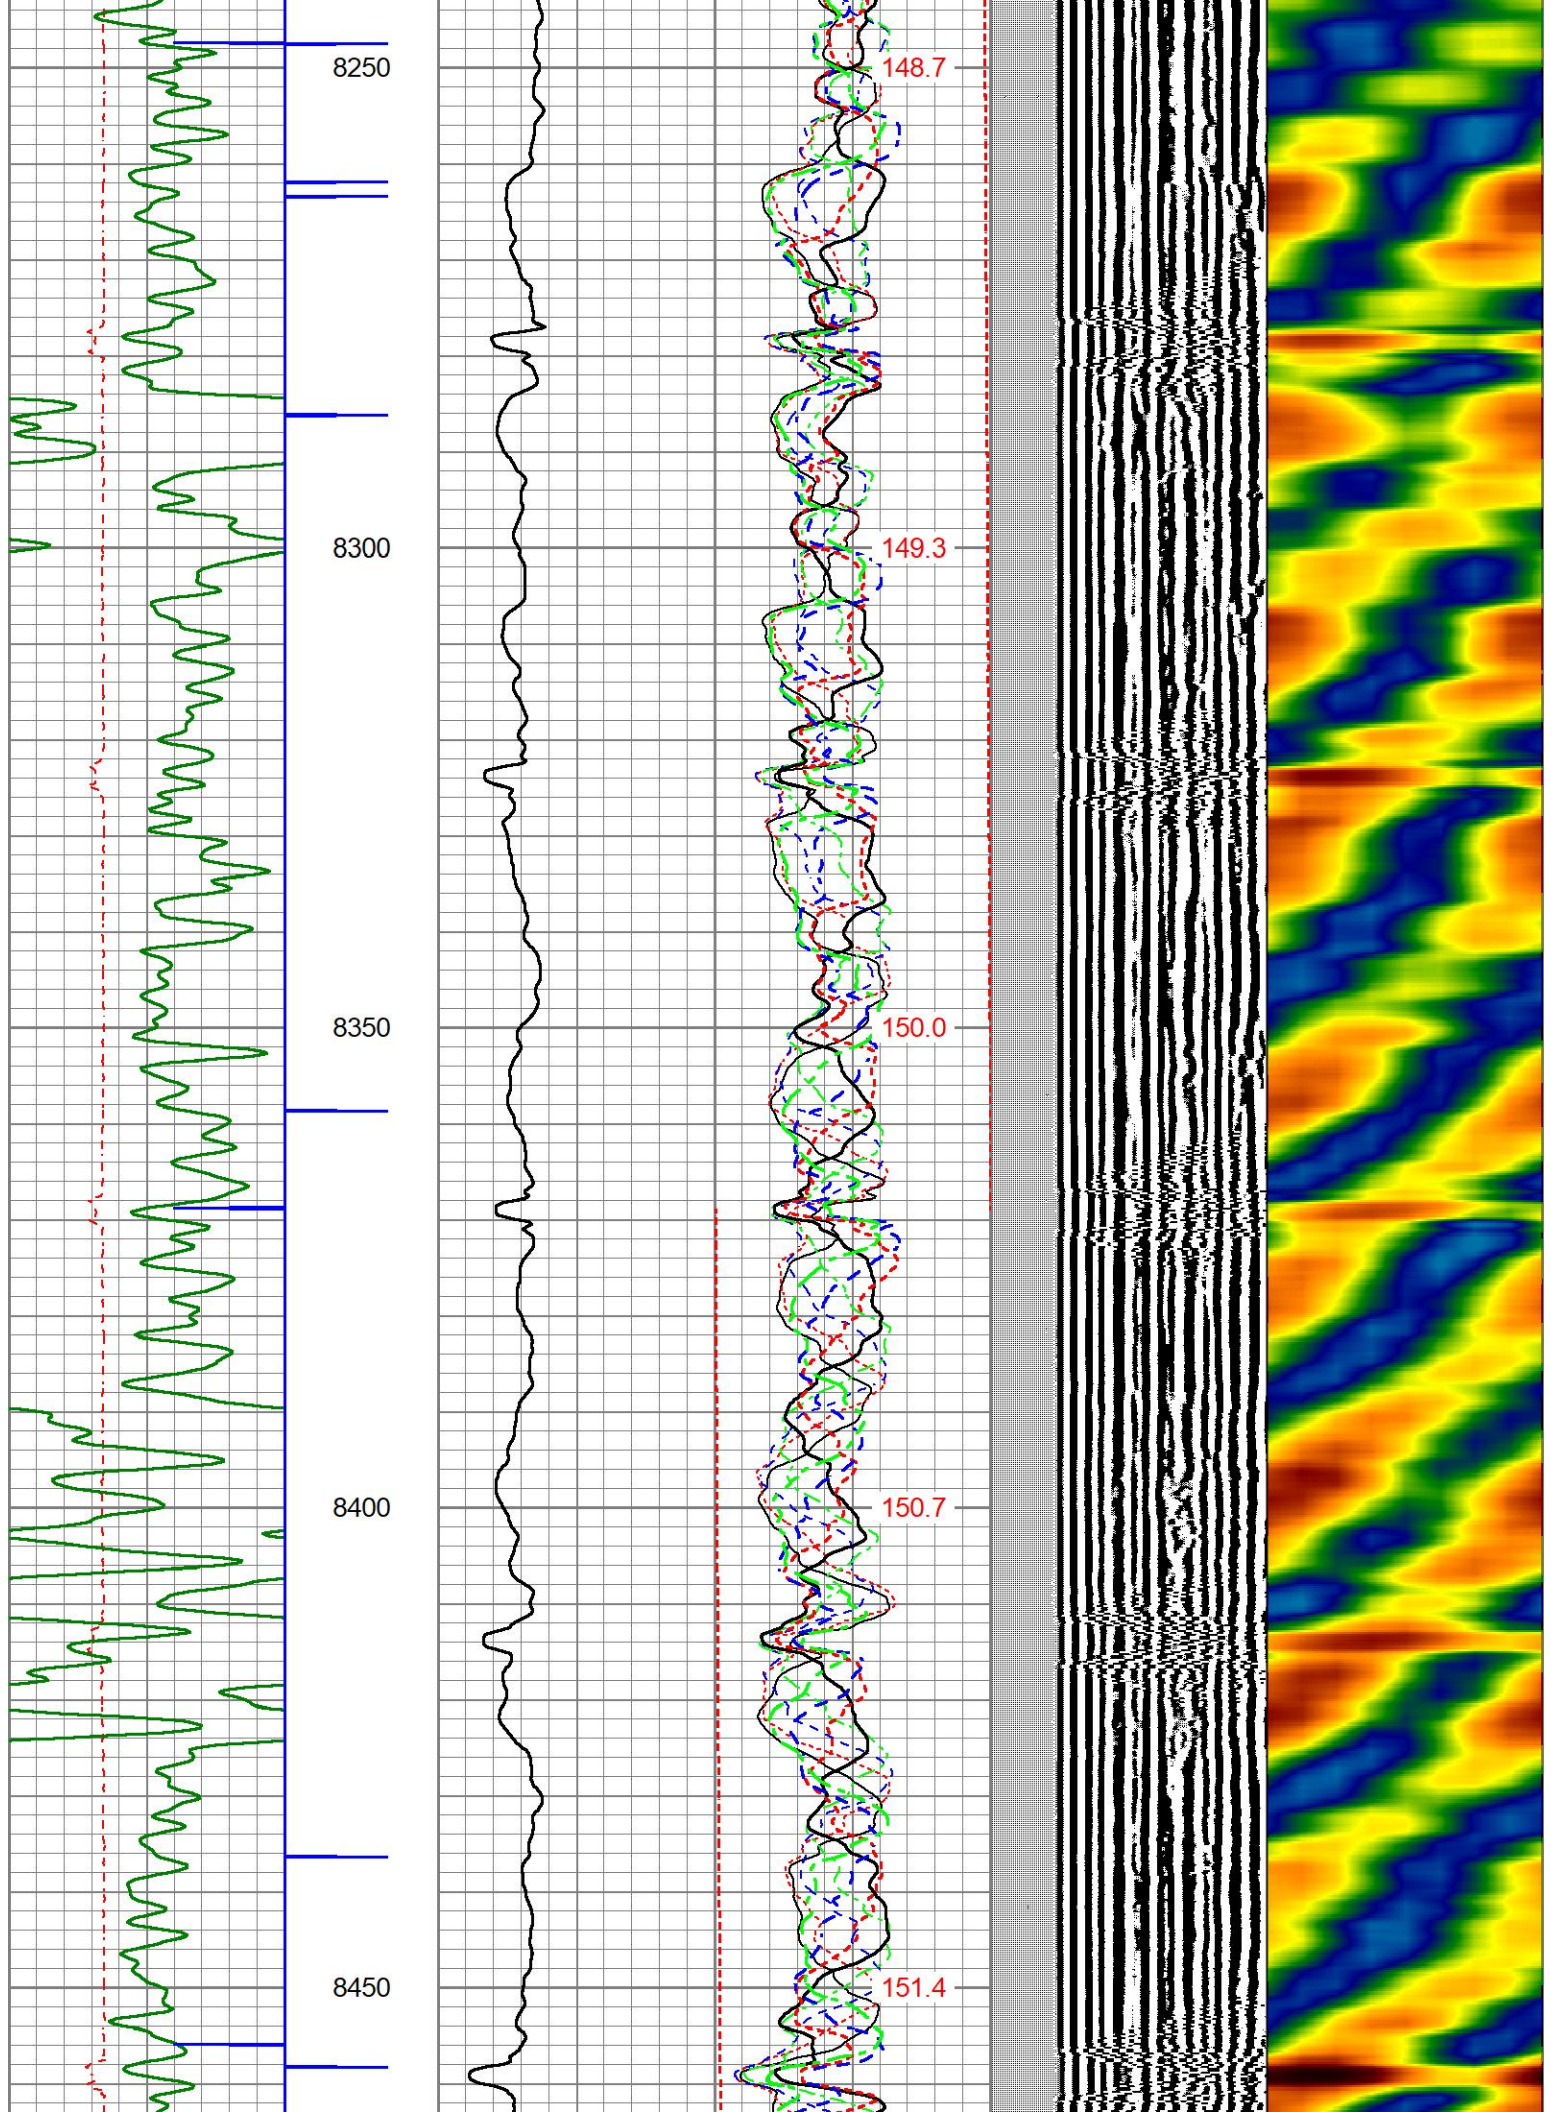

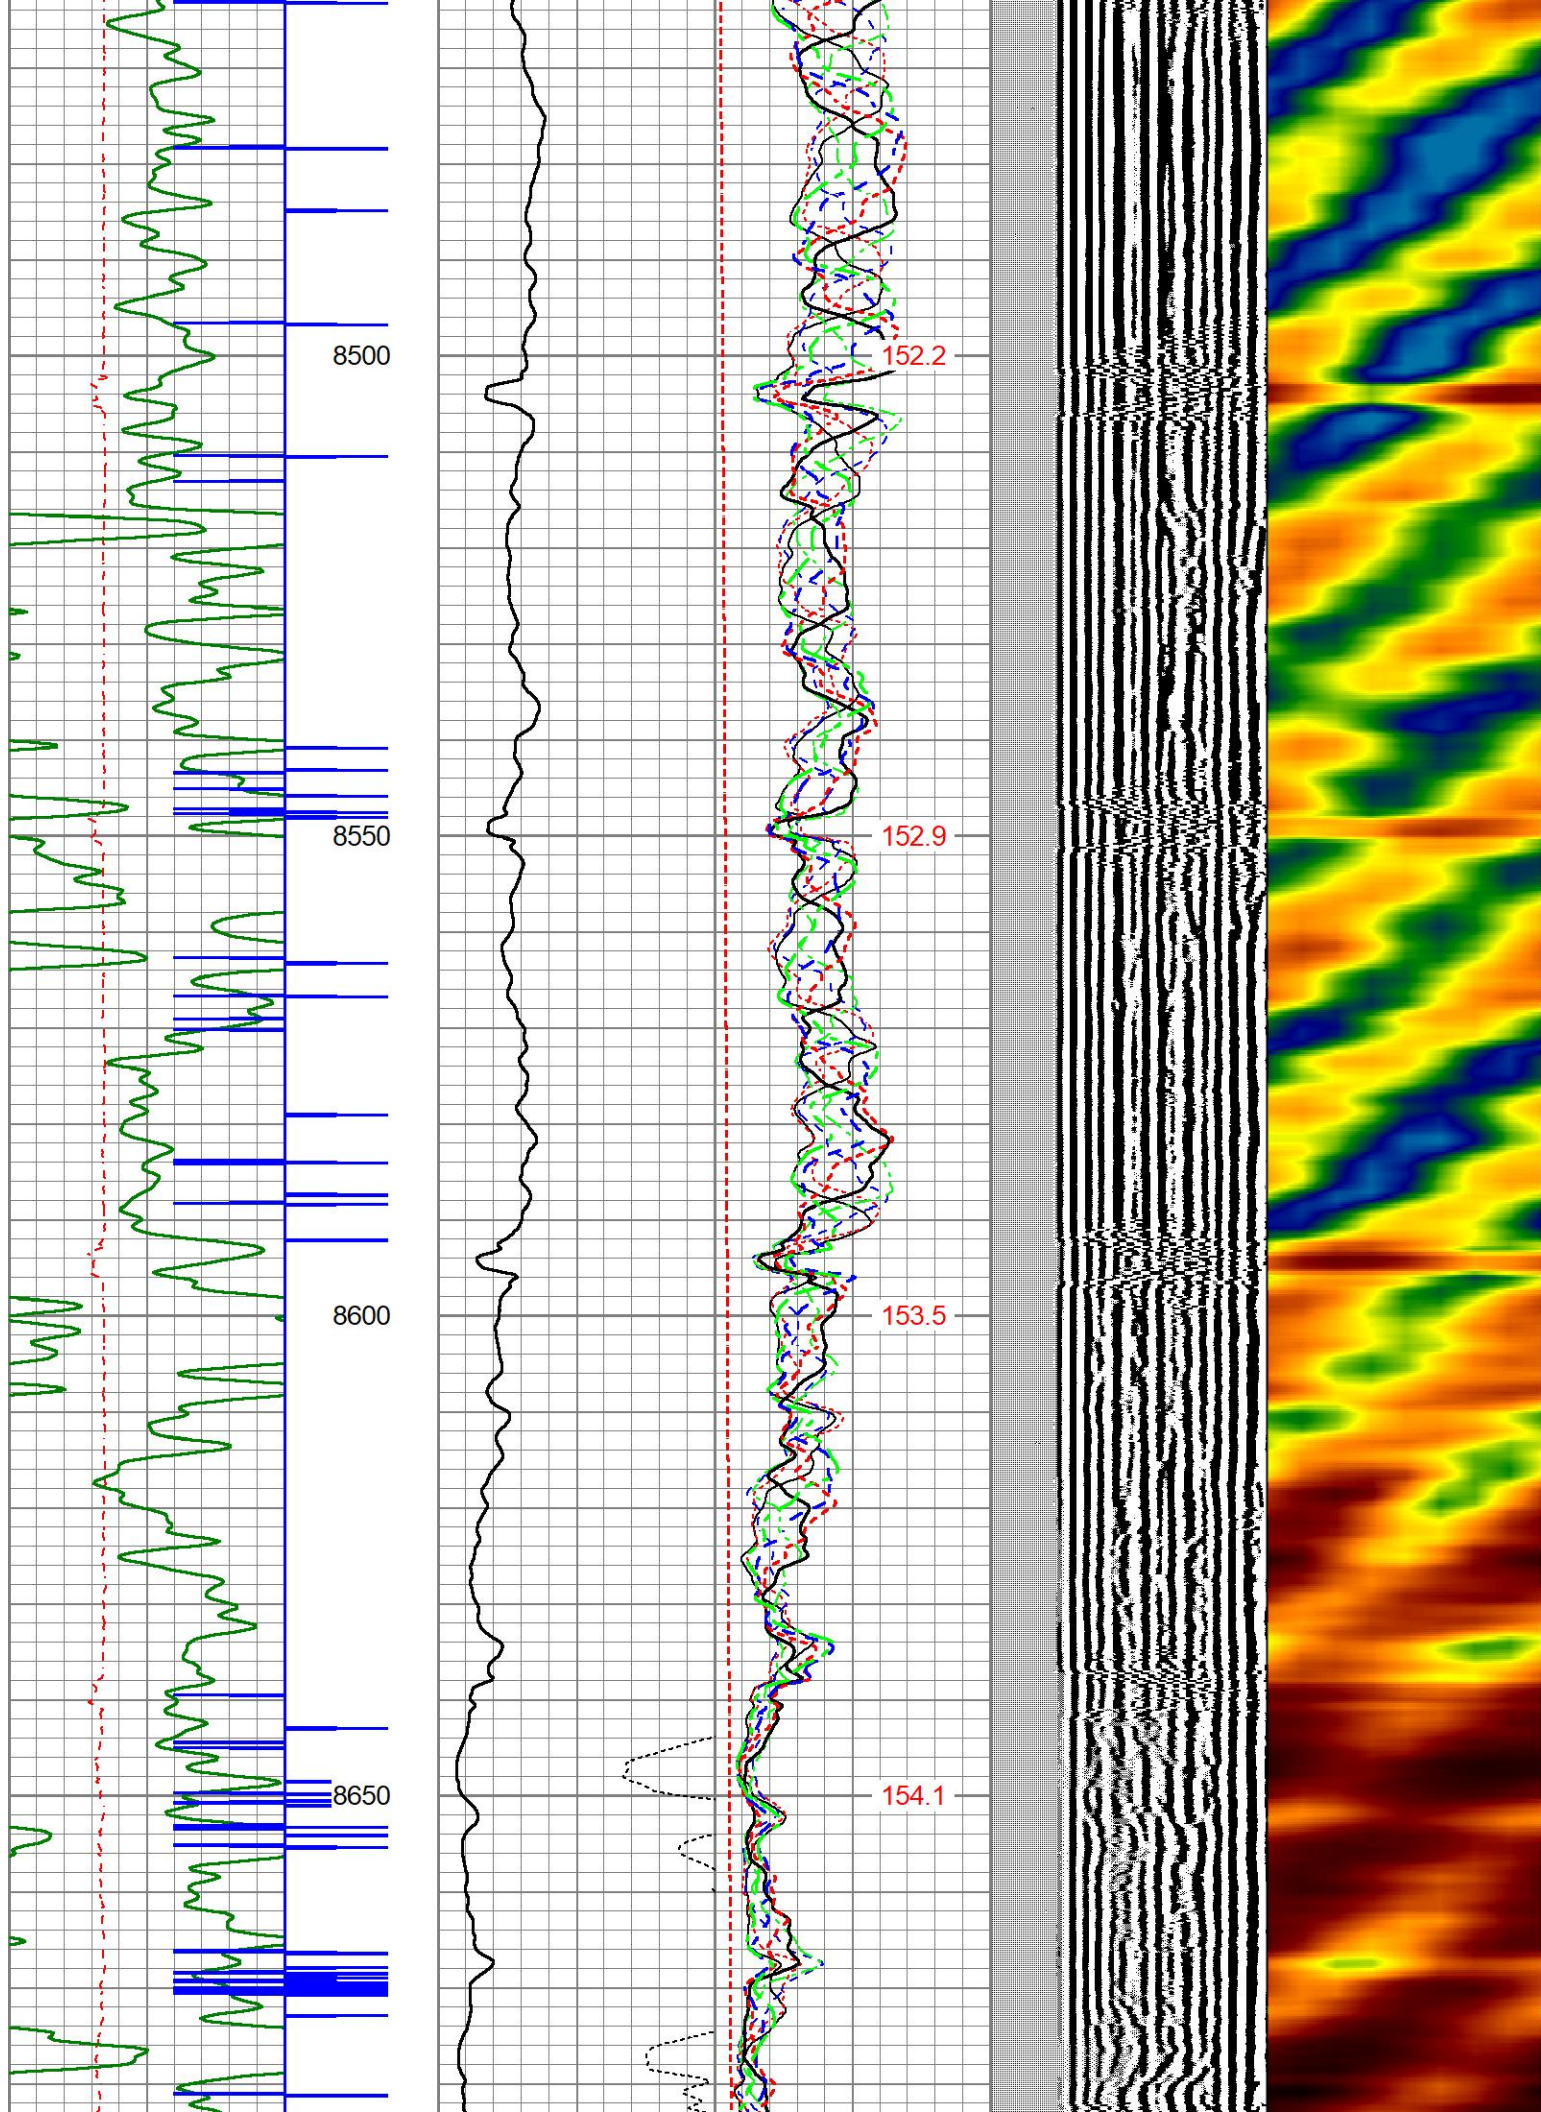

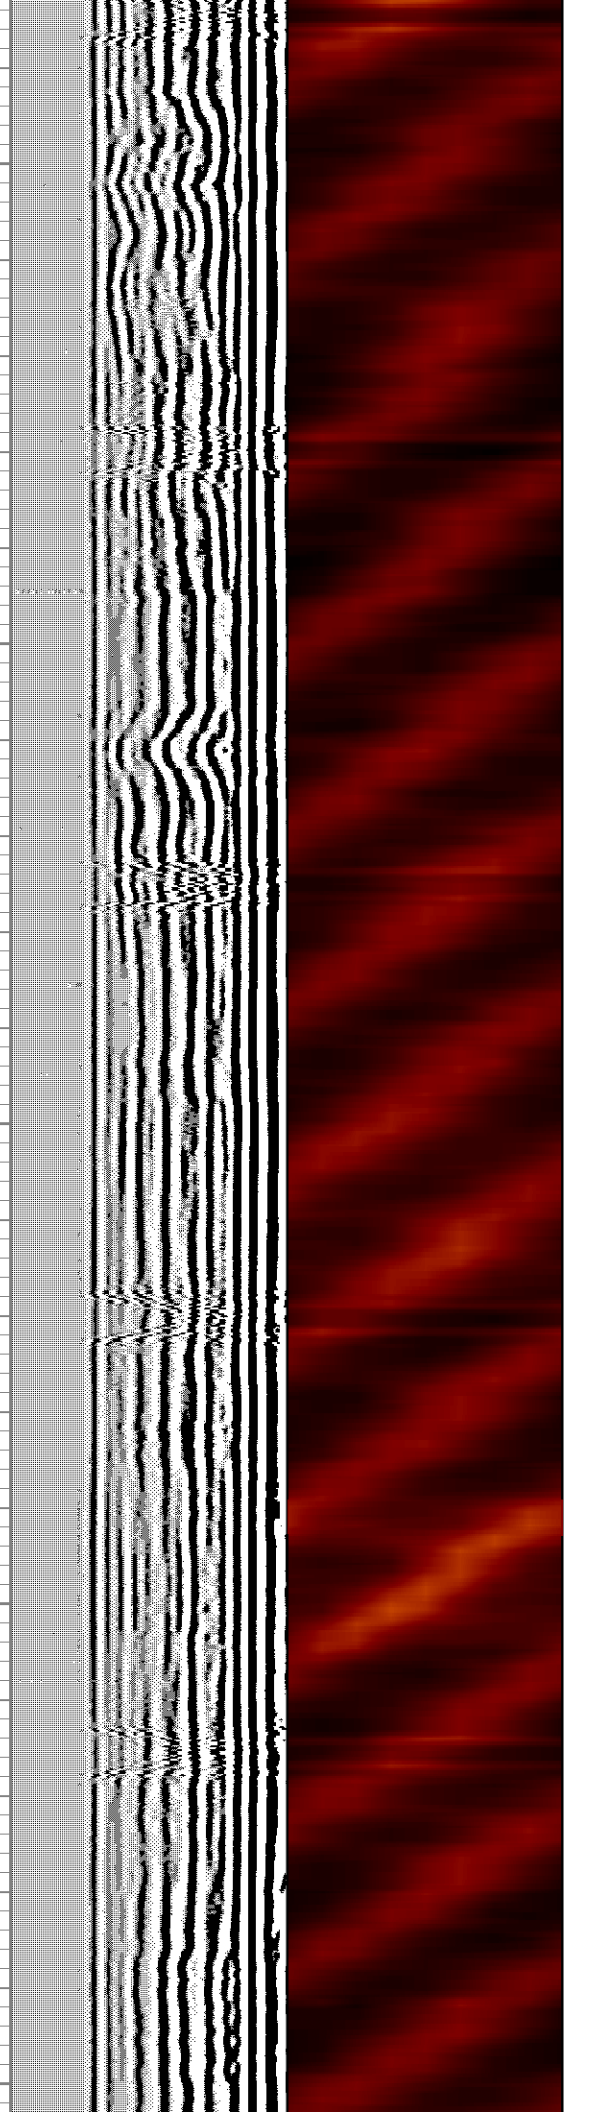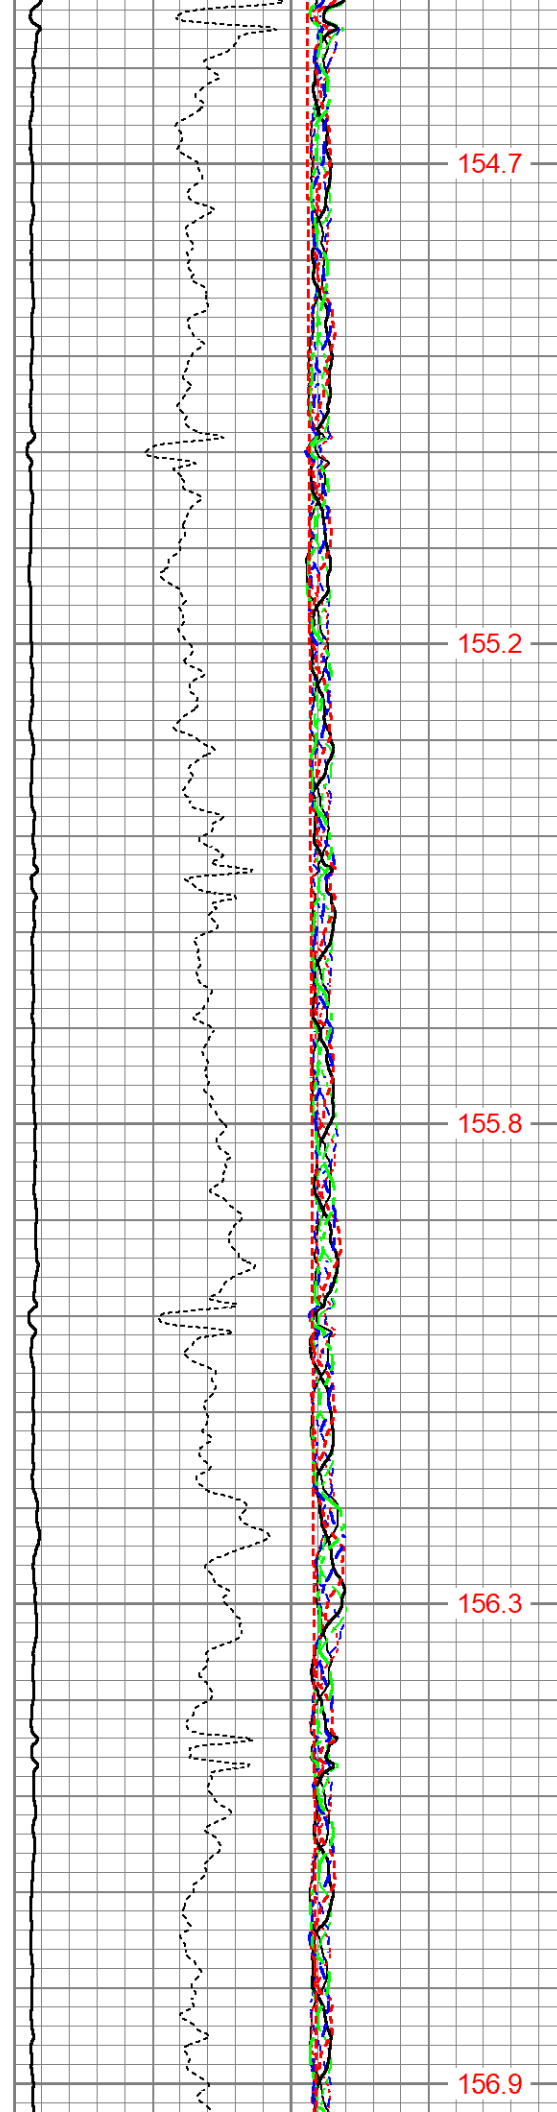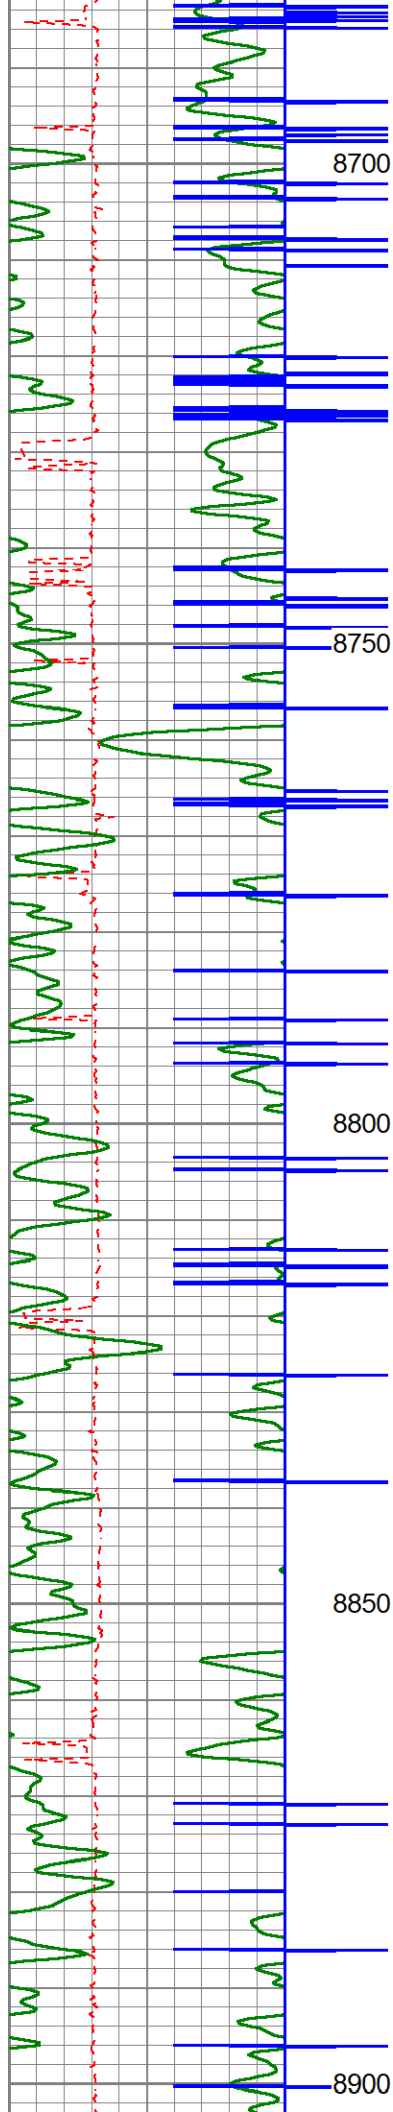

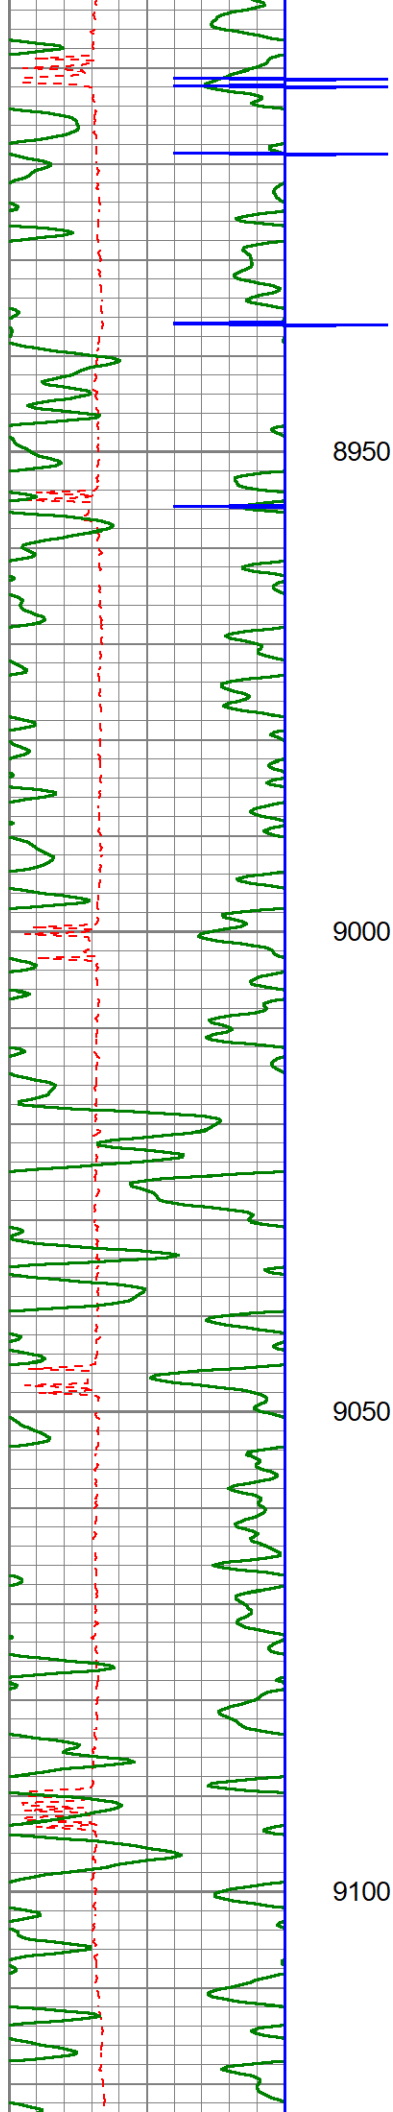


8950

9000

9050

9100

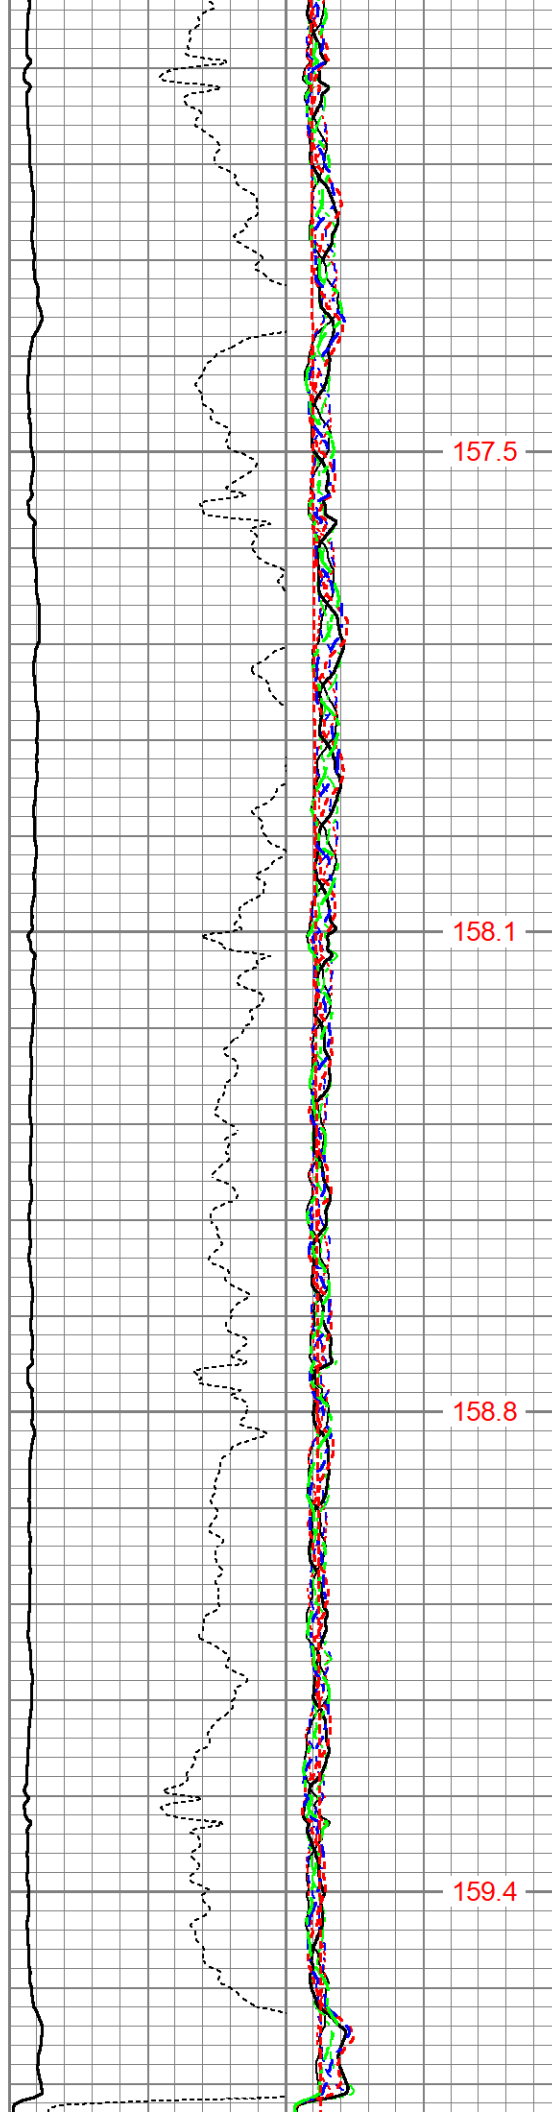



157.5


158.1




158.8




159.4

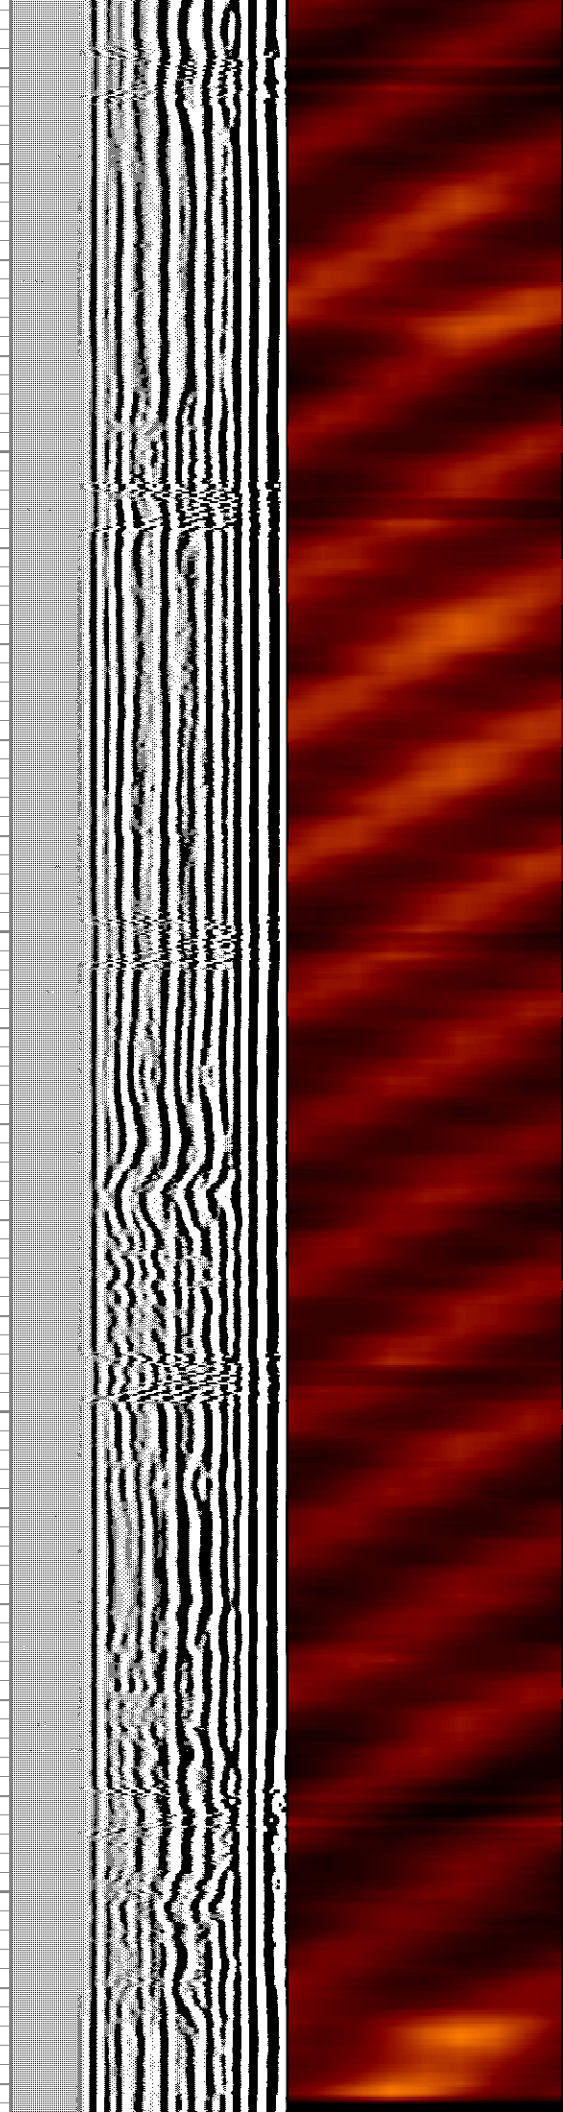




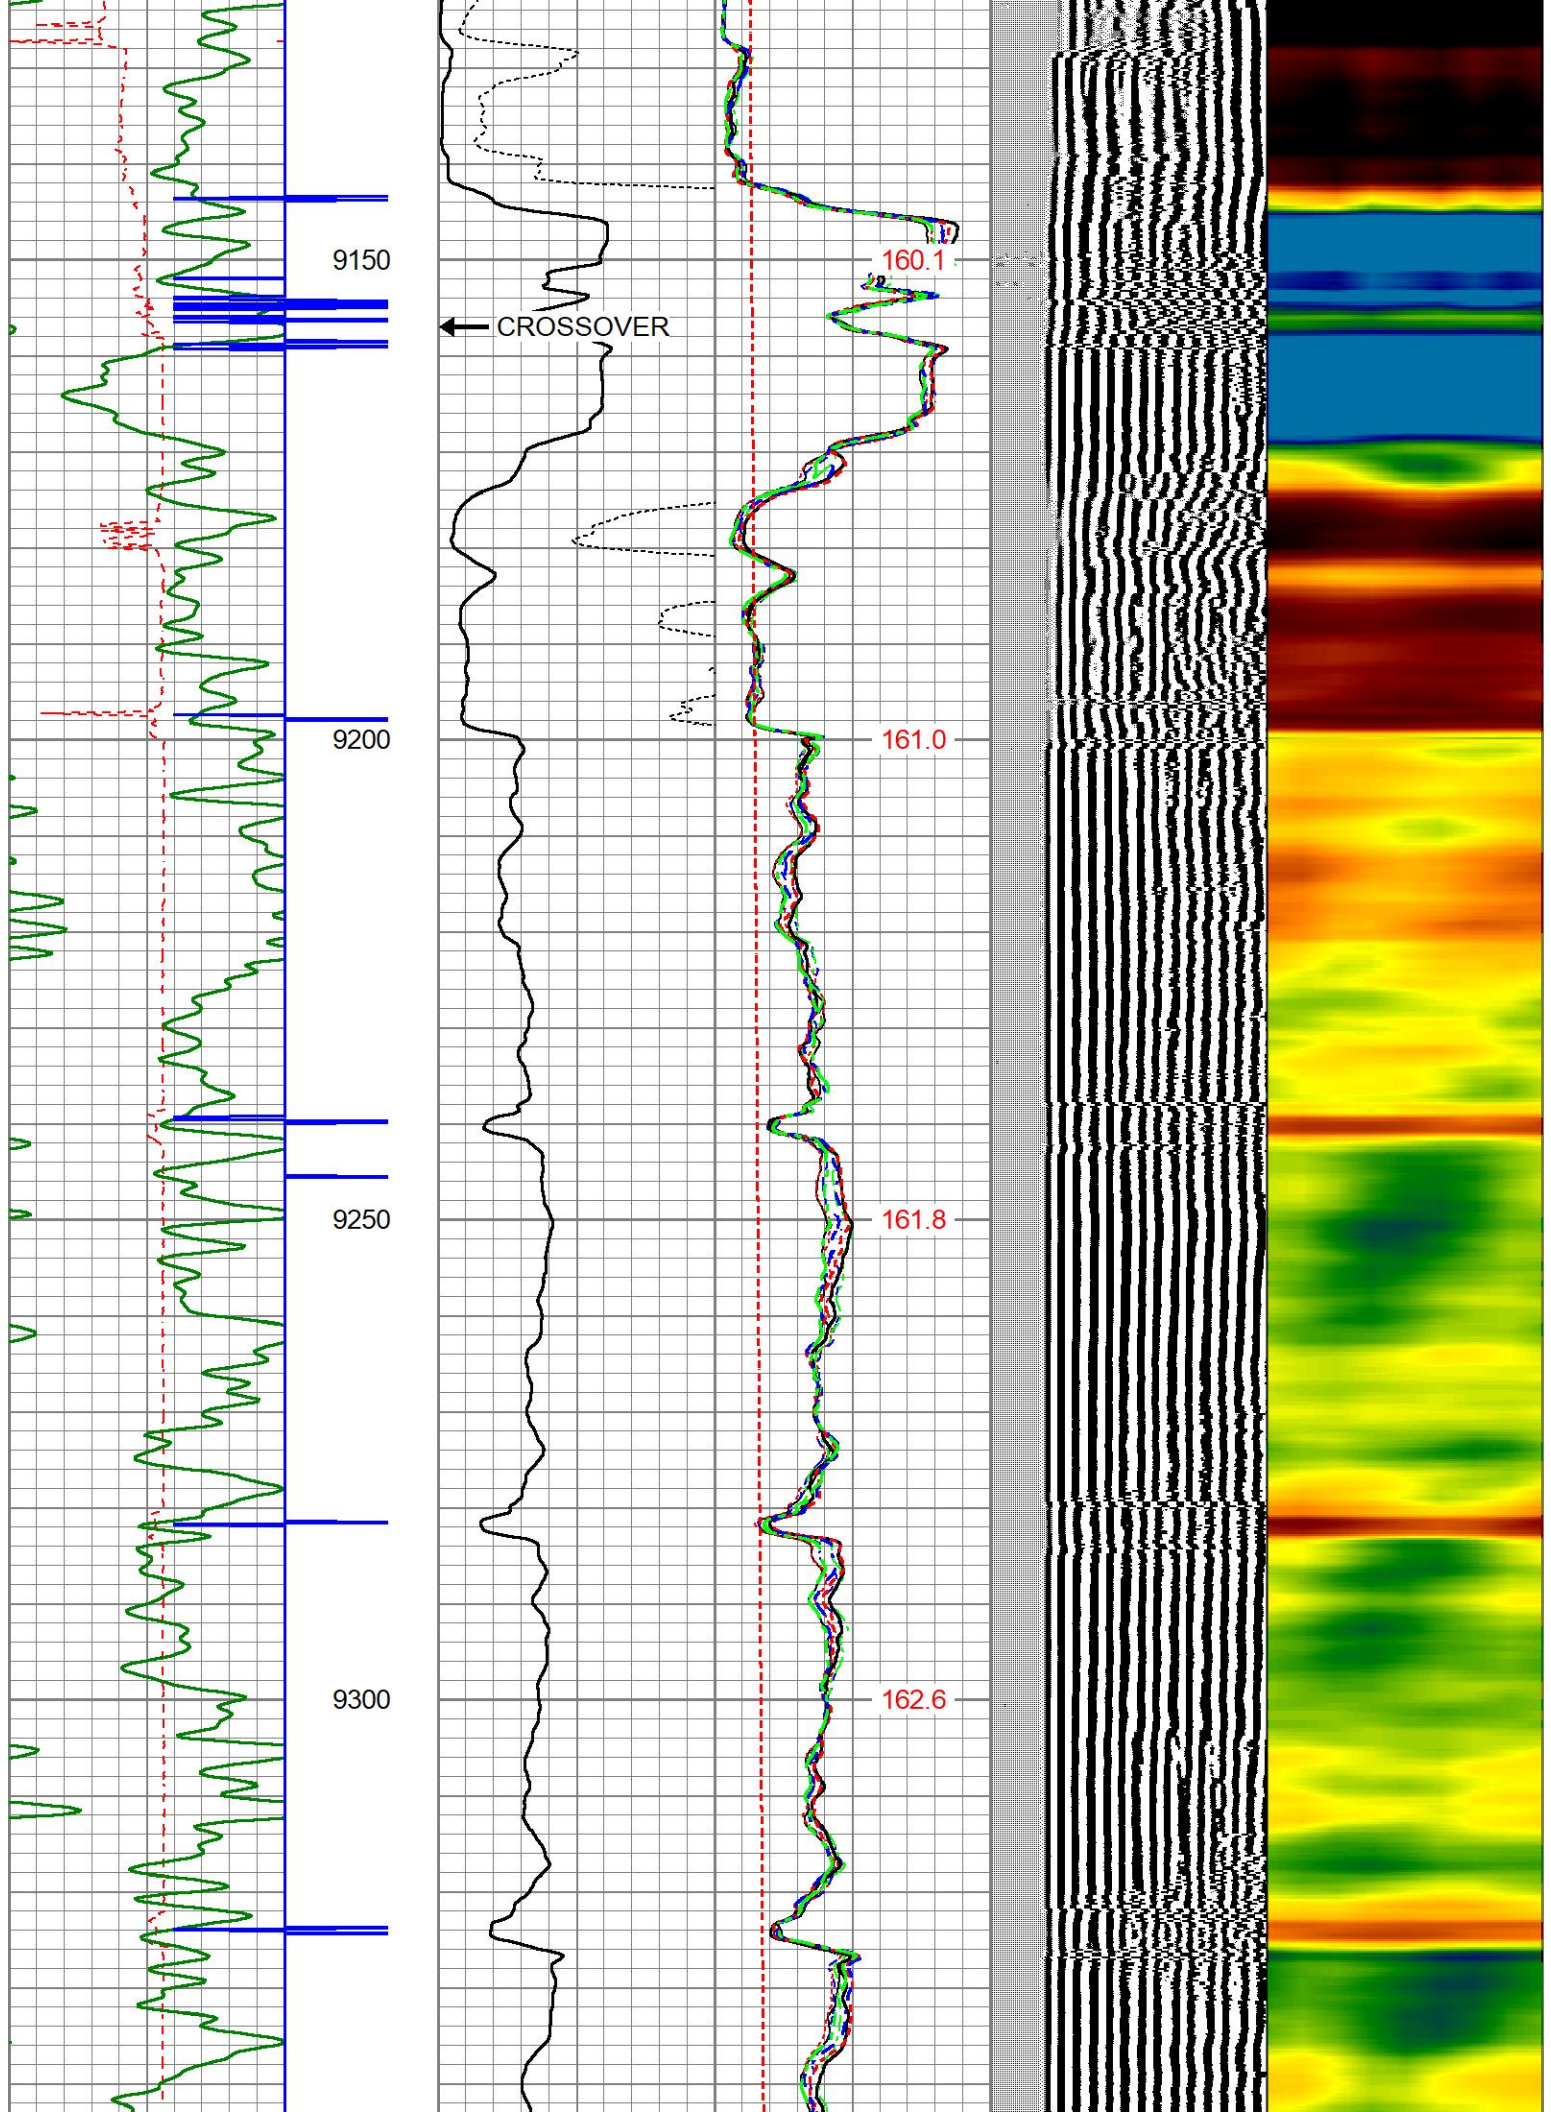


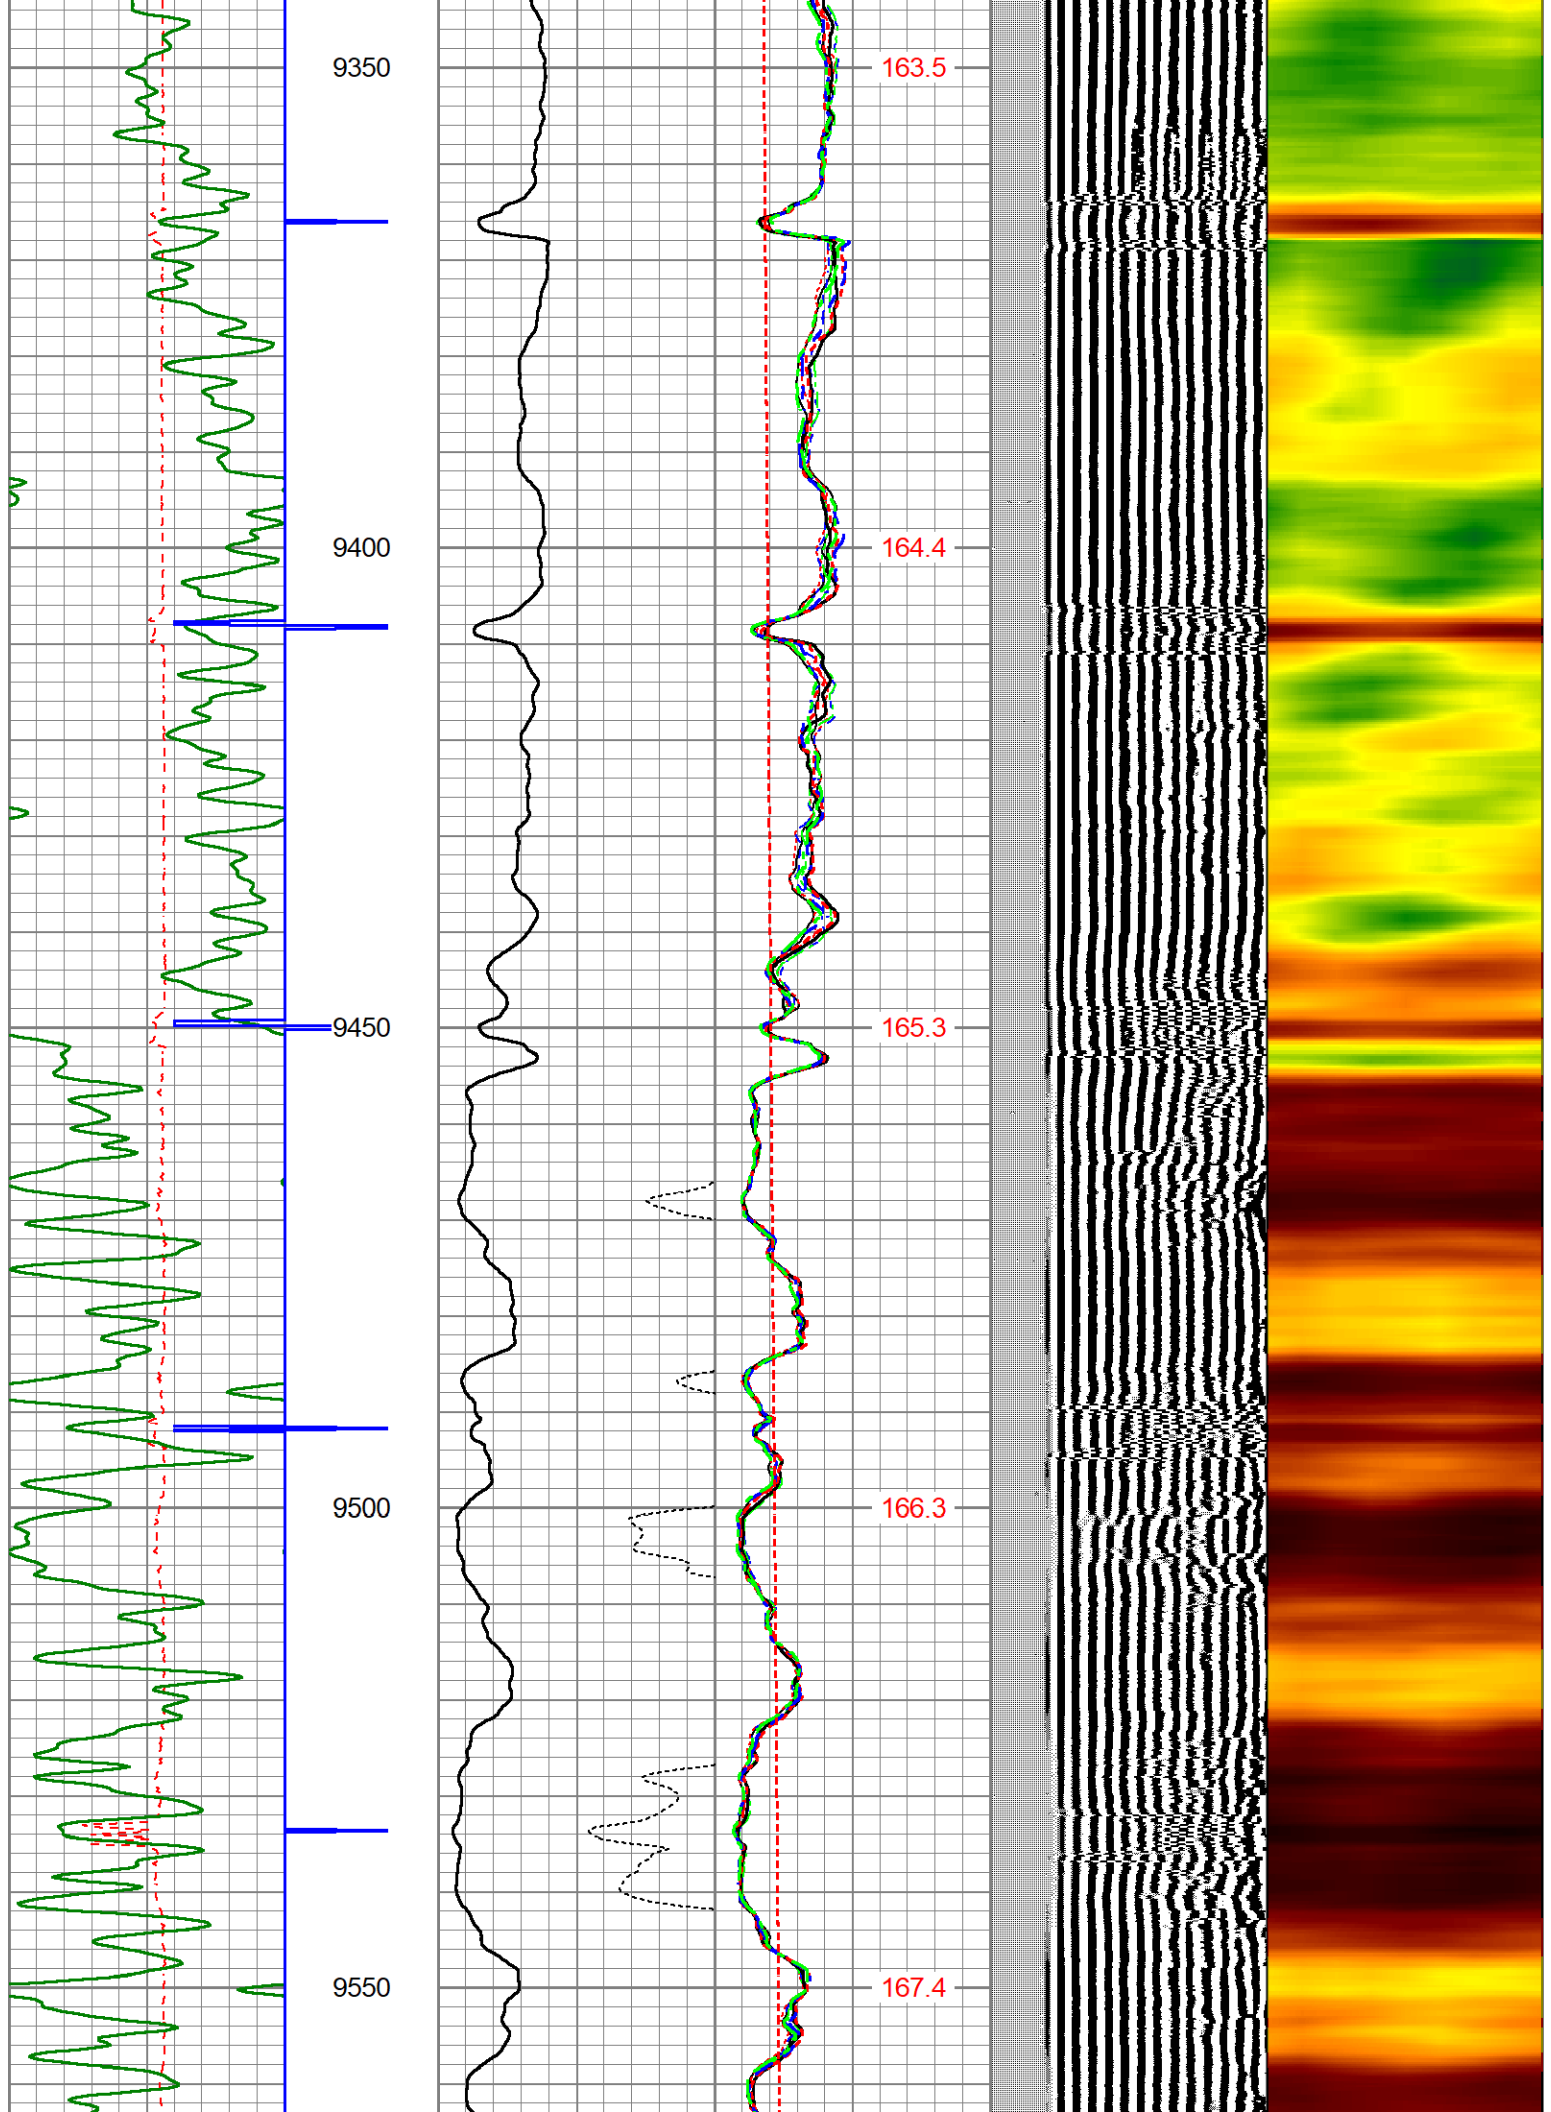


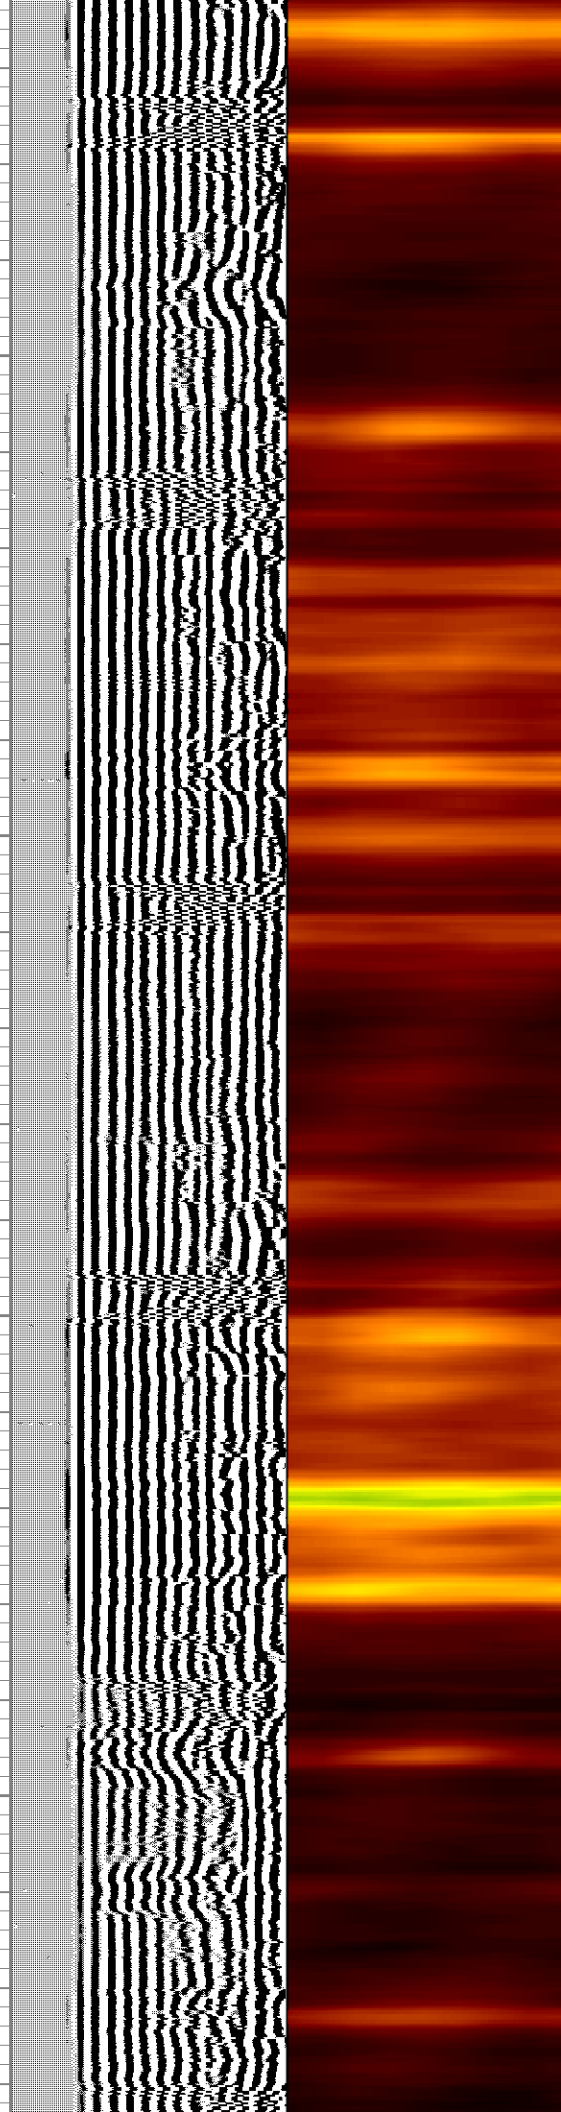
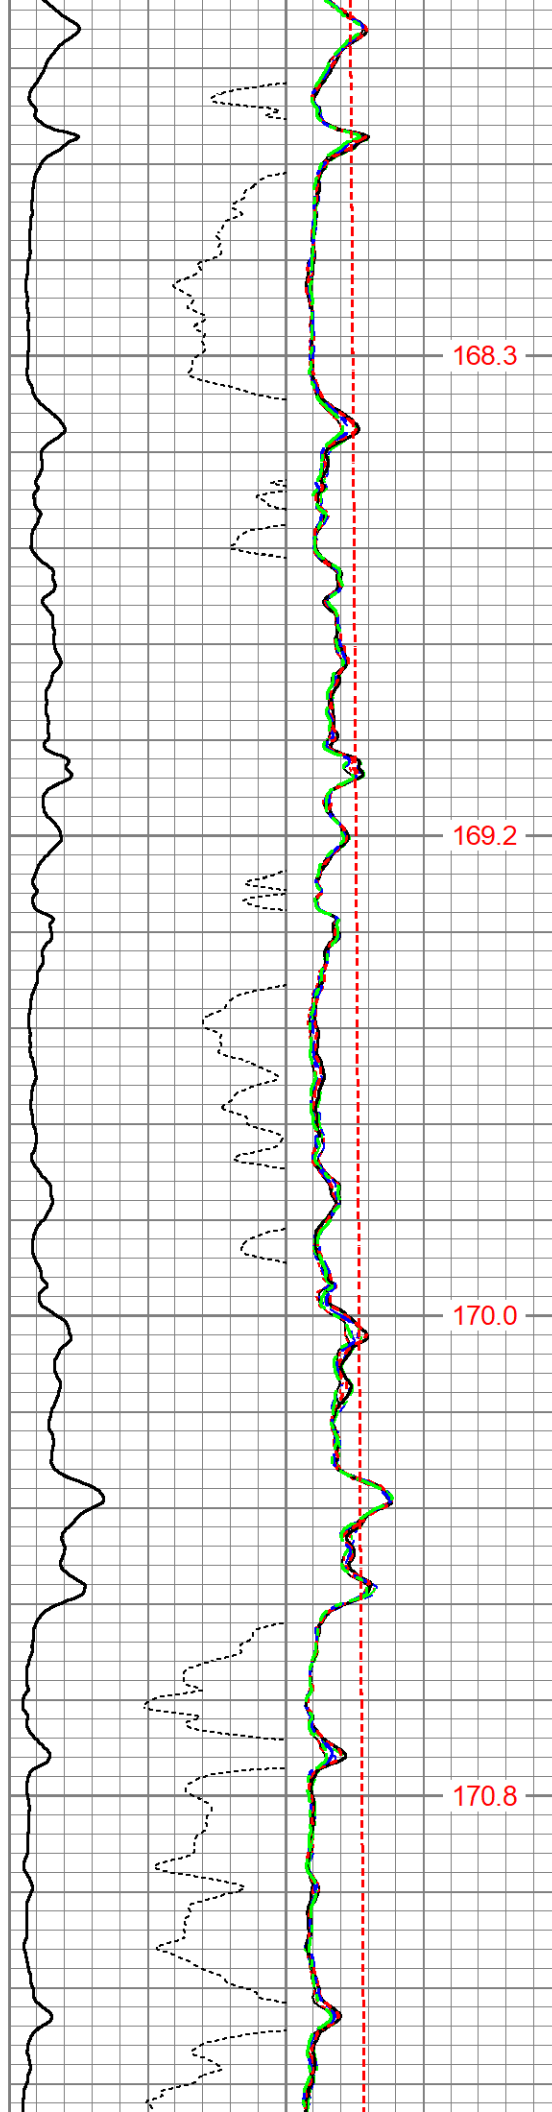
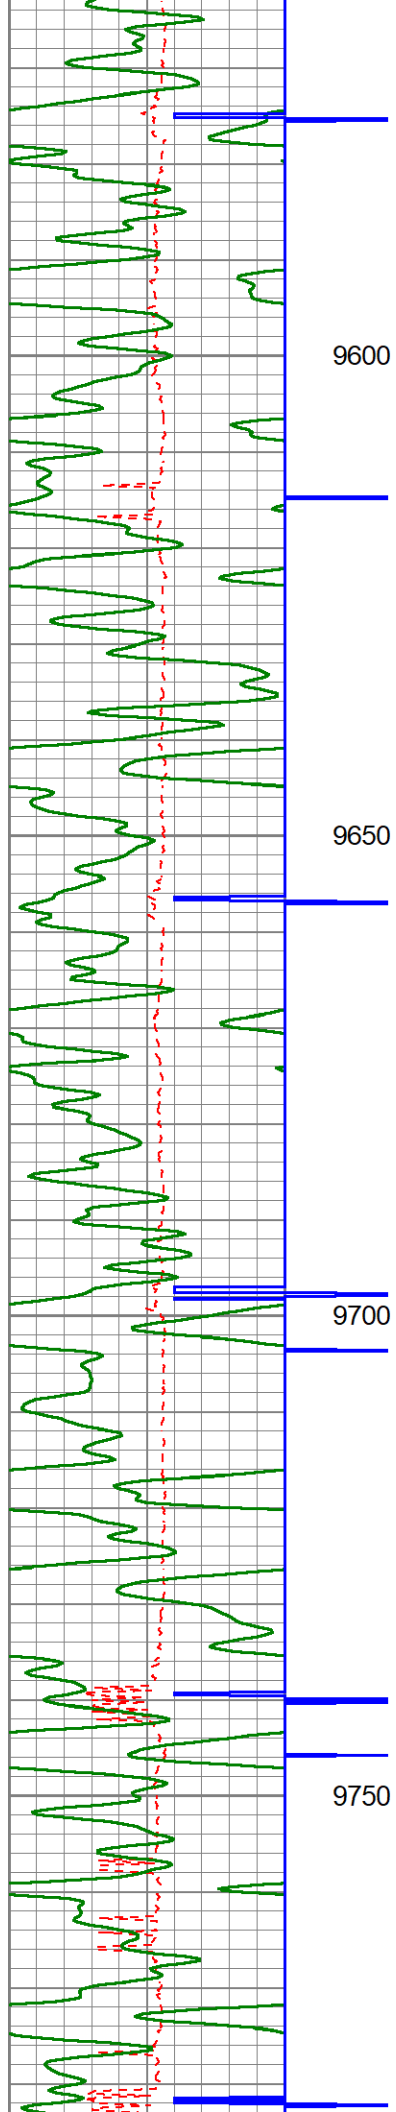


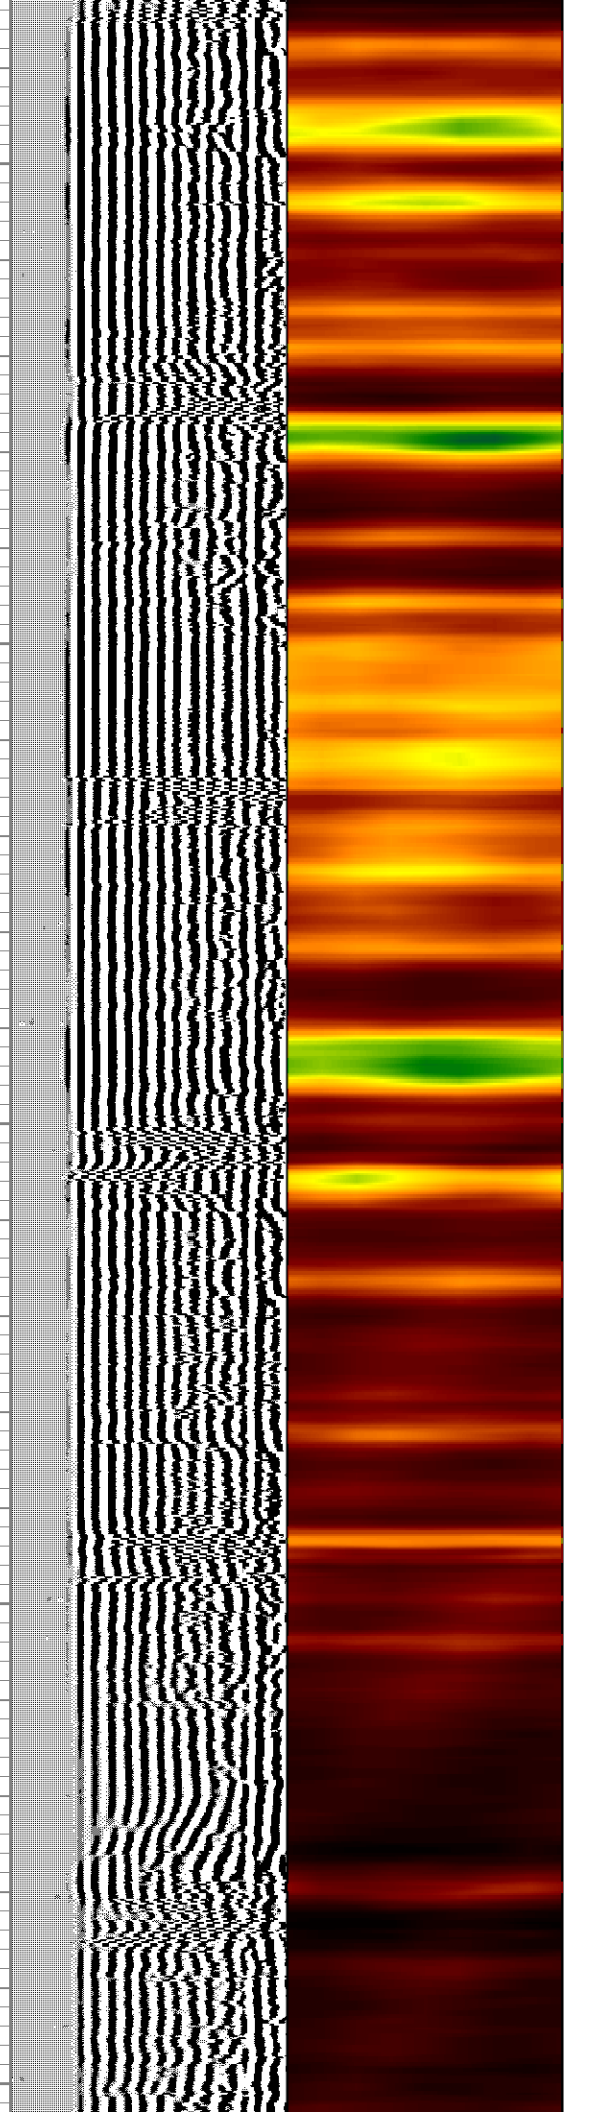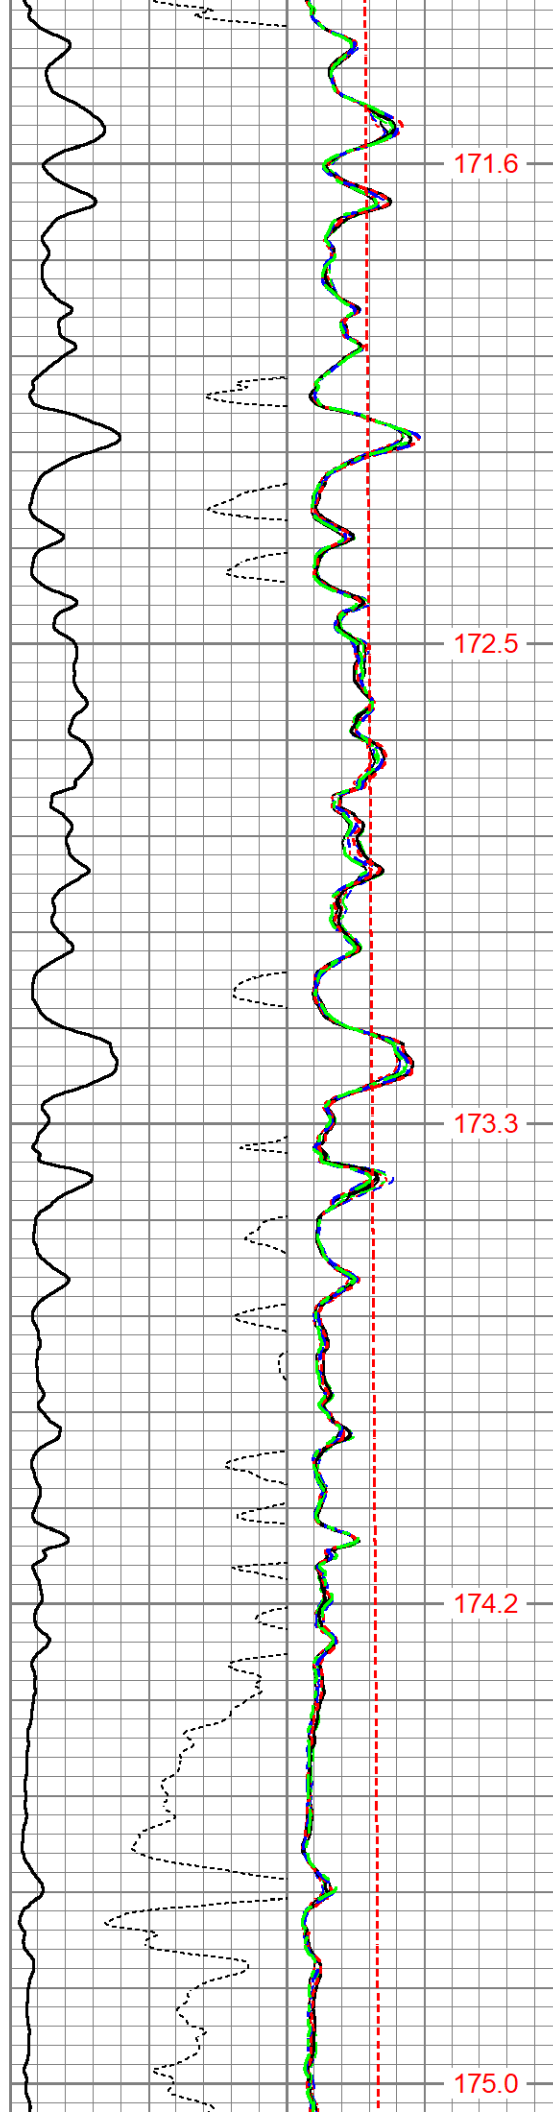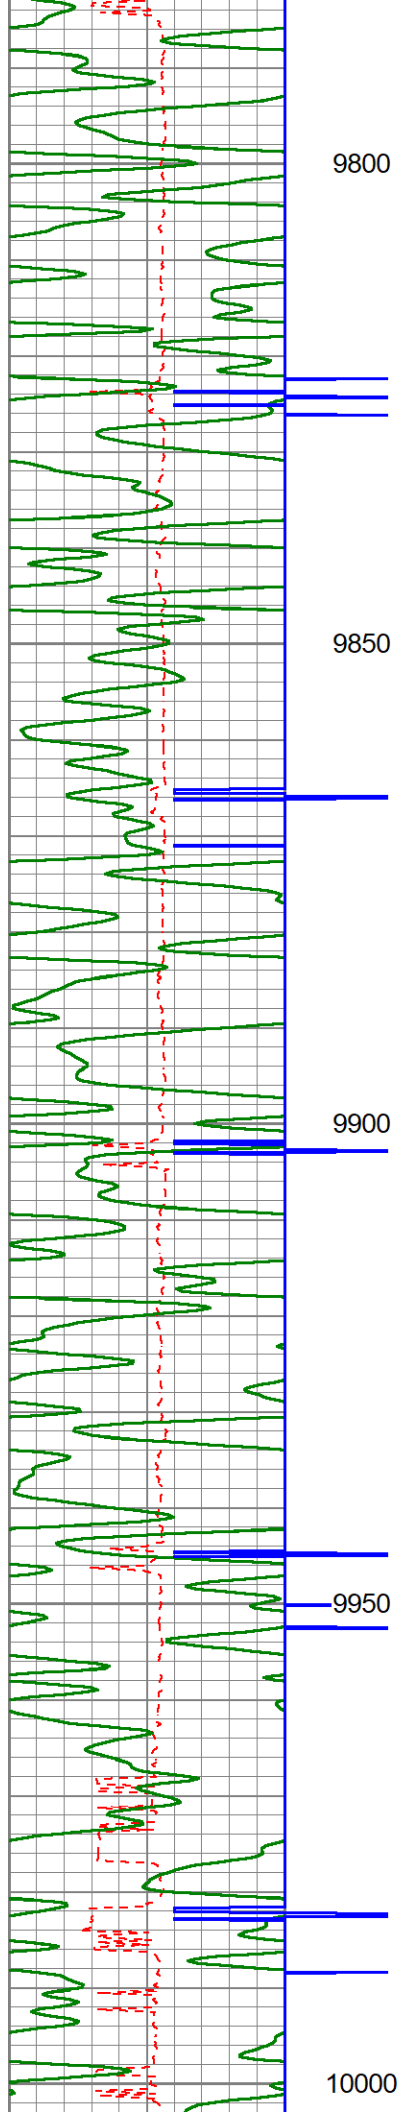


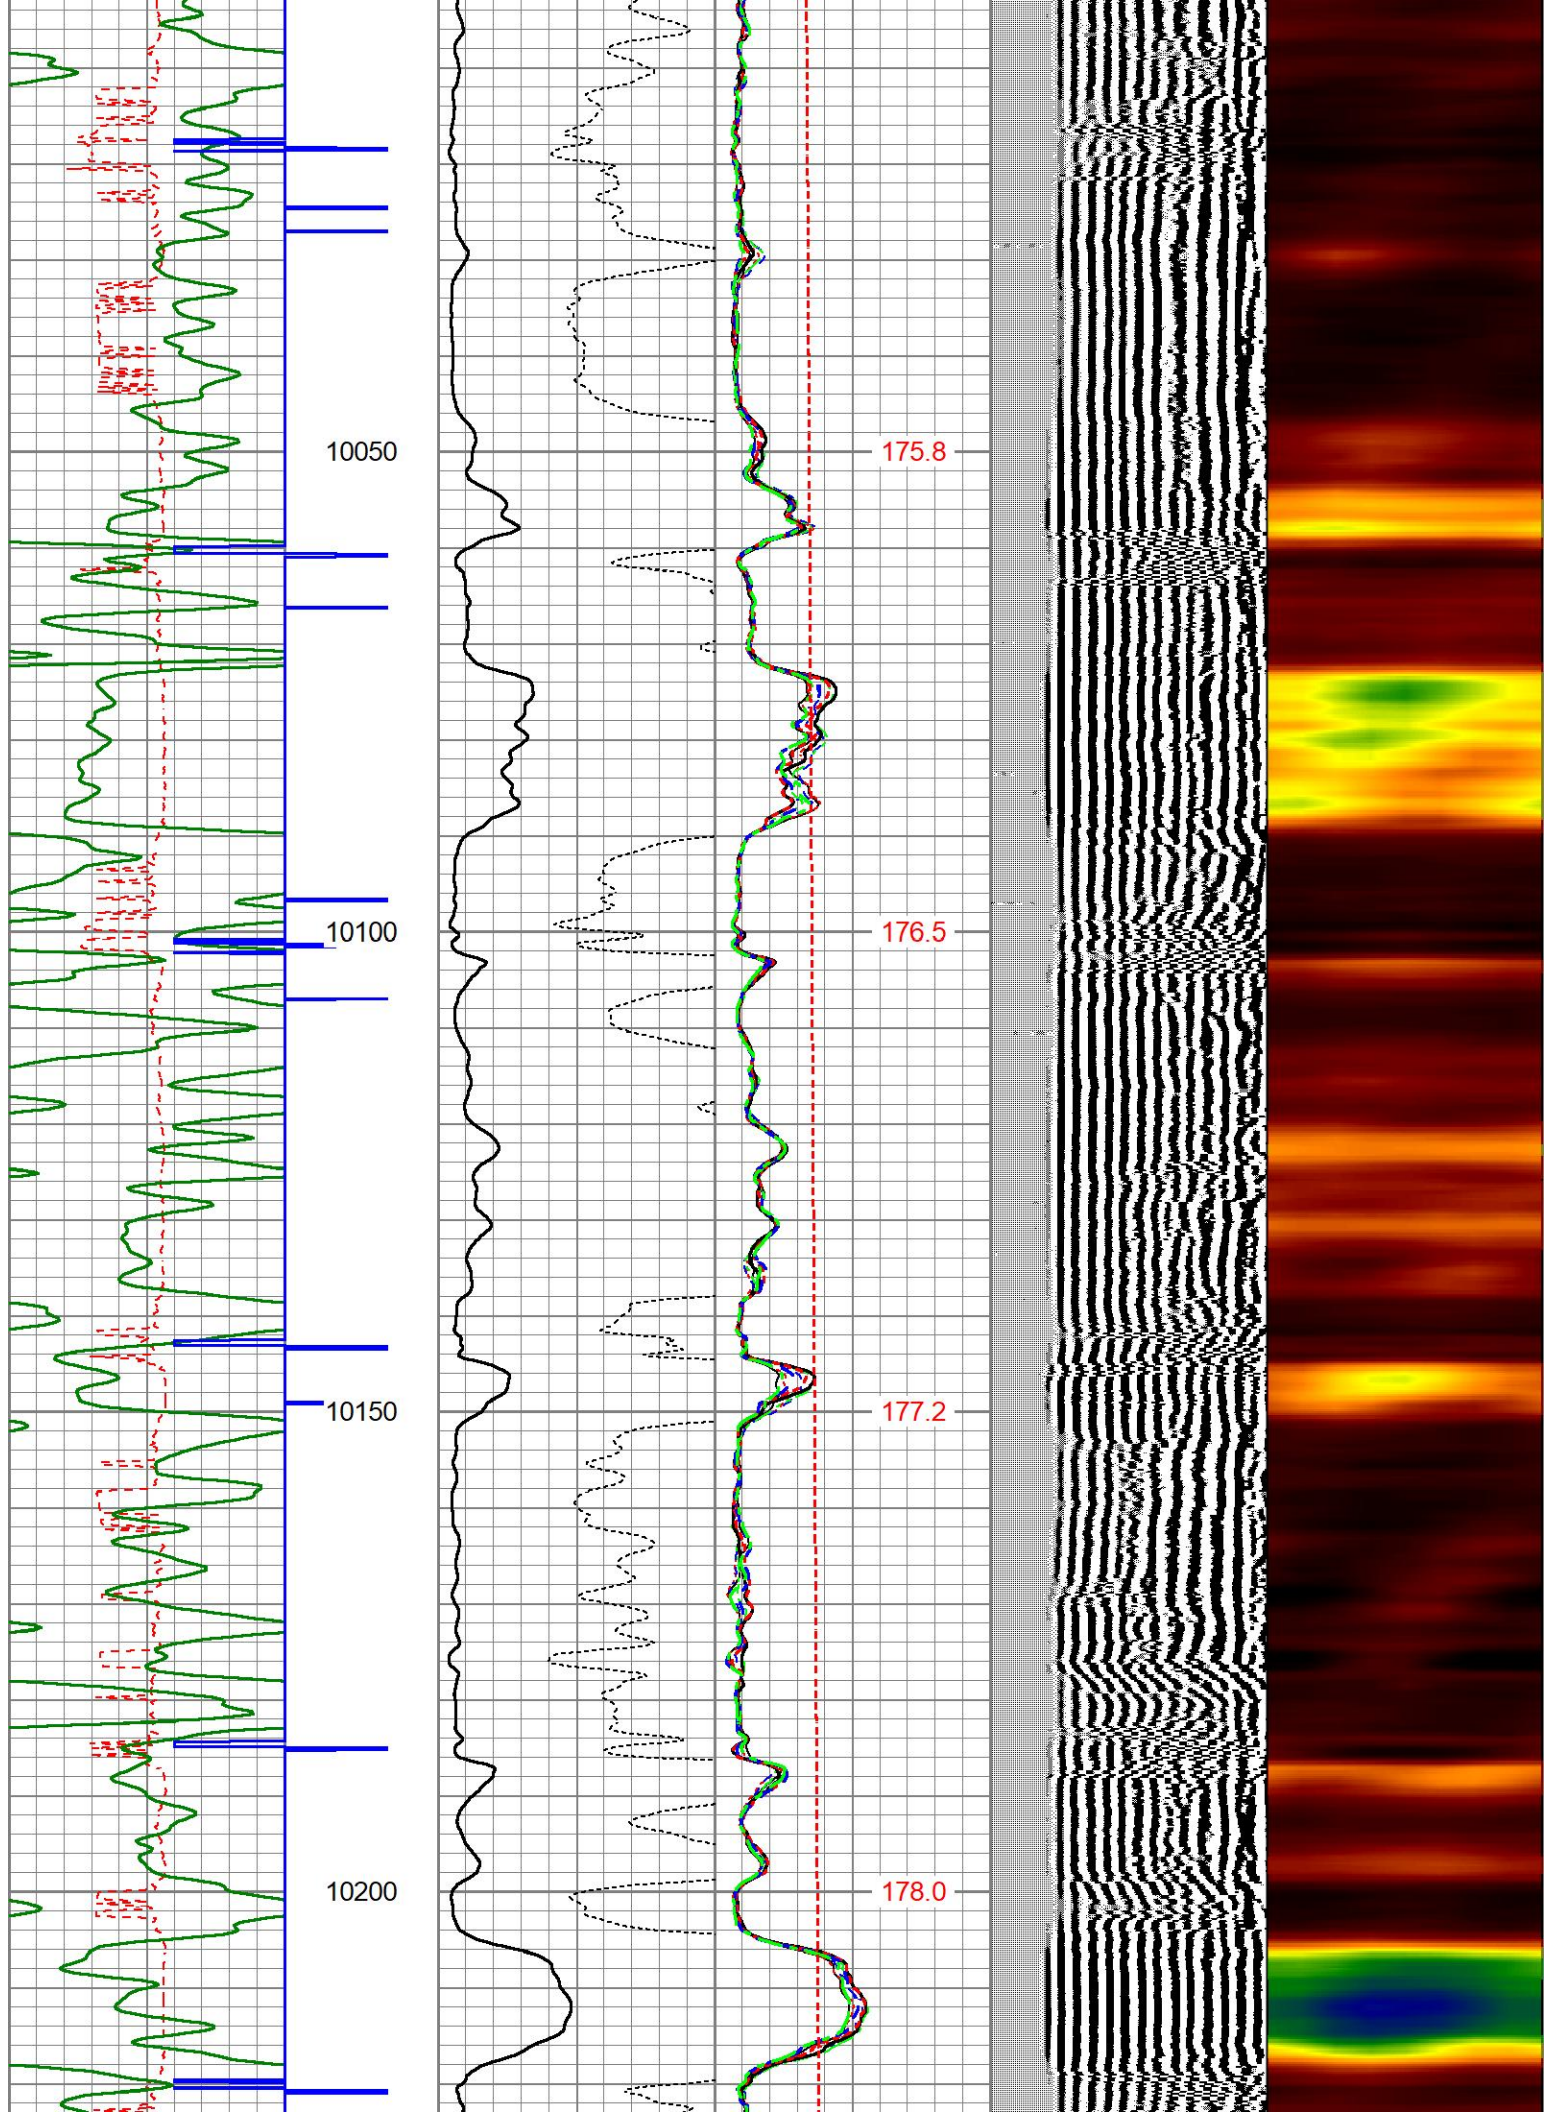


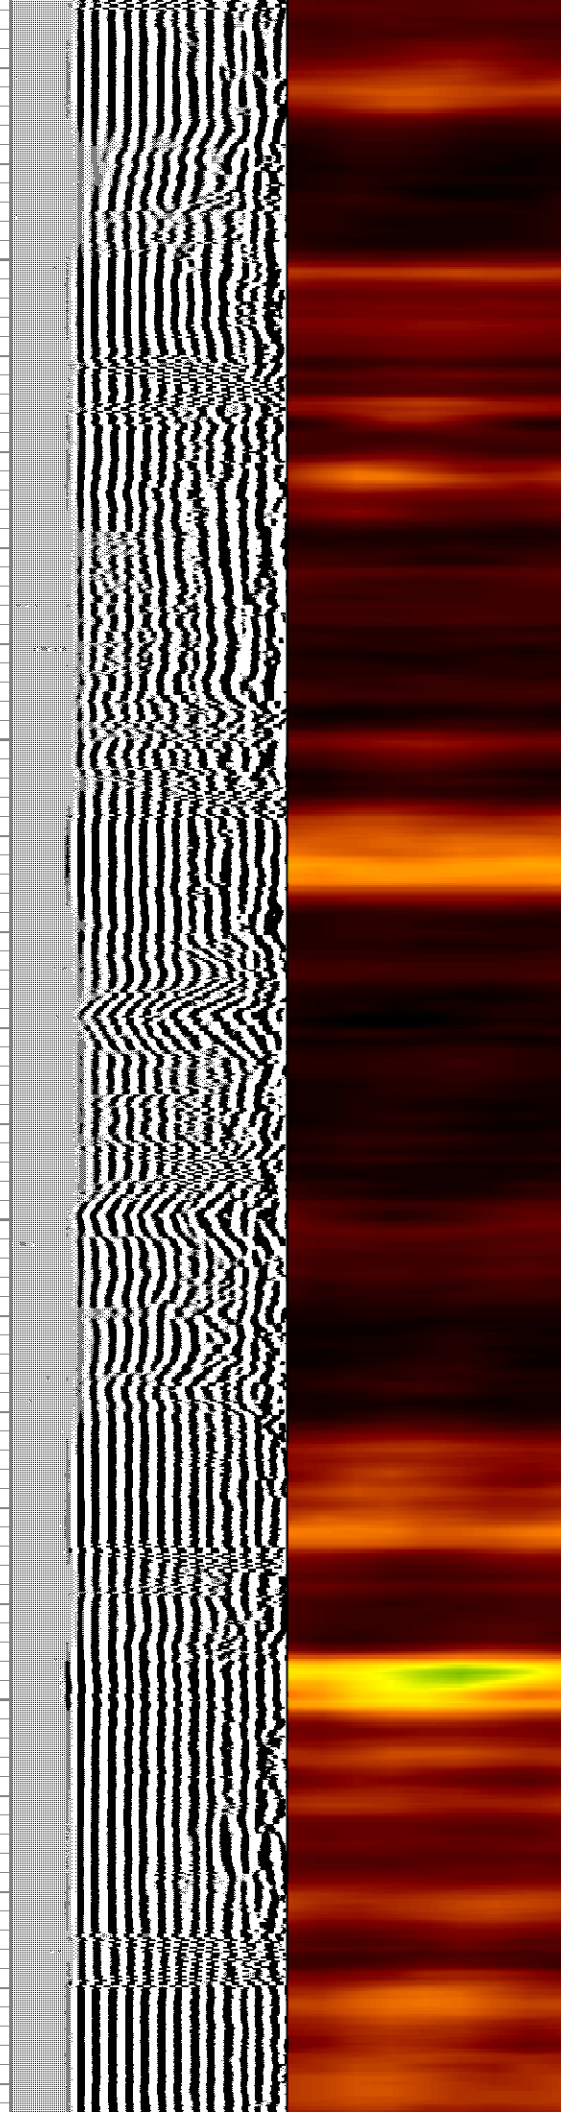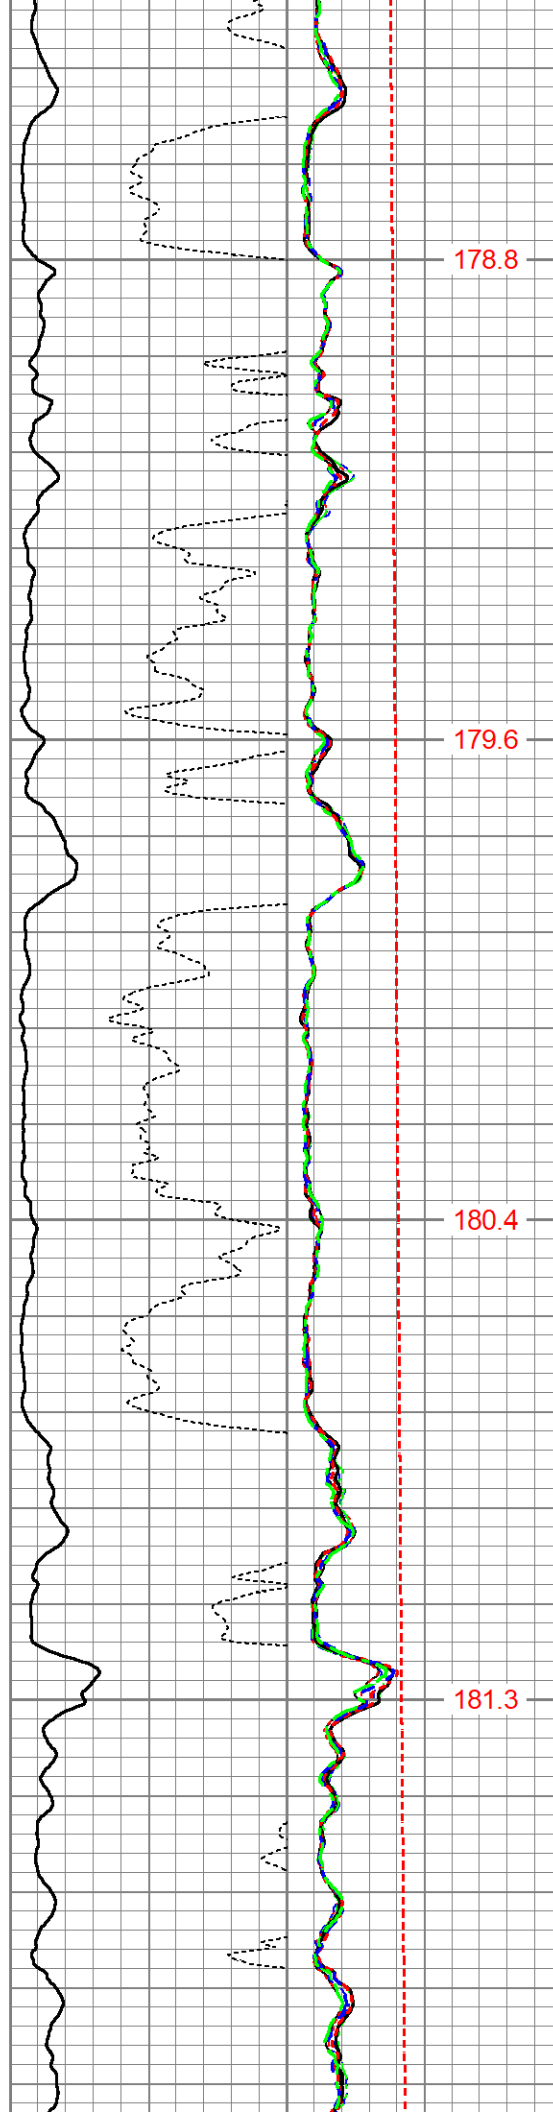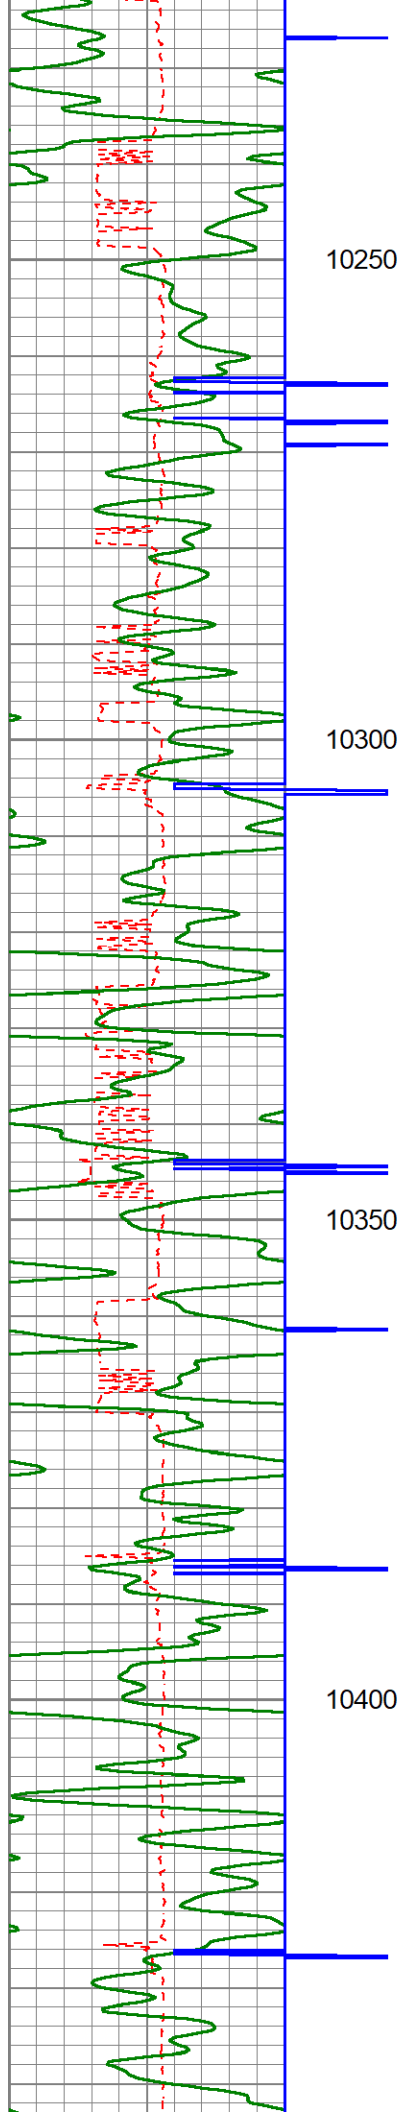


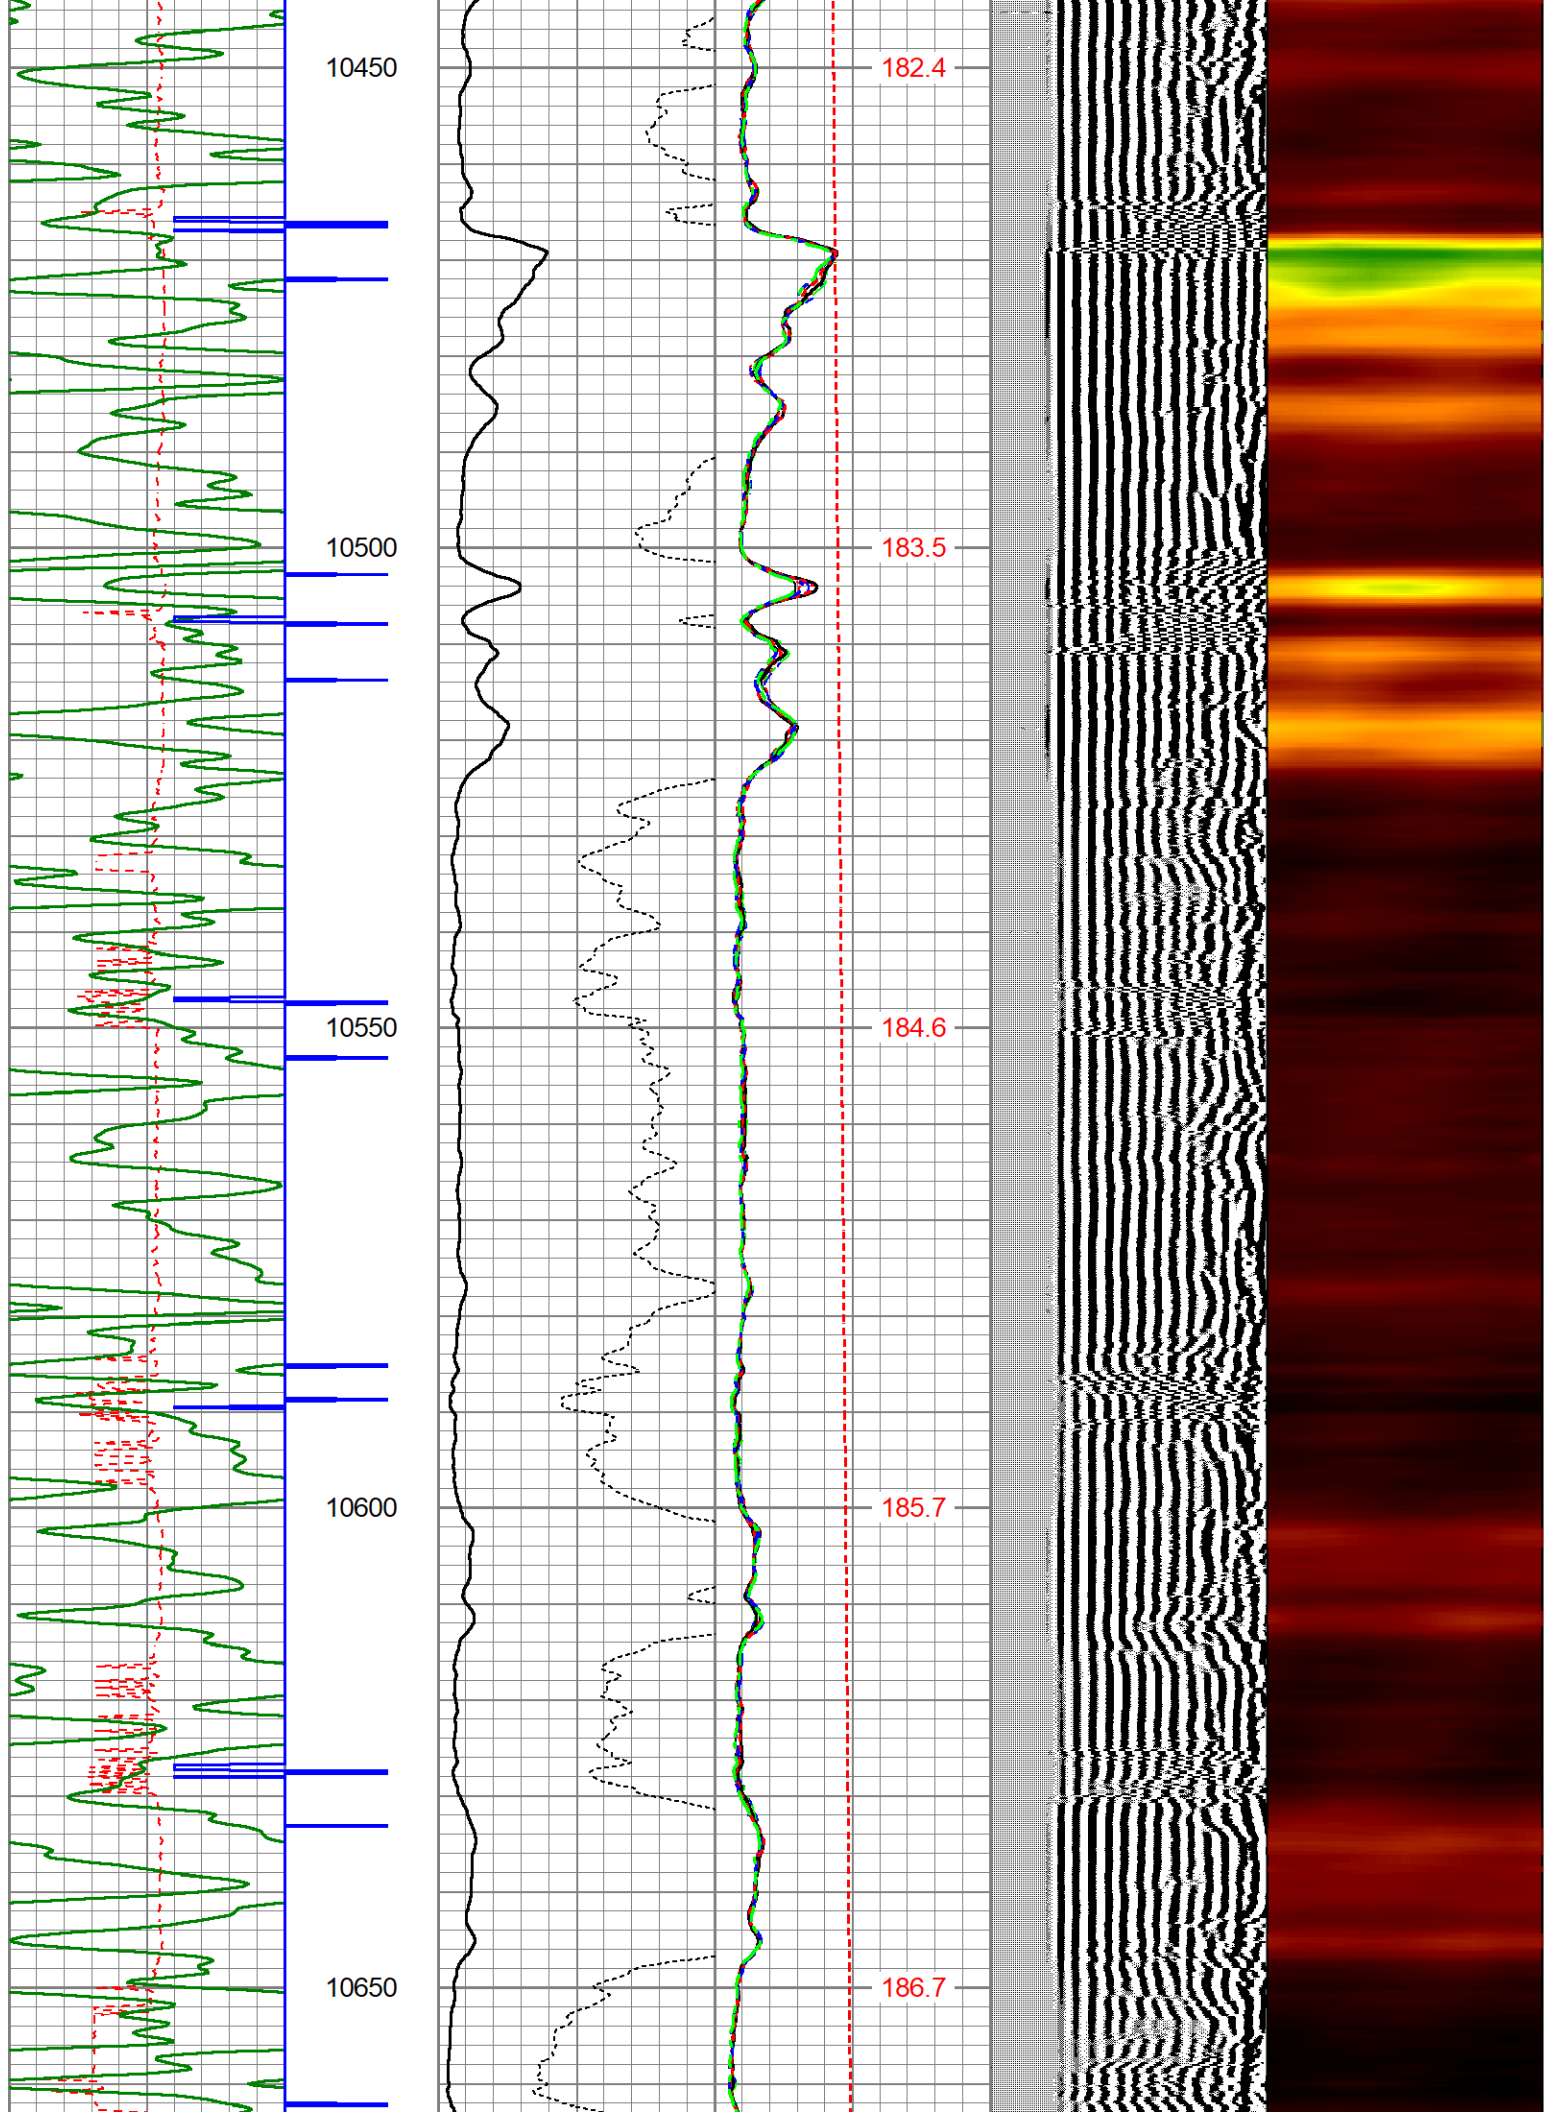


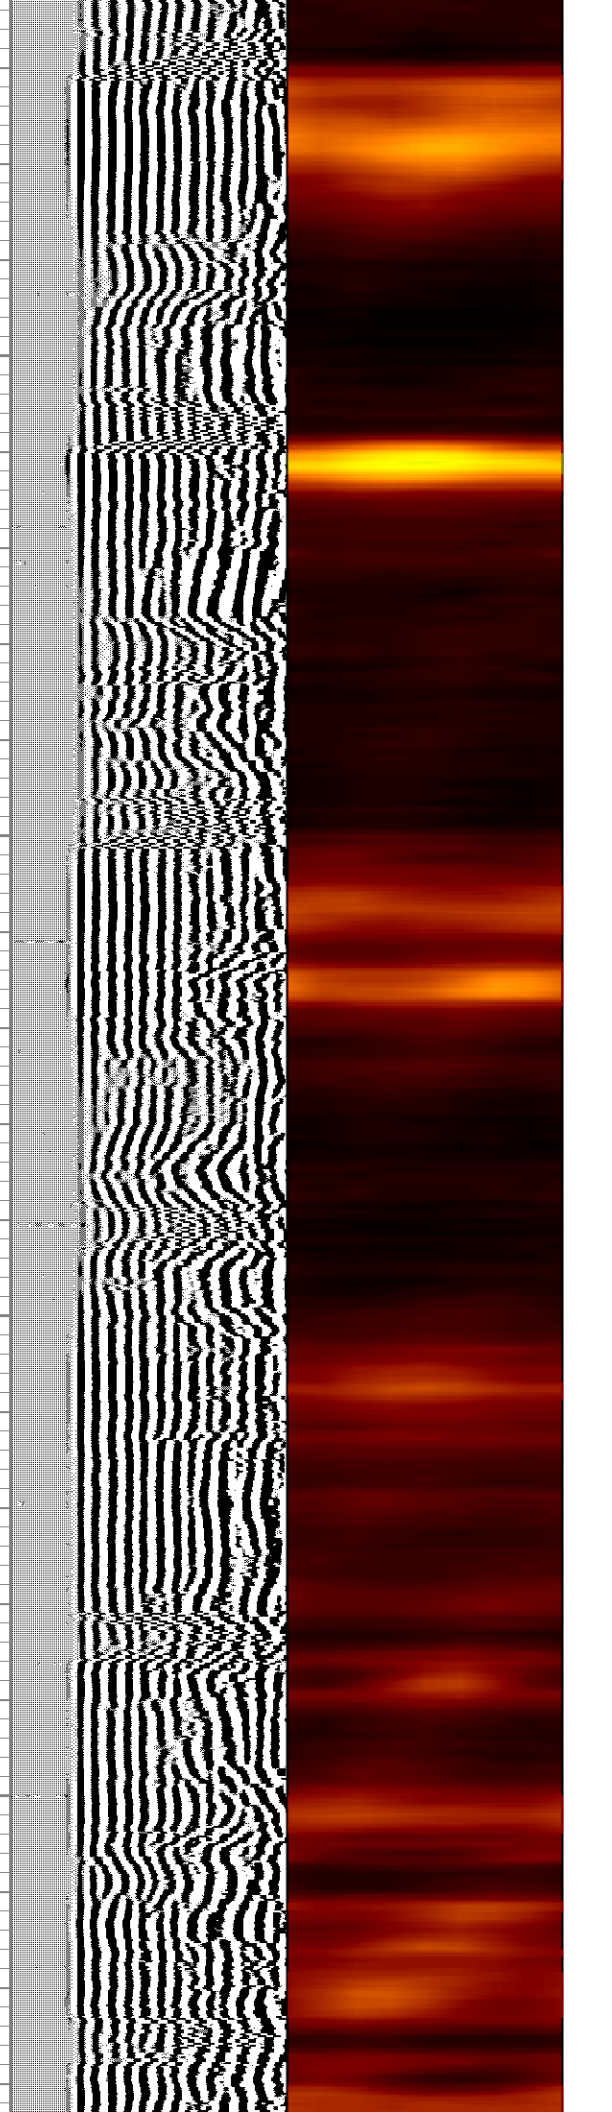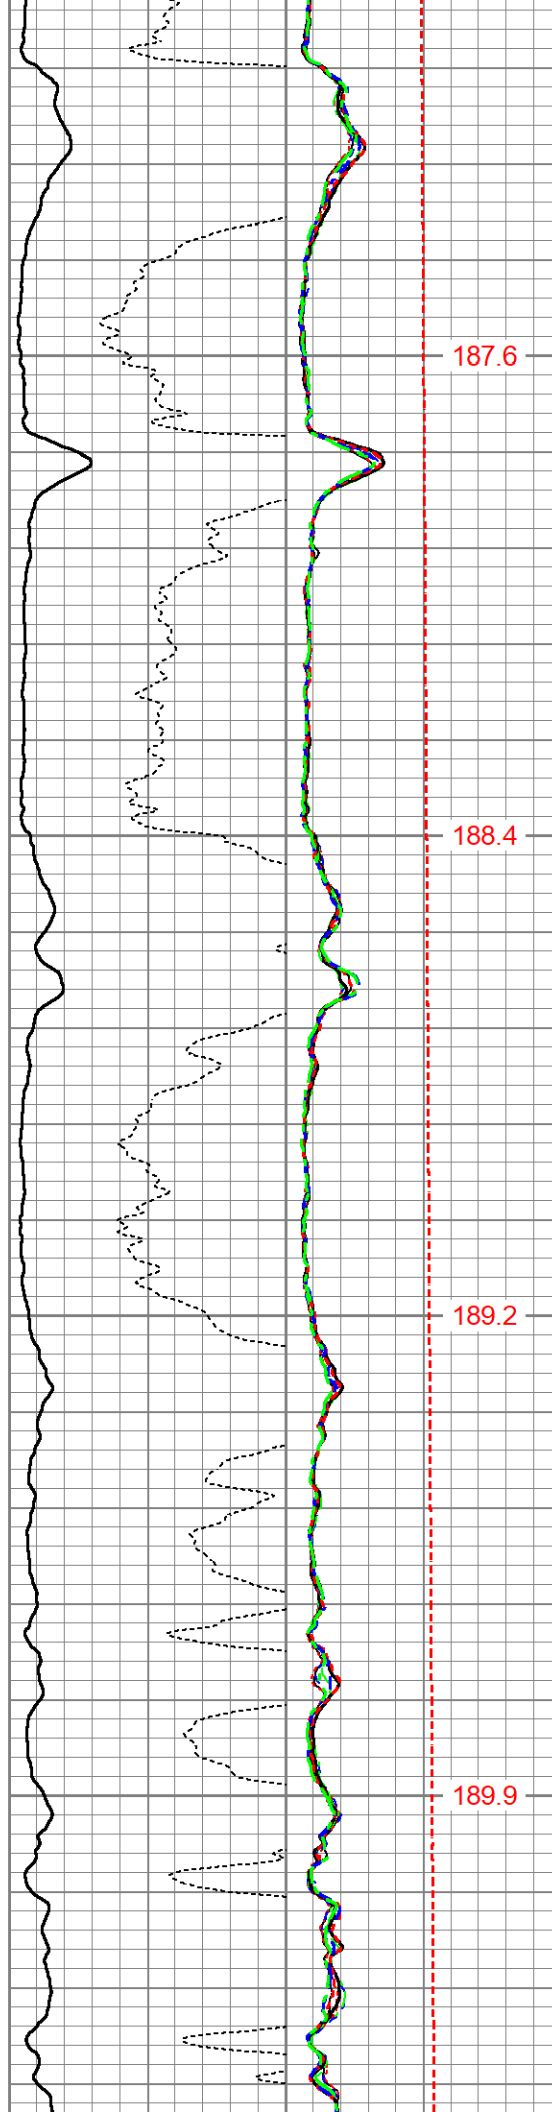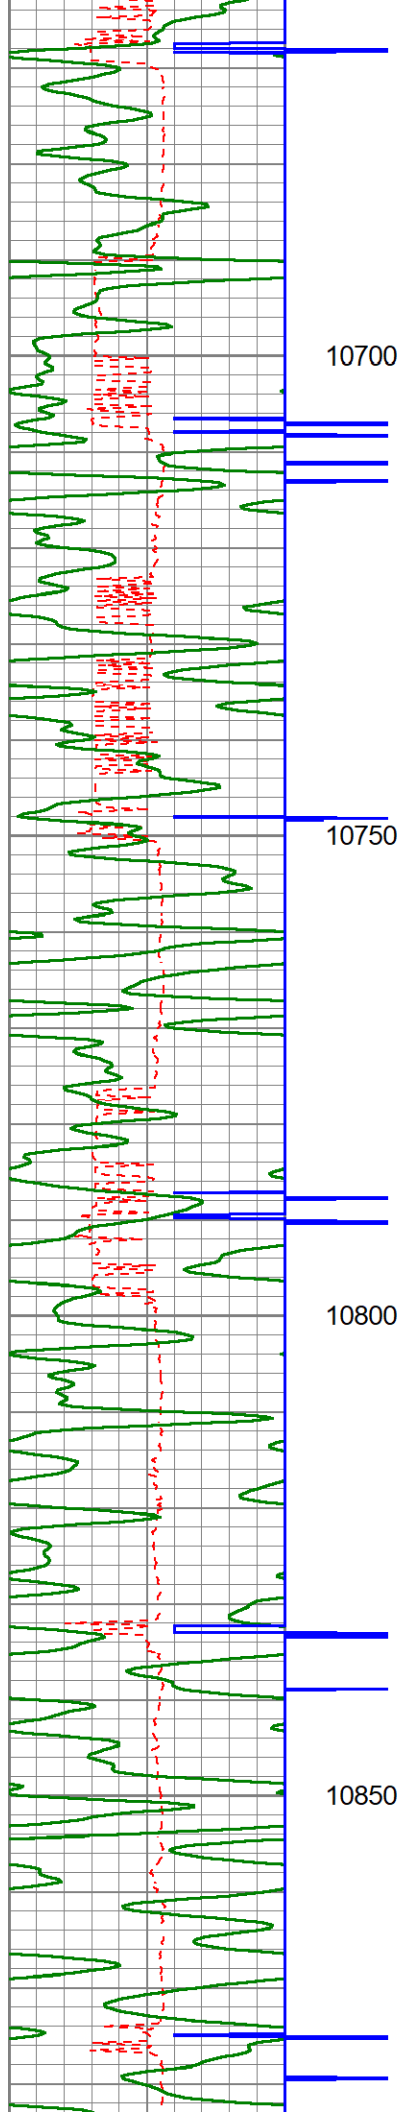


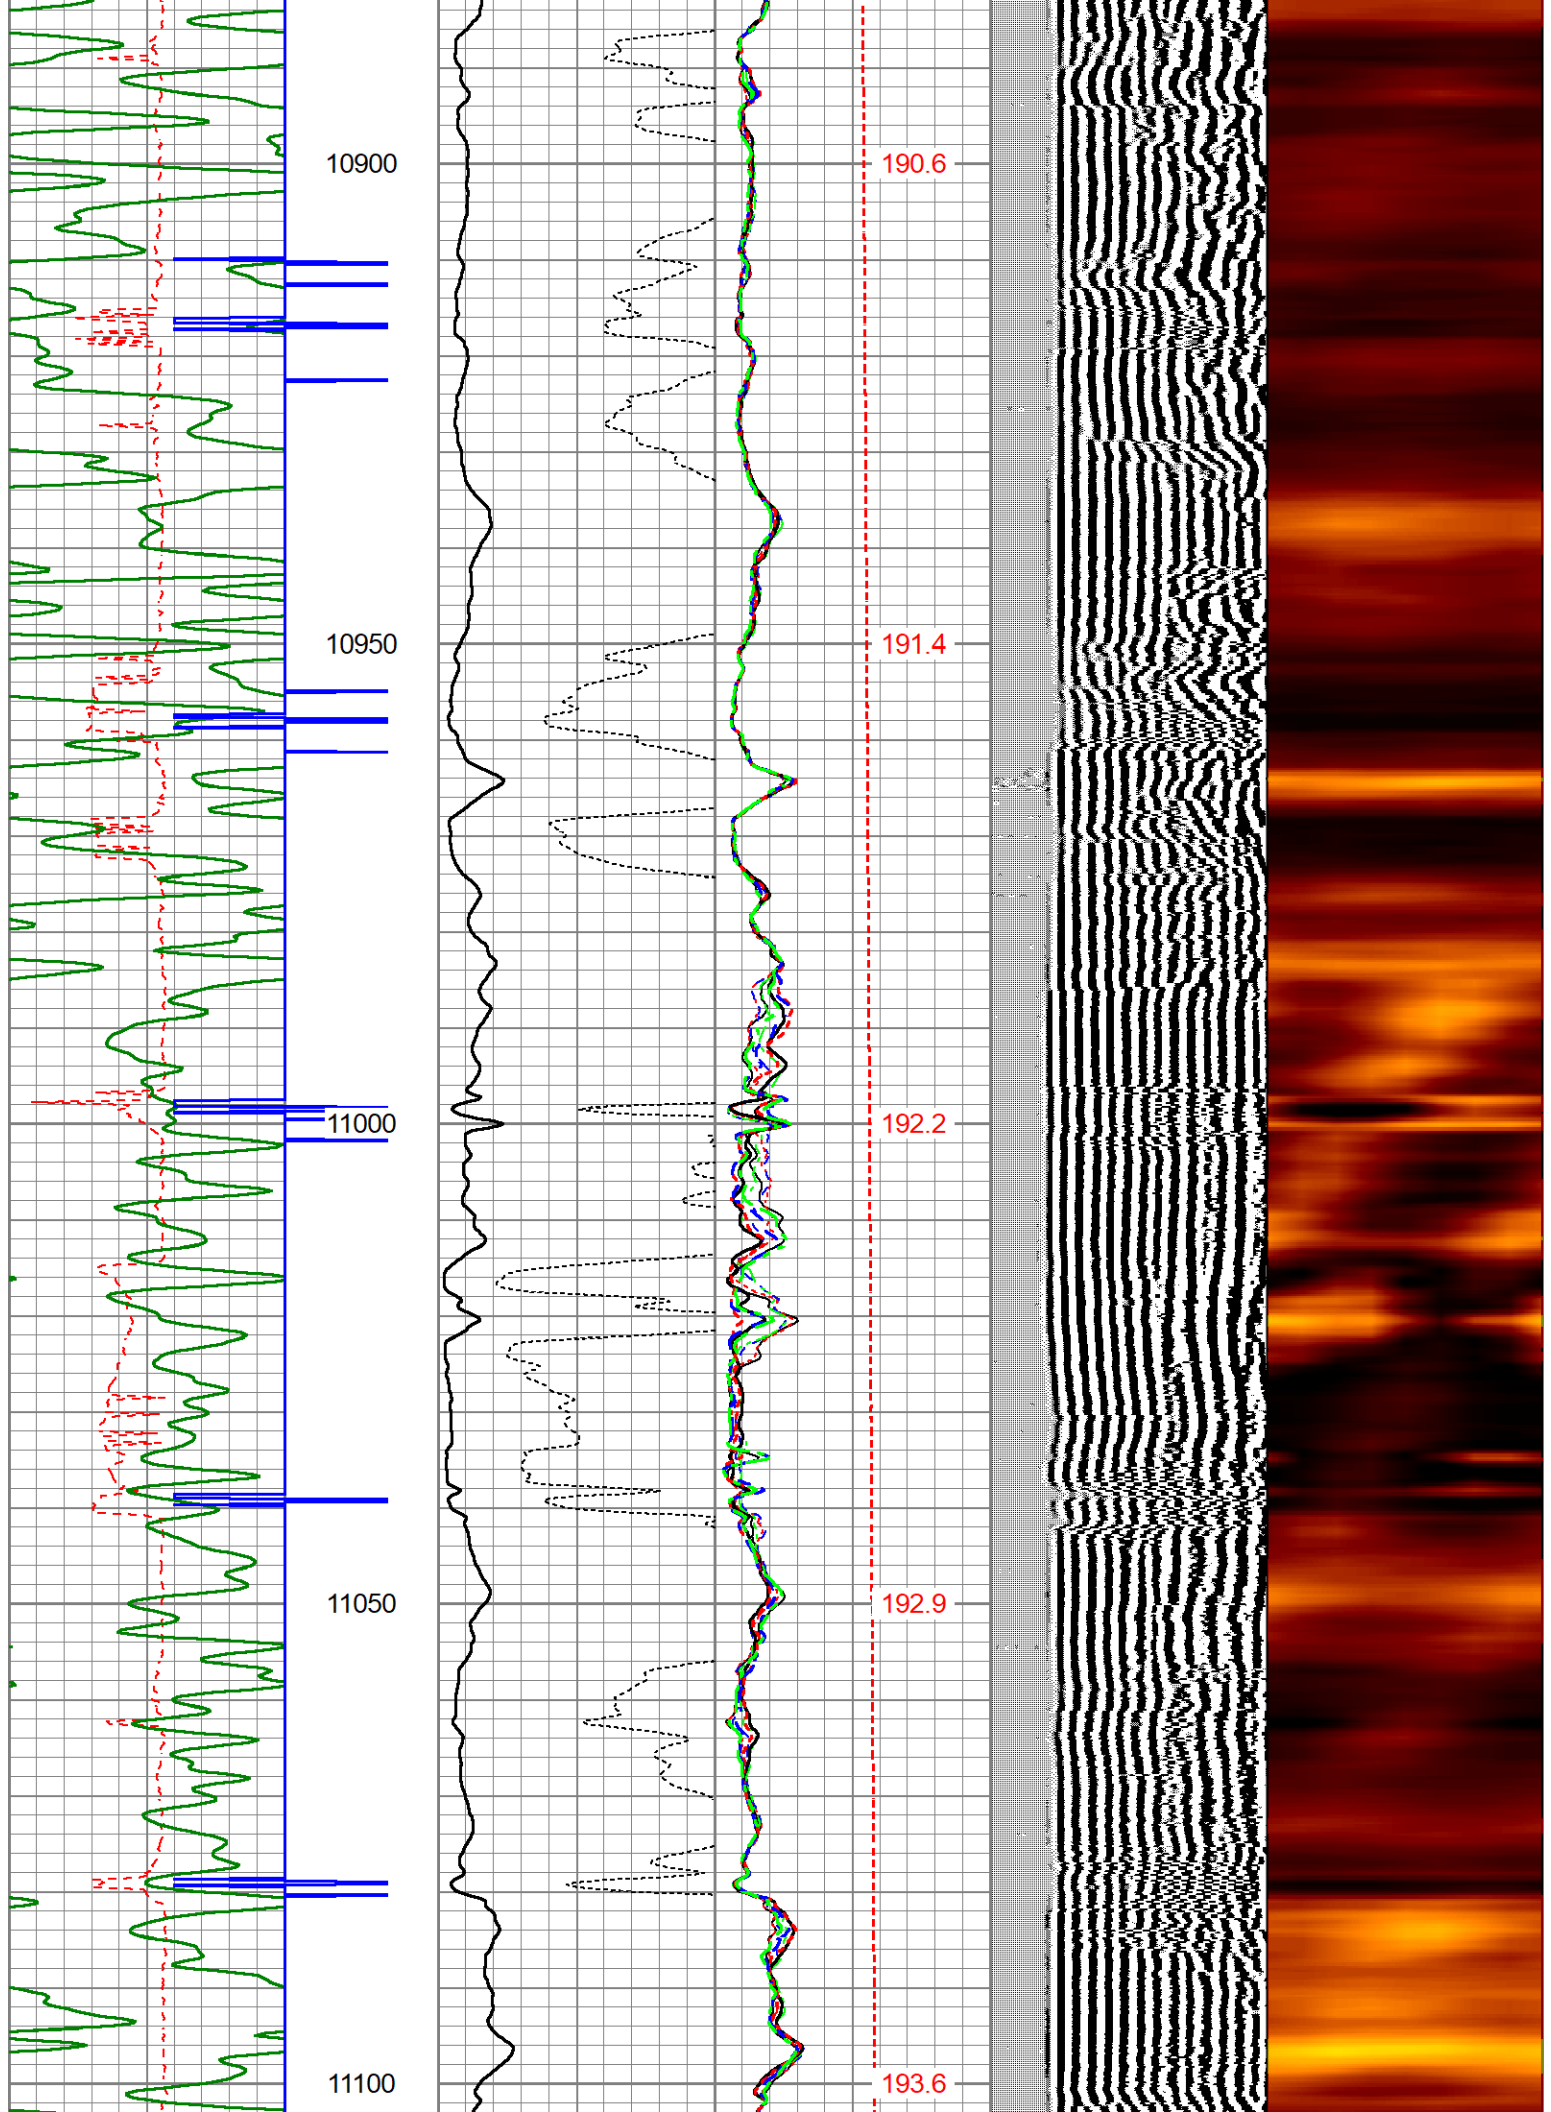


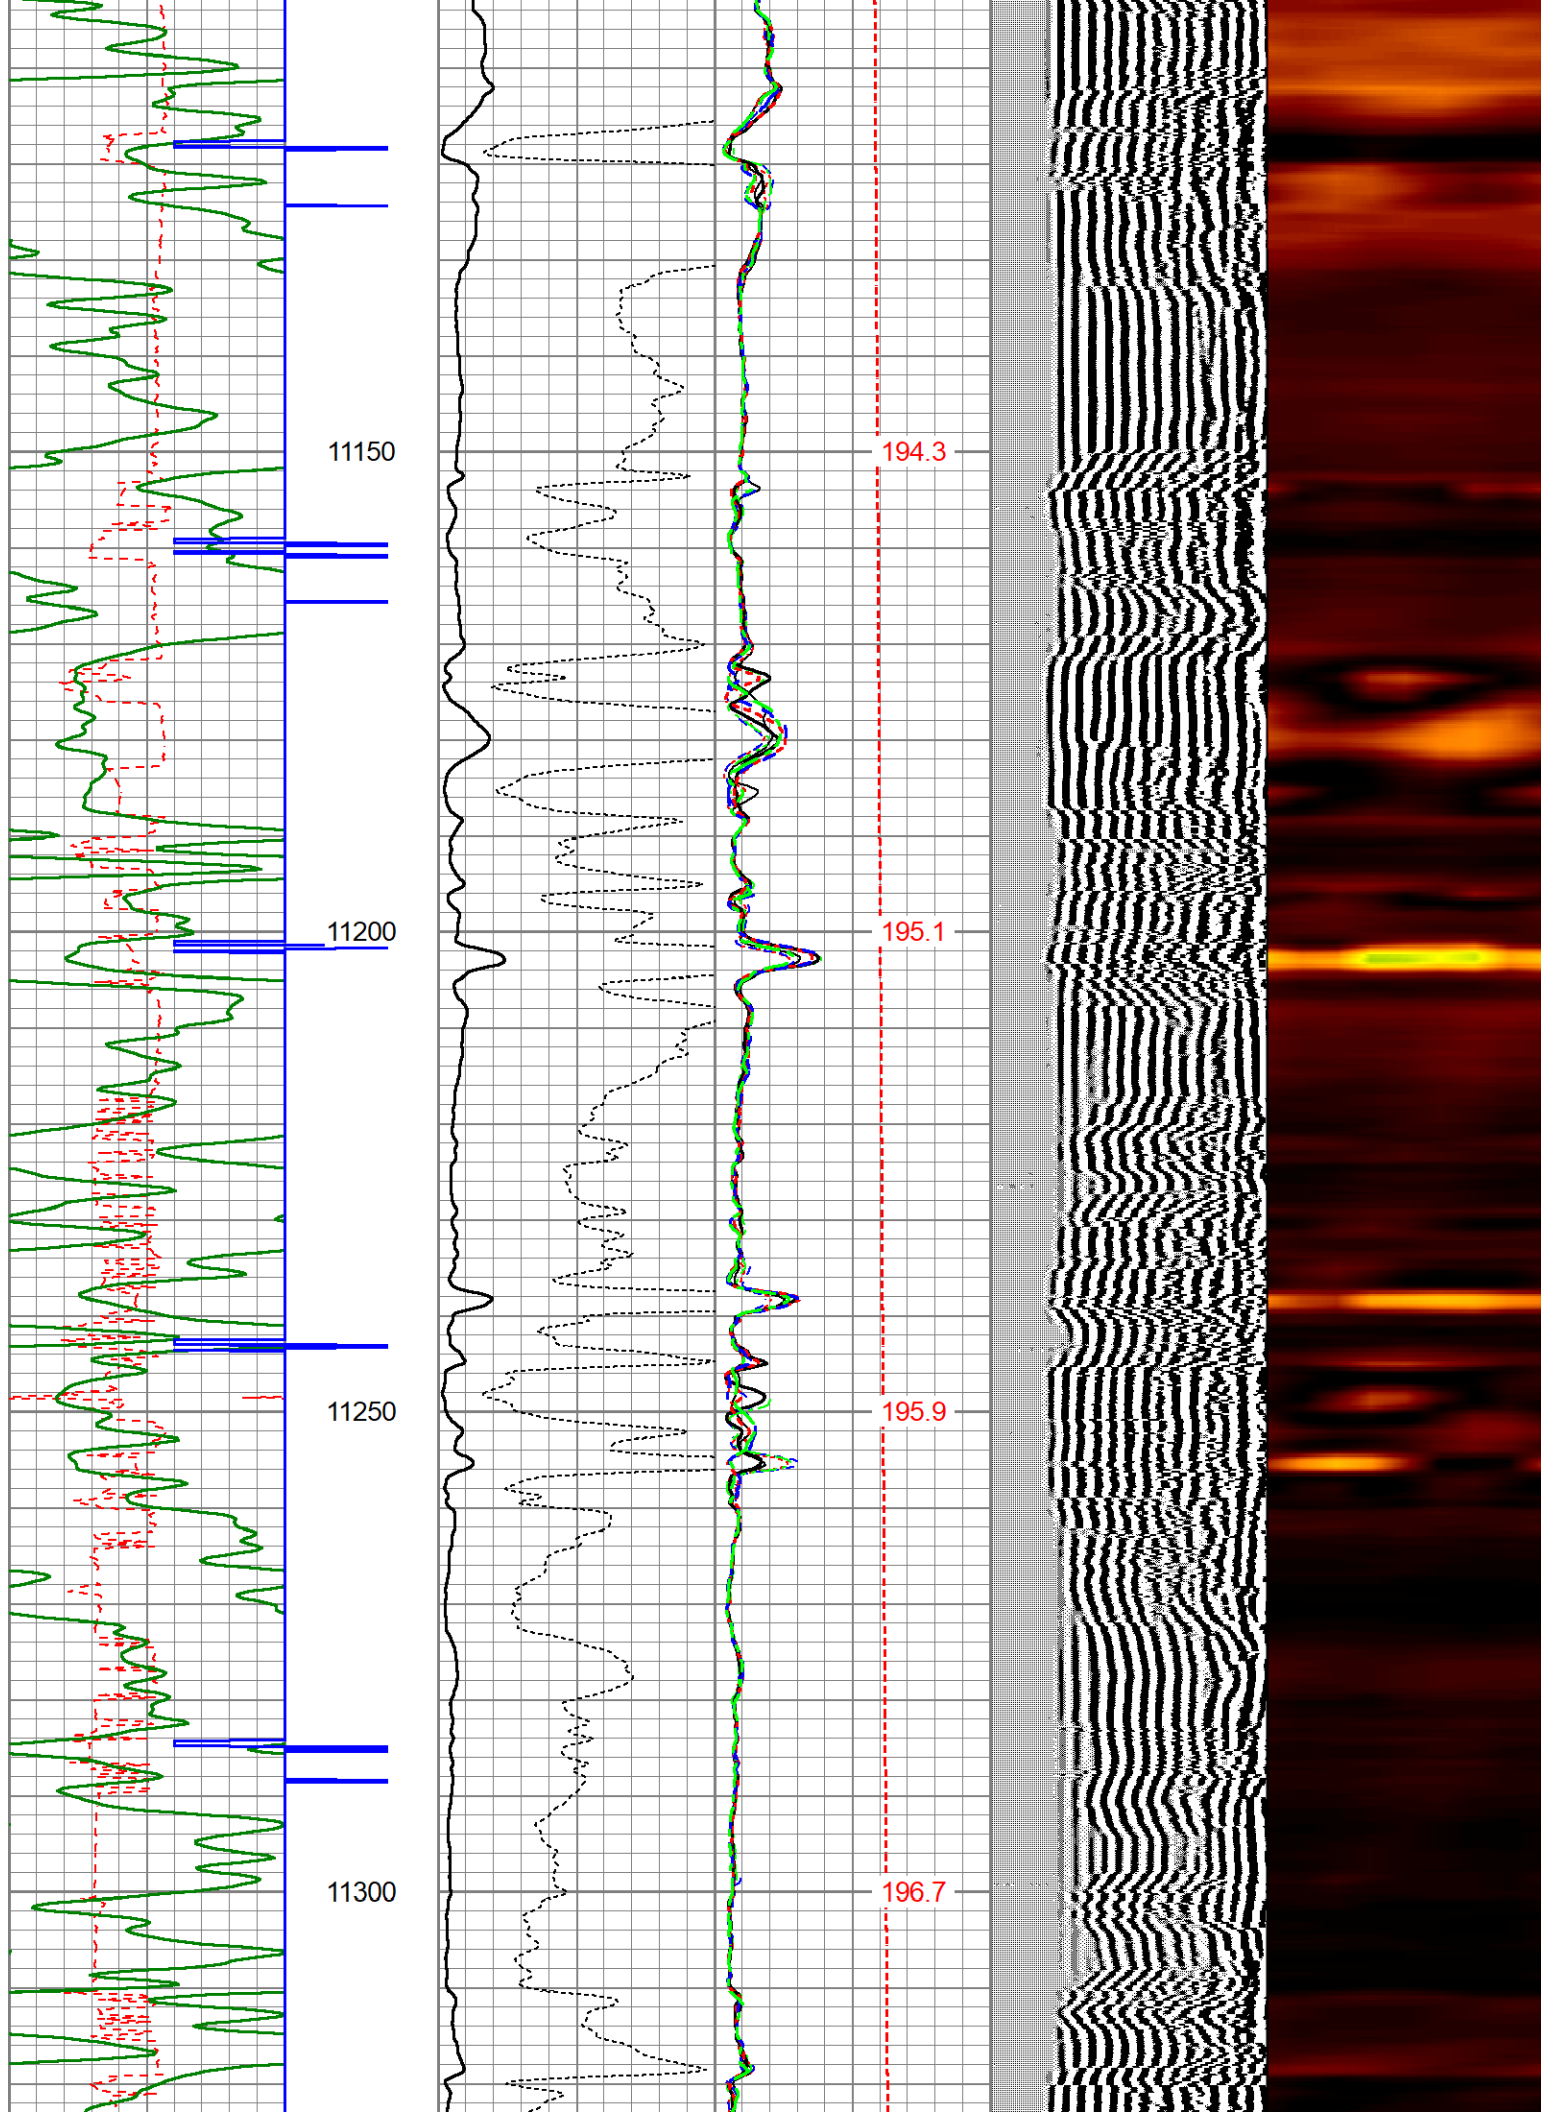




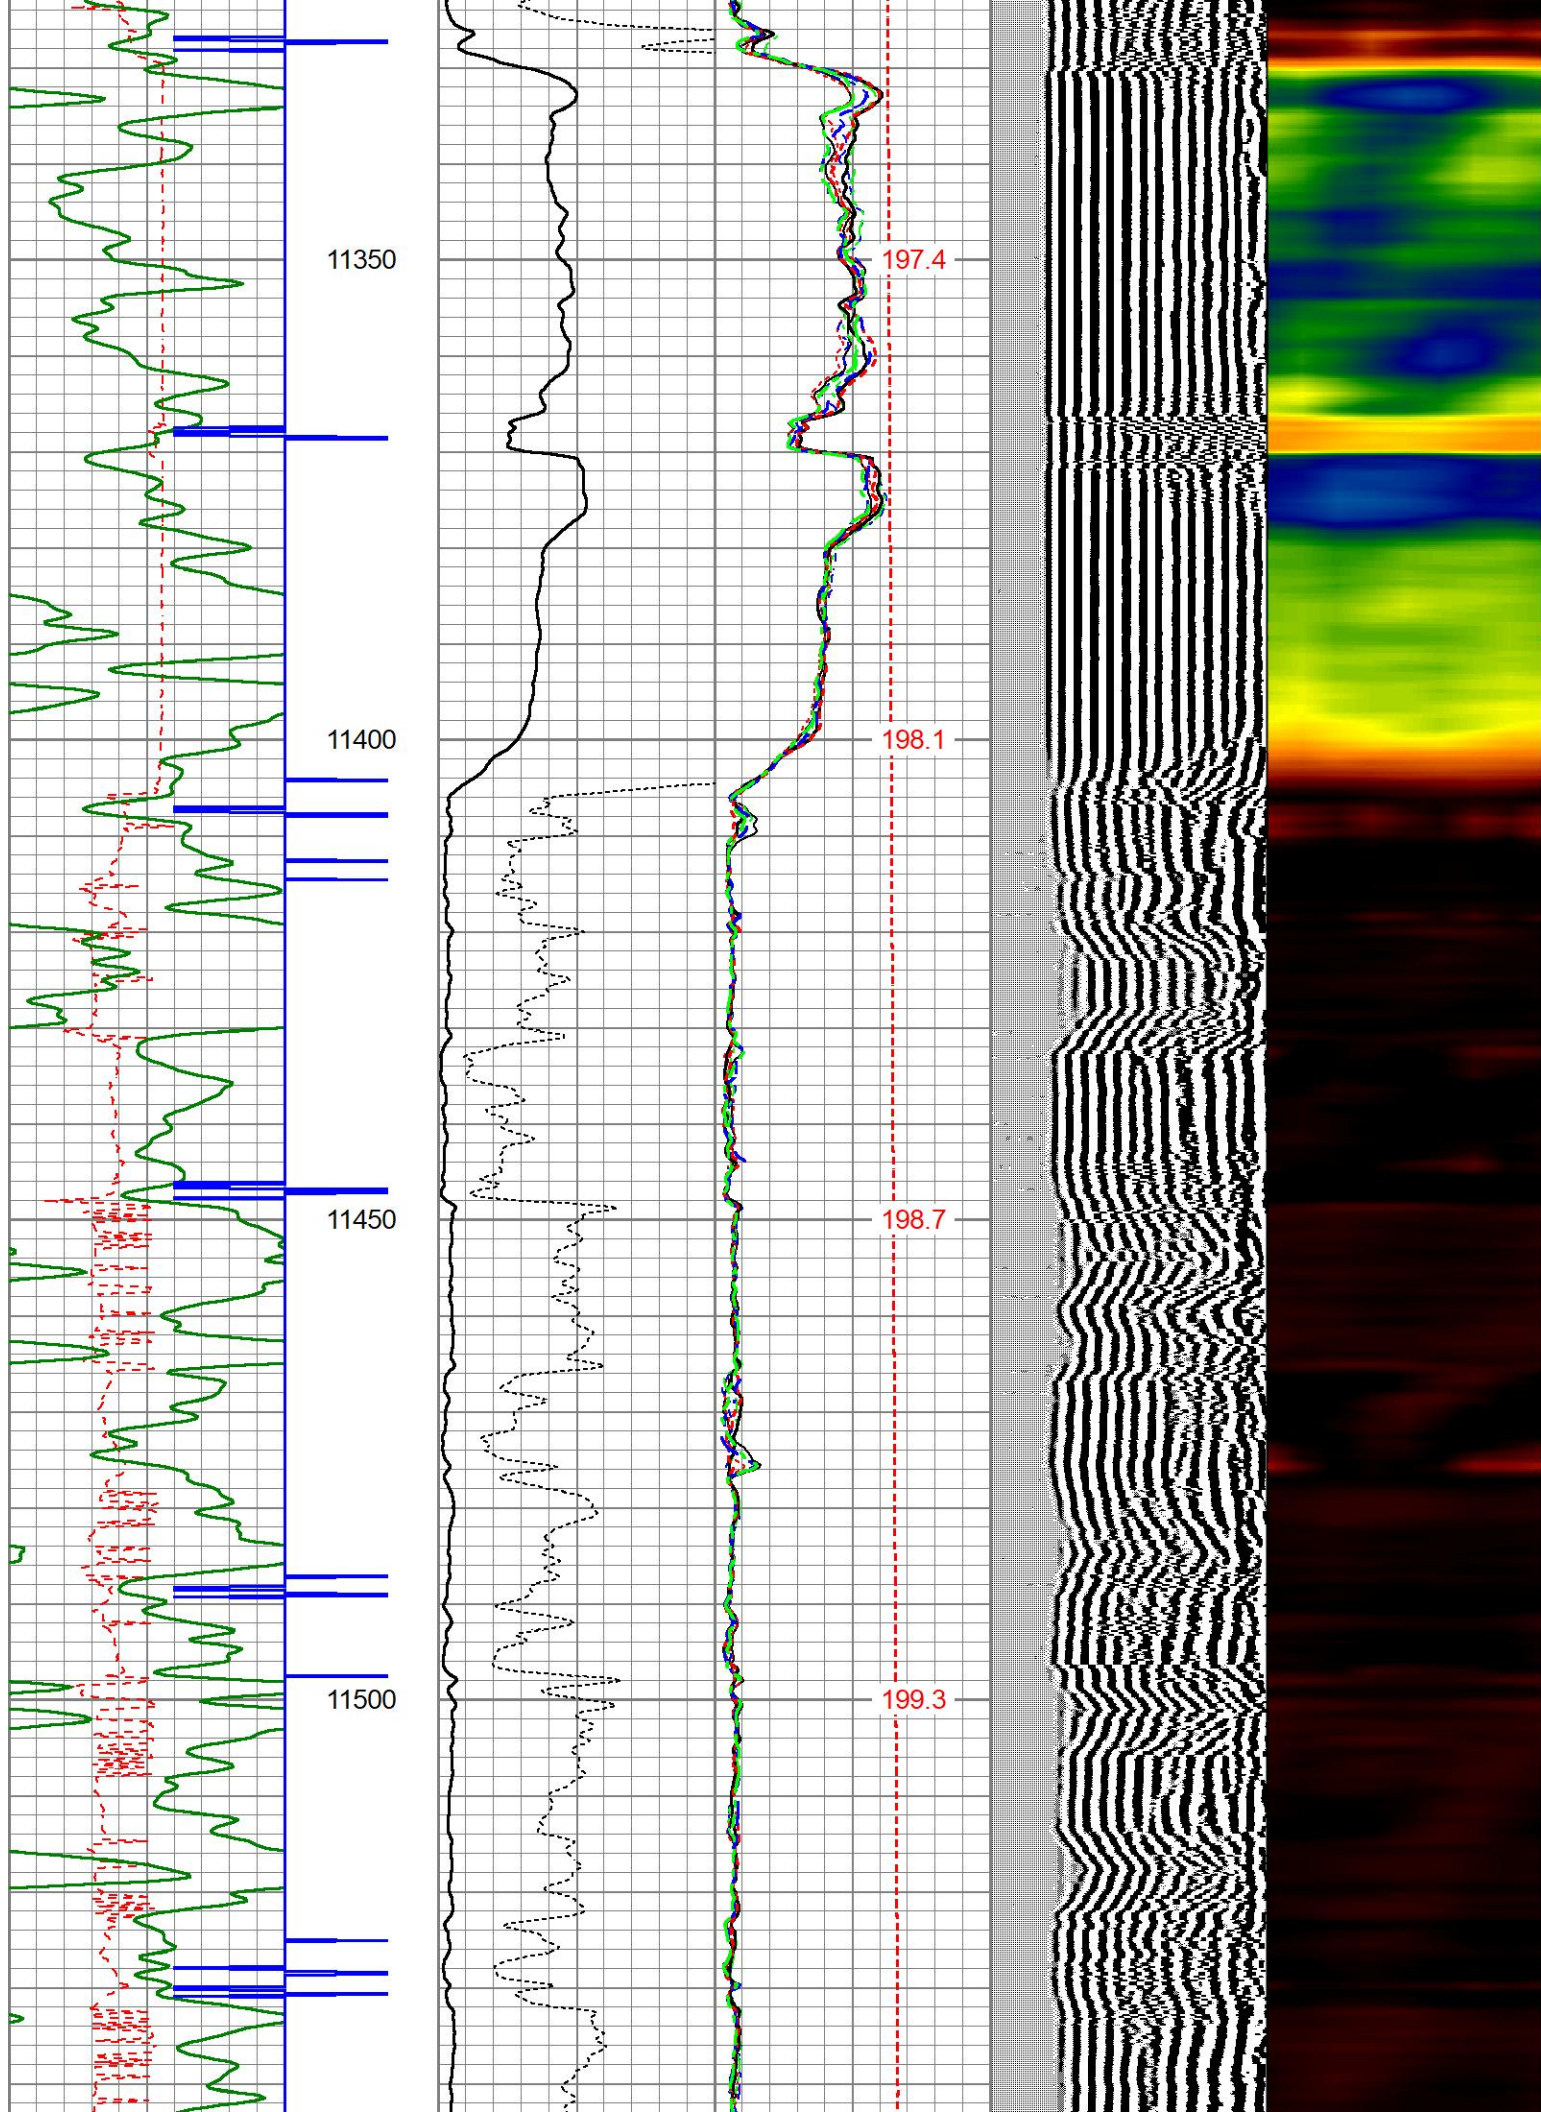




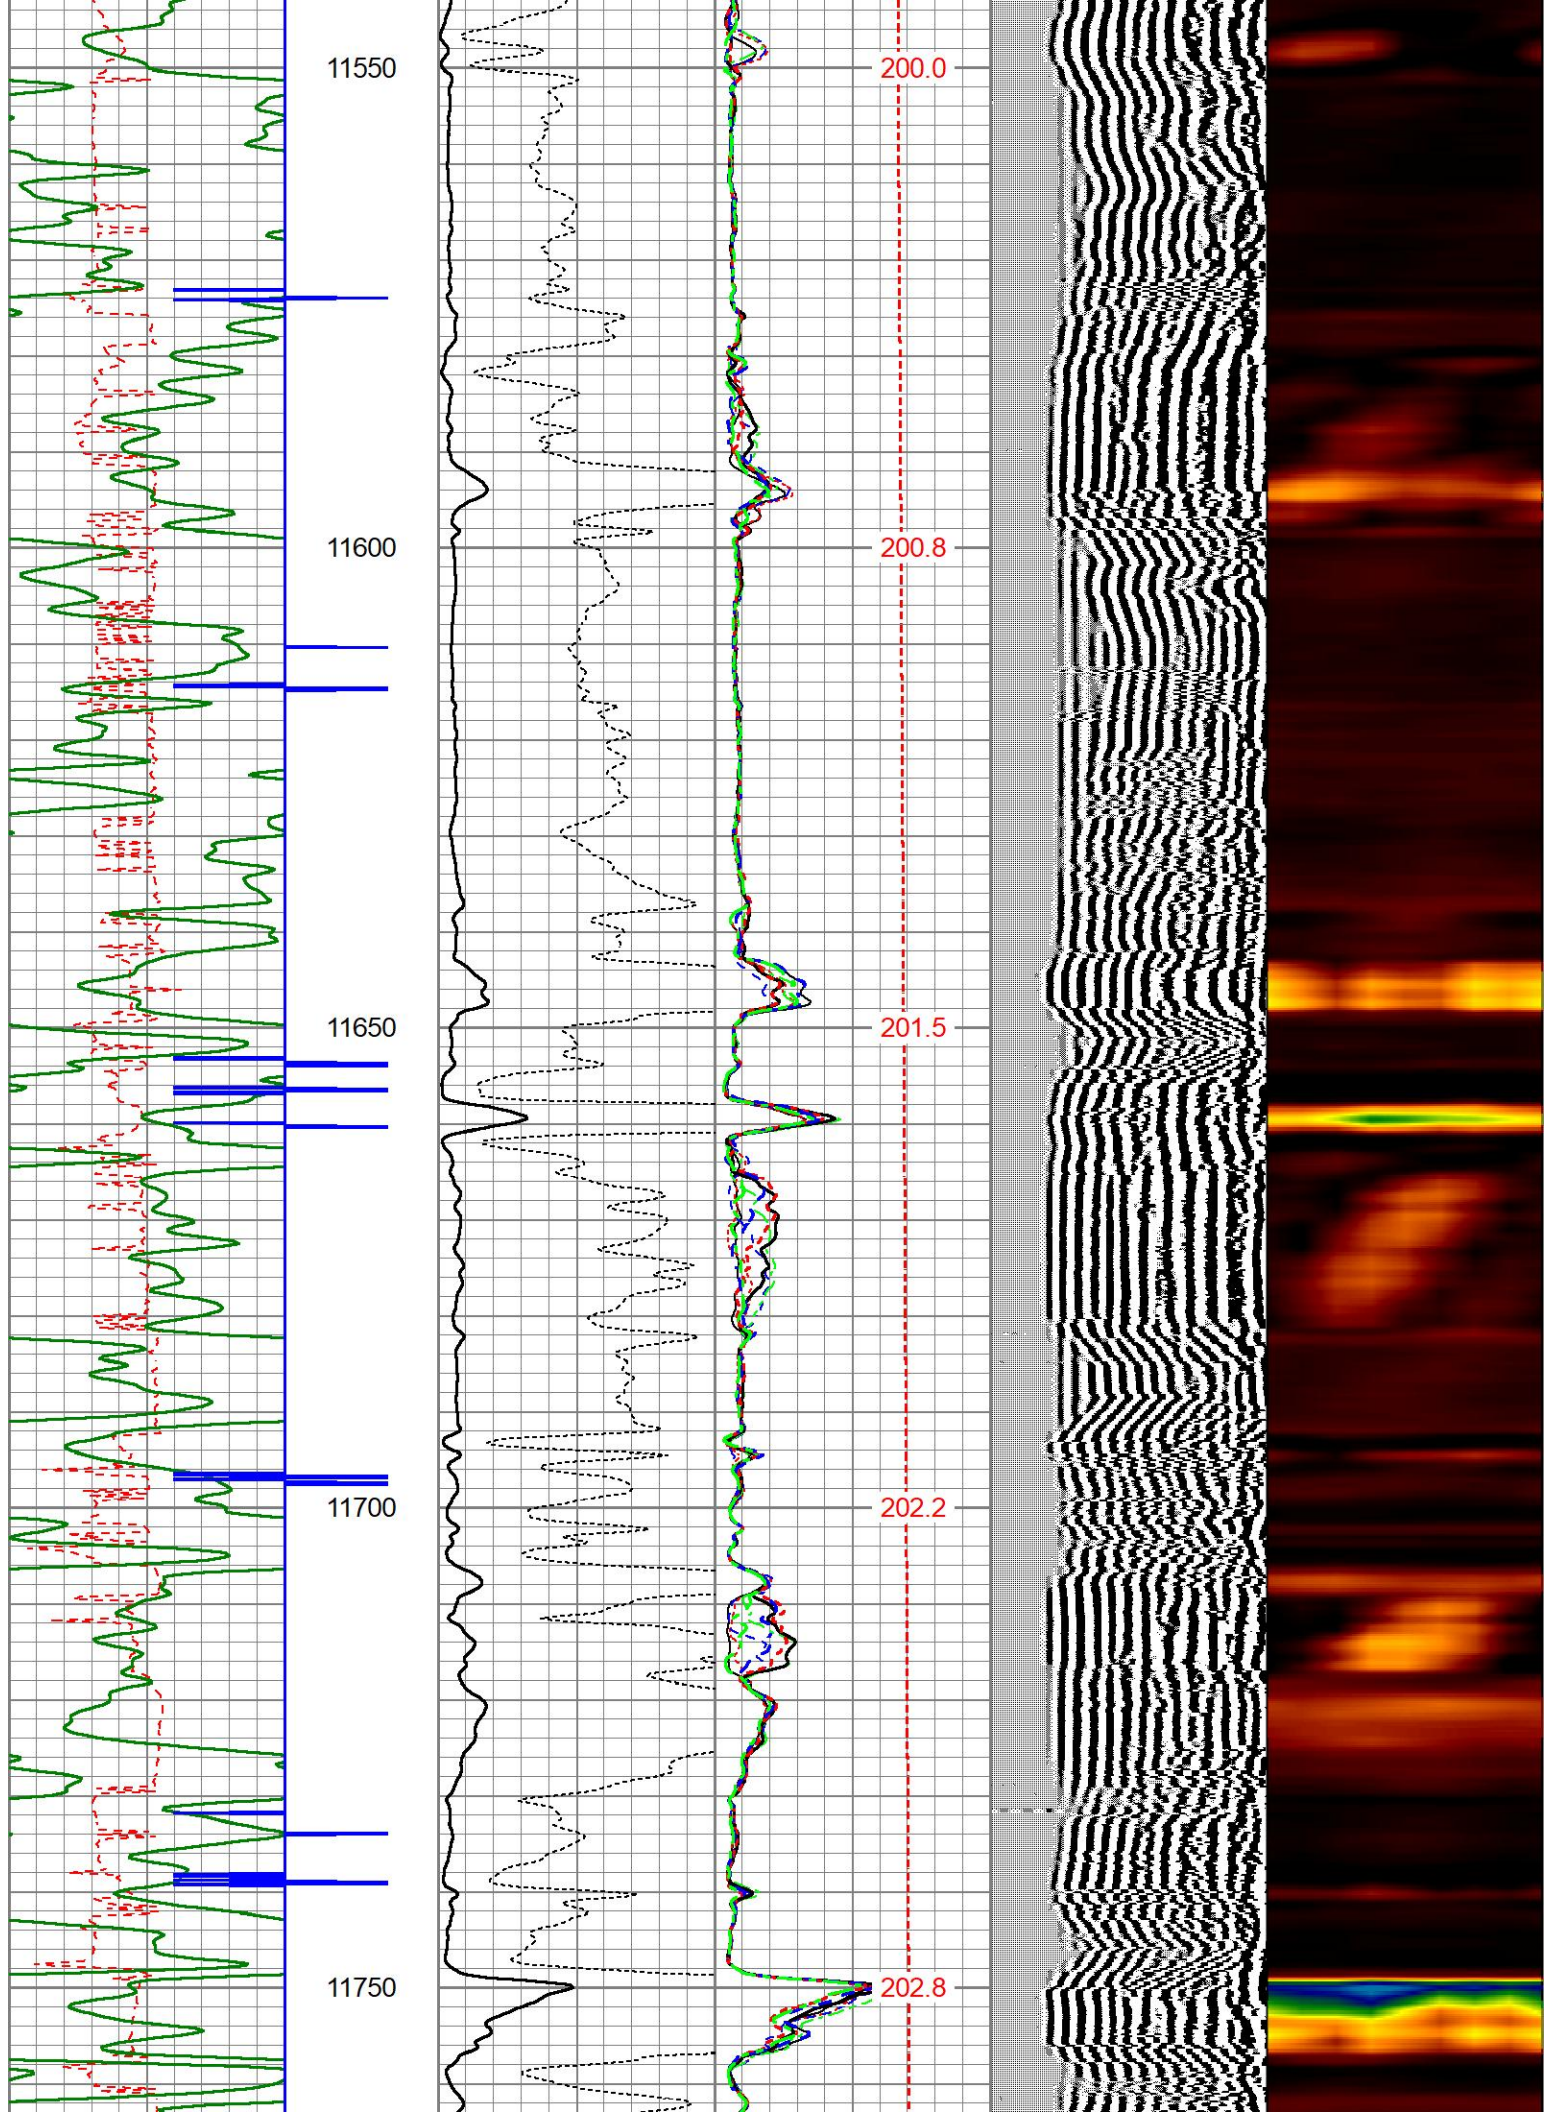




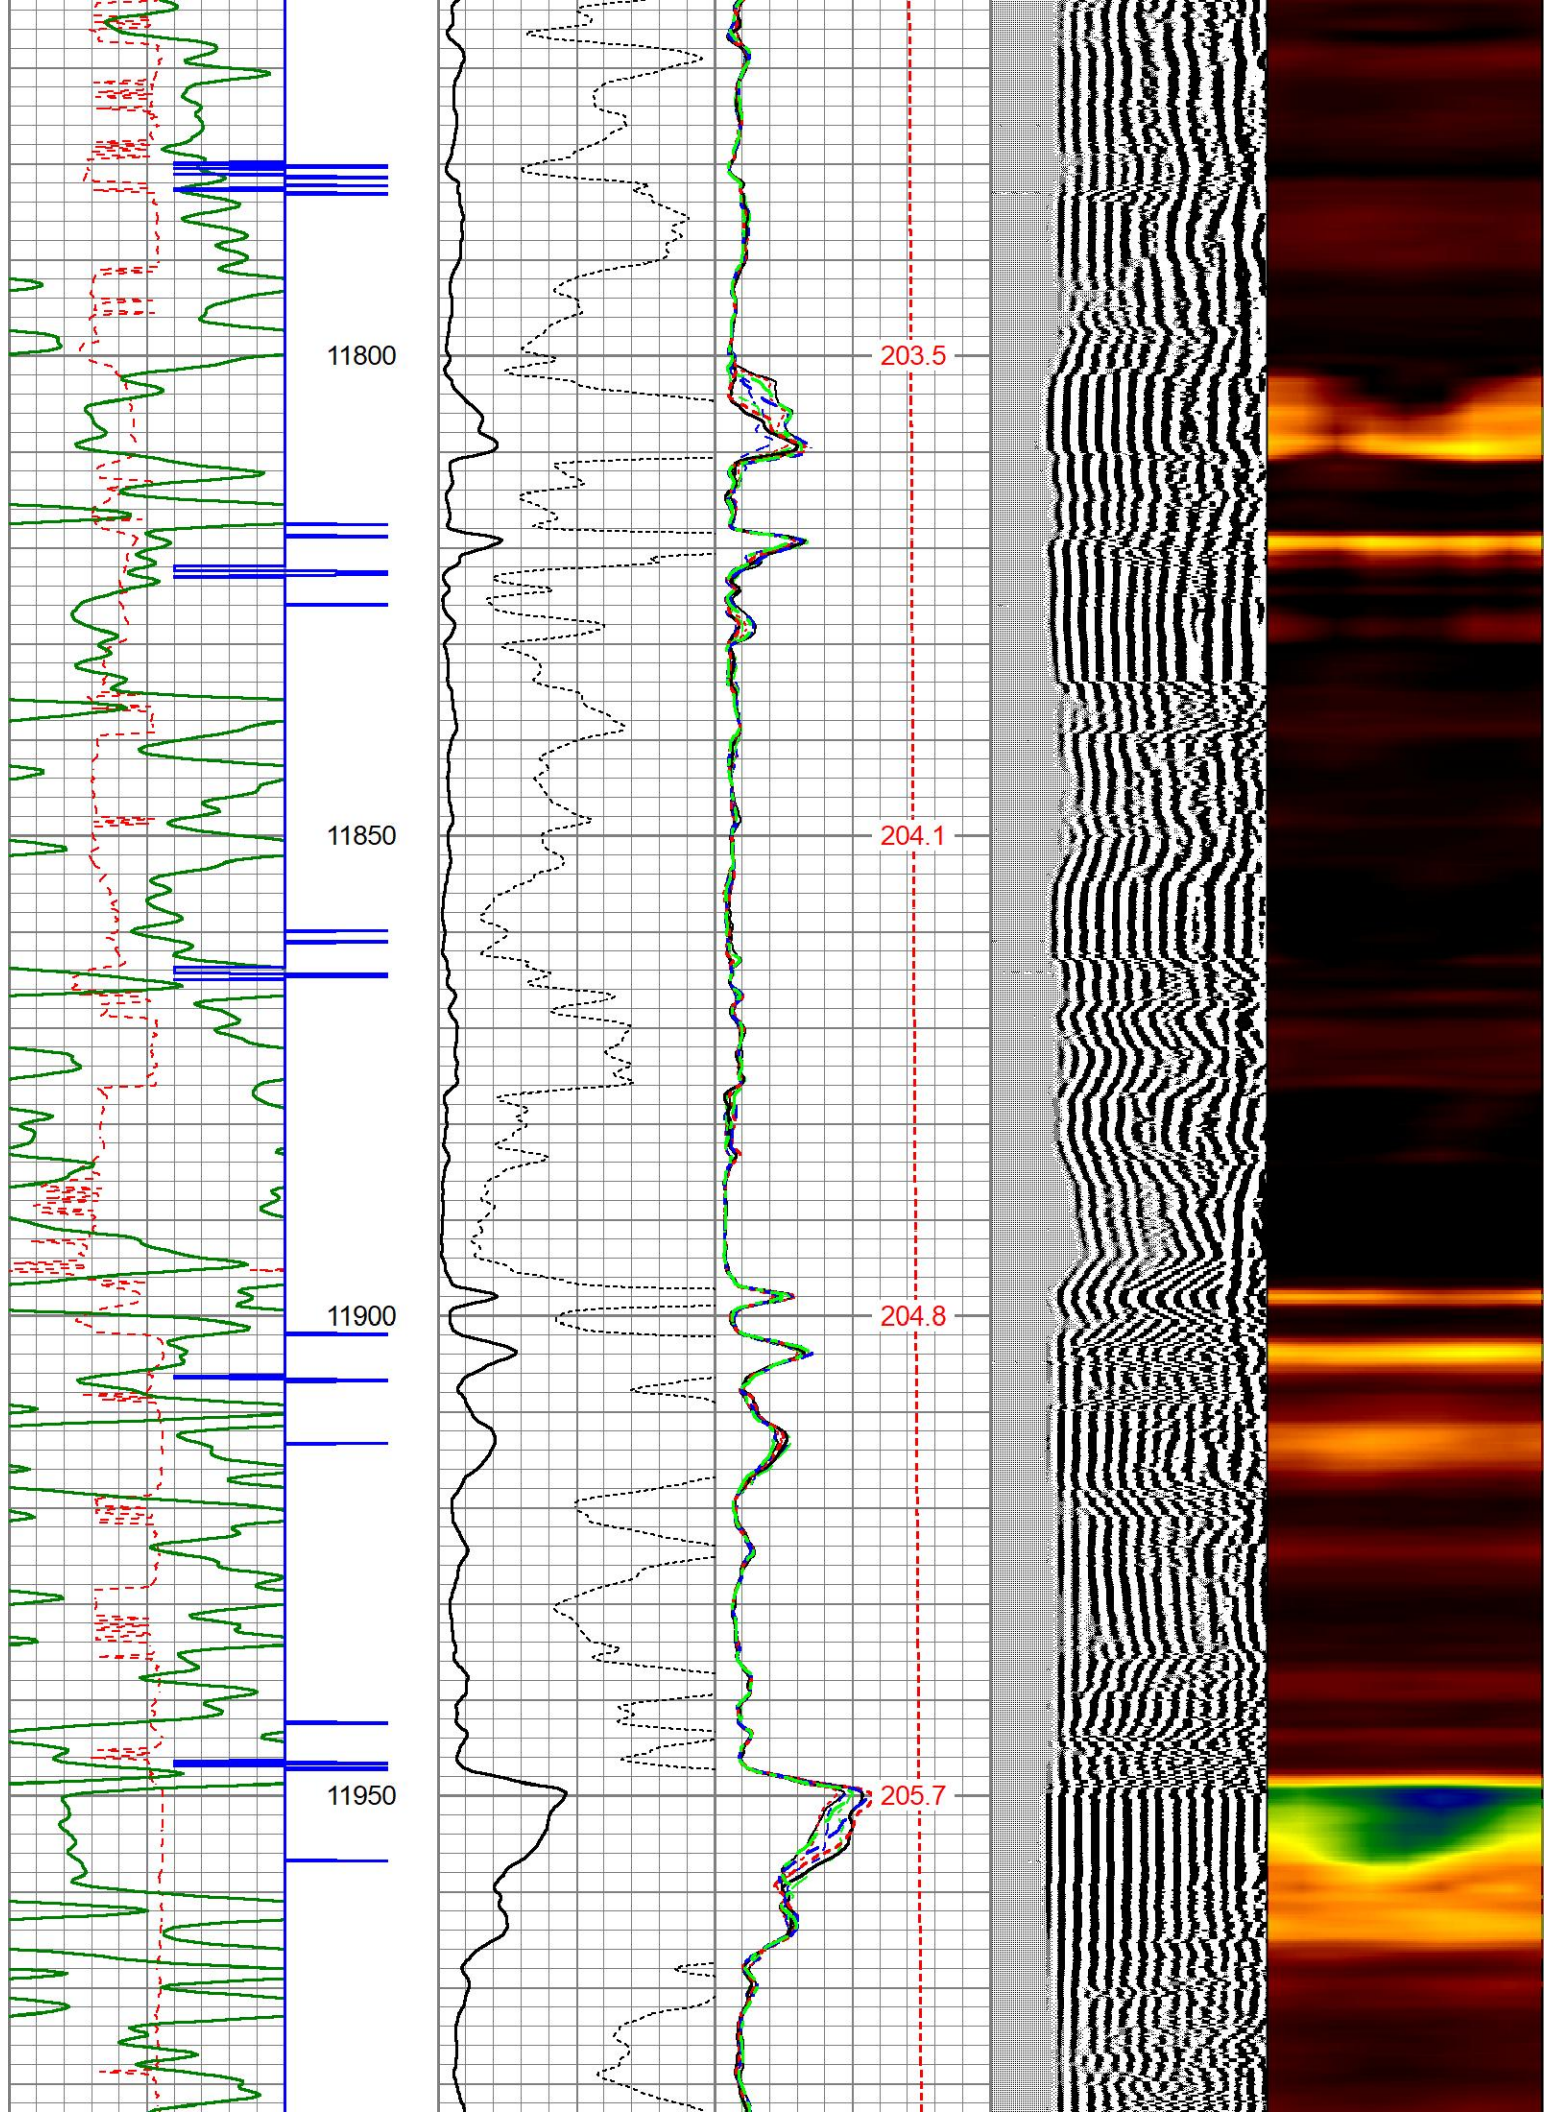


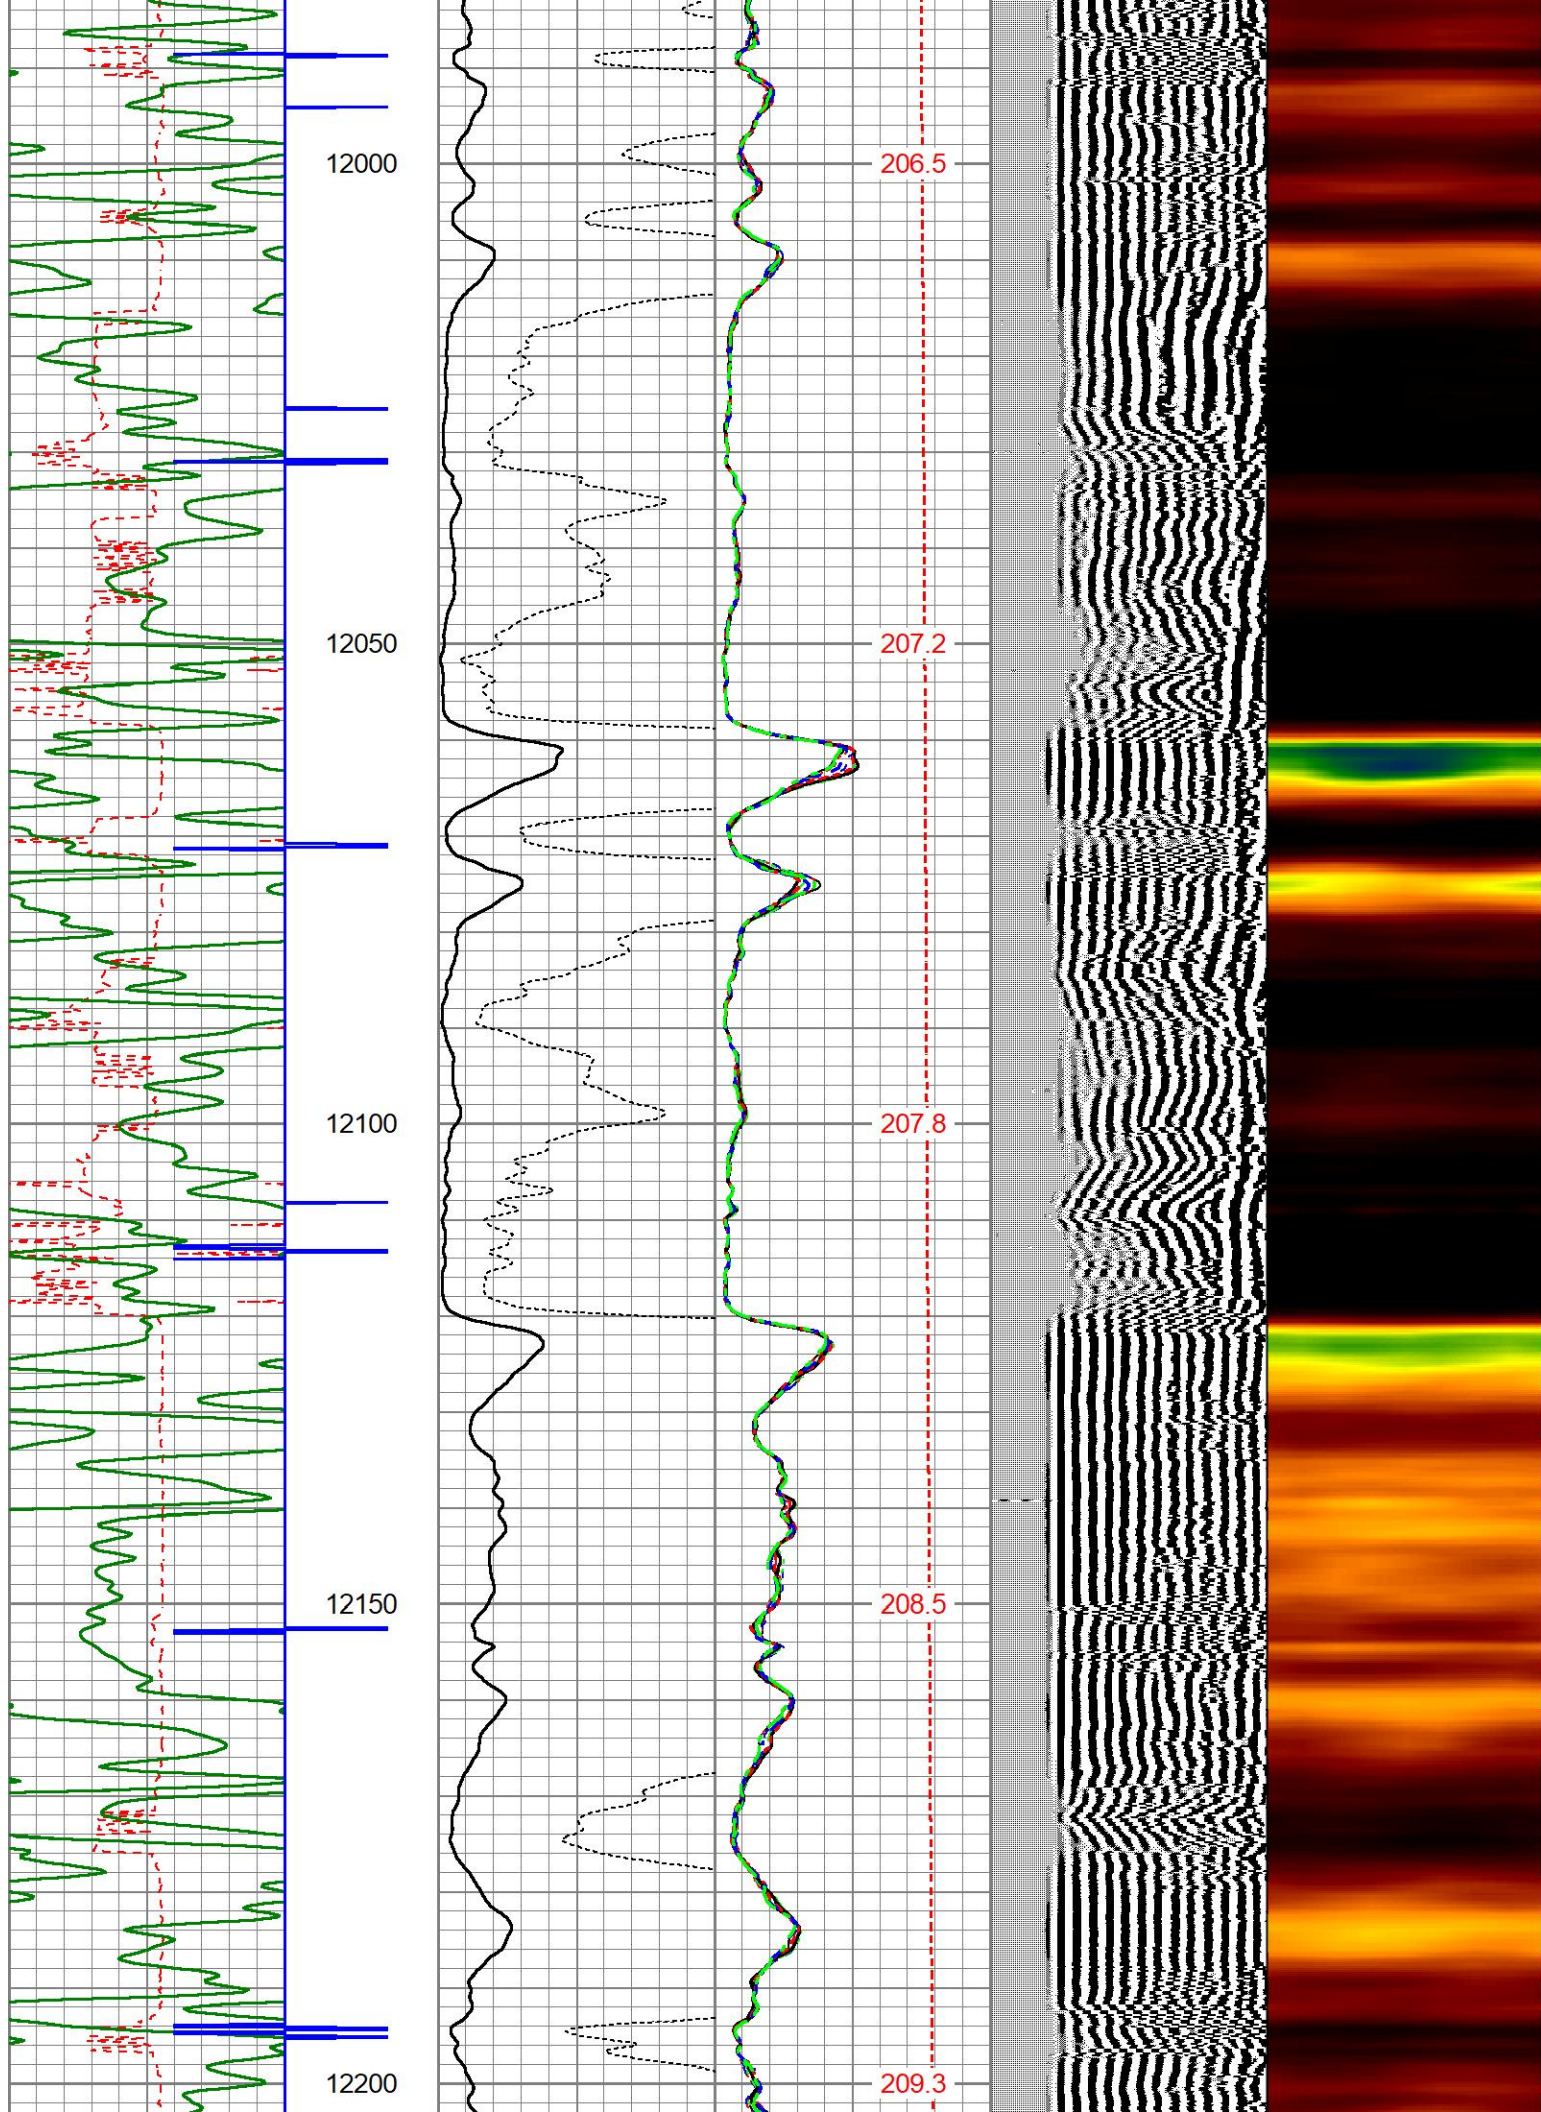


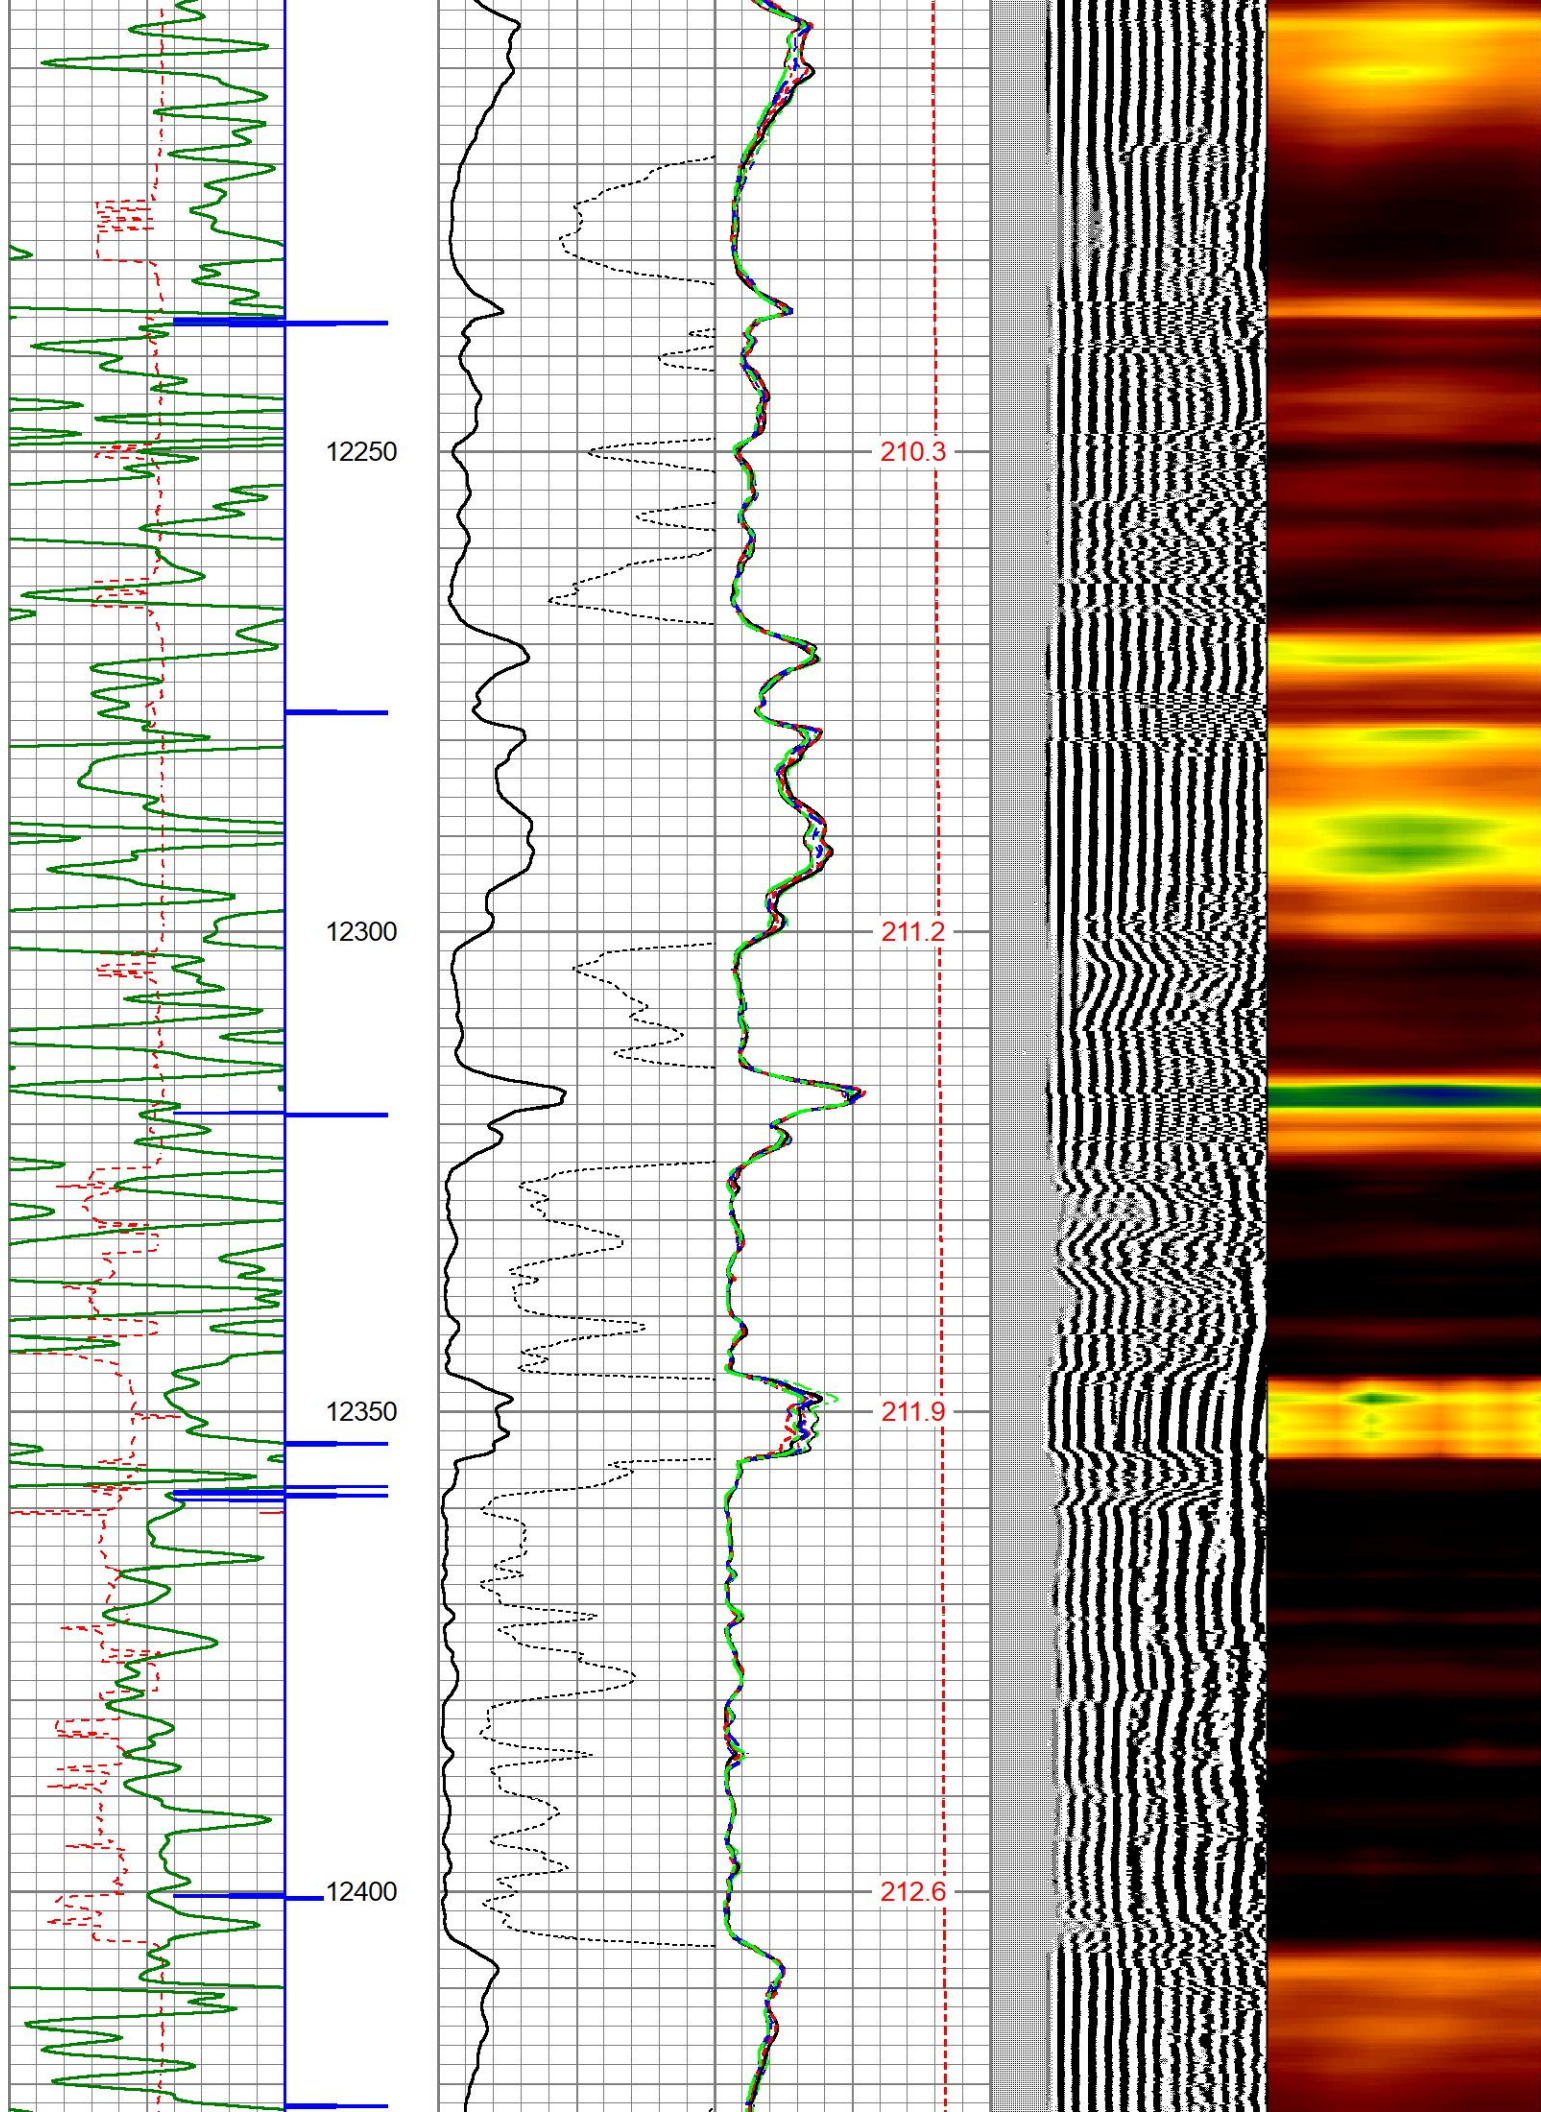


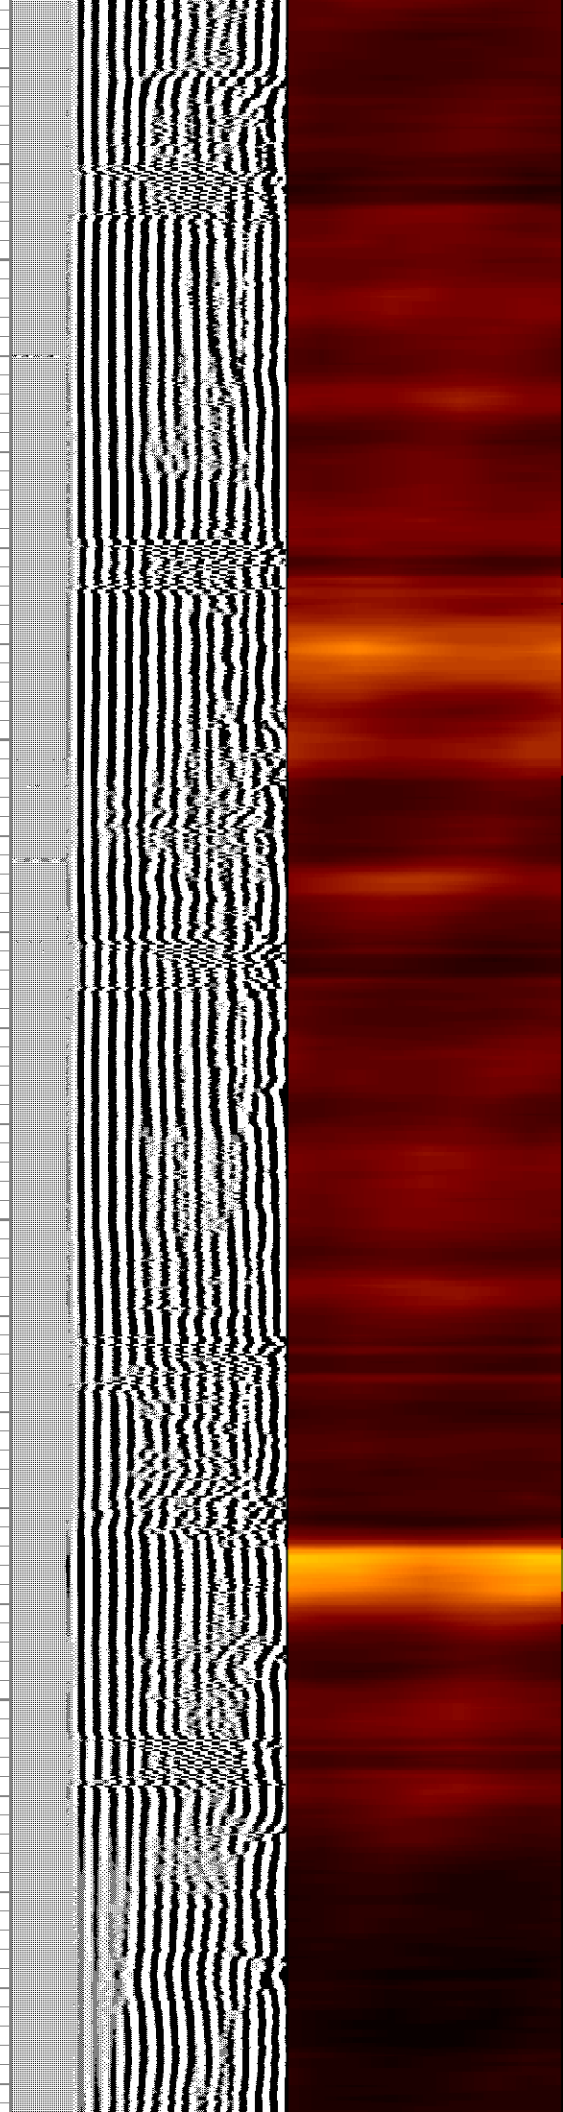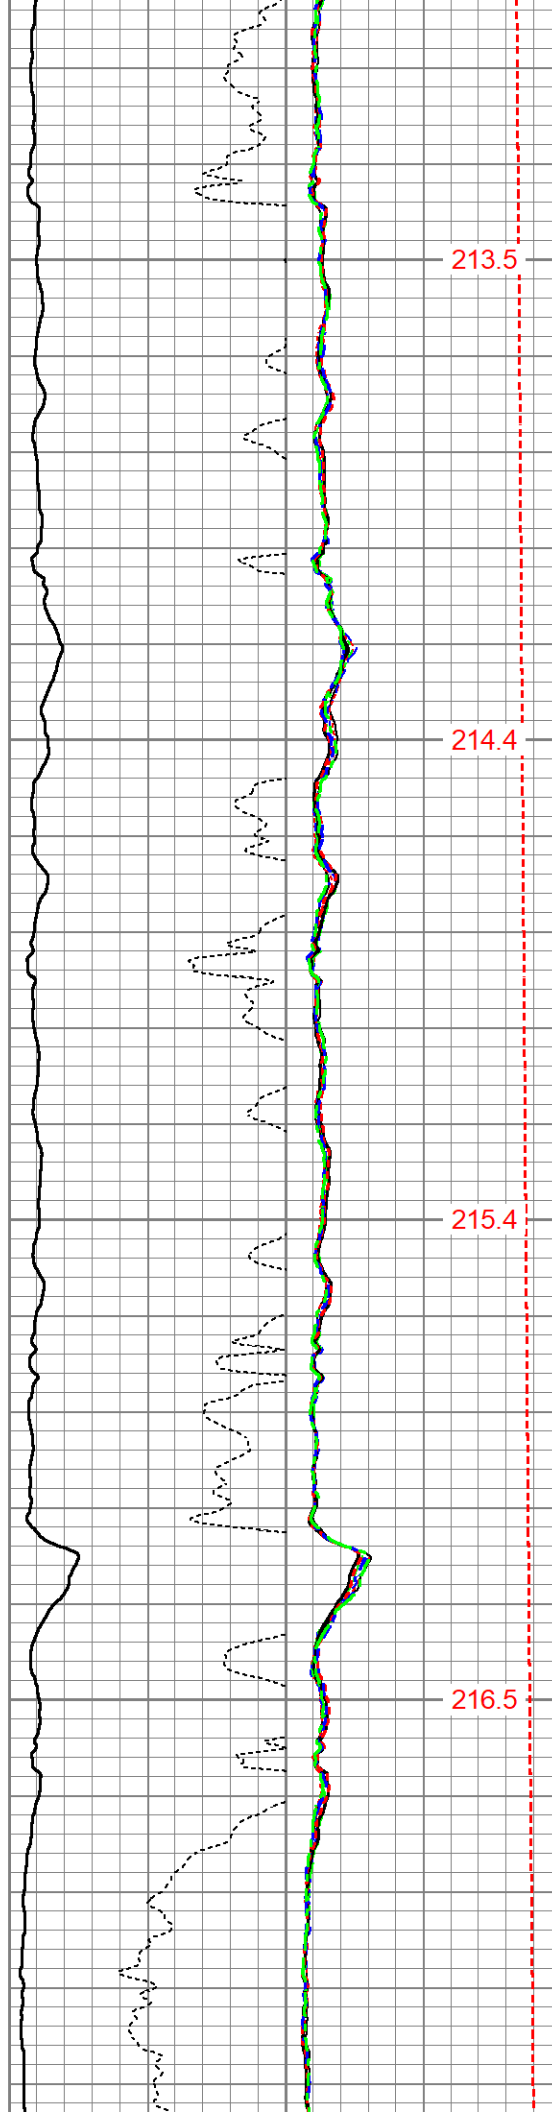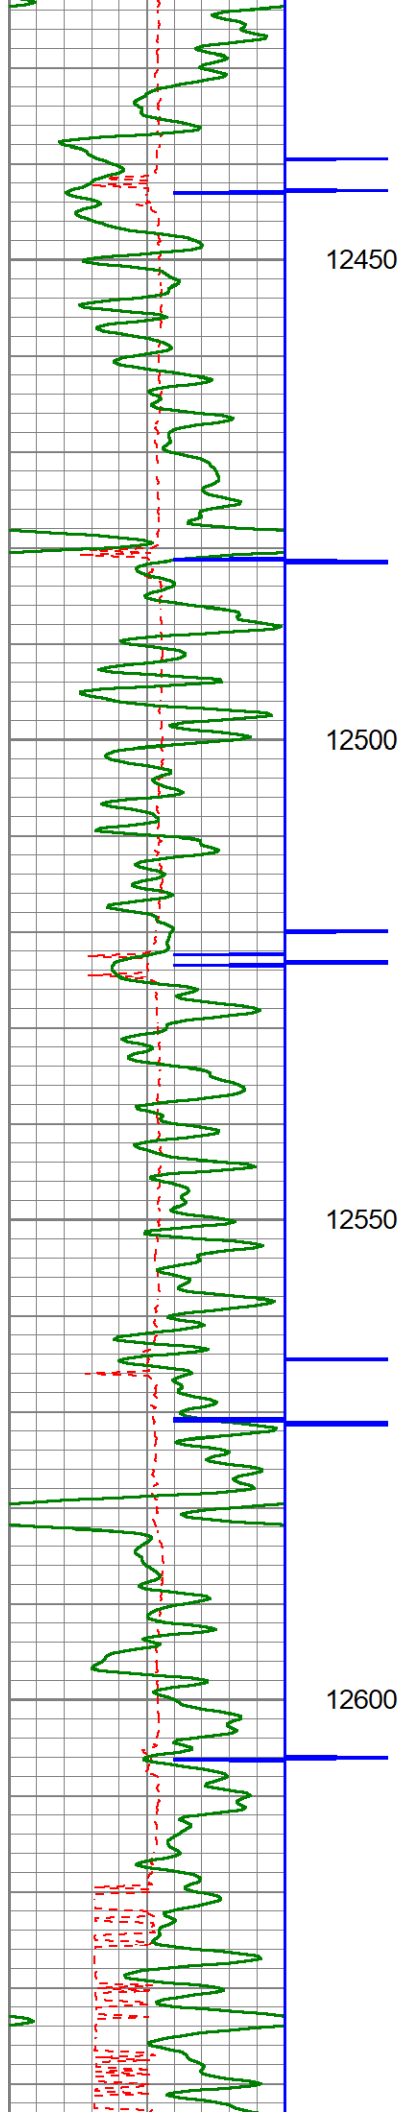

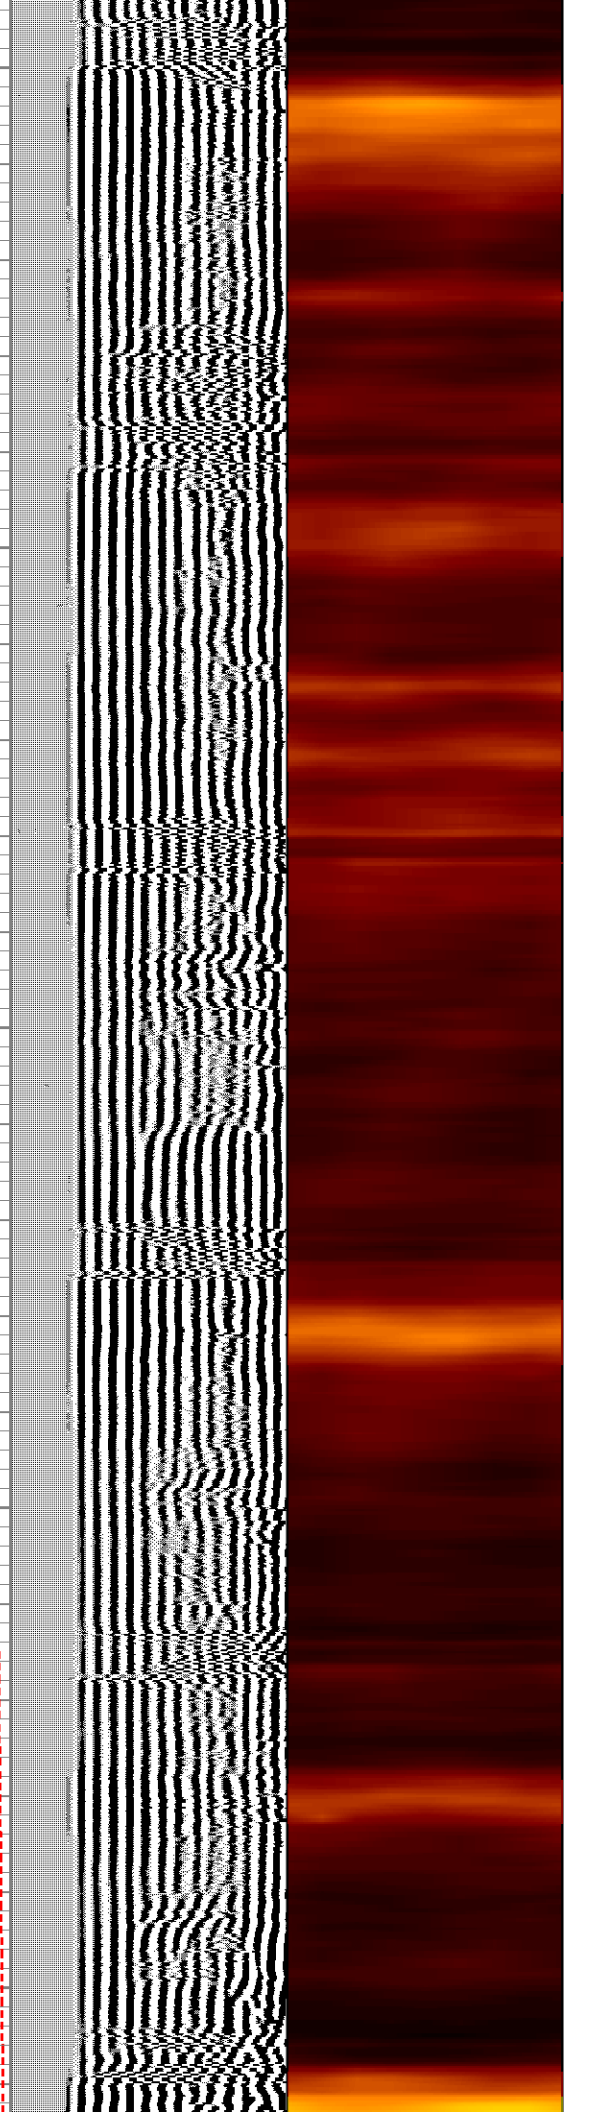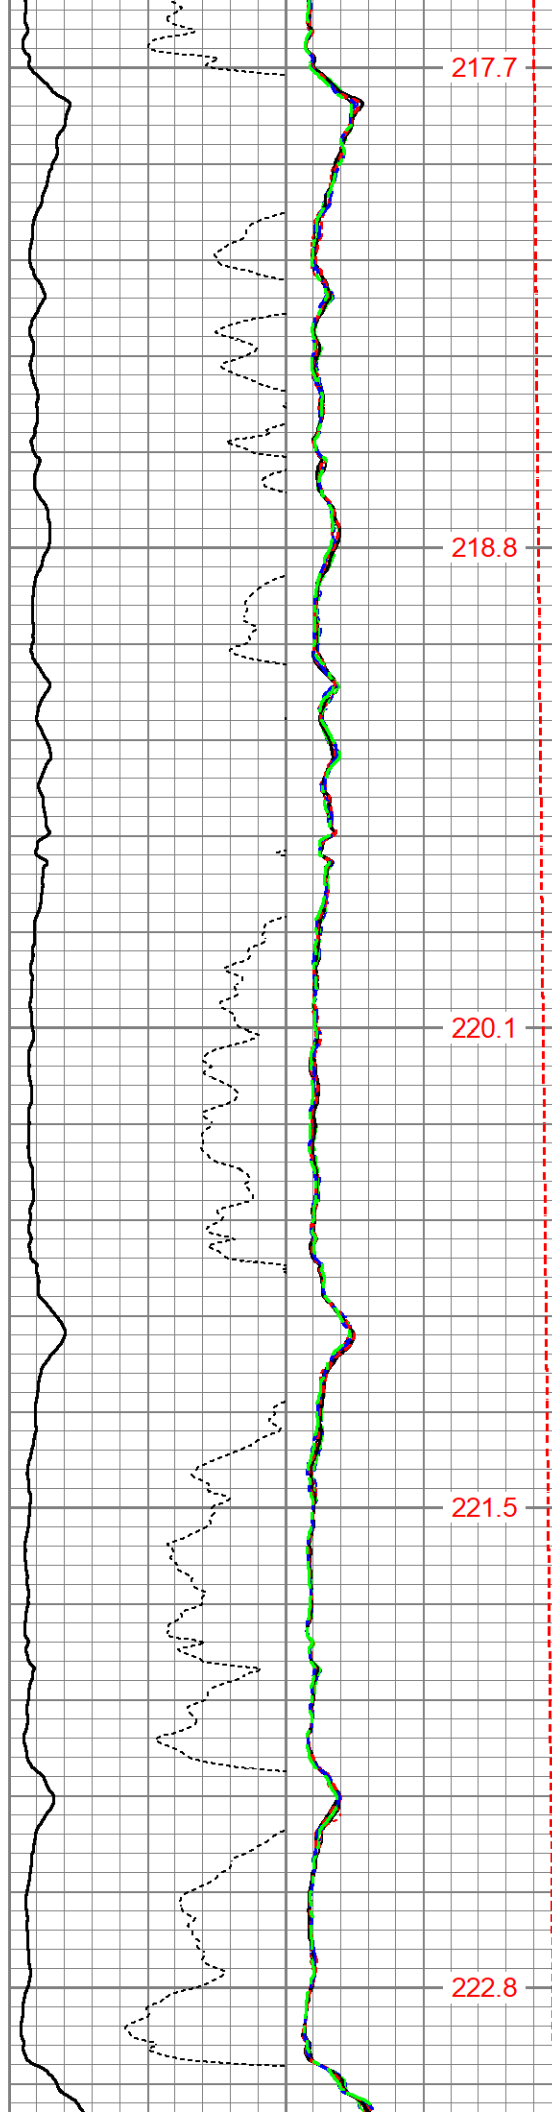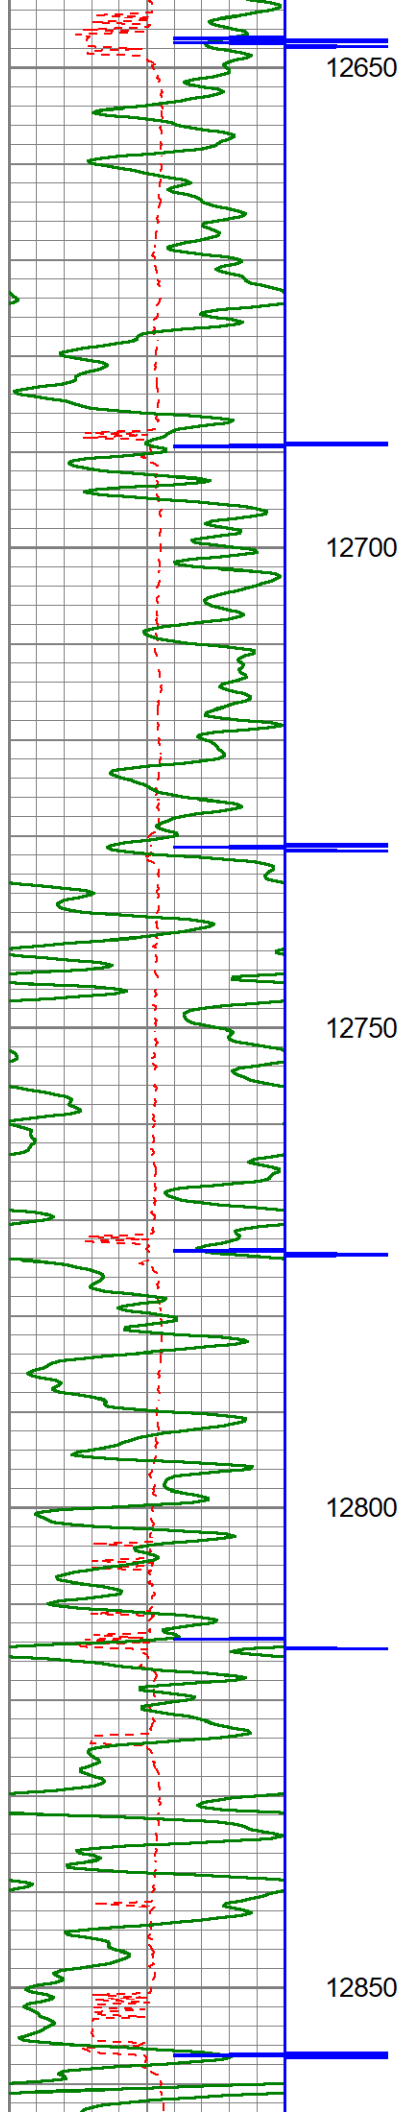

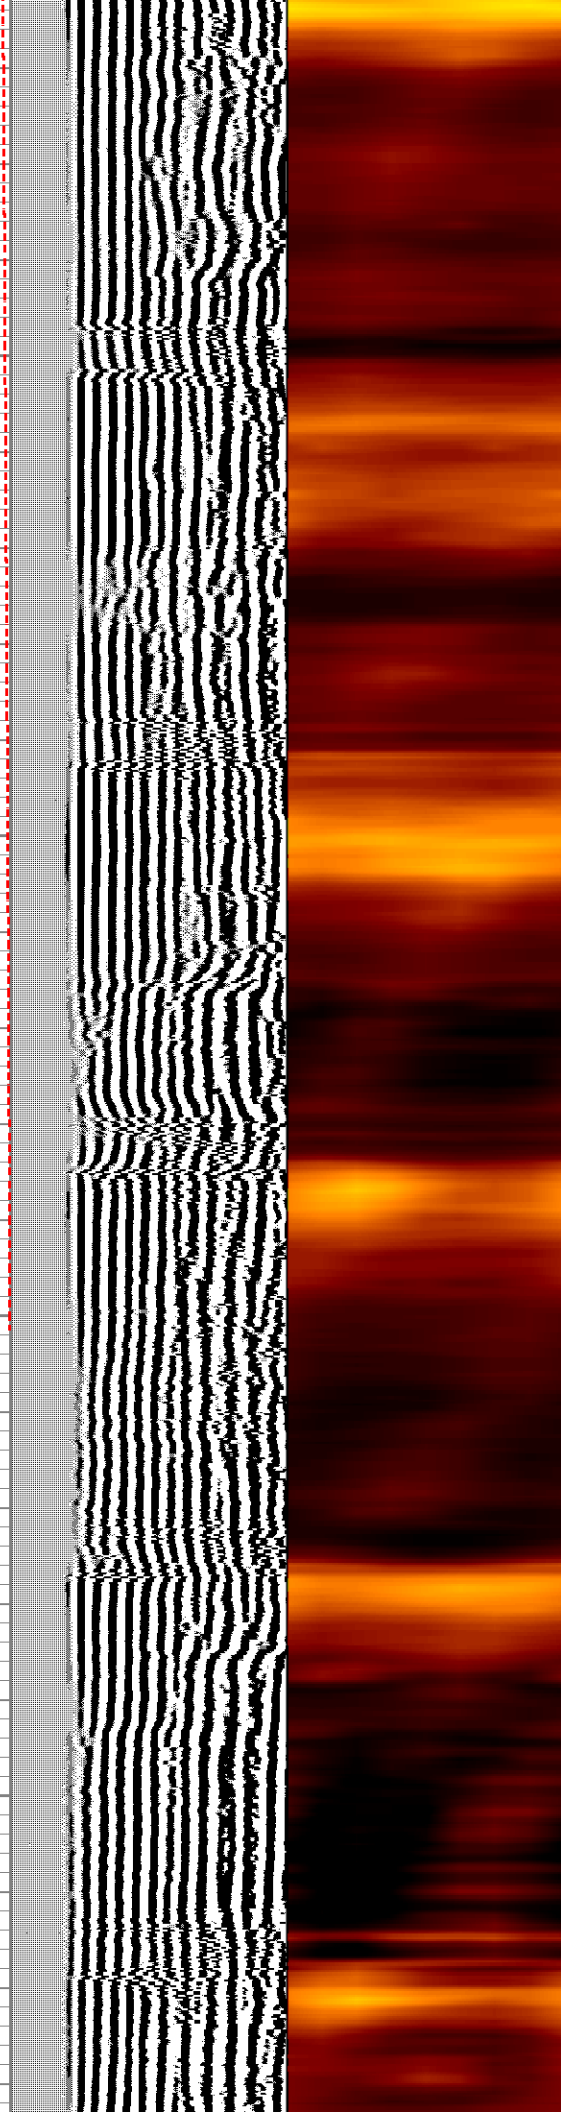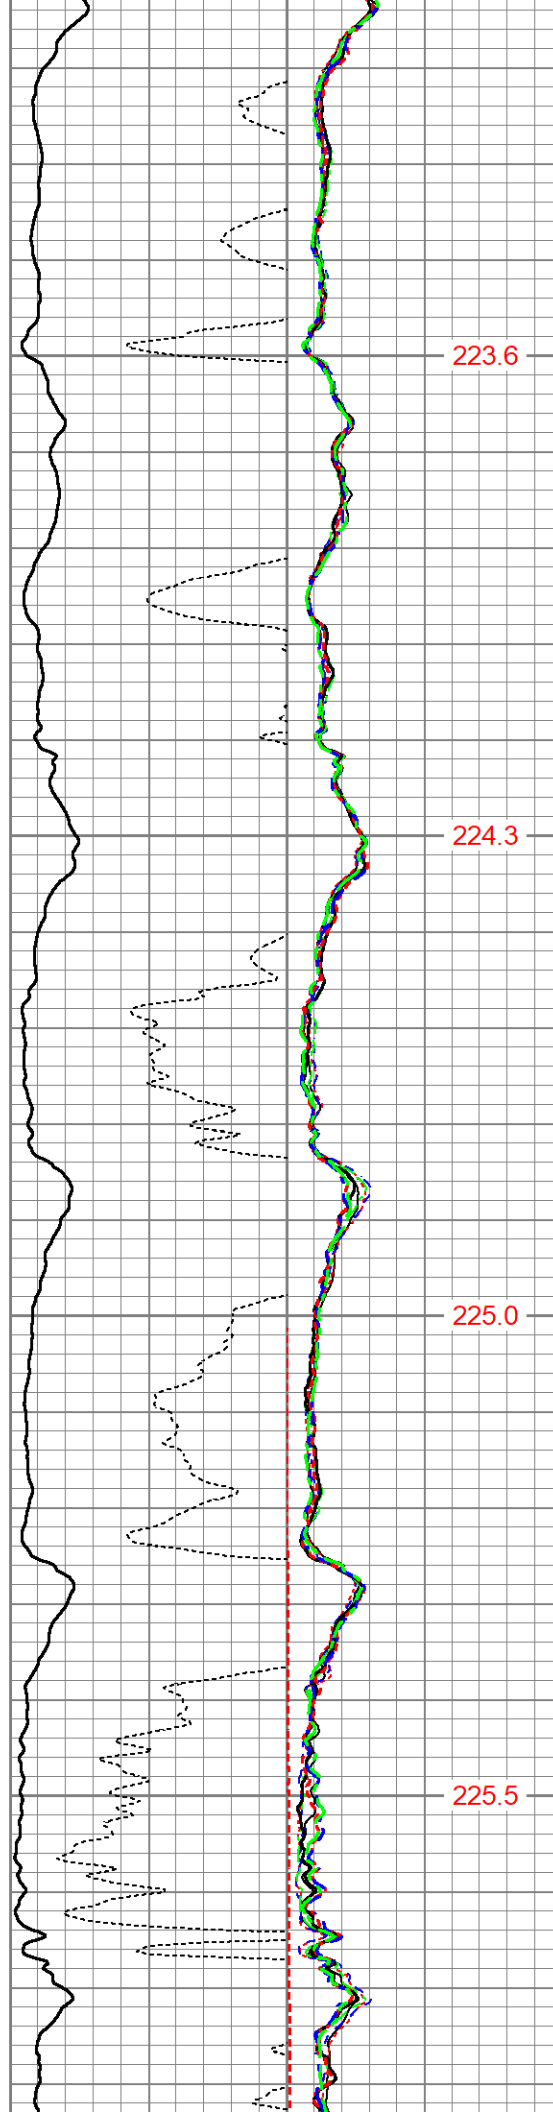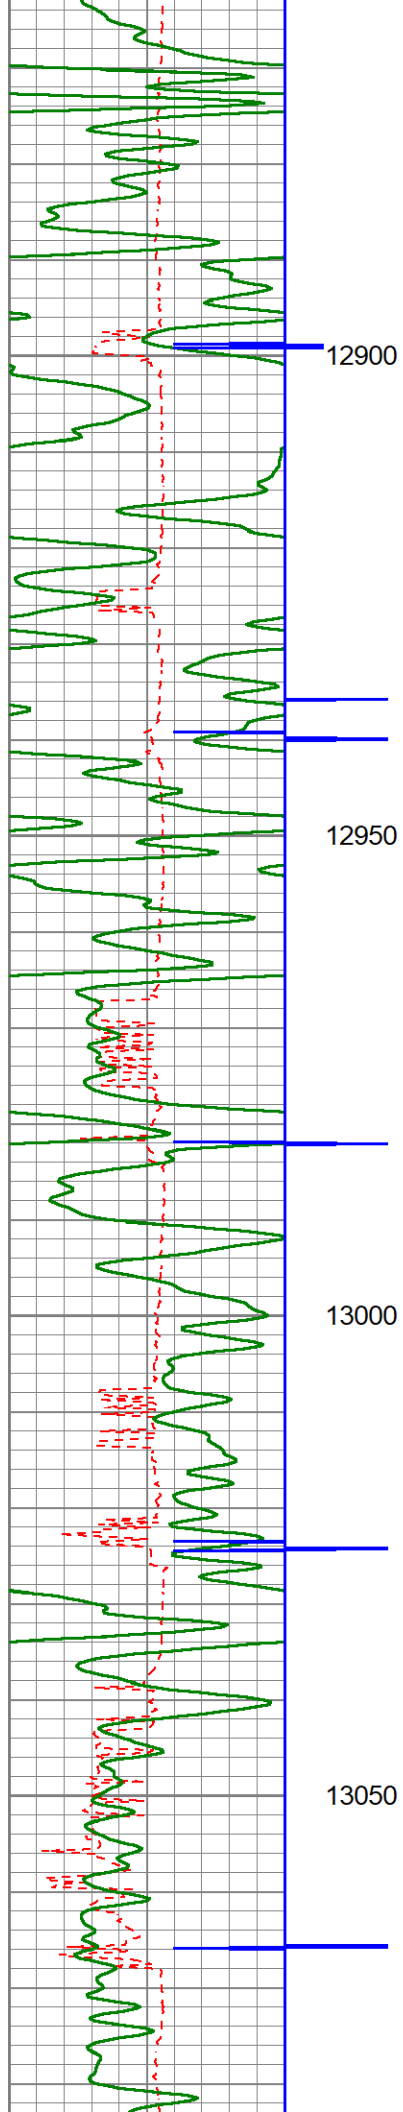

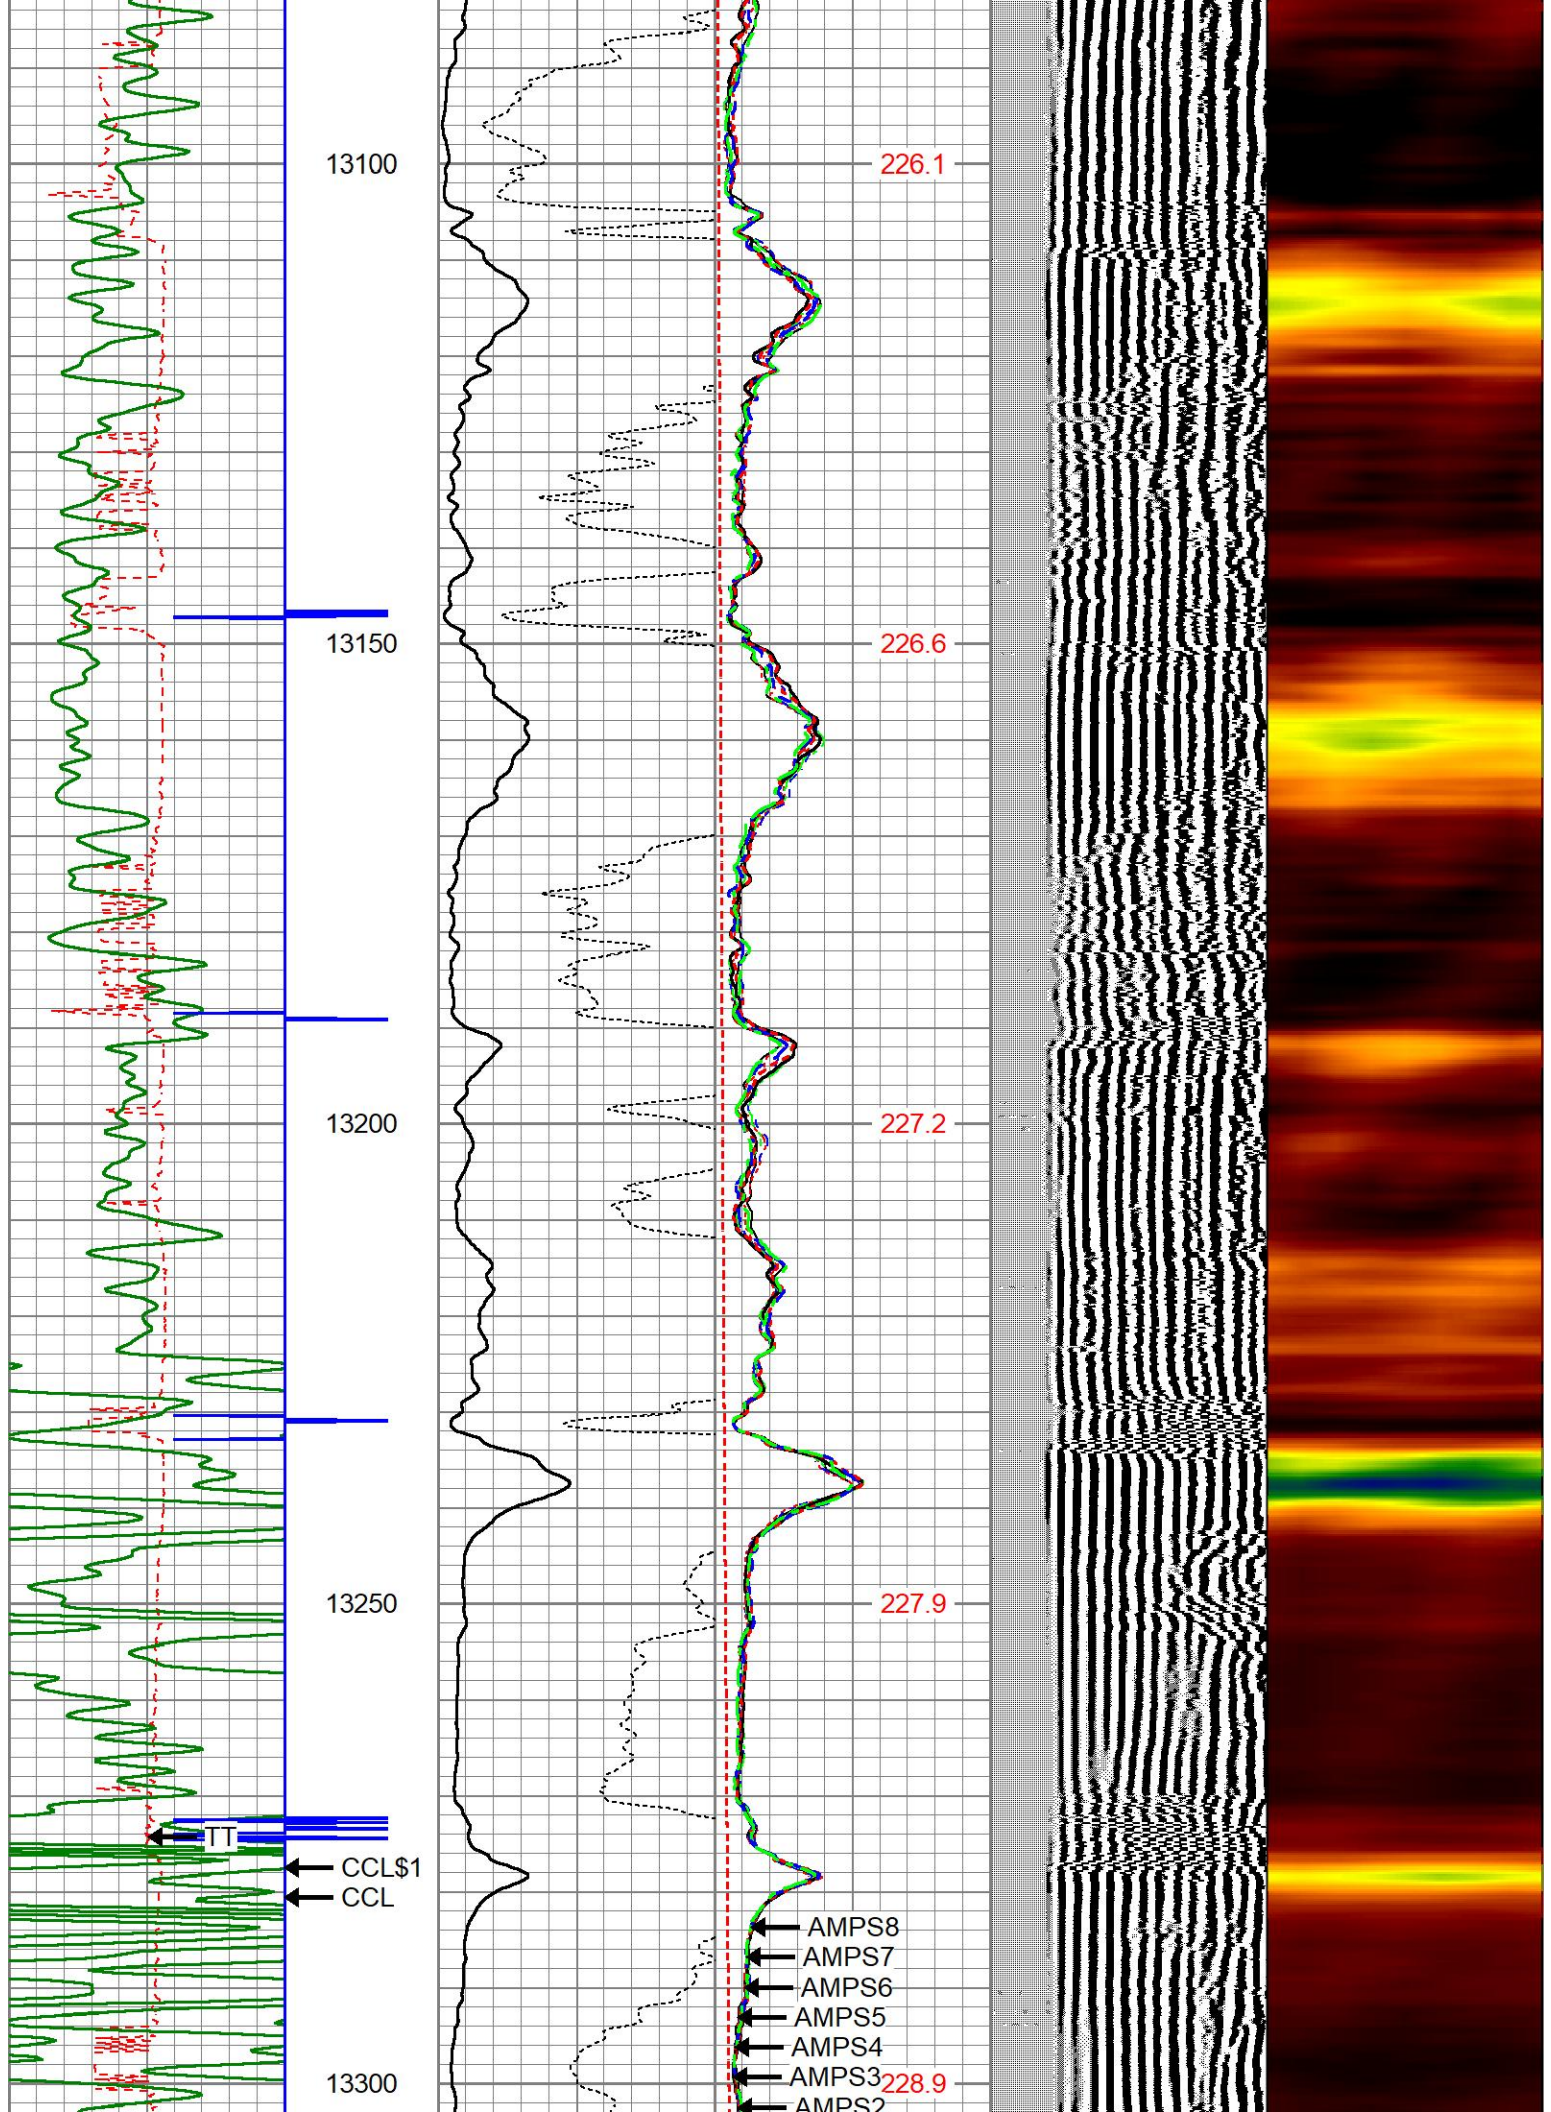

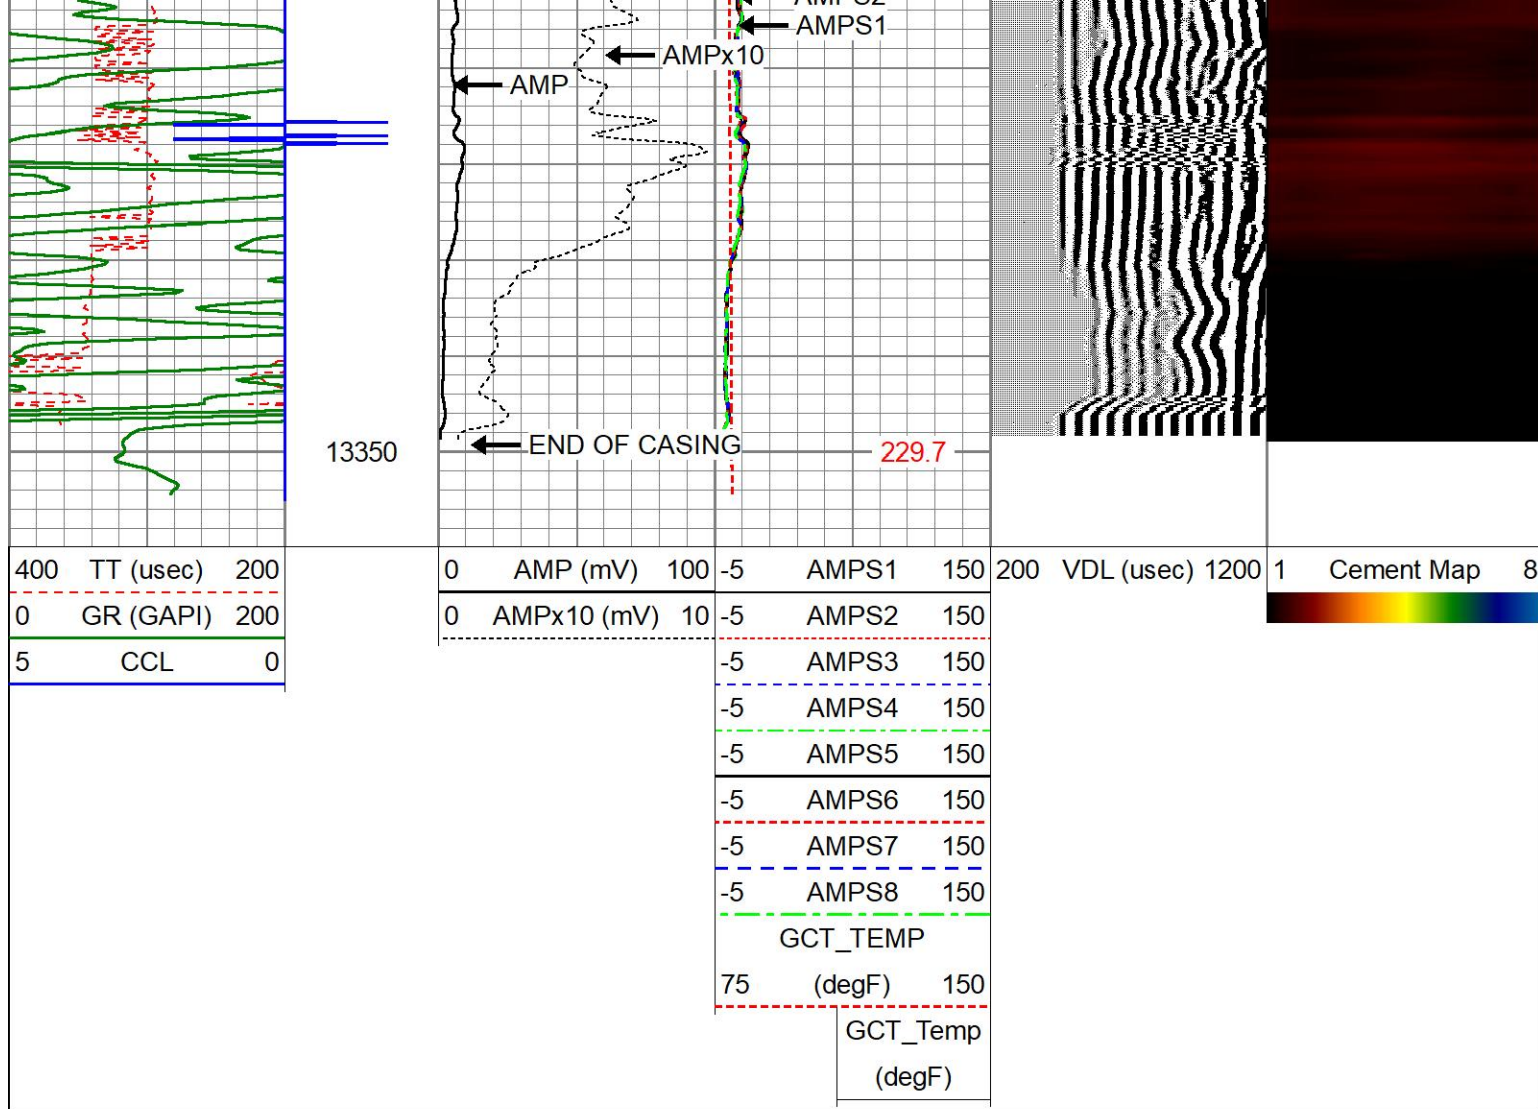

Log Variables

Database C:\ProgramData\Warrior\Data\6_22_21_rcbl.db
Dataset field/well/run1/pass2/_vars_

Top - 9200.00 ft

BOREID in 7.875	BOTTEMP degF 100	CASEOD in 9.625	CASETHCK in 0.435	CASEWGHT lb/ft 43.5	MAXAMPL mV 51.3	MINAMPL mV 1	MINATTN db/ft 0.8
PERFS No	PPT uSec 0	SRFTEMP degF 0	TDEPTH ft 9200				

9200.00 ft - Bottom

CASEOD in 7	CASETHCK in 0.453	CASEWGHT lb/ft 32	MAXAMPL mV 62.2	TDEPTH ft 13500
-------------------	-------------------------	-------------------------	-----------------------	-----------------------

Variable Description

BOREID : Borehole I.D.
BOTTEMP : Bottom Hole Temperature
CASEOD : Casing O.D.
CASETHCK : Casing Thickness

CASEWGHT : Casing Weight
MAXAMPL : Maximum Amplitude
MINAMPL : Minimum Amplitude
MINATTN : Minimum Attenuation

PERFS : Perforation Flag
PPT : Predicted Pipe Time
SRFTEMP : Surface Temperature
TDEPTH : Total Depth

Sensor	Offset (ft)	Schematic	Description	Length (ft)	O.D. (in)	Weight (lb)
--------	-------------	-----------	-------------	-------------	-----------	-------------



Company	OVERFLOW ENERGY LLC	
Well	ROSE SWD 1	
Field	N/A	
County	EDDY	
State	NEW MEXICO	Country USA