

Submit 3 Copies To Appropriate District Office  
 District I  
 1625 N. French Dr., Hobbs, NM 87240  
 District II  
 811 South First, Artesia, NM 87210  
 District III  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 District IV  
 2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico  
 Energy, Minerals and Natural Resources

Form C-103  
 Revised March 25, 1999

OIL CONSERVATION DIVISION  
 2040 South Pacheco  
 Santa Fe, NM 87505

WELL API NO. <b>30-007-20206</b>
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name:  <b>VPR A</b>
8. Well No. <b>56</b>
9. Pool name or Wildcat

SUNDRY NOTICES AND REPORTS ON WELLS  
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:  
 Oil Well  Gas Well  Other  **X Coalbed Methane**

2. Name of Operator  
**EL PASO ENERGY RATON, L.L.C.**

3. Address of Operator  
**PO BOX 190 RATON, NM 87740**

4. Well Location  
 Unit Letter **P** : **646'** feet from the **South** line and **1151'** feet from the **East** line  
 Section **23** Township **32N** Range **20E** NMPM **Colfax** County

10. Elevation (Show whether DR, RKB, RT, GR, etc.)  
**7674' (GR)**

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK  PLUG AND ABANDON   
 TEMPORARILY ABANDON  CHANGE PLANS   
 PULL OR ALTER CASING  MULTIPLE COMPLETION   
 OTHER:

SUBSEQUENT REPORT OF:

REMEDIAL WORK  ALTERING CASING   
 COMMENCE DRILLING OPNS.  PLUG AND ABANDONMENT   
 CASING TEST AND CEMENT JOB   
 OTHER:

12. Proposed procedure for P & A:

- 1) Spot balanced 100' cement plug from 1925 to 1825' (across bottom set of perf's from 1833' - 1855', frac stage 1, but not across perf's from 1786 to 1810'). Let set up.
  - 2) Set retainer @ 1650'. Pump cement into perforations at 1786-1810' and the channel up the backside. Volumes to be determined.
  - 3) Spot 50'+ of cement on top of retainer.
  - 4) Fill hole with 9#/gal. mud containing corrosion inhibitor as request by state of NM
  - 5) Set CIBP @ 1050' (below Raton perforations from 934' to 1016').
  - 6) Spot 300' cement plug from 1050' to 750'.
  - 7) Fill hole with 9#/gal. mud containing corrosion inhibitor as request by state of NM
  - 8) Spot approx. 350' cement plug back to surface.
  - 9) Dress off surface plug, cut off casing to required depth (3' below ground level), weld on plate, and install marker with  
 El Paso, VPRA56, 646'FSL, 1151'FEL, Sec. 23-32N-20E  
 API No. 30-007-20206  
 as required by New Mexico Oil & Gas Conservation Division.
  - 10) File reports as required by New Mexico Oil & Gas Conservation Division.
- I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE DR Lankford TITLE Engineer DATE 03/19/02


Type or print name Donald R. Lankford Telephone No. (505) 445-6721

APPROVED BY [Signature] TITLE DISTRICT SUPERVISOR DATE 3/21/02

Conditions of approval, if any:

<b>Operator</b>	<b>El Paso Energy Raton LLC</b>	<b>Well Name:</b>	<b>VPRA-56</b>
		API #	30-007-20206
Surface Elevation		Location (qtr,qtr)	SE/4
		Sec, Twp, Rng,	23-T32N-20E
Vermejo Producing Formation		Footage Loc.	646' FSL, 1151'FEL

Wellbore Diagram

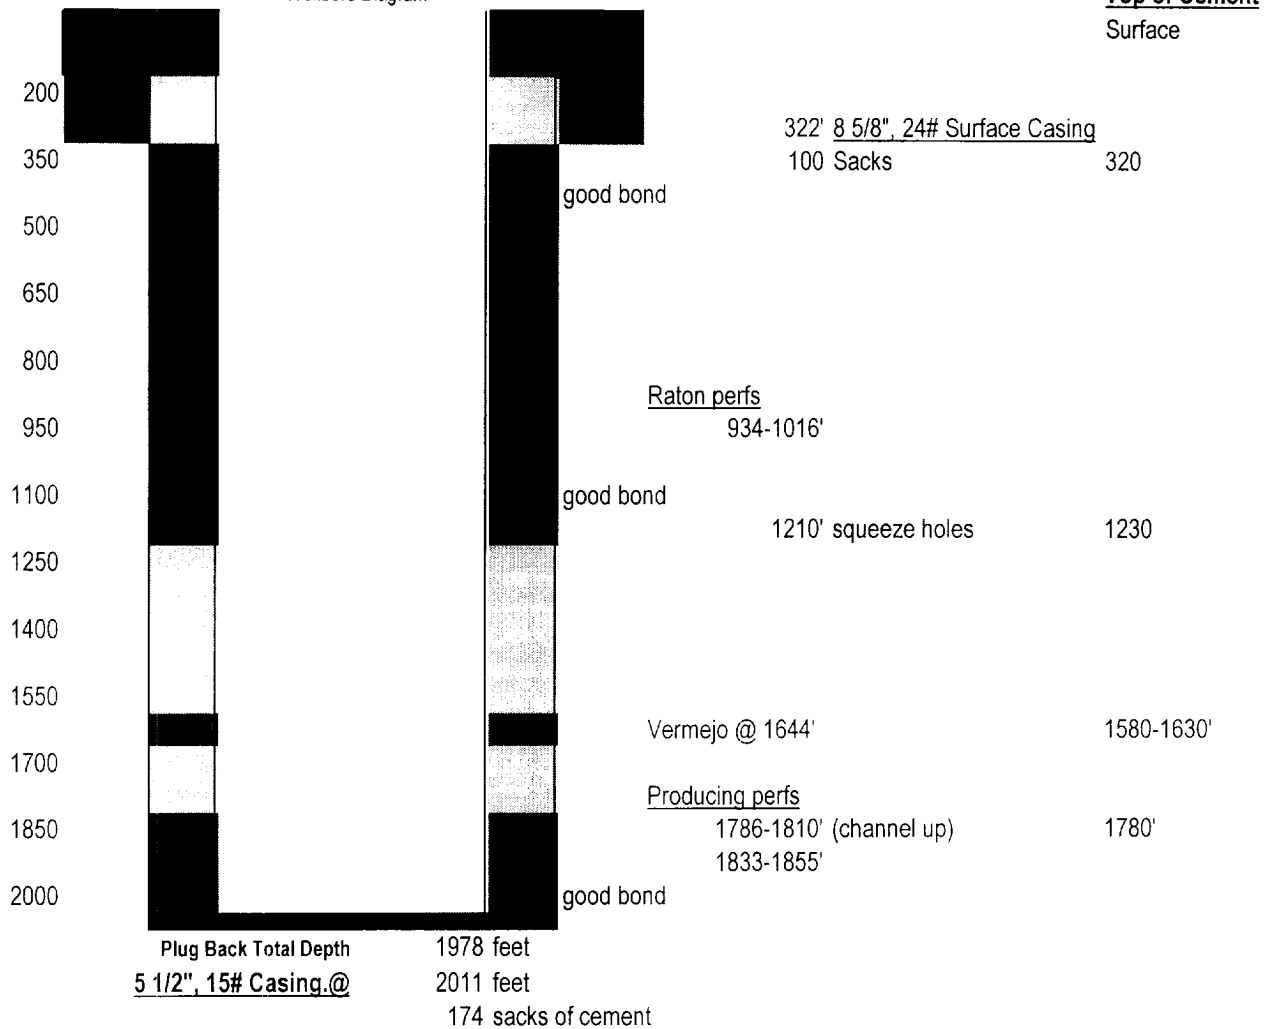

**Operator** El Paso Energy Raton LLC

**Well Name:**

**VPRA-56**

Surface Elevation  
7674'

API #  
Location (qtr,qtr)  
Sec, Twp, Rng,  
Footage Loc.

30-007-20206  
SE/4  
23-T32N-20E  
646' FSL, 1151'FEL

Vermejo Producing Formation

**Proposed  
Wellbore Diagram**

**Top of Cement  
Surface**

