


N.

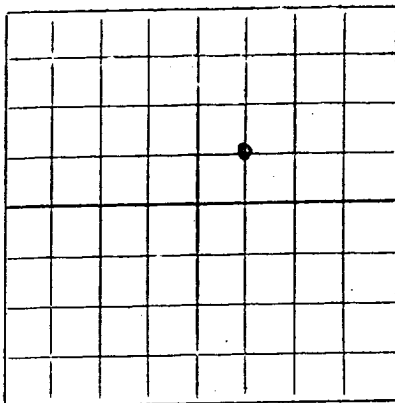

### NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

AREA 640 ACRES  
LOCATE WELL CORRECTLY

Citizen Service Production Company  
(Company or Operator)

Driggers  
(Lease)

Well No. 1, in SW  $\frac{1}{4}$  of NE  $\frac{1}{4}$ , of Sec. 22, T. 11-N, R. 21-E, NMPM.

Wildcat Pool, Guadalupe County.

Well is 1920 feet from North line and 1920 feet from East line

of Section 22-11N-21E. If State Land the Oil and Gas Lease No. is -

Drilling Commenced April 2, 1955 Drilling was Completed May 16, 1955

Name of Drilling Contractor Makin Drilling Company

Address Hobbs, New Mexico

Elevation above sea level at Top of Tubing Head 5091' (DF). The information given is to be kept confidential until 1955.

#### OIL SANDS OR ZONES

No. 1, from <u>-</u> to <u>-</u>	No. 4, from <u>-</u> to <u>-</u>
No. 2, from <u>-</u> to <u>-</u>	No. 5, from <u>-</u> to <u>-</u>
No. 3, from <u>-</u> to <u>-</u>	No. 6, from <u>-</u> to <u>-</u>

#### IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from <u>-</u> to <u>-</u> feet.
No. 2, from <u>-</u> to <u>-</u> feet.
No. 3, from <u>-</u> to <u>-</u> feet.
No. 4, from <u>-</u> to <u>-</u> feet.

#### CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13 3/8	485	New	255.77'	Reamer	-	-	Surface
9 5/8	367	New	2260.00'	Reamer	1740'	1812-1835'	Intermediate

#### MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 3/4"	13 3/8"	269'	300 bags	Plug	-	-
17 3/4"	9 5/8"	2275'	200 bags	Plug	-	-
7 7/8"						

#### RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Perf. (1812-1835') (23') 4 jet shots/ft. Acidized w/2500 gal. 15% reg. acid.

Total load 72 bbl.

Result of Production Stimulation Recovered load - 20 lbs.

Depth Cleaned Out -