

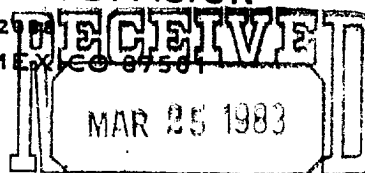
OIL CONSERVATION DIVISION

P. O. BOX 2000

SANTA FE, NEW MEXICO 87501

Form C-103
Revised 10-1-7

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	☒
U.S.G.S.	
LAND OFFICE	
OPERATOR	

OIL CONSERVATION DIVISION
SANTA FE

5a. Indicate Type of Lease

State ☐Fee ☒

5. State Oil & Gas Lease No.

NA

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR.
USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐	7. Unit Agreement Name NA
2. Name of Operator Triton Oil & Gas Corp.	8. Farm or Lease Name Purcell
3. Address of Operator 4849 Greenville Avenue, 10th Floor, Dallas, Texas 75206	9. Well No. 1
4. Location of Well UNIT LETTER <u>B</u> <u>1656.98</u> FEET FROM THE <u>East</u> <u>LINE AND</u> <u>985.7</u> FEET FROM THE <u>North</u> <u>LINE, SECTION</u> <u>14</u> <u>TOWNSHIP</u> <u>11 N</u> <u>RANGE</u> <u>33 E</u> <u>NMPM.</u>	10. Field and Pool, or Wildcat Wildcat
15. Elevation (Show whether DF, RT, GR, etc.) 4049.55' GR	12. County Quay

6. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data
NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☐	REMEDIAL WORK ☐	ALTERING CASING ☒
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☒	PLUG AND ABANDONMENT ☒
PULL OR ALTER CASING ☐	OTHER ☐	CASING TEST AND CEMENT JOBS ☒	OTHER ☐

7. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Commence Drilling Operations: This well spudded on 1-12-83 at 8:00 A.M.

Casing and Cement Test: TD 1000'. Casing run 1-17-83. Consisted of 48 joints of 5 1/2" 14# K-55 ST&C, range 1, casing 998.6'. Set at 997.2'. Cemented with 280 sks, Class "H" with 2% CaCl + 2% cement circulated to surface. Centralizers @ 939', 510', 454', 403', and 337'. Bottom plug baffle @ 976'.

Plug and Abandon: 2-20-83. Perf'd from 470' to 478', 4 shots/ft. 1 9/16" Gun. 2-21-83 rig up CRC to set plug. Set 30' of Cal-Seal @ 465' top. Perf'd from 435' to 451', 2 shots/ft. with 1 9/16" Gun. 2-24-83 rig up CRC. Set 30' of Cal-Seal over perfs to 421' top. Perf'd 410' to 420', 4 shots/ft. 2-27-83 rig up CRC. Set 30' plug over perfs to 390' top. Set 30' plug at surface. Well P & A/

8. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

CHIEF	TITLE <u>Materials Coordinator</u>	DATE <u>3-17-83</u>
APPROVED BY <u>[Signature]</u>	TITLE <u>DIRECTOR SUPERVISOR</u>	DATE <u>4/24/83</u>