

Submit To Appropriate District Office State Lease - 6 copies Fee Lease - 5 copies District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505	State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505	Form C-105 Revised June 10, 2003 WELL API NO. 30-015-32807 5. Indicate Type of Lease STATE ☐ FEE ☒ State Oil & Gas Lease No.
--	---	---

WELL COMPLETION OR RECOMPLETION REPORT AND LOG	
1a. Type of Well: OIL WELL ☐ GAS WELL ☒ DRY ☐ OTHER _____ b. Type of Completion: NEW ☒ WORK ☐ DEEPEN ☐ PLUG ☐ DIFF. WELL ☐ OVER BACK RESVR. ☐ OTHER _____ 2. Name of Operator Robert Elliott Devon Energy Production Company, L.P. Operations Engr Advisor 3. Address of Operator 405-228-8609 20 N. Broadway, Suite 1500, Oklahoma City, OK 73102 4. Well Location SHL: Unit Letter O : 1176' Feet From The south Line and 2123' Feet From The east Line BHL: Unit Ltr I : 1876' FSL & 690' FEL, Sec. 34-21S-24R , Eddy, NM Section 34 Township 21S Range 24E NMPM Eddy County	7. Lease Name or Unit Agreement Name Righthand Canyon "34" Fee Com. RECEIVED JUN 09 2004 8. Well No. 7 OCD-ARTESIA 9. Pool name or Wildcat Indian Basin (Upper Penn) Assoc.

10. Date Spudded 05/23/2003	11. Date T.D. Reached 06/16/2003	12. Date Compl. (Ready to Prod.) 08/07/2003	13. Elevations (DF& RKB, RT, GR, etc.) GL 3918, DF 3934, KB 3935	14. Elev. Casinghead
15. Total Depth MD 8910' TVD 8672'	16. Plug Back T.D. MD 8820' TVD 8585'	17. If Multiple Compl. How Many Zones? N/A	18. Intervals Drilled By all	Rotary Tools X
19. Producing Interval(s), of this completion - Top, Bottom, Name Upper Penn 8148-8254'				20. Was Directional Survey Made yes
21. Type Electric and Other Logs Run Hi Res Laterolog Array & 3 Detector Litho-Density Comp Neutron & CBLs				22. Was Well Cored no

23. CASING RECORD (Report all strings set in well)					
CASING SIZE	WEIGHT LB./FT.	DEPTH SET	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
9 5/8"	36# J55	1550'	14 3/4"	1100 sx; TOC surf	
7"	23# J55/L80/HCL80	8910'	8 3/4"	2175 sx; TOC 3070'	CBL

24. LINER RECORD				25. TUBING RECORD		
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN	SIZE	DEPTH SET
					2 7/8"	8340' EOM
						SUB PUMP

26. Perforation record (interval, size, and number) Upper Penn 8148-8254' with 138 holes (0.41" EHD)	27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC. <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:50%;">DEPTH INTERVAL 8148-8254'</td> <td style="width:50%;">AMOUNT AND KIND MATERIAL USED 14,000 gals 20% NeFe + 134 BS</td> </tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> </table>	DEPTH INTERVAL 8148-8254'	AMOUNT AND KIND MATERIAL USED 14,000 gals 20% NeFe + 134 BS				
DEPTH INTERVAL 8148-8254'	AMOUNT AND KIND MATERIAL USED 14,000 gals 20% NeFe + 134 BS						

28. PRODUCTION							
Date First Production 08/07/2003		Production Method (Flowing, gas lift, pumping - Size and type pump) Reda DN-3000 submersible pumps			Well Status (Prod. or Shut-in) producing		
Date of Test 08/12/2003	Hours Tested 24 hrs	Choke Size	Prod'n For Test Period	Oil - Bbl 42	Gas - MCF 156	Water - Bbl. 3256	Gas - Oil Ratio 3714/1
Flow Tubing Press.	Casing Pressure	Calculated 24-Hour Rate	Oil - Bbl. 42	Gas - MCF 156	Water - Bbl. 3256	Oil Gravity - API - (Corr.) 40 deg	

29. Disposition of Gas (Sold, used for fuel, vented, etc.) sold	Test Witnessed By Joe Huber
---	---------------------------------------

30. List Attachments open hole logs, CBLs, deviation and directional surveys	
--	--

31. I hereby certify that the information shown on both sides of this form as true and complete to the best of my knowledge and belief	
--	--

Signature Candace R. Graham	Printed 405-235-3611 X4520	Name Candace R. Graham	Title Operations Tech. II	Date 06/04/2004
E-mail Address candi.graham@dv.com				

Fee Com. #7, Sec. 34-T21S-R24E, Eddy, NM

INSTRUCTIONS

API 30-015-32807

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well. It shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 25 through 29 shall be reported for each zone. The form is to be filed in quintuplicate except on state land, where six copies are required. See Rule 1105.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy	T. Canyon	T. Ojo Alamo	T. Penn "B"
T. Salt	T. Strawn	T. Kirtland-Fruitland	T. Penn. "C"
B. Salt	T. Atoka	T. Pictured Cliffs	T. Penn. "D"
T. Yates	T. Miss	T. Cliff House	T. Leadville
T. 7 Rivers	T. Devonian	T. Menefee	T. Madison
T. Queen	T. Silurian	T. Point Lookout	T. Elbert
T. Grayburg	T. Montoya	T. Mancos	T. McCracken
T. San Andres	T. Simpson	T. Gallup	T. Ignacio Otzte
T. Glorieta Yeso 2777'	T. McKee	Base Greenhorn	T. Granite
T. Paddock	T. Ellenburger	T. Dakota	T.
T. Blinberry	T. Gr. Wash	T. Morrison	T.
T. Tubb	T. Delaware Sand	T. Todilto	T.
T. Drinkard	T. Bone Springs 3248'	T. Entrada	T.
T. Abo	T. 3rd Bone Spring 7108'	T. Wingate	T.
T. Wolfcamp 7543'	T.	T. Chinle	T.
T. Penn, Up 7806'	T.	T. Permian	T.
T. Cisco (Bugh Co) 8112'	T.	T. Penn "A"	T.
Reef			OIL OR GAS

OIL OR GAS SANDS OR ZONES

No. 1, from.....to.....

No. 2, from.....to.....

No. 3, from.....to.....

No. 4, from.....to.....

IMPORTANT WATER SANDS

include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

LITHOLOGY RECORD (Attach additional sheet if necessary)

From	To	Thickness In Feet	Lithology
8112'	8910'	798'	Cisco Reef / gas, oil, water

WELL NAME AND NUMBER Right Hand Canyon "34" Federal No. 7
LOCATION Section 34, T21S, R24E, Eddy County NM
OPERATOR Devon Energy Production, L.P.
DRILLING CONTRACTOR United Drilling, Inc.

The undersigned hereby certifies that he is an authorized representative of the drilling contractor who drilled the above described well and had conducted deviation tests and obtained the following results:

<u>Degrees @ Depth</u>	<u>Degrees @ Depth</u>	<u>Degrees @ Depth</u>
<u>3/4° 511'</u>	<u> </u>	<u> </u>
<u>1/2° 980'</u>	<u> </u>	<u> </u>
<u> </u>	<u> </u>	<u> </u>
<u> </u>	<u> </u>	<u> </u>
<u> </u>	<u> </u>	<u> </u>
<u> </u>	<u> </u>	<u> </u>
<u> </u>	<u> </u>	<u> </u>
<u> </u>	<u> </u>	<u> </u>
<u> </u>	<u> </u>	<u> </u>

RECEIVED

JUN 09 2004

ODD-ARTESIA

Drilling Contractor United Drilling, Inc.

By: George A. Aho
George A. Aho

Title: Business Manager

Subscribed and sworn to before me this 2nd day of June,
2003.

Karma Tarbeisley
Notary Public

My Commission Expires: 09-25-03

Chaves NM
County State

OPERATOR: DEVON ENERGY PROD. CO.
WELL/LEASE: RIGHT HAND CANYON 34 #7
COUNTY: EDDY

005-0021

STATE OF NEW MEXICO
DEVIATION REPORT

1,540	1/2
2,014	3/4
2,515	3/4

RECEIVED

JUN 09 2004

OCD-ARTESIA


By: 


STATE OF TEXAS


COUNTY OF MIDLAND

The foregoing instrument was acknowledged before me on this 24th day of June, 2003, by Steve Moore on behalf of Patterson-UTI Drilling Company LP, LLLP.

My Commission Expires: 4/08/2007


Notary Public for Midland County, Texas

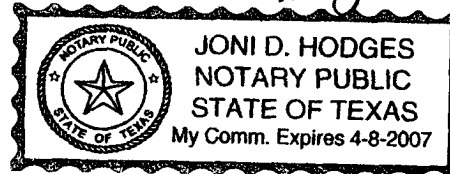

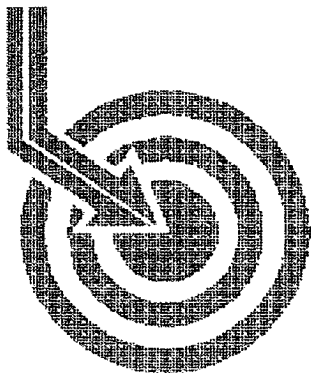

Scientific Drilling

DEVON ENERGY

Field: Indian Basin
Site: Eddy County, NM
Well: Right Hand Canyon 34 Fed. Com. #7
Wellpath: VH - Job #32K0603291/377
Survey: 06/07/03 & 7/23/03

RECEIVED

JUN 09 2004


OOB-ARTESIA

This survey is correct to the best of my knowledge
and is supported by actual field data.

[Signature] Company Representative

Notorized this date 17th of September, 2003.

[Signature]
Notary Signature
County of Midland
State of Texas



Scientific Drilling

Survey Report

Company: DEVON ENERGY Field: Indian Basin Site: Eddy County, NM Well: Right Hand Canyon 34 Fed. Com. Wellpath: VH - Job #32K0603291/377	Date: 9/16/2003 Co-ordinate(NE) Reference: Vertical (TVD) Reference: Section (VS) Reference: Survey Calculation Method:	Time: 16:08:00 Site: Eddy County, NM, True North SITE 0.0 Well (0.00N,0.00E,64.10Azi) Minimum Curvature	Page: 1 Db: Sybase
--	--	--	-------------------------------------

Survey: 06/07/03 & 7/23/03 KSRG 0'-2892' & KSRG 2900'-8837	Start Date: 7/23/2003	
Company: Scientific Drilling Tool: Keeper, Keeper Gyro	Engineer: Angel Guebara Tied-to: From Surface	

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.0	0.00
100.0	0.99	220.67	100.0	-0.8	-0.7	-0.6	0.99	0.9	220.67
200.0	1.38	235.41	200.0	-2.8	-2.0	-2.1	0.49	2.9	226.72
300.0	2.88	230.40	299.9	-6.4	-4.3	-5.0	1.51	6.6	229.69
400.0	2.63	233.19	399.8	-11.1	-7.3	-8.8	0.28	11.4	230.55
500.0	2.39	241.55	499.7	-15.4	-9.6	-12.5	0.44	15.8	232.38
600.0	1.49	247.68	599.6	-18.8	-11.1	-15.5	0.92	19.1	234.41
700.0	1.11	240.46	699.6	-21.1	-12.1	-17.6	0.41	21.3	235.48
800.0	0.70	211.60	799.6	-22.6	-13.1	-18.7	0.60	22.8	235.07
900.0	0.86	189.54	899.6	-23.5	-14.3	-19.2	0.34	23.9	233.21
1000.0	0.88	195.72	999.6	-24.5	-15.8	-19.5	0.10	25.1	230.96
1100.0	0.85	189.45	1099.6	-25.4	-17.3	-19.8	0.10	26.3	228.93
1200.0	1.00	182.79	1199.5	-26.2	-18.9	-20.0	0.18	27.5	226.63
1300.0	1.03	168.53	1299.5	-26.9	-20.6	-19.9	0.25	28.7	223.90
1400.0	0.89	163.16	1399.5	-27.2	-22.3	-19.5	0.17	29.6	221.15
1500.0	0.79	173.52	1499.5	-27.6	-23.7	-19.2	0.18	30.5	218.96
1600.0	0.38	210.46	1599.5	-28.1	-24.7	-19.2	0.54	31.3	217.97
1700.0	0.37	269.94	1699.5	-28.7	-25.0	-19.7	0.37	31.8	218.35
1800.0	0.35	283.54	1799.5	-29.2	-24.9	-20.4	0.09	32.2	219.29
1900.0	0.37	287.72	1899.5	-29.7	-24.7	-21.0	0.03	32.4	220.31
2000.0	0.56	292.01	1999.5	-30.2	-24.4	-21.7	0.19	32.7	221.64
2100.0	0.49	304.16	2099.5	-30.8	-24.0	-22.5	0.13	32.9	223.18
2200.0	0.50	298.97	2199.5	-31.2	-23.6	-23.3	0.05	33.1	224.65
2300.0	0.62	302.84	2299.5	-31.8	-23.1	-24.1	0.13	33.4	226.28
2400.0	0.73	311.22	2399.5	-32.3	-22.3	-25.0	0.15	33.6	228.26
2500.0	0.90	303.40	2499.5	-32.9	-21.5	-26.2	0.20	33.9	230.61
2600.0	0.75	307.77	2599.5	-33.6	-20.7	-27.3	0.16	34.3	232.94
2700.0	0.76	314.98	2699.4	-34.1	-19.8	-28.3	0.10	34.6	235.07
2800.0	0.95	322.44	2799.4	-34.5	-18.7	-29.3	0.22	34.7	237.52
2892.0	1.01	321.71	2891.4	-34.8	-17.4	-30.3	0.07	34.9	240.09
2900.0	1.09	319.28	2899.4	-34.9	-17.3	-30.4	1.14	35.0	240.32
3000.0	1.11	73.56	2999.4	-34.2	-16.3	-30.1	1.85	34.2	241.52
3100.0	3.48	77.92	3099.3	-30.3	-15.4	-26.2	2.37	30.4	239.52
3200.0	6.12	70.07	3199.0	-22.0	-12.9	-18.2	2.71	22.3	234.54
3300.0	8.78	62.09	3298.1	-9.1	-7.6	-6.4	2.85	9.9	220.36
3400.0	10.86	59.95	3396.6	7.9	0.7	8.5	2.11	8.5	85.06
3500.0	13.90	56.43	3494.3	29.3	12.1	26.6	3.13	29.3	65.58
3600.0	15.66	59.12	3591.0	54.6	25.7	48.2	1.89	54.6	61.98
3700.0	16.59	60.90	3687.1	82.3	39.5	72.3	1.05	82.4	61.33
3800.0	16.88	66.04	3782.8	111.1	52.4	98.0	1.51	111.2	61.89
3900.0	17.96	66.07	3878.2	141.0	64.5	125.4	1.08	141.0	62.77
4000.0	17.43	62.51	3973.5	171.4	77.7	152.8	1.20	171.4	63.05
4100.0	16.51	61.46	4069.2	200.5	91.4	178.5	0.97	200.6	62.89
4200.0	16.08	61.23	4165.1	228.6	104.8	203.2	0.43	228.6	62.70
4300.0	14.61	65.12	4261.6	255.0	116.8	226.8	1.79	255.1	62.74
4400.0	14.39	63.86	4358.4	280.0	127.6	249.3	0.38	280.1	62.90
4500.0	16.18	63.78	4454.9	306.4	139.2	273.0	1.79	306.5	62.98
4600.0	18.01	68.14	4550.4	335.8	151.1	299.9	2.23	335.8	63.25
4700.0	17.93	67.29	4645.6	366.5	162.8	328.4	0.27	366.6	63.62


Scientific Drilling Survey Report

Company: DEVON ENERGY
Field: Indian Basin
Site: Eddy County, NM
Well: Right Hand Canyon 34 Fed. Com.
Wellpath: VH - Job #32K0603291/377

Date: 9/16/2003 **Time:** 16:08:00 **Page:** 2
Co-ordinate(NE) Reference: Site: Eddy County, NM, True North
Vertical (TVD) Reference: SITE 0.0
Section (VS) Reference: Well (0.00N,0.00E,64.10Azi)
Survey Calculation Method: Minimum Curvature **Db:** Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
4800.0	17.35	65.70	4740.9	396.8	174.9	356.2	0.75	396.8	63.84
4900.0	17.24	65.53	4836.3	426.5	187.2	383.3	0.12	426.5	63.97
5000.0	17.00	65.01	4931.9	456.0	199.5	410.0	0.28	456.0	64.05
5100.0	17.73	65.75	5027.3	485.8	211.9	437.1	0.76	485.8	64.13
5200.0	17.94	61.33	5122.5	516.4	225.6	464.5	1.37	516.4	64.10
5300.0	17.82	59.49	5217.7	547.0	240.7	491.2	0.58	547.1	63.89
5400.0	17.31	61.16	5313.1	577.2	255.7	517.4	0.72	577.2	63.70
5500.0	17.28	64.73	5408.5	606.9	269.2	543.9	1.06	606.9	63.67
5600.0	18.04	64.68	5503.8	637.2	282.2	571.3	0.76	637.2	63.72
5700.0	17.55	64.40	5599.0	667.8	295.3	598.9	0.50	667.8	63.75
5800.0	16.83	64.34	5694.6	697.3	308.1	625.6	0.72	697.3	63.78
5900.0	16.67	64.01	5790.3	726.1	320.6	651.5	0.19	726.1	63.80
6000.0	17.12	62.04	5886.0	755.2	333.8	677.4	0.73	755.2	63.77
6100.0	16.83	62.66	5981.7	784.4	347.4	703.3	0.34	784.4	63.71
6200.0	17.75	64.70	6077.1	814.1	360.5	729.9	1.10	814.1	63.71
6300.0	17.97	64.06	6172.3	844.8	373.8	757.6	0.29	844.8	63.74
6400.0	18.07	65.11	6267.4	875.7	387.1	785.5	0.34	875.7	63.77
6500.0	17.57	64.37	6362.6	906.3	400.1	813.2	0.55	906.3	63.80
6600.0	17.32	63.45	6458.0	936.3	413.3	840.1	0.37	936.3	63.80
6700.0	16.89	63.41	6553.6	965.7	426.5	866.4	0.43	965.7	63.79
6800.0	17.26	64.20	6649.2	995.0	439.4	892.8	0.44	995.0	63.79
6900.0	16.30	64.83	6744.9	1023.9	451.9	918.8	0.98	1023.9	63.81
7000.0	15.97	65.07	6841.0	1051.7	463.6	944.0	0.34	1051.7	63.84
7100.0	16.05	65.32	6937.1	1079.3	475.2	969.0	0.11	1079.3	63.88
7200.0	15.90	66.13	7033.2	1106.8	486.5	994.1	0.27	1106.8	63.92
7300.0	15.92	64.57	7129.4	1134.2	497.9	1019.0	0.43	1134.2	63.96
7400.0	16.37	62.72	7225.5	1162.0	510.3	1043.9	0.68	1162.0	63.95
7500.0	19.24	63.46	7320.7	1192.6	524.1	1071.2	2.88	1192.6	63.93
7600.0	16.35	66.88	7415.9	1223.1	537.0	1098.9	3.07	1223.1	63.96
7700.0	14.18	67.72	7512.3	1249.4	547.2	1123.2	2.18	1249.4	64.03
7800.0	13.50	69.44	7609.4	1273.2	555.9	1145.4	0.79	1273.2	64.11
7900.0	15.23	69.75	7706.3	1297.9	564.6	1168.7	1.73	1297.9	64.22
8000.0	16.57	64.40	7802.5	1325.3	575.3	1193.9	1.98	1325.3	64.27
8100.0	12.99	67.35	7899.2	1350.7	585.8	1217.1	3.66	1350.7	64.30
8200.0	15.37	66.11	7996.1	1375.2	595.5	1239.6	2.40	1375.2	64.34
8300.0	16.65	65.49	8092.2	1402.8	606.8	1264.8	1.29	1402.8	64.37
8400.0	17.23	64.15	8187.9	1431.9	619.2	1291.1	0.70	1431.9	64.38
8500.0	17.95	62.69	8283.2	1462.1	632.7	1318.2	0.84	1462.1	64.36
8600.0	18.92	61.92	8378.1	1493.7	647.4	1346.2	1.00	1493.7	64.32
8700.0	19.88	60.11	8472.4	1526.9	663.5	1375.2	1.13	1526.9	64.24
8800.0	21.02	59.07	8566.1	1561.7	681.2	1405.3	1.20	1561.7	64.14
8837.0	21.25	59.21	8600.6	1575.0	688.0	1416.8	0.64	1575.0	64.10



**Scientific
Drilling**


Field: Indian Basin

Site: Eddy County, NM

Well: Right Hand Canyon 34 Fed. Com. #7

Wellpath: VH - Job #32K0603291/377


Survey: 06/07/03 & 7/23/03



Azimuths to True North
Magnetic North: 0.00°

Magnetic Field
Strength: 0nT
Dip Angle: 0.00°
Date: 6/9/2003
Model: Wmm_95

South(-)/North(+) [200ft/in]

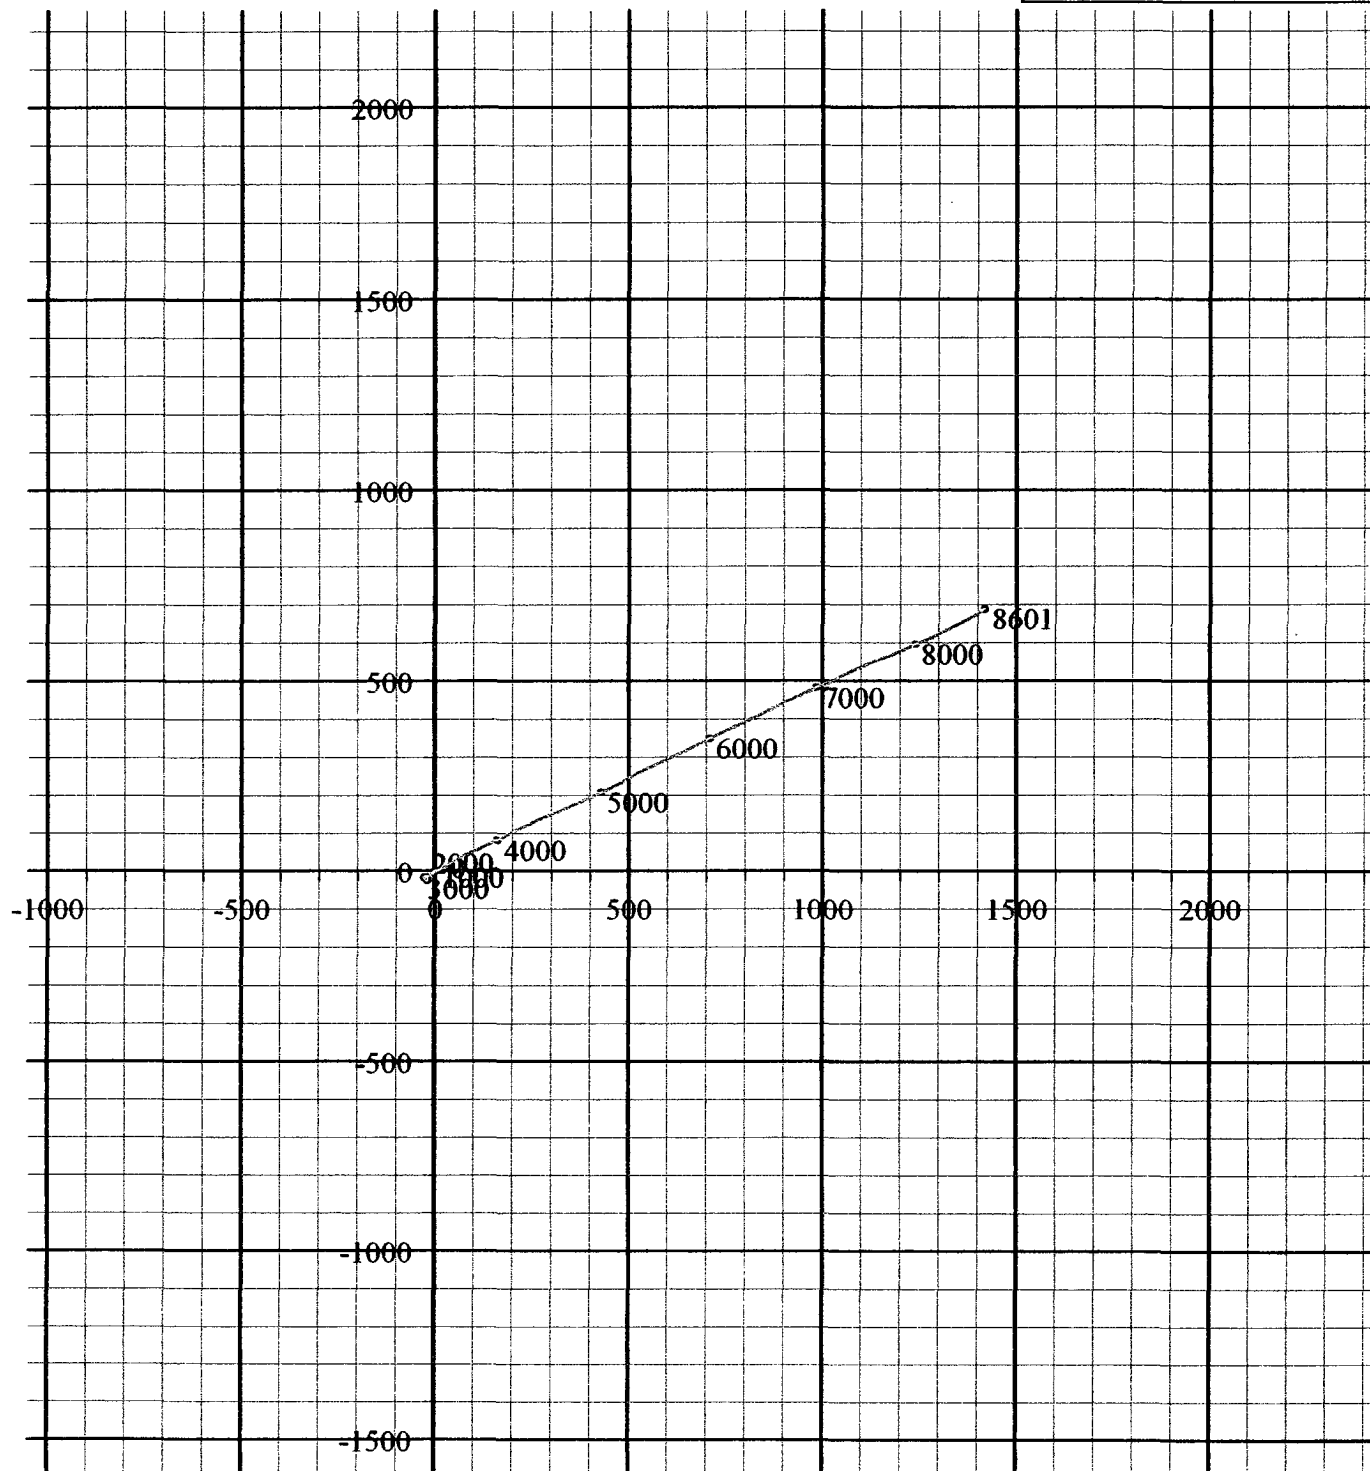

West(-)/East(+) [200ft/in]