

Oil Cons.
N.M. DIV-Dist. 2
1301 W. Grand Avenue
Alamogordo, NM 88210
UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires January 31, 2004

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other
2. Name of Operator
MURCHISON OIL & GAS, INC.
3a. Address 1100 MIRA VISTA BLVD.
PLANO, TX. 75093-4698
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEC. 3, T25S, R26E
1250' FSL & 1250' FEL SE/SE (P)

3b. Phone No. (including area code)
(972) 931-8700

RECEIVED
OCD - ARTESIA

5. Lease Serial No.
NM 19836
6. If Indian, Allottee or Tribe Name
7. If Unit or CA/Agreement, Name and/or No.
8138
8. Well Name and No.
RINGER FED COM #6
9. API Well No.
30-015-33187
10. Field and Pool, or Exploratory Area
WHITE CITY PENN
11. County or Parish, State
EDDY, NM.


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

SEE ATTACHED

Approved as to plugging of the well bore.
Liability under bond is retained until
surface restoration is completed.

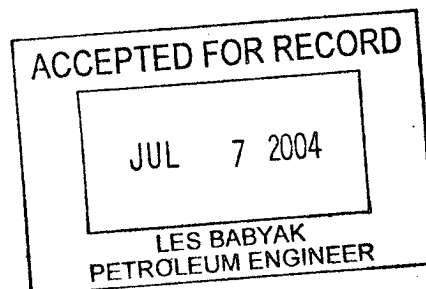

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

MICHAEL S. DAUGHERTY

Title VICE PRESIDENT OPERATIONS

Signature

Michael S. Daugherty

Date

6/30/04

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

**Ringer Fed Com #6
Eddy Co., NM.
Attachment to Form 3160-5 dated 6/30/04
Plug and Abandon**

Drilled 6-1/2" hole to total depth of 11760' on 5/22/04. Spot cement plug above Morrow from 10987' to 10748' with 50 SXS Class "H" + 1.2% BA-50 + .40% CD-32 + .10% SMS + 5% NACL.

Spot cement plug above Strawn from 10292' to 10049' with 50 SXS Class "H" + 1.2% BA-50 + .40% CD-32 + .10% SMS + 5% NACL.

Spot cement plug 7-5/8" across casing shoe @ 8553'. Cement from 8628' to 8449' Class H + 1.2% BA-50 + .40% CD-32 + .10% SMS + 5% NACL, WOC and tag top of plug at 8488'.

Spot cement plug above Bone Springs from 5500' to 5321' with 40 SXS Class H + 1.2% BA-50 + .40% CD-32 + .10% SMS + 5% NACL.

Spot cement plug across 9-5/8" casing shoe @ 1914'. Cement plug from 2000' to 1866' 30 SXS Class "H" + 1.2% BA-50 + .40% CD-32 + .10% SMS + 5% NACL.

Perforate 7-5/8" casing @ 400' with 4 SPF. Pump 79 SXS Class "C" 2% CACL until good cement to surface.

Pits fenced, location cleaned, mouse and rat hole filled and P&A marker installed. Pit remains to be closed and location reclaimed. Will submit final P&A notice when complete.

GEOLOGICAL TOPS

Bell Canyon	1906'
Bone Springs	5376'
Wolfcamp	8608'
Strawn	10292'
Atoka	10347'
Morrow	10937'

NOTE: Notified Kathy with BLM of Plugging operations @ 1700 HR. 5/26/04 prior to plugging.