

Submit 3 Copies to Appropriate
District Office
DISTRICT I
1625 n. French Dr., Hobbs, NM 88240
DISTRICT II
811 South First, Artesia, NM 88210
DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410
DISTRICT IV
2040 S. Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION

2040 South Pacheco
Santa Fe, NM 87505

APR 2003
RECEIVED
OCD - ARTESIA

Form C-103
Revised March 25, 1999

WELL API NO.

30-015-28760

Indicate Type of Lease

STATE ☒ FEE ☐

State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name:

Dorothy 36 State Com

8. Well No.

1

9. Pool name or Wildcat

Empire, Morrow, South

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)

1. Type of Well:
Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Louis Dreyfus Natural Gas Corp.

3. Address of Operator
14000 Quail Springs Parkway - Suite 600 - Oklahoma City, OK 73134

4. Well Location
Unit letter N 1163' feet from the South line and 1647' feet from the West line.
Section 36 Township 17S Range 28E NMPM Eddy County

10. Elevation (Show whether DR, RKB, RT, Gr, etc.)

3674'

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Set a cement retainer @ 8950', or as close to the top of the cut off tubing as possible.
2. Pump 100 sx cement through retainer.
3. Fill casing with 10# salt gel mud.
4. Pump 100' cement plug f/8176' to 8076'.
5. Cut off and pull 7" csg @ 5075' and pump a 100' cement plug. Tag.
6. Spot 100' plug, 50' in and 50' out of the 8 5/8" casing. Tag.
7. Spot 100' plug, 50' in and 50' out of the 13 3/8" casing. Tag.
8. Pump 50' plug from 53' to 3' 490'-590'.
9. Cut off the 13 3/8" casing 3' below GL, and weld on the cap with information.
10. Fill in and smooth off location. Set well marker.

Perf. Csg. @ 7123' Place 100' of cmt inside
outside of Csg 7023'-7123'
Perf. Csg. @ 6172 Place 100' of cmt
outside of Csg 6072'-6172'
From 5025'-5125'-73'
100' Plug - 4205'-4305'
100' plug 650'-750'-TAG
Perf. 8 5/8" csg @ 60'-Circ. cmt. 0'-60'
WOC - 24 HRS - TAG

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Carla Christian TITLE Regulatory Specialist DATE 04/22/03

Type or print name Carla Christian

Telephone No. 405-749-5263

APPROVED BY [Signature] TITLE Field Rep DATE 5-2-03

Conditions of approval, if any:

1/14/03

Dominion Exploration & Production

Dorothy 36 State Com #1

Prop. No. 4526.001


A.P.I. # 30-015-28760

Sec 36-17S-28E

Empire South (Morrow) Field

Eddy County, New Mexico

Spud Date: 1/19/96
Comp. Date:

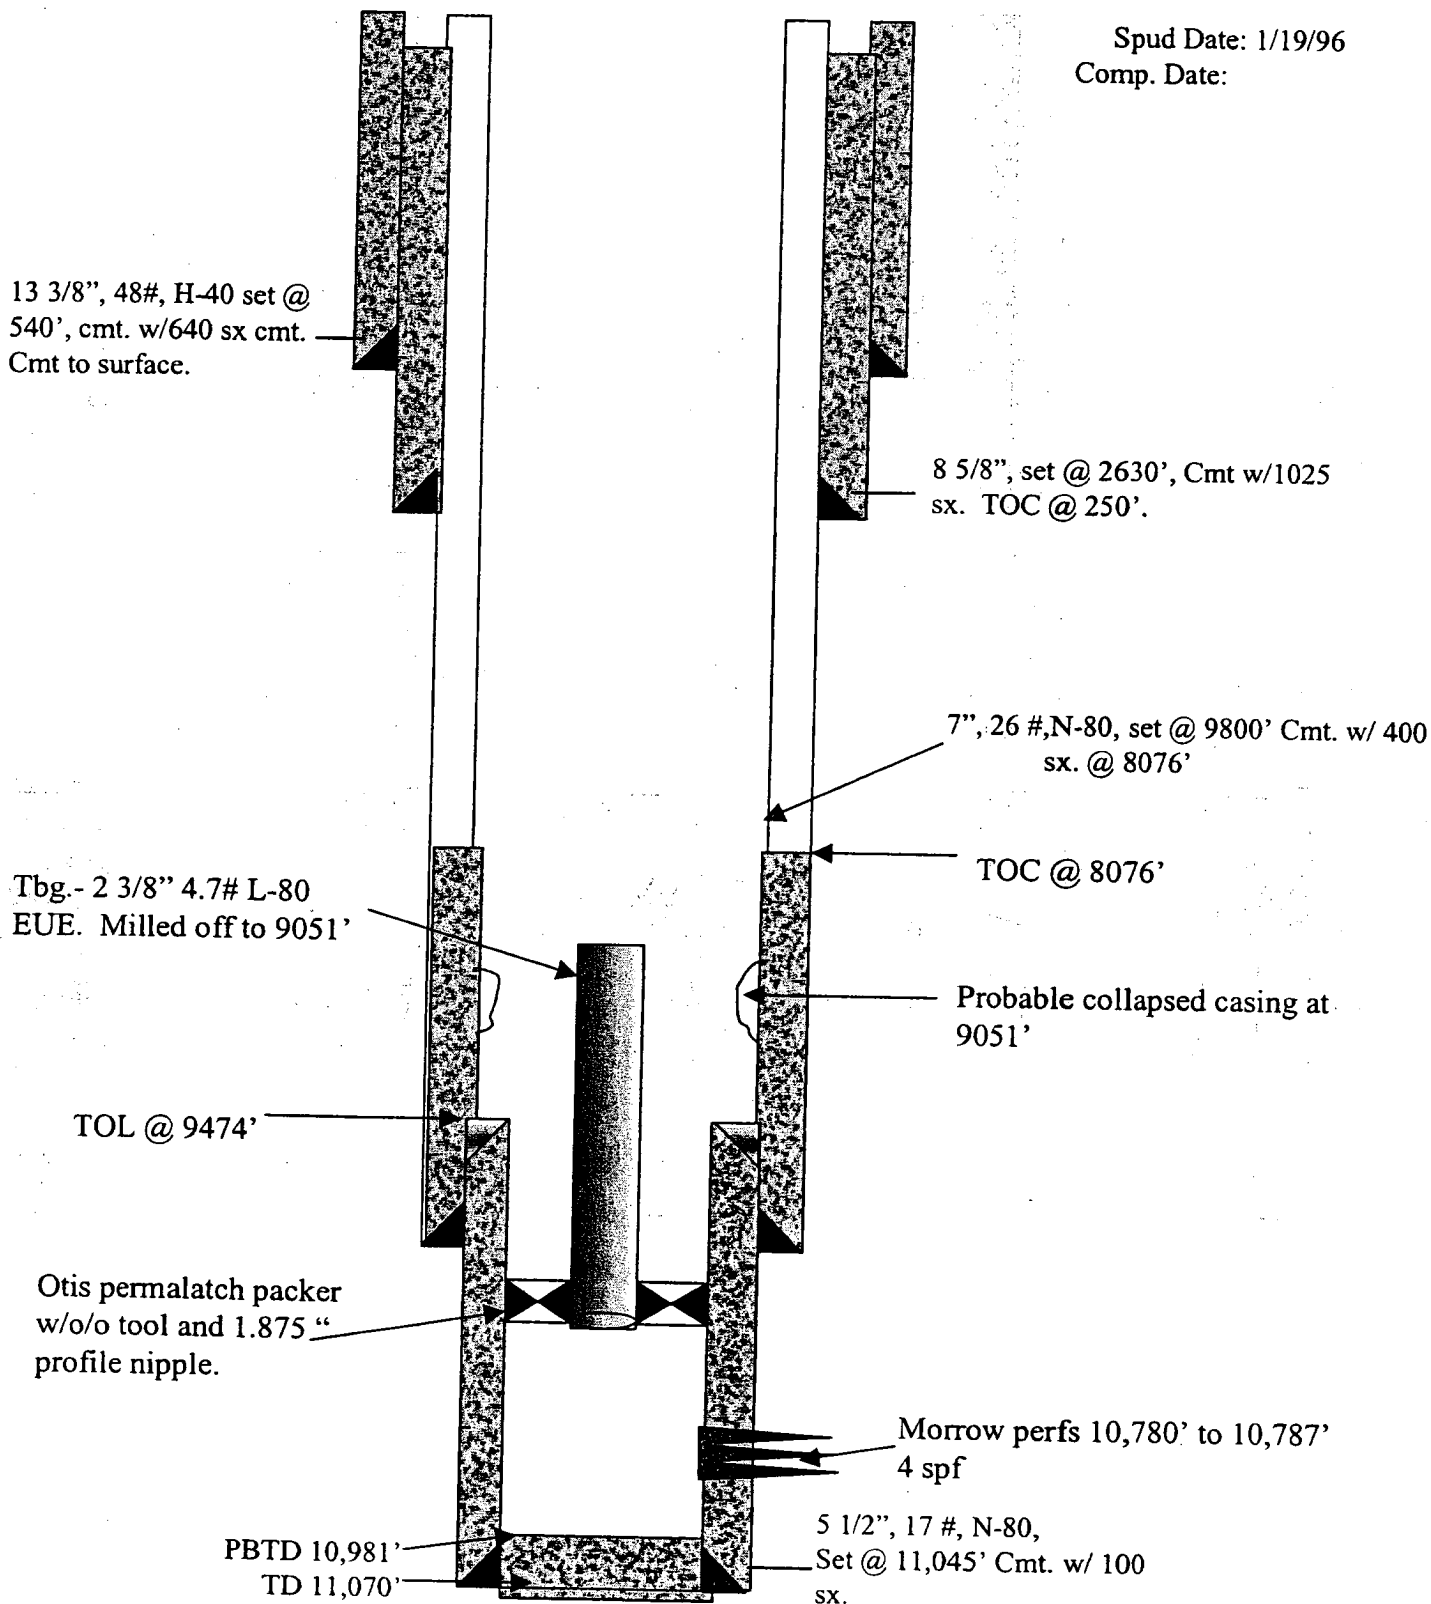

4/14/03

Dominion Exploration & Production

Dorothy 36 State Com #1

Prop. No. 4526.001

A.P.I. # 30-015-28760

Sec 36-17S-28E

Empire South (Morrow) Field

Eddy County, New Mexico

Spud Date: 1/19/96

Comp. Date:

Perf 8 5/8" @53'
and cmt 53'-3'.

100' cmt 540' to 640'
@ base of 13 3/8" -
tag

13 3/8", 48#, H-40 set @
540', cmt. w/640 sx cmt.
Cmt to surface.

Spot 100' cmt - 50' in
and out of 8 5/8" casing
- tag

8 5/8", set @ 2630', Cmt w/1025
sx. TOC @ 250'.

Cut and pull 7" csg and set
100' cmt plug @ 5076'

7", 26 #, N-80, set @ 9800' Cmt. w/ 400
sx. @ 8076'

100' cmt plug 8076' to 8176'

TOC @ 8076'

Retainer set @ ~9050' w/100.sx
cmt.

Tbg. - 2 3/8" 4.7# L-80
EUE. Milled off to 9051'

Probable collapsed casing at
9051'

TOL @ 9474'

Otis permalatch packer
w/o/o tool and 1.875 "
profile nipple.

Morrow perms 10,780' to 10,787'
4 spf

PBTD 10,981'
TD 11,070'

5 1/2", 17 #, N-80,
Set @ 11,045' Cmt. w/ 100
sx.

OPERATOR: Dominion Exploration & Production

API# 30-015-28760

WELL: Dorothy 36 State Com # 1

LOCATION: N-36-17-28

SURFACE CSG- CSG. SIZE 13 3/8" SET @ 540' SX. CMT. TOC. Circ

INT.CSG- CSG. SIZE 8 5/8" SET @ 2630' SX. CMT. TOC. 250'

LONG STRING- CSG. SIZE 7 " SET @ 9800' SX. CMT. ' TOC. 8076'

OTHER- 5 1/2' liner 9474' to 11,045 cmt. To TOL

