

Submit to Appropriate
District Office
State Lease - 6 copies
Fee Lease - 5 copies
DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd, Aztec, NM 87410

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-105
Revised 1-1-89

OIL CONSERVATION DIVISION

2040 Pacheco St.
Santa Fe, NM 87505

WELL API NO.
30-015-33349

5. Indicate Type of Lease
STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well:
OIL WELL ☐ GAS WELL ☒ DRY ☐ OTHER _____
b. Type of Completion:
NEW WELL ☒ WORK OVER ☐ DEEPEN ☐ PLUG BACK ☐ DIFF RESV ☐ OTHER ☐

7. Lease Name or Unit Agreement Name
State W
RECEIVED
JAN 20 2005
DUARTE

2. Name of Operator
Pogo Producing Company

8. Well No.
7

3. Address of Operator
P.O. Box 10340, Midland, TX 79702-7340

9. Pool name or Wildcat
Carlsbad Morrow South

4. Well Location
Unit Letter N : 780 Feet From The South Line and 2310 Feet From The West Line
Section 3 Township 23S Range 26E NMPM Eddy County

10. Date Spudded 04/16/04 11. Date T.D. Reached 06/01/04 12. Date Compl. (Ready to Prod.) 11/20/04 13. Elevations (DF & RKB, RT, GR, etc.) 3305 14. Elev. Casinghead 3306

15. Total Depth 12,000 16. Plug Back T.D. 11,913 17. If Multiple Compl. How Many Zones? 18. Intervals Drilled By Rotary Tools 0-12,000 Cable Tools

19. Producing Interval(s), of this completion - Top, Bottom, Name Morrow 11,668-73, 11,680-86, 11,714-24 20. Was Directional Survey Made Yes

21. Type Electric and Other Logs Run 22. Was Well Cored No

23. **CASING RECORD (Report all strings set in well)**

CASING SIZE	WEIGHT LB/FT.	DEPTH SET	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
13-3/8	48	509	17-1/2	700 sks	
9-5/8	43.5	2490	12-1/4	1000 sks	
7	29	9750	8-1/2	2000 sks	

24. LINER RECORD				25. TUBING RECORD		
SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN	SIZE	DEPTH SET
5	9545	12,000	325		2-3/8	11,480

26. Perforation record (interval, size, and number)
Strawn 10,421-475, 10,561-567 - Sqzd
Morrow 11,668-73, 11,680-86, 11,714-24
27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.
DEPTH INTERVAL AMOUNT AND KIND MATERIAL USED
10421-567 (OA) Acdz & Frac see attached
11668-724 (OA) Frac w/ 32,333# 20/40 Bauxite
+ 14,500# 20/40 Ceramax

28. **PRODUCTION**

Date First Production 11/20/04 Production Method (Flowing, gas lift, pumping - Size and type pump) Flowing Well Status (Prod. or Shut-in) Producing
Date of Test 11/30/04 Hours Tested 24 Choke Size 24/64 Prod'n For Test Period Oil - BbL. 0 Gas - MCF 347 Water - BbL. 2 Gas - Oil Ratio ---
Flow Tubing Press. 72 Casing Pressure --- Calculated 24-Hour Rate Oil - BbL. Gas - MCF Water - BbL. Oil Gravity - API - (Corr.) ---

29. Disposition of Gas (Sold, used for fuel, vented, etc.) Sold Test Witnessed By Blaise Campanella

30. List Attachments
Sundries, Deviation Surveys, Logs, C-104

31. I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief

Signature Cathy Wright Printed Name Cathy Wright Sr Eng Tech 1/19/05
Date

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well. It shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all specific tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, Items 25 through 29 shall be reported for each zone. The form is to be filed in quintuplicate except on state land, where six copies are required. See Rule 1105.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

Southeastern New Mexico

T. Anhy _____
 T. Salt _____
 B. Salt _____
 T. Yates _____
 T. 7 Rivers _____
 T. Queen _____
 T. Grayburg _____
 T. San Andres _____
 T. Glorieta _____
 T. Paddock _____
 T. Blinebry _____
 T. Tubb _____
 T. Drinkard _____
 T. Abo _____
 T. Wolfcamp _____
 T. Penn _____
 T. Cisco (Bough C) _____

T. Canyon _____
 T. Strawn _____
 T. Atoka _____
 T. Miss _____
 T. Devonian _____
 T. Silurian _____
 T. Montoya _____
 T. Simpson _____
 T. McKee _____
 T. Ellenburger _____
 T. Gr. Wash _____
 T. Delaware Sand _____
 T. Bone Springs _____
 T. _____
 T. _____
 T. _____

Northwestern New Mexico

T. Ojo Alamo _____
 T. Kirtland-Fruitland _____
 T. Pictured Cliffs _____
 T. Cliff House _____
 T. Menefee _____
 T. Point Lookout _____
 T. Mancos _____
 T. Gallup _____
 Base Greenhorn _____
 T. Dakota _____
 T. Morrison _____
 T. Todilto _____
 T. Entrada _____
 T. Wingate _____
 T. Chinle _____
 T. Permian _____
 T. Penn. "A" _____

T. Penn. "B" _____
 T. Penn. "C" _____
 T. Penn. "D" _____
 T. Leadville _____
 T. Madison _____
 T. Elbert _____
 T. McCracken _____
 T. Ignacio Otzte _____
 T. Granite _____
 T. _____
 T. _____
 T. _____
 T. _____
 T. _____
 T. _____
 T. _____

OIL OR GAS SANDS OR ZONES

No. 1, from _____ to _____
 No. 2, from _____ to _____
 No. 3, from _____ to _____
 No. 4, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet
 No. 2, from _____ to _____ feet
 No. 3, from _____ to _____ feet

LITHOLOGY RECORD (Attach additional sheet if necessary)

From	To	Thickness in Feet	Lithology	From	To	Thickness in Feet	Lithology
		1300	Basal Anhydrite				
		1688	Delaware Lime				
		1826	Bell Canyon				
		2430	Cherry Canyon				
		3598	Brushy Canyon				
		5168	Bone Spring				
		8674	Wolfcamp				
		10,011	Cisco				
		10,222	Strawn				
		10,943	Morrow				

RECEIVED

JUN 28 2004

078-0023

OPERATOR: POGO PRODUCING
WELL/LEASE: STATE W #7
COUNTY: EDDY, NM


MIDLAND

STATE OF NEW MEXICO
DEVIATION REPORT

285	1.00	4,416	0.75	11,008	1.06
665	1.00	4,736	0.75	11,362	0.75
734	2.00	5,056	1.00	11,610	0.75
737	1.23	5,376	0.75	12,000	0.75
777	1.32	5,696	2.50		
809	1.58	5,824	1.75		
999	1.58	5,950	1.00		
1,063	0.88	6,239	1.00		
1,095	0.70	6,558	1.25		
1,429	2.29	6,874	0.25		
1,446	2.11	7,196	0.25		
1,461	2.20	7,514	0.50		
1,510	1.93	7,832	2.75		
1,542	1.93	7,933	2.50		
1,606	1.67	7,992	2.50		
1,638	1.58	8,120	2.25		
1,765	1.49	8,344	2.00		
1,797	1.32	8,698	1.00		
1,829	1.41	9,018	2.00		
1,940	2.00	9,178	2.00		
2,036	2.00	9,495	1.00		
2,132	1.25	9,779	0.75		
2,291	0.75	10,096	4.25		
2,820	0.25	10,218	4.40		
3,139	1.00	10,281	4.31		
3,459	1.00	10,344	4.04		
3,778	0.75	10,757	3.00		
4,096	1.50	10,945	1.41		


CONFIDENTIAL

By:




STATE OF TEXAS
COUNTY OF MIDLAND

The foregoing instrument was acknowledged before me on this 25th day of June, 2004, by Steve Moore on behalf of Patterson-UTi Drilling Company LP, LLLP.


Notary Public for Midland County, Texas

My Commission Expires: 8/23/2007

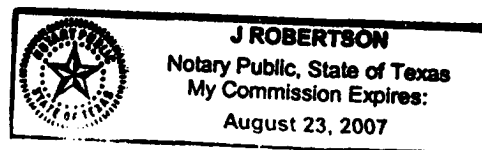

DISTRICT I
P.O. Box 1980, Hobbs, NM 88241-1980

DISTRICT II
P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
P.O. BOX 2088, SANTA FE, N.M. 87504-2088

State of New Mexico
Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

Form C-102
Revised February 10, 1994
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number 30-015-33349	Pool Code 73960	Pool Name Carlsbad Morrow South
Property Code 26857	Property Name STATE "W"	Well Number 7
OGRID No. 017891	Operator Name POGO PRODUCING COMPANY	Elevation 3305'

Surface Location

UL or lot No. N	Section 3	Township 23-S	Range 26-E	Lot Idn	Feet from the 780	North/South line SOUTH	Feet from the 2310	East/West line WEST	County EDDY
--------------------	--------------	------------------	---------------	---------	----------------------	---------------------------	-----------------------	------------------------	----------------

Bottom Hole Location If Different From Surface

UL or lot No. N	Section 3	Township 23S	Range 26E	Lot Idn	Feet from the 810.7	North/South line South	Feet from the 2357.9	East/West line West	County Eddy
--------------------	--------------	-----------------	--------------	---------	------------------------	---------------------------	-------------------------	------------------------	----------------

Dedicated Acres 320	Joint or Infill	Consolidation Code	Order No.
------------------------	-----------------	--------------------	-----------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

LOT 4	LOT 3	LOT 2	LOT 1
-------	-------	-------	-------

RECEIVED
JAN 20 2005
COUNTY CLERK

GEODETIC COORDINATES
NAD 27 NME
Y = 483230.9 N
X = 515946.0 E
LAT. 32°19'42.63"N
LONG. 104°16'54.15"W

2357.9'
2310'
780'
810.7'

OPERATOR CERTIFICATION


I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.

Cathy Wright
Signature
Cathy Wright
Printed Name
Sr Eng Tech'
Title
1/19/05
Date

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

March 08, 2004
Date Surveyed
A.W.B.
Signature & Seal of Professional Surveyor
GARY EIDSON
04.11.0277
Certificate No. GARY EIDSON 12641

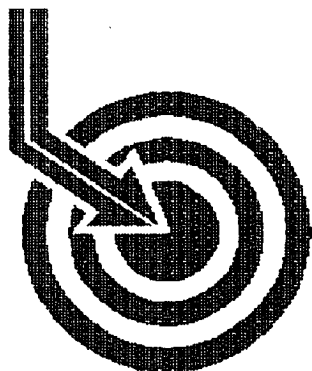

Scientific Drilling

CONFIDENTIAL

POGO

Field: S. Carlsbad
Site: Eddy County, NM
Well: State W #7
Wellpath: VH - Job #32K0504306
Survey: 05/17/04

RECEIVED

JAN 20 2005


EDD-ARTESIA

This survey is correct to the best of my knowledge
and is supported by actual field data.

..... Company Representative

Notorized this date 24th of June, 2004.

Notary Signature
County of Midland
State of Texas

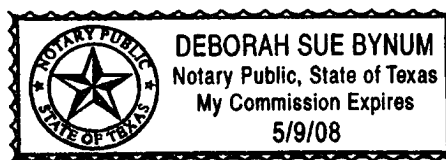



Scientific Drilling Survey Report

CONFIDENTIAL

Company: POGO	Date: 6/24/2004	Time: 16:13:21	Page: 1
Field: S. Carlsbad	Co-ordinate(NE) Reference:	Site: Eddy County, NM, Grid North	
Site: Eddy County, NM	Vertical (TVD) Reference:	SITE: 0.0	
Well: State W #7	Section (VS) Reference:	Well (0.00N,0.00E,302.67Azi)	
Wellpath: VH - Job #32K0504306	Survey Calculation Method:	Minimum Curvature	Db: Sybase

Survey: 05/17/04	Start Date: 5/17/2004
KSRG 0'-9735'	
Company: Scientific Drilling	Engineer: Gonzales/P&M
Tool: Keeper, Keeper Gyro	Tied-to: From Surface

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.0	0.00
100.0	0.60	61.38	100.0	-0.3	0.3	0.5	0.60	0.5	61.38
200.0	0.61	57.39	200.0	-0.7	0.8	1.4	0.04	1.6	60.04
300.0	0.78	74.33	300.0	-1.4	1.3	2.5	0.26	2.8	63.00
400.0	0.75	311.67	400.0	-1.2	1.9	2.6	1.34	3.2	54.55
500.0	1.36	109.75	500.0	-1.7	1.9	3.3	2.07	3.8	59.65
600.0	0.78	135.62	600.0	-3.5	1.0	4.9	0.74	5.0	78.09
700.0	0.71	167.13	699.9	-4.6	-0.1	5.5	0.41	5.5	90.69
800.0	1.35	126.65	799.9	-6.3	-1.4	6.6	0.93	6.7	101.83
900.0	1.70	106.28	899.9	-8.9	-2.5	8.9	0.64	9.3	105.60
1000.0	1.61	104.82	999.9	-11.6	-3.3	11.7	0.10	12.2	105.59
1100.0	0.80	86.75	1099.8	-13.5	-3.6	13.8	0.88	14.2	104.61
1200.0	0.64	28.04	1199.8	-14.0	-3.1	14.7	0.72	15.0	101.72
1300.0	1.46	6.60	1299.8	-13.4	-1.3	15.1	0.90	15.2	94.89
1400.0	2.08	351.49	1399.8	-11.7	1.8	15.0	0.77	15.1	83.29
1500.0	2.05	342.01	1499.7	-9.1	5.3	14.2	0.34	15.1	69.66
1600.0	1.79	337.37	1599.6	-6.4	8.4	13.0	0.30	15.5	57.19
1700.0	1.53	339.10	1699.6	-4.1	11.1	12.0	0.26	16.3	47.15
1800.0	1.37	330.82	1799.6	-1.9	13.4	10.9	0.26	17.3	39.16
1900.0	1.31	331.09	1899.5	0.1	15.4	9.8	0.06	18.3	32.33
2000.0	1.16	329.04	1999.5	2.0	17.3	8.7	0.16	19.4	26.67
2100.0	0.90	324.93	2099.5	3.7	18.8	7.7	0.27	20.3	22.31
2200.0	0.83	311.89	2199.5	5.1	19.9	6.7	0.21	21.0	18.65
2300.0	0.81	309.76	2299.5	6.5	20.9	5.6	0.04	21.6	15.13
2400.0	0.95	298.43	2399.5	8.0	21.7	4.4	0.22	22.2	11.38
2500.0	0.48	327.88	2499.5	9.2	22.5	3.4	0.58	22.7	8.66
2600.0	0.67	301.68	2599.5	10.2	23.1	2.7	0.32	23.3	6.66
2700.0	0.63	308.85	2699.4	11.3	23.8	1.8	0.09	23.8	4.27
2800.0	0.67	292.63	2799.4	12.5	24.3	0.8	0.19	24.4	1.90
2900.0	0.62	298.48	2899.4	13.6	24.8	-0.2	0.08	24.8	359.52
3000.0	0.58	305.33	2999.4	14.6	25.4	-1.1	0.08	25.4	357.52
3100.0	0.73	302.94	3099.4	15.8	26.0	-2.0	0.15	26.1	355.51
3200.0	0.72	302.69	3199.4	17.0	26.7	-3.1	0.01	26.9	353.36
3300.0	0.91	307.09	3299.4	18.5	27.5	-4.3	0.20	27.9	351.18
3400.0	0.92	296.42	3399.4	20.0	28.4	-5.6	0.17	28.9	348.79
3500.0	1.18	293.64	3499.4	21.9	29.1	-7.3	0.26	30.0	345.96
3600.0	1.11	294.63	3599.4	23.8	29.9	-9.1	0.07	31.3	343.08
3700.0	0.82	284.15	3699.3	25.5	30.5	-10.7	0.34	32.3	340.71
3800.0	0.79	289.76	3799.3	26.8	30.9	-12.0	0.08	33.2	338.76
3900.0	0.85	290.88	3899.3	28.2	31.4	-13.4	0.06	34.2	336.96
4000.0	0.74	298.43	3999.3	29.6	32.0	-14.6	0.15	35.2	335.44
4100.0	0.83	301.35	4099.3	31.0	32.7	-15.8	0.10	36.3	334.18
4200.0	0.77	276.58	4199.3	32.3	33.1	-17.1	0.35	37.3	332.71
4300.0	0.76	282.01	4299.3	33.5	33.4	-18.4	0.07	38.1	331.10
4400.0	0.75	288.97	4399.3	34.8	33.7	-19.7	0.09	39.0	329.72
4500.0	0.67	277.27	4499.3	35.9	34.0	-20.9	0.17	39.9	328.44
4600.0	0.73	276.72	4599.3	37.0	34.1	-22.1	0.06	40.7	327.09
4700.0	0.87	275.39	4699.3	38.3	34.3	-23.5	0.14	41.6	325.59
4800.0	0.88	260.18	4799.2	39.5	34.2	-25.0	0.23	42.4	323.86



Scientific Drilling Survey Report

Company: POGO
Field: S. Carlsbad
Site: Eddy County, NM
Well: State W #7
Wellpath: VH - Job #32K0504306

CONFIDENTIAL

Date: 6/24/2004 Time: 16:13:21 Page: 2
Co-ordinate(NE) Reference: Site: Eddy County, NM, Grid North
Vertical (TVD) Reference: SITE 0.0
Section (VS) Reference: Well (0.00N,0.00E,302.67Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase


Survey

MD ft	Incl deg	Azlm deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
4900.0	0.78	252.72	4899.2	40.5	33.9	-26.4	0.15	43.0	322.08
5000.0	0.59	247.62	4999.2	41.3	33.5	-27.5	0.20	43.4	320.58
5100.0	0.48	238.94	5099.2	41.7	33.1	-28.4	0.14	43.6	319.39
5200.0	0.32	249.80	5199.2	42.1	32.8	-29.0	0.18	43.8	318.51
5300.0	0.69	183.36	5299.2	42.0	32.1	-29.3	0.63	43.4	317.61
5400.0	0.64	198.13	5399.2	41.5	30.9	-29.5	0.18	42.7	316.38
5500.0	0.57	189.69	5499.2	41.2	29.9	-29.7	0.11	42.2	315.17
5600.0	0.55	222.17	5599.2	41.1	29.1	-30.2	0.31	41.9	313.96
5700.0	0.72	132.27	5699.2	40.5	28.3	-30.0	0.91	41.3	313.32
5800.0	1.57	96.91	5799.2	38.7	27.7	-28.2	1.07	39.5	314.51
5900.0	1.19	89.93	5899.1	36.6	27.5	-25.8	0.41	37.7	316.89
6000.0	1.14	85.15	5999.1	34.9	27.6	-23.8	0.11	36.4	319.31
6100.0	1.13	88.02	6099.1	33.3	27.8	-21.8	0.06	35.3	321.87
6200.0	0.95	83.16	6199.1	31.9	27.9	-20.0	0.20	34.3	324.38
6300.0	0.93	85.13	6299.1	30.6	28.1	-18.3	0.04	33.5	326.82
6400.0	1.89	107.17	6399.0	28.4	27.6	-16.0	1.09	31.9	329.99
6500.0	2.23	113.23	6499.0	24.8	26.4	-12.6	0.40	29.2	334.48
6600.0	1.00	141.97	6598.9	22.1	24.9	-10.3	1.44	27.0	337.61
6700.0	0.79	155.50	6698.9	20.7	23.6	-9.4	0.30	25.4	338.19
6800.0	0.62	159.81	6798.9	19.7	22.5	-9.0	0.18	24.2	338.23
6900.0	0.10	274.58	6898.9	19.3	22.0	-8.9	0.67	23.7	338.01
7000.0	0.21	115.23	6998.9	19.2	21.9	-8.8	0.31	23.6	338.12
7100.0	0.44	261.50	7098.9	19.3	21.8	-9.0	0.63	23.6	337.52
7200.0	0.57	255.82	7198.9	20.0	21.6	-9.9	0.14	23.7	335.43
7300.0	0.38	245.26	7298.9	20.5	21.3	-10.7	0.21	23.8	333.45
7400.0	0.34	257.43	7398.9	20.9	21.1	-11.2	0.09	23.9	331.97
7500.0	0.38	272.70	7498.9	21.4	21.1	-11.9	0.10	24.2	330.62
7600.0	1.32	266.87	7598.9	22.6	21.0	-13.3	0.94	24.9	327.59
7700.0	1.95	262.52	7698.8	24.8	20.7	-16.2	0.64	26.3	322.04
7800.0	1.92	267.29	7798.8	27.5	20.4	-19.5	0.16	28.3	316.29
7900.0	2.05	267.25	7898.7	30.3	20.3	-23.0	0.13	30.7	311.40
8000.0	1.69	269.87	7998.7	33.0	20.2	-26.3	0.37	33.1	307.55
8100.0	1.57	273.46	8098.6	35.4	20.3	-29.1	0.16	35.5	304.85
8200.0	1.60	272.71	8198.6	37.8	20.4	-31.9	0.04	37.8	302.65
8300.0	1.54	246.62	8298.6	39.8	20.0	-34.5	0.71	39.9	300.04
8400.0	1.34	249.86	8398.5	41.3	19.0	-36.8	0.22	41.4	297.31
8500.0	1.30	251.55	8498.5	42.7	18.3	-39.0	0.06	43.1	295.08
8600.0	0.80	263.85	8598.5	43.9	17.8	-40.8	0.55	44.5	293.61
8700.0	0.71	270.50	8698.5	45.0	17.7	-42.1	0.13	45.7	292.87
8800.0	0.50	265.15	8798.5	45.9	17.7	-43.1	0.22	46.6	292.33
8900.0	0.70	290.84	8898.5	46.8	17.9	-44.1	0.33	47.6	292.07
9000.0	1.45	323.81	8998.5	48.6	19.1	-45.5	0.94	49.3	292.83
9100.0	1.37	335.48	9098.4	50.8	21.2	-46.7	0.30	51.3	294.46
9200.0	1.26	338.77	9198.4	52.7	23.4	-47.6	0.13	53.0	296.14
9300.0	1.08	342.91	9298.4	54.3	25.3	-48.3	0.20	54.5	297.64
9400.0	0.69	340.94	9398.4	55.5	26.8	-48.8	0.39	55.6	298.76
9500.0	0.65	23.57	9498.4	56.0	27.8	-48.7	0.49	56.1	299.75
9600.0	0.99	7.14	9598.3	56.5	29.2	-48.4	0.41	56.5	301.13
9700.0	0.50	19.19	9698.3	57.0	30.5	-48.1	0.51	57.0	302.35
9735.0	0.59	49.85	9733.3	57.0	30.7	-47.9	0.86	57.0	302.67



Scientific
Drilling

Field: S. Carlsbad
Site: Eddy County, NM
Well: State W #7
Wellpath: VH - Job #32K0504306
Survey: 05/17/04



Azimuths to Grid North
True North: 0.00°
Magnetic North: 0.00°

Magnetic Field
Strength: 0nT
Dip Angle: 0.00°
Date: 6 24 2004
Model: igrf2000

CONFIDENTIAL

