
| and the contract of the contra | | |
|--|--|--|
| Submit 1 Copy To Appropriate District State of New Mexico | Form C-103 | |
| Office Engage Minagels and Natural Passages | October 13, 2009 | |
| District I Energy, Witherais and Natural Resources 1625 N French Dr., Hobbs, NM 88240 | WELL API NO. | |
| District II | 30-015-24400 | |
| 1301 W. Grand Ave, Artesia, NM 88210 OIL CONSERVATION DIVISION District III 1220 South St. Francis Dr. | 5. Indicate Type of Lease | |
| 1000 Rio Brazos Rd. Aztec NM 87410 | STATE FEE | |
| District IV Santa Fe, NM 87505 | 6. State Oil & Gas Lease No. | |
| 1220 S St Francis Dr , Santa Fe, NM 87505 | | |
| SUNDRY NOTICES AND REPORTS ON WELLS | 7. Lease Name or Unit Agreement Name | |
| (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A | Achen Frey DM 🗸 | |
| DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS) | 8. Well Number | |
| 1. Type of Well: Oil Well Gas Well Other | 9 ~ | |
| 2. Name of Operator | 9. OGRID Number | |
| Yates Petroleum Corporation | 025575 | |
| 3. Address of Operator | 10. Pool name or Wildcat | |
| 105 South Fourth Street, Artesia, NM 88210 | Eagle Creek San Andres | |
| 4. Well Location | | |
| Unit Letter I : 2310 feet from the South line and | 990 feet from the East line | |
| Section 14 Township 17S Range 25E | NMPM Eddy County | |
| 11. Elevation (Show whether DR, RKB, RT, GR, etc. | | |
| 3477' GR | | |
| | | |
| 12. Check Appropriate Box to Indicate Nature of Notice | Report or Other Data | |
| 12. Check Appropriate box to indicate Nature of Notice | e, Report of Other Data | |
| NOTICE OF INTENTION TO: SU | BSEQUENT REPORT OF: | |
| PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒ REMEDIAL WO | | |
| TEMPORARILY ABANDON | RILLING OPNS P AND A | |
| PULL OR ALTER CASING | NT JOB | |
| DOWNHOLE COMMINGLE | | |
| _ | _ | |
| OTHER: OTHER: | <u>U</u> _ | |
| 13. Describe proposed or completed operations. (Clearly state all pertinent details, a | | |
| of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple C proposed completion or recompletion. | completions: Attach wellbore diagram of | |
| proposed completion of recompletion. | | |
| A MINI WOO BY | | |
| L. MIRU WSC. Rig up any safety equipment as necessary. | | |
| MIRU WSC. Rig up any safety equipment as necessary. Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. | This will fill the entire well bore up from the | |
| | This will fill the entire well bore up from the | |
| 2. Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. | • | |
| 2. Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. | ns. | |
| Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. Cut off wellhead and install dry hole marker. Clean up location as per regulation. | RECEIVED | |
| Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. Cut off wellhead and install dry hole marker. Clean up location as per regulation. | RECEIVED | |
| Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notify OCD 24 | hrs. prior JUN 15 2011 | |
| Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notify OCD 24 | hrs. prior JUN 15 2011 | |
| Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notify OCD 24 | hrs. prio JUN 15 2011 | |
| Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notify OCD 24 To any work. SEE ATTACHED | hrs. prioi JUN 15 2011 | |
| Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notify OCD 24 To any work. SEE ATTACHED CONDITIONS OF Rig Release Date: | hrs. prioi JUN 15 2011 | |
| Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notify OCD 24 To any work. SEE ATTACHED CONDITIONS OF Rig Release Date: | hrs. prior JUN 15 2011 | |
| Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notity OCD 24 To any work. SEE ATTACHED CONDITIONS OF | hrs. prior JUN 15 2011 | |
| Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notify OCD 24 To any work. SEE ATTACHED CONDITIONS OF APPROVAL Rig Release Date: | hrs. prioi JUN 15 2011 done. NMOCD ARTESIA | |
| Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notify OCD 24 To any work. SEE ATTACHED CONDITIONS OF Rig Release Date: | hrs. prioi JUN 15 2011 NMOCD ARTESIA | |
| Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notify OCD 24 To any work. SEE ATTACHED CONDITIONS OF APPROVAL Rig Release Date: | hrs. prioi JUN 15 2011 NMOCD ARTESIA | |
| 2. Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. 3. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notify OCD 24 To any work. SEE ATTACHED CONDITIONS OF APPROVAL I hereby certify that the information above is true and complete to the best of my knowled. | hrs. prioi JUN 15 2011 NMOCD ARTESIA | |
| 2. Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. 3. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notify OCD 24 TO CITY WORK SEE ATTACHED CONDITIONS OF APPROVAL Rig Release Date: I hereby certify that the information above is true and complete to the best of my knowled. SIGNATURE TITLE Regulatory Compliance. | hrs. prior JUN 15 2011 NMOCD ARTESIA dige and belief. ce Technician DATE June 13, 2011 | |
| 2. Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. 3. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notify OCD 24 To any work. SEE ATTACHED CONDITIONS OF APPROVAL I hereby certify that the information above is true and complete to the best of my knowled. SIGNATURE TITLE Regulatory Compliance. Type or print name Craig Aton E-mail address: caton@yatespetre. | hrs. prior JUN 15 2011 NMOCD ARTESIA dige and belief. ce Technician DATE June 13, 2011 | |
| 2. Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. 3. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notify OCD 24 TO CITY WORK SEE ATTACHED CONDITIONS OF APPROVAL Rig Release Date: I hereby certify that the information above is true and complete to the best of my knowled. SIGNATURE TITLE Regulatory Compliance. | hrs. prior JUN 15 2011 NMOCD ARTESIA dige and belief. ce Technician DATE June 13, 2011 | |
| 2. Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. 3. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notify OCD 24 To any work. SEE ATTACHED CONDITIONS OF APPROVAL Rig Release Date: APPROVAL I hereby certify that the information above is true and complete to the best of my knowled. SIGNATURE TITLE Regulatory Compliance. Type or print name Craig Aton For State Use Only | hrs. prior done. RECEIVED JUN 15 2011 NMOCD ARTESIA dige and belief. ce Technician DATE June 13, 2011 oleum.com PHONE:575-748-4385 | |
| 2. Set a CIBP at 1219'. Spot a 90 sx class "C" cement plug from 1219' to surface. CIBP to the surface. WOC and tag plug. 3. Cut off wellhead and install dry hole marker. Clean up location as per regulation. Notify OCD 24 To any work. SEE ATTACHED CONDITIONS OF APPROVAL I hereby certify that the information above is true and complete to the best of my knowled. SIGNATURE TITLE Regulatory Compliance. Type or print name Craig Aton E-mail address: caton@yatespetre. | hrs. prior JUN 15 2011 NMOCD ARTESIA dige and belief. ce Technician DATE June 13, 2011 oleum.com PHONE: 575-748-4385 | |

| SPUD DATE: 2/17/83 | AM | | | 10' FSL & 990' FEL of So ZERO: | |
|---|-------|----------------|--------------------|-----------------------------------|-------------|
| 9-7/8" Hole 10-3/4" @ 359" w/225 sx (Circ) 10-3/4" @ 359" w/225 sx (Circ) Top (SA) Top (SA) Top (SA) | | CASING PROGRAM | | | |
| 9-7/8" Hole 9-7/8" Hole 6-1/4" Hole | 360 | " 40.5# K-55 | | | |
| 9-7/8" Hole 9-7/8" Hole 7" @ 1,140 w/450 sx 1'ed to surf w/340 SA TOP | 1,140 | ¥ J-55 | | | |
| 9-7/8" Hole 7" @ 1,140 w/450 sx 1*ed to surf w/340 SA TOP | 1,489 | 9.5# | | | 4 ¾" Hole |
| 6-1/4" Hole | S | Before | | | 9-7/8" Hole |
| For Carry with 1991 and | 730' | | 1"ed to surf w/340 | | 6-1/4" Hole |
| SA Perfs: 1,269-1,464 | | | | | |

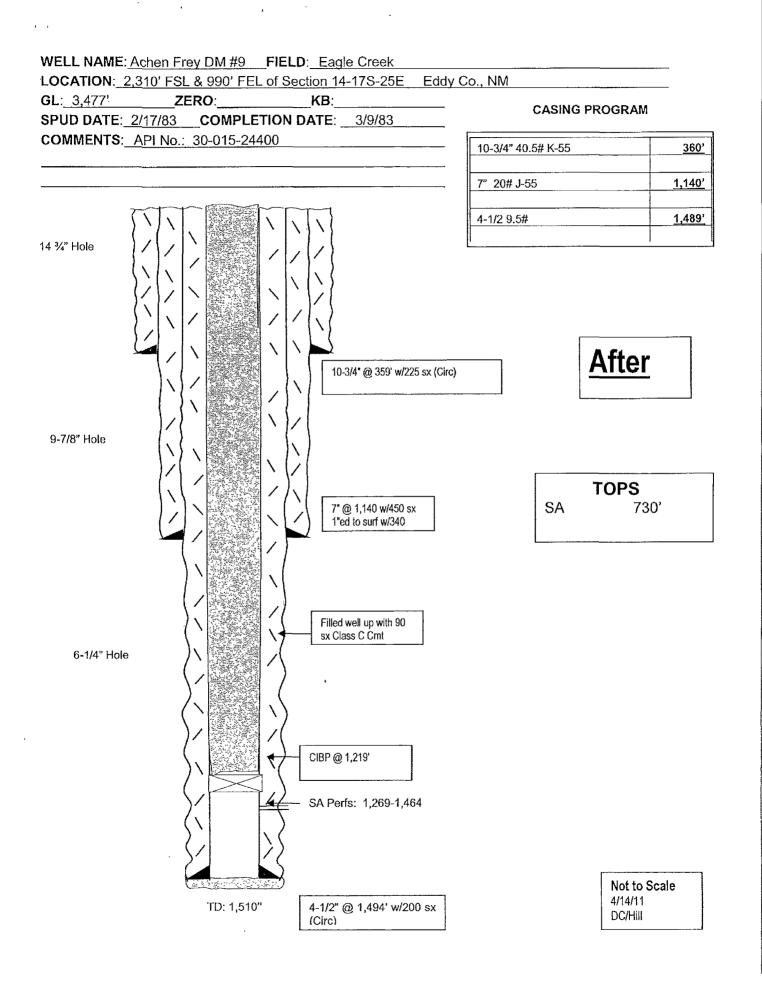

NEW MEXICO OIL CONSERVATION DIVISION DISTRICT 2 OFFICE 1301 W. GRAND AVENUE ARTESIA, NM 88210 (575)748-1283

CONDITIONS OF APPROVAL FOR PLUGGING & ABANDONMENT

Operator: Va Tes Pe Troleum Corp.

Well Name & Number: Achen Frey DM "9

API #: 30-015-24400

- 1. Produced water <u>will not</u> be used during any part of the plugging & abandonment operation.
- 2. Notify NMOCD Dist. 2 office at least 24 hrs before beginning work.
- 3. Trucking companies being used to haul oilfield waste fluids to a disposal commercial or private shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator, as well as the contractor, to verify that this permit is place prior to performing work. Drivers shall produce a copy upon request of NMOCD Field Inspectors.
- **4.** A subsequent C-103 will serve as notification that the well bore has been plugged ONLY. A C-103 FINAL shall be filed before any bonding can be released on the well. Upon receipt of the Final, an inspection will be performed to verify that the location has been satisfactorily cleaned to NMOCD standards.
- 5. If work has not begun within 90 days of the approval of this procedure, an extension request must be filed, stating reason that well has not been plugged.
- **6.** Every attempt must be made to clean the well bore out to below the perfs, before any plugs can be set, by whatever means possible.

DG

Date: 6/20/80//