

Form 3160-3  
(June 2015)FORM APPROVED  
OMB No. 1004-0137  
Expires: January 31, 2018

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
**APPLICATION FOR PERMIT TO DRILL OR REENTER**

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		5. Lease Serial No. <b>NMNM057273</b> 6. If Indian, Allottee or Tribe Name  7. If Unit or CA Agreement, Name and No.  8. Lease Name and Well No. <b>JEFF SMITH MDP1 7-18 FEDERAL COM</b>  32H 9. API Well No. <b>30 015 47437</b>
2. Name of Operator <b>OXY USA INCORPORATED</b> 3a. Address <b>5 Greenway Plaza, Suite 110, Houston, TX 77046</b> 3b. Phone No. (include area code) <b>(713) 366-5716</b>		10. Field and Pool, or Exploratory <b>COTTON DRAW BONE SPRING/COTTO</b> 11. Sec., T. R. M. or Blk. and Survey or Area <b>SEC 6/T24S/R31E/NMP</b>
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface <b>SESW / 730 FSL / 1790 FWL / LAT 32.2411228 / LONG -103.8198652</b> At proposed prod. zone <b>SESW / 20 FSL / 2160 FWL / LAT 32.2101223 / LONG -103.8186956</b>		12. County or Parish <b>EDDY</b> 13. State <b>NM</b>
14. Distance in miles and direction from nearest town or post office* <b>15 miles</b>		15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) <b>20 feet</b> 16. No of acres in lease <b>607.16</b> 17. Spacing Unit dedicated to this well <b>655.0</b>
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. <b>35 feet</b> 19. Proposed Depth <b>10828 feet / 21484 feet</b> 20. BLM/BIA Bond No. in file <b>FED: ESB000226</b>		21. Elevations (Show whether DF, KDB, RT, GL, etc.) <b>3451 feet</b> 22. Approximate date work will start* <b>12/07/2020</b> 23. Estimated duration <b>45 days</b>
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- |   |   |
|---|---|
| 1. Well plat certified by a registered surveyor.<br>2. A Drilling Plan.<br>3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).<br>5. Operator certification.<br>6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature (Electronic Submission)  Title <b>Advisor Regulatory</b>	Name (Printed/Typed) <b>LESLIE REEVES / Ph: (713) 366-5716</b>	Date <b>02/26/2020</b>
Approved by (Signature) (Electronic Submission)  Title <b>Assistant Field Manager Lands &amp; Minerals</b>	Name (Printed/Typed) <b>Cody Layton / Ph: (575) 234-5959</b>  Office <b>Carlsbad Field Office</b>	Date <b>08/28/2020</b>

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
 Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

APPROVED WITH CONDITIONS  
 Approval Date: 08/28/2020

District I  
1625 N. French Dr., Hobbs, NM 88240  
Phone: (575) 393-6161 Fax: (575) 393-0720  
District II  
811 S. First St., Artesia, NM 88210  
Phone: (575) 748-1283 Fax: (575) 748-9720  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
Phone: (505) 334-6178 Fax: (505) 334-6170  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505  
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico  
Energy, Minerals & Natural Resources Department  
OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-102  
Revised August 1, 2011  
Submit one copy to appropriate  
District Office  
☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

<sup>1</sup> API Number <b>30-015- 47437</b>	<sup>2</sup> Pool Code <b>13367</b>	<sup>3</sup> Pool Name <b>COTTON DRAW; BONE SPRING</b>
<sup>4</sup> Property Code <b>328304</b>	<sup>5</sup> Property Name <b>JEFF SMITH MDP1 7_18 FED COM</b>	<sup>6</sup> Well Number <b>32H</b>
<sup>7</sup> OGRID No. <b>16696</b>	<sup>8</sup> Operator Name <b>OXY USA INC.</b>	<sup>9</sup> Elevation <b>3451'</b>

<sup>10</sup> Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	6	24S	31E		730	SOUTH	1790	WEST	EDDY

<sup>11</sup> Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	18	24S	31E		20	SOUTH	2160	WEST	EDDY

<sup>12</sup> Dedicated Acres <b>655.04</b>	<sup>13</sup> Joint or Infill	<sup>14</sup> Consolidation Code	<sup>15</sup> Order No.
--	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

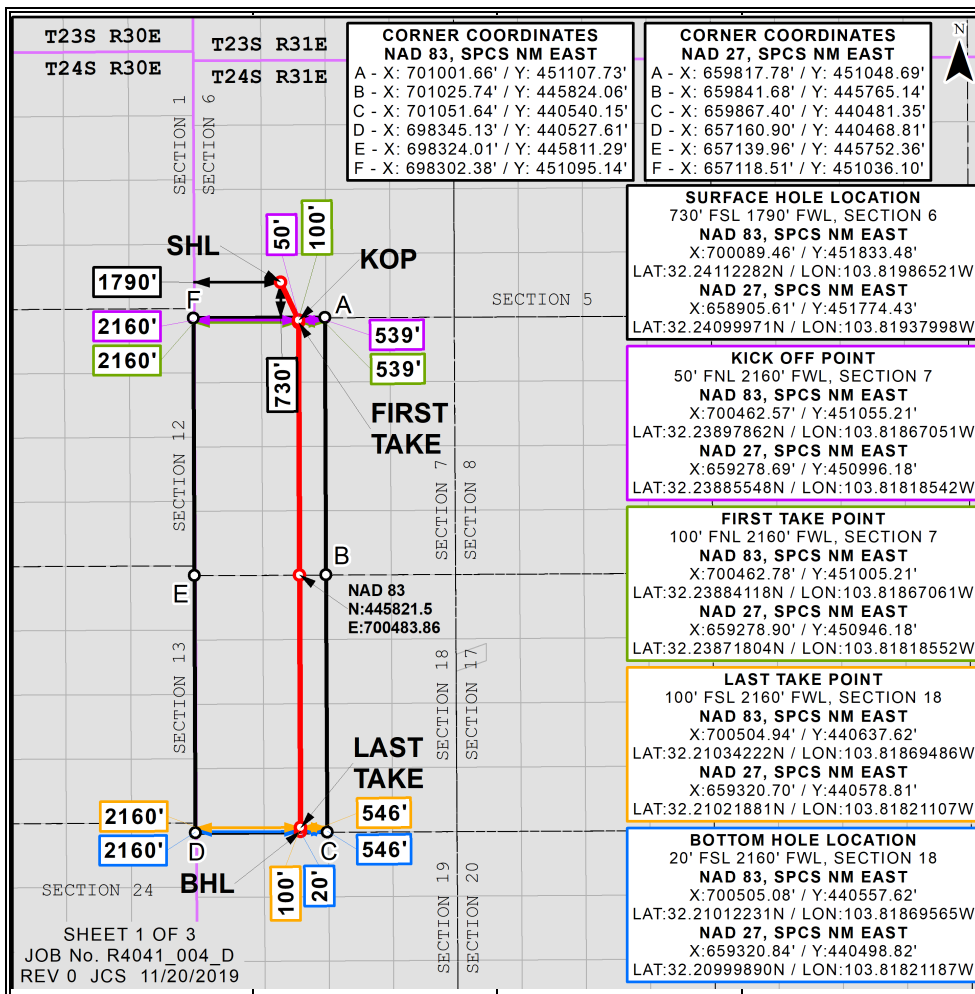	<p><b><sup>17</sup> OPERATOR CERTIFICATION</b></p> <p>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</p> <p><i>Leslie T. Reeves</i> 2/26/20 Signature Date</p> <p><b>LESLIE REEVES</b> Printed Name</p> <p><b>LESLIE_REEVES@OXY.COM</b> E-mail Address</p> <p><b><sup>18</sup> SURVEYOR CERTIFICATION</b></p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>NOVEMBER 21, 2019 Date of Survey</p> <p>Signature and Seal of Professional Surveyor</p> <p><b>DAVID W. MYERS</b> Certificate Number 11403</p>
--	--

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
811 S. First St., Artesia, NM 88210  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources Department  
Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Submit Original  
to Appropriate  
District Office

## GAS CAPTURE PLAN

Date: 02-11-2020

☒ Original

Operator & OGRID No.: OXY USA INC. - 16696

☐ Amended - Reason for Amendment: \_\_\_\_\_

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomple to new zone, re-frac) activity.

*Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).*

### Well(s)/Production Facility – Name of facility

The well(s) that will be located at the production facility are shown in the table below.

Well Name	API	Well Location (ULSTR)	Footages	Expected MCF/D	Flared or Vent	Comments
JEFF SMITH MDP1 7 FED COM 175H	Pending	P-6-T24S-R-31E	331 FSL 565 FEL	2,800	0	
JEFF SMITH MDP1 7 FED COM 176H	Pending	P-6-T24S-R31E	331 FSL 530 FEL	2,800	0	
JEFF SMITH MDP1 7 FED COM 25H	Pending	P-6-T24S-R31E	330 FSL 240 FEL	3,700	0	
JEFF SMITH MDP1 7_18 FED COM 11H	Pending	N-6-T24S-R31E	277 FSL 1926 FWL	2,500	0	
JEFF SMITH MDP1 7_18 FED COM 12H	Pending	N-6-T24S-31E	277 FSL 1961 FWL	2,500	0	
JEFF SMITH MDP1 7_18 FED COM 13H	Pending	P-6-T24S-R31E	418 FSL 994 FEL	2,500	0	
JEFF SMITH MDP1 7_18 FED COM 14H	Pending	P-6-T24S-R31E	348 FSL 994 FEL	2,500	0	
JEFF SMITH MDP1 7_18 FED COM 171H	Pending	M-7-T24S-R31E	779 FSL 705 FWL	4,200	0	
JEFF SMITH MDP1 7_18 FED COM 172H	Pending	M-6-T24S-R31E	779 FSL 740 FWL	4,200	0	
JEFF SMITH MDP1 7_18 FED COM 173H	Pending	N-6-T24S-R31E	275 FSL 2256 FWL	4,200	0	
JEFF SMITH MDP1 7_18 FED COM 174H	Pending	N-6-T23S-R31E	275 FSL 2291 FWL	4,200	0	
JEFF SMITH MDP1 7_18 FED COM 1H	Pending	N-6-T24S-R31E	730 FSL 1755 FWL	3,800	0	
JEFF SMITH MDP1 7_18 FED COM 21H	Pending	D-7-T24S-R31E	198 FNL 321 FWL	5,500	0	
JEFF SMITH MDP1 7_18 FED COM 22H	Pending	D-7-T24S-R31E	198 FNL 421 FWL	5,500	0	
JEFF SMITH MDP1 7_18 FED COM 23H	Pending	C-7-T24S-R31E	233 FNL 2136 FWL	5,500	0	
JEFF SMITH MDP1 7_18 FED COM 24H	Pending	C-7-T24S-R31E	233 FNL 2206 FWL	5,500	0	

JEFF SMITH MDP1 7_18 FED COM 26H	Pending	P-6-T24S-R31E	329 FSL 170 FEL	5,500	0	
JEFF SMITH MDP1 7_18 FED COM 2H	Pending	A-7-T24S-R31E	248 FNL 1200 FEL	3,800	0	
JEFF SMITH MDP1 7_18 FED COM 31H	Pending	N-6-T24S-R31E	730 FSL 1690 FWL	3,000	0	
JEFF SMITH MDP1 7_18 FED COM 32H	Pending	N-6-T24S-R31E	730 FSL 1790 FWL	3,000	0	
JEFF SMITH MDP1 7_18 FED COM 33H	Pending	P-6-T24S-R31E	518 FSL 994 FEL	3,000	0	
JEFF SMITH MDP1 7_18 FED COM 34H	Pending	P-6-T24S-R31E	488 FSL 994 FEL	3,000	0	
JEFF SMITH MDP1 7_18 FED COM 3H	Pending	A-7-T24S-R31E	248 FNL 1100 FEL	3,800	0	
JEFF SMITH MDP1 7_18 FED COM 41H	Pending	N-6-T24S-R31E	279 FSL 1566 FWL	7,200	0	
JEFF SMITH MDP1 7_18 FED COM 42H	Pending	N-6-T24S-R31E	278 FSL 1636 FWL	7,200	0	
JEFF SMITH MDP1 7_18 FED COM 43H	Pending	N-6-T24S-R31E	730 FSL 2020 FWL	7,200	0	
JEFF SMITH MDP1 7_18 FED COM 44H	Pending	N-6-T24S-R31E	730 FSL 2090 FWL	7,200	0	
JEFF SMITH MDP1 7_18 FED COM 45H	Pending	P-6-T24S-R31E	1225 FSL 1200 FEL	7,200	0	
JEFF SMITH MDP1 7_18 FED COM 46H	Pending	P-6-T24S-R31E	1295 FSL 1200 FEL	7,200	0	
NUGGET 6_31 FED COM 11H	Pending	N-6-T24S-31E	277 FSL 1896 FWL	2,500	0	
NUGGET 6_31 FED COM 12H	Pending	N-6-T24S-R31E	277 FSL 1996 FWL	2,500	0	
NUGGET 6_31 FED COM 13H	Pending	P-6-T24S-R31E	453 FSL 994 FEL	2,500	0	
NUGGET 6_31 FED COM 14H	Pending	P-6-T24S-R31E	383 FSL 994 FEL	2,500	0	
NUGGET 6_31 FED COM 171H	Pending	D-7-T24S-R31E	198 FNL 456 FWL	4,200	0	
NUGGET 6_31 FED COM 172H	Pending	D-7-T24S-R31E	198 FNL 491 FWL	4,200	0	
NUGGET 6_31 FED COM 173H	Pending	C-7-T24S-R31E	620 FNL 1994 FWL	4,200	0	
NUGGET 6_31 FED COM 174H	Pending	C-7-T24S-R31E	620 FNL 2029 FWL	4,200	0	
NUGGET 6_31 FED COM 175H	Pending	P-6-T24S-R31E	1089 FSL 300 FEL	4,200	0	
NUGGET 6_31 FED COM 176H	Pending	P-6-T24S-R31E	1089 FSL 265 FEL	4,200	0	
NUGGET 6_31 FED COM 1H	Pending	N-6-T24S-R31E	730 FSL 1720 FWL	3,800	0	
NUGGET 6_31 FED COM 21H	Pending	D-7-T24S-R31E	198 FNL 351 FWL	5,500	0	
NUGGET 6_31 FED COM 22H	Pending	D-7-T24S-R31E	198 FNL 386 FWL	5,500	0	

NUGGET 6_31 FED COM 23H	Pending	C-7-T24S-R31E	233 FNL 2106 FWL	5,500	0	
NUGGET 6_31 FED COM 24H	Pending	C-7-T24S-R31E	233 FNL 2171 FWL	5,500	0	
NUGGET 6_31 FED COM 25H	Pending	P-6-T24S-R31E	330 FSL 270 FEL	5,500	0	
NUGGET 6_31 FED COM 26H	Pending	P-6-T24S-R31E	329 FSL 205 FEL	5,500	0	
NUGGET 6_31 FED COM 2H	Pending	A-7-T24S-R31E	248 FNL 1170 FEL	3,800	0	
NUGGET 6_31 FED COM 31H	Pending	C-7-T24S-R31E	231 FNL 1811 FWL	3,000	0	
NUGGET 6_31 FED COM 32H	Pending	C-7-T24S-R31E	231 FNL 1846 FWL	3,000	0	
NUGGET 6_31 FED COM 33H	Pending	P-6-T24S-R31E	1090 FSL 515 FEL	3,000	0	
NUGGET 6_31 FED COM 34H	Pending	P-6-T24S-R31E	1090 FSL 480 FEL	3,000	0	
NUGGET 6_31 FED COM 3H	Pending	A-7-T24S-R31E	248 FNL 1135 FEL	3,800	0	
NUGGET 6_31 FED COM 41H	Pending	N-6-T24S-R31E	279 FSL 1536 FWL	7,200	0	
NUGGET 6_31 FED COM 42H	Pending	N-6-T24S-R31E	278 FSNL 1601 FWL	7,200	0	
NUGGET 6_31 FED COM 43H	Pending	N-6-T24S-R31E	730 FSL 1990 FWL	7,200	0	
NUGGET 6_31 FED COM 44H	Pending	N-6-T24S-R31E	730 FSL 2055 FWL	7,200	0	
NUGGET 6_31 FED COM 45H	Pending	P-6-T24S-R31E	1195 FSL 1200 FEL	7,200	0	
NUGGET 6_31 FED COM 46H	Pending	P-6-T24S-R31E	1260 FSL 1200 FEL	7,200	0	

### **Gathering System and Pipeline Notification**

Well(s) will be connected to a production facility after flowback operations are complete, where a gas transporter system is in place. The gas produced from production facility is dedicated to Enterprise Field Services, LLC (“Enterprise”) and is connected to Enterprise low/high pressure gathering system located in Eddy County, New Mexico. OXY USA INC. (“OXY”) provides (periodically) to Enterprise a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, OXY and Enterprise have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at Enterprise’s Processing Plant located in Sec. 36, Twn. 24S, Rng. 30E, Eddy County, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

### **Flowback Strategy**

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on Enterprise system at that time. Based on current information, it is OXY’s belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

### **Alternatives to Reduce Flaring**

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation – On lease
  - Only a portion of gas is consumed operating the generator, remainder of gas will be flared

- Compressed Natural Gas – On lease
  - Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal – On lease
  - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

# PECOS DISTRICT

## DRILLING CONDITIONS OF APPROVAL

<b>OPERATOR'S NAME:</b>	<b>OXY USA INCORPORATED</b>
<b>LEASE NO.:</b>	NMNM057273
<b>WELL NAME &amp; NO.:</b>	JEFF SMITH MDP1 7-18 FEDERAL COM 32H
<b>SURFACE HOLE FOOTAGE:</b>	730'/S & 1790'/W
<b>BOTTOM HOLE FOOTAGE:</b>	20'/S & 2160'/E
<b>LOCATION:</b>	Section 6, T.24 S., R.31 E., NMP
<b>COUNTY:</b>	Eddy County, New Mexico

COA

H2S	<input type="radio"/> Yes	<input checked="" type="radio"/> No	
Potash	<input type="radio"/> None	<input checked="" type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input checked="" type="checkbox"/> Fluid Filled	<input checked="" type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit

Break Testing	<input checked="" type="radio"/> Yes	<input type="radio"/> No
---------------	--------------------------------------	--------------------------

### A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

### B. CASING

#### Casing Design

1. The **10-3/4** inch surface casing shall be set at approximately **861** feet (a minimum of **70 feet (Eddy County)** into the Rustler Anhydrite and above the salt) and cemented to the surface.
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run

to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **24 hours in the Potash Area** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

**Intermediate casing must be kept fluid filled to 1/3 to meet BLM minimum collapse requirement.**

- 2. The **7-5/8** inch intermediate casing shall be set at approximately **10109** feet. The minimum required fill of cement behind the **7-5/8** inch intermediate casing is:

**Option 1 (Single Stage):**

- Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash. Excess cement calculates to -63%, additional cement might be required.**

**Option 2:**

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job. **Excess cement calculates to 6.6%, additional cement might be required.**
- b. Second stage above DV tool:
  - Cement to surface. If cement does not circulate, contact the appropriate BLM office. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.**



**Excess cement calculates to 8.8%, additional cement might be required.**

- Operator will perform bradenhead squeeze. Cement to surface. If cement does not circulate see B.1.a, c-d above.

**Operator has proposed to pump down 9-5/8" X 7-5/8" annulus. CBL will be required on one well per pad. If the pumped volume of cement is less than permitted in the APD, BLM will be notified and a CBL may be run. Echometer will be used after bradenhead cement job to determine TOC before pumping top-out cement.**

- ❖ **In Secretary Potash Areas** if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.

3. The minimum required fill of cement behind the **5-1/2** inch production casing is:

**Option 1 (Single Stage):**

Cement should tie-back at least **500 feet** into previous casing string.  
Operator shall provide method of verification.

**Excess cement calculates to 20.07%, additional cement might be required.**

**C. PRESSURE CONTROL**

1. **Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'**
- 2.

**Option 1:**

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the intermediate casing shoe shall be **5000 (5M)** psi.

## **Option 2:**

1. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 5000 (5M) psi.**
  - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
  - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - c. Manufacturer representative shall install the test plug for the initial BOP test.
  - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
  - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

## **D. SPECIAL REQUIREMENT (S)**

### **Communitization Agreement**

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

### **Offline Cementing**

- Contact the BLM prior to the commencement of any offline cementing procedure.

**BOPE Break Testing Variance (Note: For 5M BOPE or less)**

- BOPE Break Testing is ONLY permitted for 5M BOPE or less.
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required.
- The BLM is to be contacted **(575-361-2822 Eddy County) (575-393-3612 Lea County)** 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per Onshore Oil and Gas Order No. 2.

**A separate sundry will be sent prior to spud that reflects the pad based break testing plan**

## **GENERAL REQUIREMENTS**

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,  
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)  
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
  - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
  - b. When the operator proposes to set surface casing with Spudder Rig

- Notify the BLM when moving in and removing the Spudder Rig.
  - Notify the BLM when moving in the 2<sup>nd</sup> Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
  - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
  3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

#### A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.

4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

**B. PRESSURE CONTROL**

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
  - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.

- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - c. Manufacturer representative shall install the test plug for the initial BOP test.
  - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
  - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
- a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
  - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
  - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
  - d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall

have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.

- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

#### C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

#### D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

**RI08192020**



U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

# Operator Certification Data Report

08/31/2020

## Operator Certification

*I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.*

**NAME:** Leslie Reeves

**Signed on:** 07/10/2020

**Title:** Advisor Regulatory

**Street Address:** 5 Greenway Plaza, Suite 110

**City:** Houston

**State:** TX

**Zip:** 77046

**Phone:** (713)497-2492

**Email address:** Leslie\_Reeves@oxy.com

## Field Representative

**Representative Name:** Mike Wilson

**Street Address:**

**City:**

**State:**

**Zip:**

**Phone:** (575)631-6618

**Email address:** Michael\_Wilson@oxy.com





APD ID: 10400054486

Submission Date: 02/26/2020

Highlighted data  
reflects the most  
recent changes

Operator Name: OXY USA INCORPORATED

Well Name: JEFF SMITH MDP1 7-18 FEDERAL COM

Well Number: 32H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

## Section 1 - General

APD ID: 10400054486

Tie to previous NOS? N

Submission Date: 02/26/2020

BLM Office: CARLSBAD

User: Leslie Reeves

Title: Advisor Regulatory

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM057273

Lease Acres: 607.16

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? Y

Permitting Agent? NO

APD Operator: OXY USA INCORPORATED

Operator letter of designation:

JeffSmithMDP17\_18FdCom32H\_C102\_20200710070606.pdf

JeffSmithMDP17\_18FdCom32H\_SitePlan\_20200710070617.pdf

## Operator Info

Operator Organization Name: OXY USA INCORPORATED

Operator Address: 5 Greenway Plaza, Suite 110

Zip: 77046

Operator PO Box:

Operator City: Houston

State: TX

Operator Phone: (713)366-5716

Operator Internet Address:

## Section 2 - Well Information

Well in Master Development Plan? EXISTING

Master Development Plan name: Sand Dunes Area

Well in Master SUPO?

Master SUPO name:

Well in Master Drilling Plan?

Master Drilling Plan name:

Well Name: JEFF SMITH MDP1 7-18 FEDERAL COM

Well Number: 32H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: COTTON DRAW  
BONE SPRING

Pool Name: COTTON DRAW  
BONE SPRING

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

**Is the proposed well in an area containing other mineral resources?** USEABLE WATER,NATURAL GAS,OIL,POTASH

**Is the proposed well in a Helium production area?** N

**Use Existing Well Pad?** N

**New surface disturbance?**

**Type of Well Pad:** MULTIPLE WELL

**Multiple Well Pad Name:** JEFF SMITH MDP1 7-18 FEDERAL COM & NUGGET 6-31 FEDERAL COM

**Number:** 1H, 31H, 32H, 43H, 44H & 1H, 43H, 44H

**Well Class:** HORIZONTAL

**Number of Legs:** 1

**Well Work Type:** Drill

**Well Type:** OIL WELL

**Describe Well Type:**

**Well sub-Type:** INFILL

**Describe sub-type:**

**Distance to town:** 15 Miles

**Distance to nearest well:** 35 FT

**Distance to lease line:** 20 FT

**Reservoir well spacing assigned acres Measurement:** 655 Acres

**Well plat:** JeffSmithMDP17\_18FdCom32H\_C102\_20200710070652.pdf

JeffSmithMDP17\_18FdCom32H\_SitePlan\_20200710070701.pdf

**Well work start Date:** 12/07/2020

**Duration:** 45 DAYS

### Section 3 - Well Location Table

**Survey Type:** RECTANGULAR

**Describe Survey Type:**

**Datum:** NAD83

**Vertical Datum:** NAVD88

**Survey number:**

**Reference Datum:** GROUND LEVEL

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
SHL Leg #1	730	FSL	1790	FWL	24S	31E	6	Aliquot SESW	32.2411228	-103.8198652	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 082904	3451	0	0	N
KOP Leg #1	50	FNL	2160	FWL	24S	31E	7	Aliquot NENW	32.2389786	-103.8186705	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 057273	-6724	10209	10175	N

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
PPP Leg #1-1	100	FNL	2160	FWL	24S	31E	7	Aliquot NENW	32.2388411	- 103.8186706	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 057273	- 7227	11035	10678	Y
PPP Leg #1-2	1	FNL	2159	FWL	24S	31E	18	Aliquot NENW	32.224589	- 103.818683	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 089819	- 7300	16120	10751	Y
EXIT Leg #1	100	FSL	2160	FWL	24S	31E	18	Aliquot SESW	32.2103422	- 103.8186948	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 089819	- 7375	21404	10826	Y
BHL Leg #1	20	FSL	2160	FWL	24S	31E	18	Aliquot SESW	32.2101223	- 103.8186956	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 089819	- 7377	21484	10828	N




# SITE PLAN

SNDDNS-0613  
SEC. 6 TWP. 24-S RGE. 31-E  
SURVEY: N.M.P.M.  
COUNTY: EDDY  
OPERATOR: OXY USA, INC.  
U.S.G.S. TOPOGRAPHIC MAP: BIG SINKS, N.M.  
FAA PERMIT NEEDED: NO

RECLAMATION

TOP SOIL



100' 0' 100' 200'  
SCALE: 1" = 200'

**WELL 1**  
JEFF SMITH MDP1 7\_18 FED COM 31H  
OXY USA, INC.  
730' FSL 1,690' FWL, SECTION 6  
NAD 83, SPCS NM EAST  
X:699989.46' / Y:451833.02'  
LAT:32.24112285N / LON:103.82018865W  
NAD 27, SPCS NM EAST  
X:658805.61' / Y:451773.96'  
LAT:32.24099974N / LON:103.81970341W  
ELEVATION = 3451'

**WELL 4**  
JEFF SMITH MDP1 7\_18 FED COM 32H  
OXY USA, INC.  
730' FSL 1,790' FWL, SECTION 6  
NAD 83, SPCS NM EAST  
X:700089.46' / Y:451833.48'  
LAT:32.24112282N / LON:103.81986521W  
NAD 27, SPCS NM EAST  
X:658905.61' / Y:451774.43'  
LAT:32.24099971N / LON:103.81937998W  
ELEVATION = 3451'

**WELL 2**  
NUGGET 6\_31 FED COM 1H  
OXY USA, INC.  
730' FSL 1,720' FWL, SECTION 6  
NAD 83, SPCS NM EAST  
X:700019.46' / Y:451833.16'  
LAT:32.24112284N / LON:103.82009162W  
NAD 27, SPCS NM EAST  
X:658835.61' / Y:451774.10'  
LAT:32.24099973N / LON:103.81960638W  
ELEVATION = 3451'


**WELL 5**  
NUGGET 6\_31 FED COM 43H  
OXY USA, INC.  
730' FSL 1,990' FWL, SECTION 6  
NAD 83, SPCS NM EAST  
X:700289.45' / Y:451834.59'  
LAT:32.24112323N / LON:103.81921835W  
NAD 27, SPCS NM EAST  
X:659105.60' / Y:451775.53'  
LAT:32.24100011N / LON:103.81873314W  
ELEVATION = 3452'

**WELL 3**  
JEFF SMITH MDP1 7\_18 FED COM 1H  
OXY USA, INC.  
730' FSL 1,755' FWL, SECTION 6  
NAD 83, SPCS NM EAST  
X:700054.46' / Y:451833.32'  
LAT:32.24112283N / LON:103.81997841  
NAD 27, SPCS NM EAST  
X:658870.61' / Y:451774.26'  
LAT:32.24099972N / LON:103.81949318W  
ELEVATION = 3452'

**WELL 6**  
JEFF SMITH MDP1 7\_18 FED COM 43H  
OXY USA, INC.  
730' FSL 2,020' FWL, SECTION 6  
NAD 83, SPCS NM EAST  
X:700319.45' / Y:451834.74'  
LAT:32.24112325N / LON:103.81912132W  
NAD 27, SPCS NM EAST  
X:659135.60' / Y:451775.68'  
LAT:32.24100013N / LON:103.81863612W  
ELEVATION = 3452'

**WELL 7**  
NUGGET 6\_31 FED COM 44H  
OXY USA, INC.  
730' FSL 2,055' FWL, SECTION 6  
NAD 83, SPCS NM EAST  
X:700354.45' / Y:451834.91'  
LAT:32.24112326N / LON:103.81900812W  
NAD 27, SPCS NM EAST  
X:659170.60' / Y:451775.86'  
LAT:32.24100015N / LON:103.81852292W  
ELEVATION = 3452'

**WELL 8**  
JEFF SMITH MDP1 7\_18 FED COM 44H  
OXY USA, INC.  
730' FSL 2,090' FWL, SECTION 6  
NAD 83, SPCS NM EAST  
X:700389.45' / Y:451835.09'  
LAT:32.24112328N / LON:103.81889492W  
NAD 27, SPCS NM EAST  
X:659205.60' / Y:451776.03'  
LAT:32.24100017N / LON:103.81840972W  
ELEVATION = 3452'

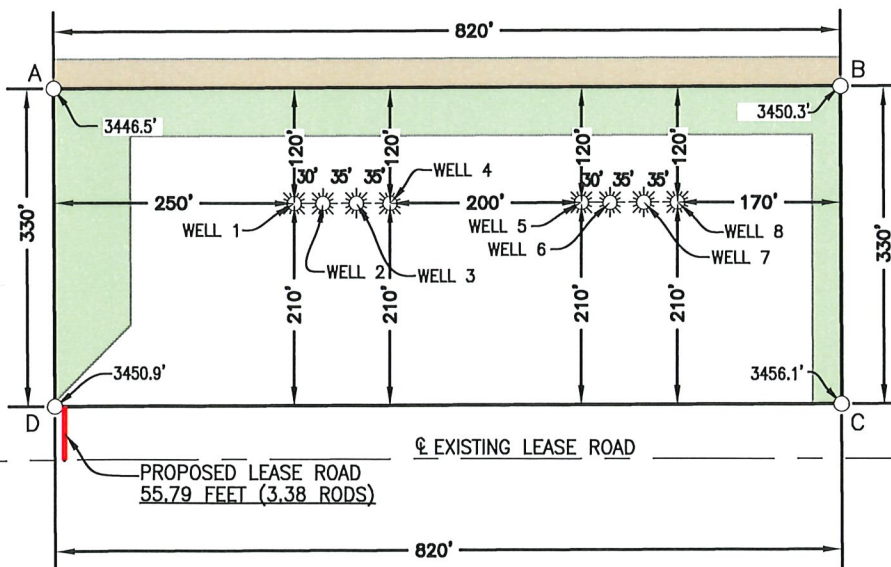

NAD 83			
A	E:(X)699738.86 N:(Y)451951.85	LAT:32.24145279 LON:-103.82099732	
B	E:(X)700558.85 N:(Y)451955.93	LAT:32.24145323 LON:-103.81834516	
C	E:(X)700560.49 N:(Y)451625.93	LAT:32.24054612 LON:-103.81834496	
D	E:(X)699740.48 N:(Y)451626.16	LAT:32.24055752 LON:-103.82099710	

NAD 27			
A	E:(X)658555.01 N:(Y)451892.79	LAT:32.24132969 LON:-103.82051205	
B	E:(X)659375.00 N:(Y)451896.87	LAT:32.24133011 LON:-103.81785995	
C	E:(X)659376.63 N:(Y)451566.88	LAT:32.24042298 LON:-103.81785981	
D	E:(X)658556.62 N:(Y)451567.11	LAT:32.2404344 LON:-103.82051187	

## BASIS OF BEARING

ALL BEARINGS AND COORDINATES REFER TO NAD 83, NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET. (ALL BEARINGS, DISTANCES, COORDINATES AND AREAS ARE GRID MEASUREMENTS UTILIZING A COMBINED SCALE FACTOR OF 0.99977704 CONVERGENCE OF 0.28238333°.)

## LEGEND

—	EXISTING ROAD	— x —	OHP	OVERHEAD POWER
—	PROPOSED ROAD	—	FENCE	FENCE
—	SURFACE SITE EDGE	—	SECTION LINE	SECTION LINE
—	EXIST. PIPELINE	—	PROPERTY LINE	PROPERTY LINE
—		—	W	WATER LINE
—		—	SWD	SALT WATER LINE
●	MONUMENT	●	QUARTER SPLIT	QUARTER SPLIT

THIS DOCUMENT IS NOT TO BE USED FOR  
CONSTRUCTION, BIDDING, RECORDATION,  
CONVEYANCE, SALE OR THE BASIS FOR THE  
ISSUANCE OF A PERMIT.



PREPARED BY:  
R-SQUARED GLOBAL, LLC  
1309 LOUISVILLE AVENUE,  
MONROE, LA 71201  
318-323-6900 OFFICE  
JOB No. R4041\_004



APD ID: 10400054486

Submission Date: 02/26/2020

Highlighted data  
reflects the most  
recent changes

Operator Name: OXY USA INCORPORATED

Well Name: JEFF SMITH MDP1 7-18 FEDERAL COM

Well Number: 32H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

## Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
669318	RUSTLER	3451	542	542	ANHYDRITE, DOLOMITE, SHALE	USEABLE WATER	N
669319	SALADO	2530	921	921	ANHYDRITE, DOLOMITE, HALITE, SHALE	OTHER : SALT	N
669316	CASTILE	661	2790	2790	ANHYDRITE	OTHER : salt	N
669320	DELAWARE	-726	4177	4177	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : BRINE	N
669321	BELL CANYON	-757	4208	4208	SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER, USEABLE WATER : BRINE	N
669322	CHERRY CANYON	-1653	5104	5104	SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : BRINE	N
669323	BRUSHY CANYON	-2914	6365	6365	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : BRINE	N
669317	BONE SPRING	-4586	8037	8039	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL	N
669327	BONE SPRING 1ST	-5606	9057	9074	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL	N
669328	BONE SPRING 2ND	-6324	9775	9803	LIMESTONE, SILTSTONE	NATURAL GAS, OIL	N

## Section 2 - Blowout Prevention

Pressure Rating (PSI): 5M

Rating Depth: 10828

Equipment: 13-5/8" 5M ANNULAR, 5M PIPE RAM, 5M BLIND RAM,

Requesting Variance? YES

Variance request: Request for the use of a flexible choke line from the BOP to Choke Manifold.

**Testing Procedure:** BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. A multibowl wellhead or a unionized multibowl wellhead system will be employed. The wellhead and connection to the BOPE will meet all API 6A requirements. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a



**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

maximum of 30 days. If any seal subject to test pressure is broken the system will be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. BOP Break Testing Request OXY requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. A separate sundry will be sent prior to spud that reflects the pad based break testing plan. BOP break test under the following conditions: After a full BOP test is conducted When skidding to drill an intermediate section where ICP is set into the third Bone Spring or shallower. When skidding to drill a production section that does not penetrate into the third Bone Spring or deeper. If the kill line is broken prior to skid, two tests will be performed. 1. Wellhead flange, co-flex hose, kill line connections and upper pipe rams 2. Wellhead flange, HCR valve, check valve, upper pipe rams If the kill line is not broken prior to skid, only one test will be performed. 1. Wellhead flange, co-flex hose, check valve, upper pipe rams

**Choke Diagram Attachment:**

JeffSmithMDP17\_18FdCom32H\_ChokeManifold\_20200226120306.pdf

**BOP Diagram Attachment:**

JeffSmithMDP17\_18FdCom32H\_BOP\_20200226120311.PDF

JeffSmithMDP17\_18FdCom32H\_FlexHoseCert\_20200226120316.pdf

JeffSmithMDP17\_18FdCom32H\_WellControlPlan\_20200226120321.pdf

### Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	14.75	10.75	NEW	API	N	0	861	0	861	3451	2590	861	J-55	40.5	BUTT	1.125	1.2	BUOY	1.4	BUOY	1.4
2	INTERMEDIATE	9.875	7.625	NEW	API	N	0	10109	0	10076	3471	-6625	10109	HCL-80	26.4	BUTT	1.125	1.2	BUOY	1.4	BUOY	1.4
3	PRODUCTION	6.75	5.5	NEW	API	N	0	21484	0	10828		-7377	21484	P-110	20	OTHER - DQX/DQW	1.125	1.2	BUOY	1.4	BUOY	1.4

**Casing Attachments**

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

## Casing Attachments

---

**Casing ID:** 1      **String Type:** SURFACE

**Inspection Document:**

**Spec Document:**

**Tapered String Spec:**

**Casing Design Assumptions and Worksheet(s):**

JeffSmithMDP17\_18FdCom32H\_CsgCriteria\_20200226120400.pdf

---

**Casing ID:** 2      **String Type:** INTERMEDIATE

**Inspection Document:**

**Spec Document:**

**Tapered String Spec:**

**Casing Design Assumptions and Worksheet(s):**

JeffSmithMDP17\_18FdCom32H\_CsgCriteria\_20200226120457.pdf

---

**Casing ID:** 3      **String Type:** PRODUCTION

**Inspection Document:**

**Spec Document:**

**Tapered String Spec:**

**Casing Design Assumptions and Worksheet(s):**

JeffSmithMDP17\_18FdCom32H\_5.500in\_x\_20.00\_P\_110\_TMK\_UP\_DQX\_20200226120544.pdf

JeffSmithMDP17\_18FdCom32H\_5.500in\_x\_20.00\_P110\_CY\_TMK\_UP\_DQW\_TORQ\_20200226120549.pdf

JeffSmithMDP17\_18FdCom32H\_CsgCriteria\_20200226120559.pdf

---

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

#### Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	861	707	1.33	14.8	940	100	CLASS C	ACCELERATOR

INTERMEDIATE	Lead	2	0	6615	814	1.92	12.9	1563	10	Class C	Accelerator
--------------	------	---	---	------	-----	------	------	------	----	---------	-------------

INTERMEDIATE	Lead	2	6615	1010 9	485	1.65	13.2	800	5	CLASS H CEMENT	RETARDER, DISPERSANT, SALT
--------------	------	---	------	-----------	-----	------	------	-----	---	-------------------	-------------------------------

PRODUCTION	Lead		9609	2148 4	870	1.38	13.2	1201	20	CLASS H CEMENT	RETARDER, DISPERSANT, SALT
------------	------	--	------	-----------	-----	------	------	------	----	-------------------	-------------------------------

#### Section 5 - Circulating Medium

**Mud System Type:** Closed

**Will an air or gas system be Used?** NO

**Description of the equipment for the circulating system in accordance with Onshore Order #2:**

**Diagram of the equipment for the circulating system in accordance with Onshore Order #2:**

**Describe what will be on location to control well or mitigate other conditions:** Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CaCl<sub>2</sub>.

**Describe the mud monitoring system utilized:** PVT/MD Totco/Visual Monitoring

#### Circulating Medium Table



**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
1010 9	2148 4	OTHER : Water- Based and/or Oil-Based Mud	9.5	12							
0	861	WATER-BASED MUD	8.6	8.8							
861	1010 9	OTHER : Saturated Brine Based Mud or Oil-Based Mud	8	10							

## Section 6 - Test, Logging, Coring

**List of production tests including testing procedures, equipment and safety measures:**

GR from TD to surface (horizontal well – vertical portion of hole). Mud Log from intermediate shoe to TD.

**List of open and cased hole logs run in the well:**

GAMMA RAY LOG,MUD LOG/GEOLOGIC LITHOLOGY LOG,MUD LOG/GEOLOGICAL LITHOLOGY LOG,

**Coring operation description for the well:**

No coring is planned at this time.

## Section 7 - Pressure

**Anticipated Bottom Hole Pressure:** 6757

**Anticipated Surface Pressure:** 4374

**Anticipated Bottom Hole Temperature(F):** 167

**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO

**Describe:**

**Contingency Plans geohazards description:**

**Contingency Plans geohazards attachment:**

**Hydrogen Sulfide drilling operations plan required?** YES

**Hydrogen sulfide drilling operations plan:**

JeffSmithMDP17\_18FdCom32H\_H2S1\_20200226120952.pdf

JeffSmithMDP17\_18FdCom32H\_H2S2\_20200226120958.pdf

JeffSmithMDP17\_18FdCom32H\_H2SEmerCont\_20200226121004.pdf

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

## Section 8 - Other Information

### Proposed horizontal/directional/multi-lateral plan submission:

JeffSmithMDP17\_18FdCom32H\_DirectPlot\_20200226121021.pdf

JeffSmithMDP17\_18FdCom32H\_DirectPlan\_20200226121026.pdf

### Other proposed operations facets description:

OXY requests the option to set casing shallower yet still below the salts if losses or hole conditions require this. Cement volumes may be adjusted if casing is set shallower and a DV tool will be run in case a contingency second stage is required for cement to reach surface. If cement circulated to surface during first stage we will drop a cancelation cone and not pump the second stage.

OXY requests the option to run production casing with DQX and/or SF TORQ connections to accommodate hole conditions or drilling operations.

OXY requests to pump a two stage cement job on the intermediate II casing string with the first stage being pumped conventionally with the calculated TOC @ the Bone Spring and the second stage performed as a bradenhead squeeze with planned cement from the Bone Spring to surface.

Annular Clearance Variance Request - As per the agreement reached in the OXY/BLM meeting on Feb 22, 2018, Oxy requests permission to allow deviation from the 0.422 annular clearance requirement from Onshore Order #2 under the following conditions:

1. Annular clearance to meet or exceed 0.422 between intermediate casing ID and production casing coupling only on the first 500 overlap between both casings.
2. Annular clearance less than 0.422 is acceptable for the curve and lateral portions of the production open hole section.

Well will be drilled with a walking/skidding operation. Plan to drill the multiple well pad in batch by section: all surface sections, intermediate sections and production sections. The wellhead will be secured with a night cap whenever the rig is not over the well.

OXY requests the option to contract a Surface Rig to drill, set surface casing, and cement for this well. If the timing between rigs is such that OXY would not be able to preset surface, the Primary Rig will MIRU and drill the well in its entirety per the APD. Please see the attached document for information on the spudder rig.

OXY respectfully requests a variance to cement the 9-5/8 and/or 7-5/8 intermediate casing strings offline. The summarized operational sequence will be as follows:

1. Run casing as per normal operations. While running casing, conduct negative pressure test and confirm integrity of the float equipment (float collar and shoe).
2. Land casing.
3. Fill pipe with kill weight fluid, and confirm well is static.
  - a. If well is not static notify BLM and kill well.
  - b. Once well is static notify BLM with intent to proceed with nipple down and offline cementing.
4. Set and pressure test annular packoff.
5. After confirmation of both annular barriers and internal barriers, nipple down BOP and install cap flange. If any barrier fails to test, the BOP stack will not be nipped down until after the cement job is completed.
6. Skid rig to next well on pad.
7. Confirm well is static before removing cap flange.
8. If well is not static notify BLM and kill well prior to cementing or nipping up for further remediation.
9. Install offline cement tool.
10. Rig up cement equipment.
  - a. Notify BLM prior to cement job.

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

11. Perform cement job.
12. Confirm well is static and floats are holding after cement job.
13. Remove cement equipment, offline cement tools and install night cap with pressure gauge for monitoring.

Oxy requests permission to adjust the CBL requirement after bradenhead cement jobs, on 7-5/8 intermediate casings, as per the agreement reached in the OXY/BLM meeting on September 5, 2019.

Three string wells:

CBL will be required on one well per pad

If the pumped volume of cement is less than permitted in the APD, BLM will be notified and a CBL may be run

Echometer will be used after bradenhead cement job to determine TOC before pumping top-out cement

**Other proposed operations facets attachment:**

JeffSmithMDP17\_18FdCom32H\_DrillPlan\_20200226121052.pdf

JeffSmithMDP17\_18FdCom32H\_SpudRigData\_20200226121057.pdf


**Other Variance attachment:**


# 5/10M BOP Stack

## Mud Cross Valves:

- 5. 10M Check Valve
- 6. Outside 10M Kill Line Valve
- 7. Inside 10M Kill Line Valve
- 8. Outside 10M Kill Line Valve
- 9. 10M HCR Valve

\*Minimum ID = 2-1/16" on Kill Line side and 3" minimum ID on choke line side

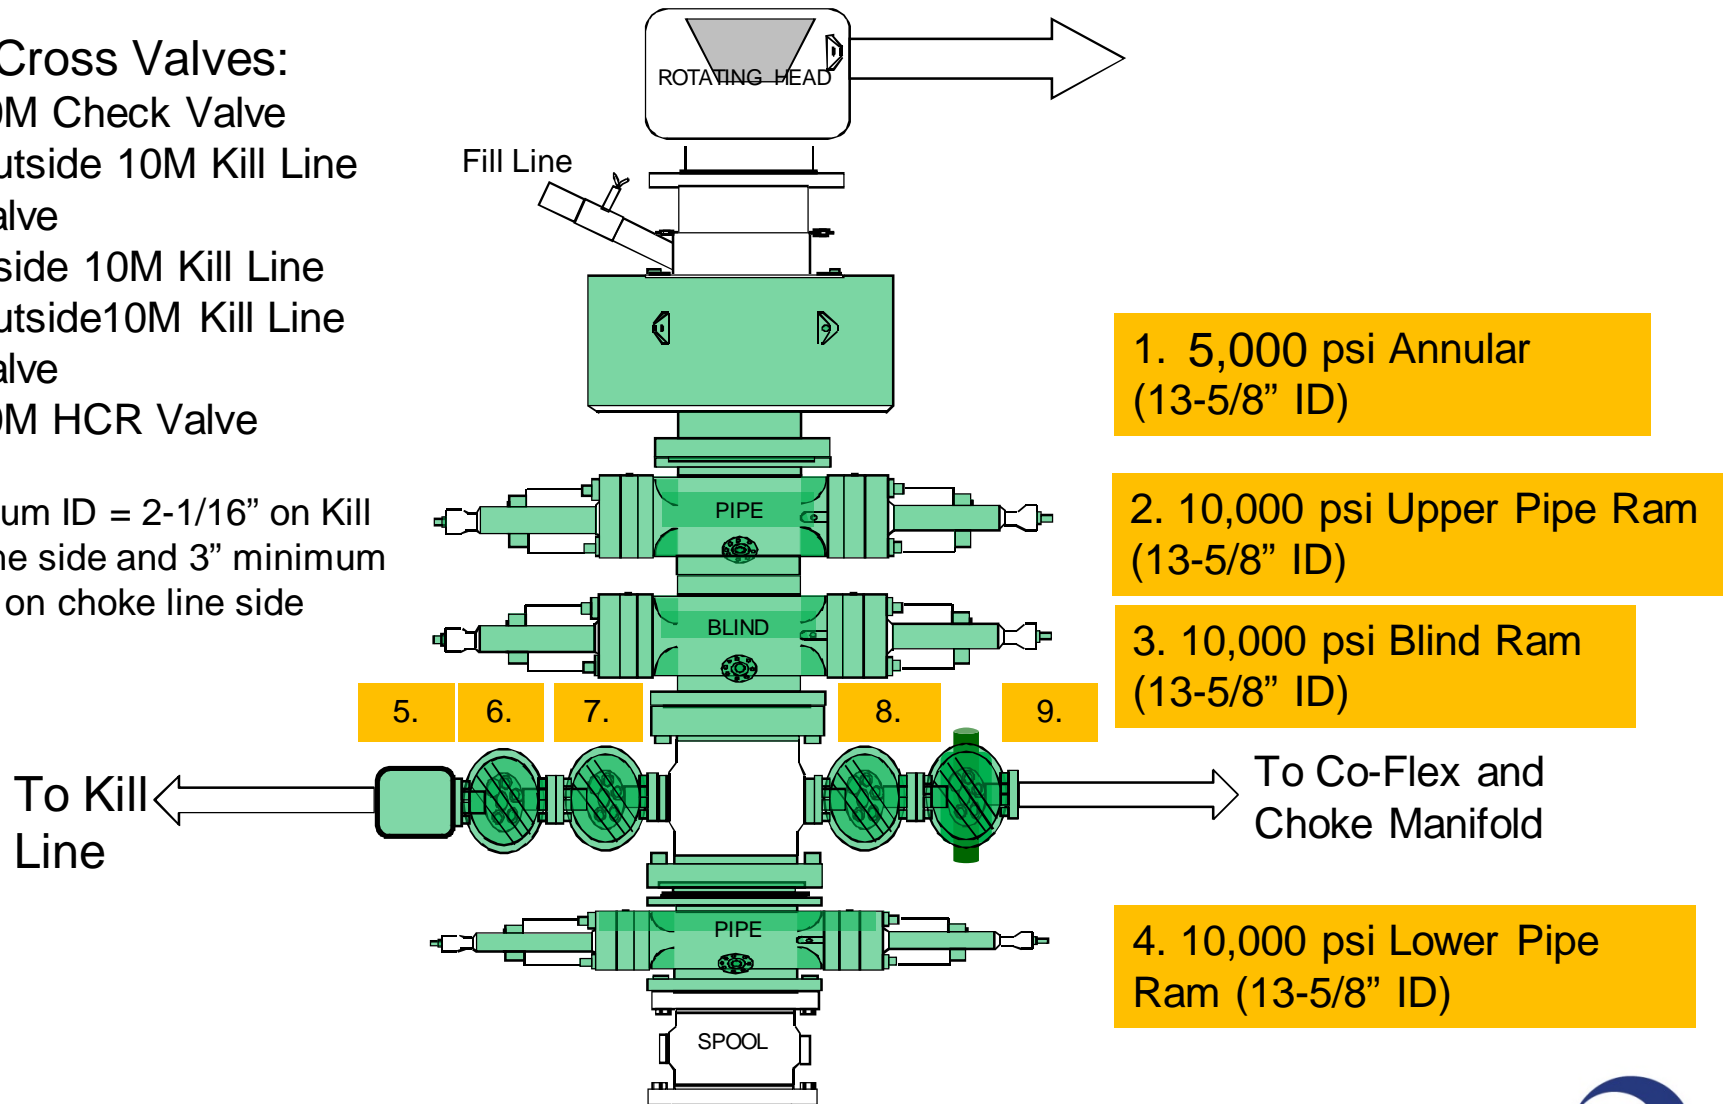

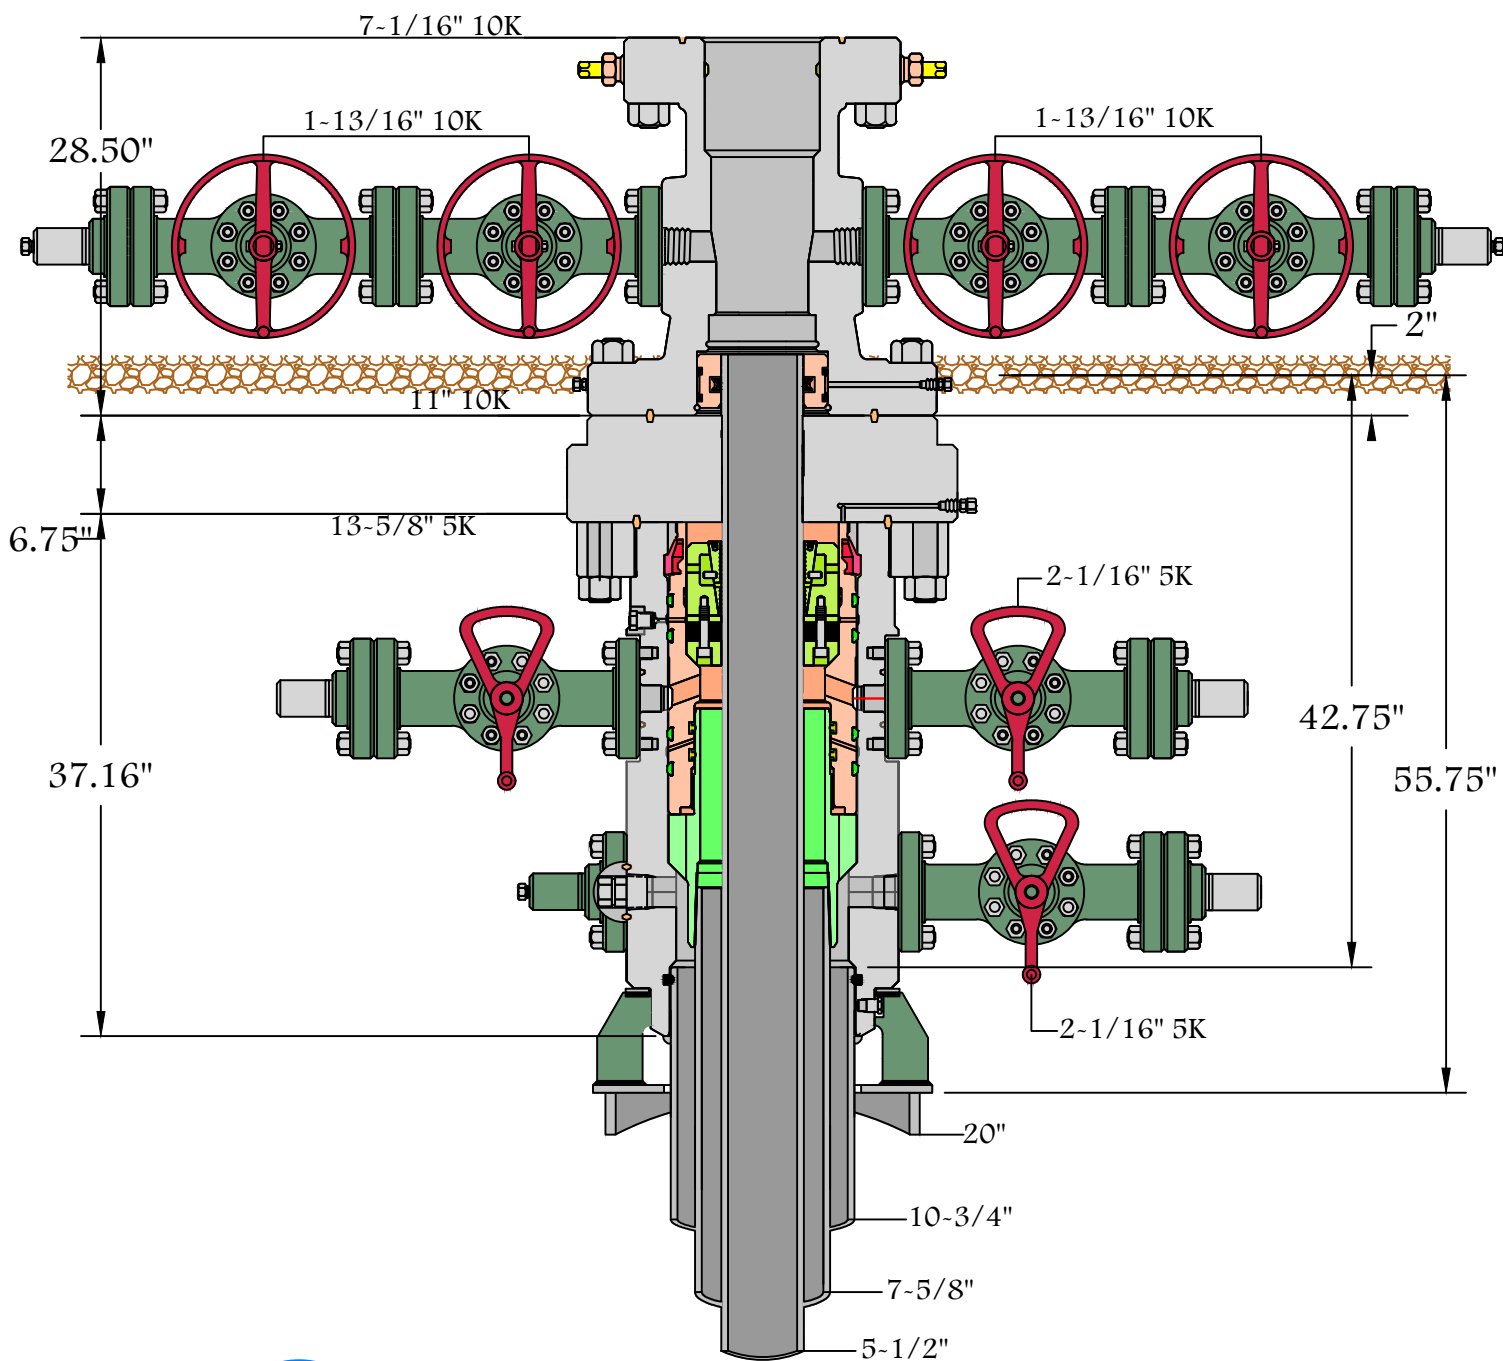

13-5/8" 5K MN-DS



Name:	Date:	Working Pressure:	#
-------	-------	-------------------	---



Project: PRD NM DIRECTIONAL PLANS (NAD 1983)  
Site: Jeff Smith MDP1 7\_18  
Well: Jeff Smith MDP1 7\_18 Fed Com 32H  
Wellbore: Wellbore #1  
Design: Permitting Plan

PROJECT DETAILS: NM DIRECTIONAL PLANS (NAD 1983)

Geodetic System: US State Plane 1983  
Datum: North American Datum 1983  
Ellipsoid: GRS 1980  
Zone: New Mexico Eastern Zone

System Datum: Mean Sea Level


WELL DETAILS: Jeff Smith MDP1 7\_18 Fed Com 32H

3451.00											
+N/-S		+E/-W		Northing		Easting		Latitude		Longitude	
0.00		0.00		451833.48		700089.46		32° 14' 28.042135 N		103° 49' 11.514726 W	
SECTION DETAILS											
MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Annotation		
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
7620.00	0.00	0.00	7620.00	0.00	0.00	0.00	0.00	0.00	Build 2°/100'		
8119.88	10.00	131.21	8117.35	-28.66	32.73	2.00	131.21	29.84	Hold 10° Tangent		
10208.93	10.00	131.21	10174.68	-267.58	305.58	0.00	0.00	278.66	KOP, Build & Turn 10°/100'		
11034.80	89.18	179.77	10677.50	-828.32	373.34	10.00	49.10	841.51	Landing Point		
21484.22	89.18	179.77	10827.50	-11276.58	415.65	0.00	0.00	11284.24	TD at 21484.22' MD		



Azimuths to Grid North  
True North: -0.27°  
Magnetic North: 6.48°

Magnetic Field  
Strength: 47877.1nT  
Dip Angle: 59.90°  
Date: 12/16/2019  
Model: HDGM\_FILE

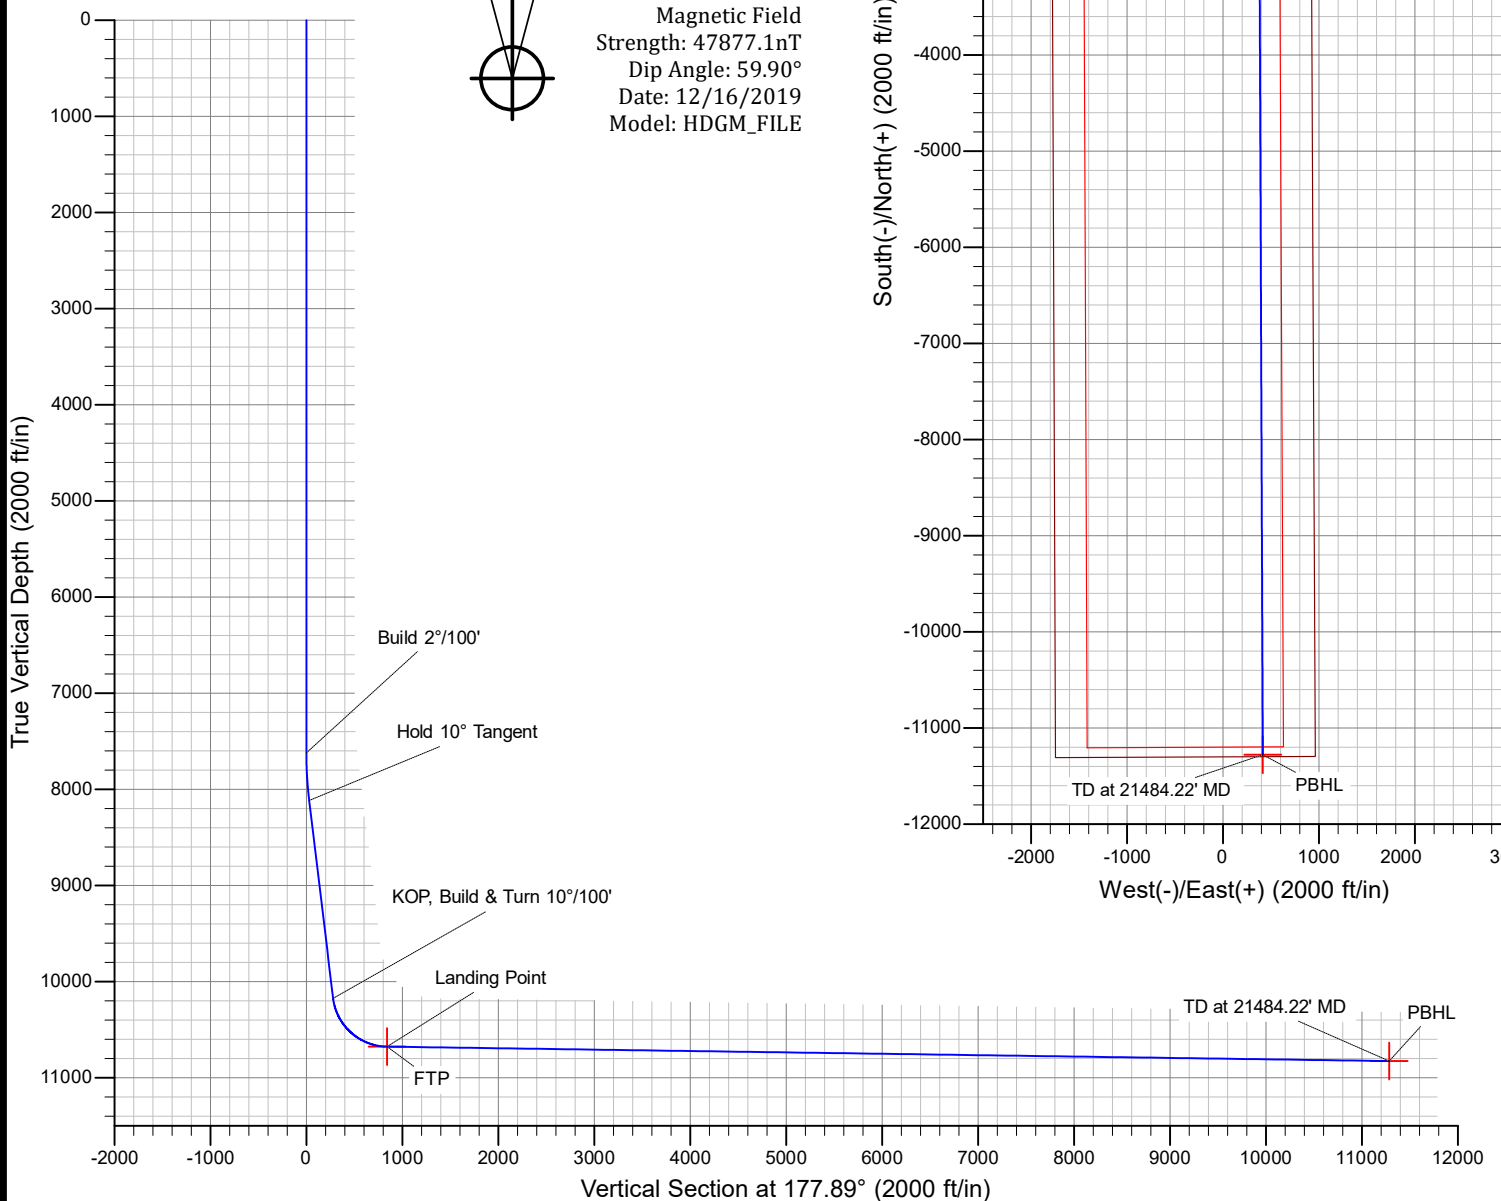

# **OXY**

**PRD NM DIRECTIONAL PLANS (NAD 1983)**

**Jeff Smith MDP1 7\_18**

**Jeff Smith MDP1 7\_18 Fed Com 32H**

**Wellbore #1**

**Plan: Permitting Plan**

## **Standard Planning Report**

**16 December, 2019**

**Oxy Inc.**  
Planning Report

<b>Database:</b>	HOPSP	<b>Local Co-ordinate Reference:</b>	Well Jeff Smith MDP1 7_18 Fed Com 32H
<b>Company:</b>	ENGINEERING DESIGNS	<b>TVD Reference:</b>	RKB=26.5' @ 3477.50ft
<b>Project:</b>	PRD NM DIRECTIONAL PLANS (NAD 1983)	<b>MD Reference:</b>	RKB=26.5' @ 3477.50ft
<b>Site:</b>	Jeff Smith MDP1 7_18	<b>North Reference:</b>	Grid
<b>Well:</b>	Jeff Smith MDP1 7_18 Fed Com 32H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Permitting Plan		

<b>Project</b>	PRD NM DIRECTIONAL PLANS (NAD 1983)		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	New Mexico Eastern Zone		Using geodetic scale factor

Site		Jeff Smith MDP1 7_18			
Site Position:		Northing:	451,833.32 usft	Latitude:	32° 14' 28.042208 N
From:	Map	Easting:	700,054.46 usft	Longitude:	103° 49' 11.922256 W
Position Uncertainty:	1.00 ft	Slot Radius:	13.200 in	Grid Convergence:	0.27 °

Well	Jeff Smith MDP1 7_18 Fed Com 32H					
Well Position	+N/-S	0.16 ft	Northing:	451,833.48 usft	Latitude:	32° 14' 28.042135 N
	+E/-W	35.00 ft	Easting:	700,089.46 usft	Longitude:	103° 49' 11.514726 W
Position Uncertainty		1.00 ft	Wellhead Elevation:		Ground Level:	3,451.00 ft

<b>Wellbore</b>	Wellbore #1				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	HDGM_FILE	12/16/2019	6.75	59.90	47,877.10000000

<b>Design</b>	Permitting Plan			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PROTOTYPE	<b>Tie On Depth:</b>	0.00
<b>Vertical Section:</b>	<b>Depth From (TVD) (ft)</b>	<b>+N/-S (ft)</b>	<b>+E/-W (ft)</b>	<b>Direction (°)</b>
	0.00	0.00	0.00	177.89

<b>Plan Survey Tool Program</b>	<b>Date</b>	12/16/2019		
<b>Depth From (ft)</b>	<b>Depth To (ft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Remarks</b>
1	0.00	21,484.22	Permitting Plan (Wellbore #1)	B001Mb_MWD+HRGM OWSG MWD + HRGM

<b>Plan Sections</b>										
<b>Measured Depth (ft)</b>	<b>Inclination (°)</b>	<b>Azimuth (°)</b>	<b>Vertical Depth (ft)</b>	<b>+N/-S (ft)</b>	<b>+E/-W (ft)</b>	<b>Dogleg Rate (°/100ft)</b>	<b>Build Rate (°/100ft)</b>	<b>Turn Rate (°/100ft)</b>	<b>TFO (°)</b>	<b>Target</b>
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
7,620.00	0.00	0.00	7,620.00	0.00	0.00	0.00	0.00	0.00	0.00	
8,119.88	10.00	131.21	8,117.35	-28.66	32.73	2.00	2.00	0.00	131.21	
10,208.93	10.00	131.21	10,174.68	-267.58	305.58	0.00	0.00	0.00	0.00	
11,034.80	89.18	179.77	10,677.50	-828.32	373.34	10.00	9.59	5.88	49.10	FTP (Jeff Smith)
21,484.22	89.18	179.77	10,827.50	-11,276.58	415.65	0.00	0.00	0.00	0.00	PBHL (Jeff Smith)



**Oxy Inc.**  
Planning Report

<b>Database:</b>	HOPSPP	<b>Local Co-ordinate Reference:</b>	Well Jeff Smith MDP1 7_18 Fed Com 32H
<b>Company:</b>	ENGINEERING DESIGNS	<b>TVD Reference:</b>	RKB=26.5' @ 3477.50ft
<b>Project:</b>	PRD NM DIRECTIONAL PLANS (NAD 1983)	<b>MD Reference:</b>	RKB=26.5' @ 3477.50ft
<b>Site:</b>	Jeff Smith MDP1 7_18	<b>North Reference:</b>	Grid
<b>Well:</b>	Jeff Smith MDP1 7_18 Fed Com 32H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,300.00	0.00	0.00	0.00	0.00	0.00	0.00

**Oxy Inc.**  
Planning Report

<b>Database:</b>	HOPSP	<b>Local Co-ordinate Reference:</b>	Well Jeff Smith MDP1 7_18 Fed Com 32H
<b>Company:</b>	ENGINEERING DESIGNS	<b>TVD Reference:</b>	RKB=26.5' @ 3477.50ft
<b>Project:</b>	PRD NM DIRECTIONAL PLANS (NAD 1983)	<b>MD Reference:</b>	RKB=26.5' @ 3477.50ft
<b>Site:</b>	Jeff Smith MDP1 7_18	<b>North Reference:</b>	Grid
<b>Well:</b>	Jeff Smith MDP1 7_18 Fed Com 32H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,400.00	0.00	0.00	5,400.00	0.00	0.00	0.00	0.00	0.00	0.00
5,500.00	0.00	0.00	5,500.00	0.00	0.00	0.00	0.00	0.00	0.00
5,600.00	0.00	0.00	5,600.00	0.00	0.00	0.00	0.00	0.00	0.00
5,700.00	0.00	0.00	5,700.00	0.00	0.00	0.00	0.00	0.00	0.00
5,800.00	0.00	0.00	5,800.00	0.00	0.00	0.00	0.00	0.00	0.00
5,900.00	0.00	0.00	5,900.00	0.00	0.00	0.00	0.00	0.00	0.00
6,000.00	0.00	0.00	6,000.00	0.00	0.00	0.00	0.00	0.00	0.00
6,100.00	0.00	0.00	6,100.00	0.00	0.00	0.00	0.00	0.00	0.00
6,200.00	0.00	0.00	6,200.00	0.00	0.00	0.00	0.00	0.00	0.00
6,300.00	0.00	0.00	6,300.00	0.00	0.00	0.00	0.00	0.00	0.00
6,400.00	0.00	0.00	6,400.00	0.00	0.00	0.00	0.00	0.00	0.00
6,500.00	0.00	0.00	6,500.00	0.00	0.00	0.00	0.00	0.00	0.00
6,600.00	0.00	0.00	6,600.00	0.00	0.00	0.00	0.00	0.00	0.00
6,700.00	0.00	0.00	6,700.00	0.00	0.00	0.00	0.00	0.00	0.00
6,800.00	0.00	0.00	6,800.00	0.00	0.00	0.00	0.00	0.00	0.00
6,900.00	0.00	0.00	6,900.00	0.00	0.00	0.00	0.00	0.00	0.00
7,000.00	0.00	0.00	7,000.00	0.00	0.00	0.00	0.00	0.00	0.00
7,100.00	0.00	0.00	7,100.00	0.00	0.00	0.00	0.00	0.00	0.00
7,200.00	0.00	0.00	7,200.00	0.00	0.00	0.00	0.00	0.00	0.00
7,300.00	0.00	0.00	7,300.00	0.00	0.00	0.00	0.00	0.00	0.00
7,400.00	0.00	0.00	7,400.00	0.00	0.00	0.00	0.00	0.00	0.00
7,500.00	0.00	0.00	7,500.00	0.00	0.00	0.00	0.00	0.00	0.00
7,600.00	0.00	0.00	7,600.00	0.00	0.00	0.00	0.00	0.00	0.00
7,620.00	0.00	0.00	7,620.00	0.00	0.00	0.00	0.00	0.00	0.00
7,700.00	1.60	131.21	7,699.99	-0.74	0.84	0.77	2.00	2.00	0.00
7,800.00	3.60	131.21	7,799.88	-3.72	4.25	3.88	2.00	2.00	0.00
7,900.00	5.60	131.21	7,899.55	-9.01	10.29	9.38	2.00	2.00	0.00
8,000.00	7.60	131.21	7,998.89	-16.58	18.93	17.26	2.00	2.00	0.00
8,100.00	9.60	131.21	8,097.76	-26.43	30.18	27.52	2.00	2.00	0.00
8,119.88	10.00	131.21	8,117.35	-28.66	32.73	29.84	2.00	2.00	0.00
8,200.00	10.00	131.21	8,196.25	-37.82	43.19	39.39	0.00	0.00	0.00
8,300.00	10.00	131.21	8,294.73	-49.26	56.25	51.30	0.00	0.00	0.00
8,400.00	10.00	131.21	8,393.21	-60.70	69.31	63.21	0.00	0.00	0.00
8,500.00	10.00	131.21	8,491.70	-72.13	82.38	75.12	0.00	0.00	0.00
8,600.00	10.00	131.21	8,590.18	-83.57	95.44	87.03	0.00	0.00	0.00
8,700.00	10.00	131.21	8,688.66	-95.01	108.50	98.94	0.00	0.00	0.00
8,800.00	10.00	131.21	8,787.14	-106.44	121.56	110.85	0.00	0.00	0.00
8,900.00	10.00	131.21	8,885.62	-117.88	134.62	122.76	0.00	0.00	0.00
9,000.00	10.00	131.21	8,984.10	-129.32	147.68	134.67	0.00	0.00	0.00
9,100.00	10.00	131.21	9,082.58	-140.76	160.74	146.58	0.00	0.00	0.00
9,200.00	10.00	131.21	9,181.07	-152.19	173.80	158.49	0.00	0.00	0.00
9,300.00	10.00	131.21	9,279.55	-163.63	186.86	170.40	0.00	0.00	0.00
9,400.00	10.00	131.21	9,378.03	-175.07	199.92	182.31	0.00	0.00	0.00
9,500.00	10.00	131.21	9,476.51	-186.50	212.98	194.22	0.00	0.00	0.00
9,600.00	10.00	131.21	9,574.99	-197.94	226.05	206.13	0.00	0.00	0.00
9,700.00	10.00	131.21	9,673.47	-209.38	239.11	218.04	0.00	0.00	0.00
9,800.00	10.00	131.21	9,771.95	-220.81	252.17	229.95	0.00	0.00	0.00
9,900.00	10.00	131.21	9,870.44	-232.25	265.23	241.86	0.00	0.00	0.00
10,000.00	10.00	131.21	9,968.92	-243.69	278.29	253.77	0.00	0.00	0.00
10,100.00	10.00	131.21	10,067.40	-255.13	291.35	265.68	0.00	0.00	0.00
10,200.00	10.00	131.21	10,165.88	-266.56	304.41	277.59	0.00	0.00	0.00
10,208.93	10.00	131.21	10,174.68	-267.58	305.58	278.66	0.00	0.00	0.00
10,300.00	17.37	154.84	10,263.16	-285.13	317.33	296.63	10.00	8.09	25.95
10,400.00	26.70	164.62	10,355.79	-320.39	329.67	332.32	10.00	9.33	9.78

**Oxy Inc.**  
Planning Report

<b>Database:</b>	HOPSPP	<b>Local Co-ordinate Reference:</b>	Well Jeff Smith MDP1 7_18 Fed Com 32H
<b>Company:</b>	ENGINEERING DESIGNS	<b>TVD Reference:</b>	RKB=26.5' @ 3477.50ft
<b>Project:</b>	PRD NM DIRECTIONAL PLANS (NAD 1983)	<b>MD Reference:</b>	RKB=26.5' @ 3477.50ft
<b>Site:</b>	Jeff Smith MDP1 7_18	<b>North Reference:</b>	Grid
<b>Well:</b>	Jeff Smith MDP1 7_18 Fed Com 32H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
10,500.00	36.37	169.52	10,440.93	-371.34	341.05	383.65	10.00	9.67	4.91
10,600.00	46.17	172.58	10,516.00	-436.43	351.12	449.07	10.00	9.80	3.05
10,700.00	56.03	174.76	10,578.73	-513.69	359.59	526.59	10.00	9.86	2.18
10,800.00	65.91	176.48	10,627.20	-600.76	366.20	613.84	10.00	9.89	1.72
10,900.00	75.82	177.96	10,659.94	-695.01	370.73	708.19	10.00	9.90	1.48
11,000.00	85.73	179.31	10,675.95	-793.56	373.06	806.76	10.00	9.91	1.35
11,034.80	89.18	179.77	10,677.50	-828.32	373.34	841.51	10.00	9.91	1.32
11,100.00	89.18	179.77	10,678.44	-893.51	373.61	906.67	0.00	0.00	0.00
11,200.00	89.18	179.77	10,679.87	-993.50	374.01	1,006.60	0.00	0.00	0.00
11,300.00	89.18	179.77	10,681.31	-1,093.49	374.42	1,106.54	0.00	0.00	0.00
11,400.00	89.18	179.77	10,682.74	-1,193.48	374.82	1,206.48	0.00	0.00	0.00
11,500.00	89.18	179.77	10,684.18	-1,293.47	375.23	1,306.41	0.00	0.00	0.00
11,600.00	89.18	179.77	10,685.61	-1,393.46	375.63	1,406.35	0.00	0.00	0.00
11,700.00	89.18	179.77	10,687.05	-1,493.45	376.04	1,506.28	0.00	0.00	0.00
11,800.00	89.18	179.77	10,688.48	-1,593.44	376.44	1,606.22	0.00	0.00	0.00
11,900.00	89.18	179.77	10,689.92	-1,693.42	376.85	1,706.16	0.00	0.00	0.00
12,000.00	89.18	179.77	10,691.36	-1,793.41	377.25	1,806.09	0.00	0.00	0.00
12,100.00	89.18	179.77	10,692.79	-1,893.40	377.66	1,906.03	0.00	0.00	0.00
12,200.00	89.18	179.77	10,694.23	-1,993.39	378.06	2,005.96	0.00	0.00	0.00
12,300.00	89.18	179.77	10,695.66	-2,093.38	378.47	2,105.90	0.00	0.00	0.00
12,400.00	89.18	179.77	10,697.10	-2,193.37	378.87	2,205.84	0.00	0.00	0.00
12,500.00	89.18	179.77	10,698.53	-2,293.36	379.28	2,305.77	0.00	0.00	0.00
12,600.00	89.18	179.77	10,699.97	-2,393.35	379.68	2,405.71	0.00	0.00	0.00
12,700.00	89.18	179.77	10,701.40	-2,493.34	380.09	2,505.64	0.00	0.00	0.00
12,800.00	89.18	179.77	10,702.84	-2,593.32	380.49	2,605.58	0.00	0.00	0.00
12,900.00	89.18	179.77	10,704.27	-2,693.31	380.89	2,705.52	0.00	0.00	0.00
13,000.00	89.18	179.77	10,705.71	-2,793.30	381.30	2,805.45	0.00	0.00	0.00
13,100.00	89.18	179.77	10,707.15	-2,893.29	381.70	2,905.39	0.00	0.00	0.00
13,200.00	89.18	179.77	10,708.58	-2,993.28	382.11	3,005.32	0.00	0.00	0.00
13,300.00	89.18	179.77	10,710.02	-3,093.27	382.51	3,105.26	0.00	0.00	0.00
13,400.00	89.18	179.77	10,711.45	-3,193.26	382.92	3,205.20	0.00	0.00	0.00
13,500.00	89.18	179.77	10,712.89	-3,293.25	383.32	3,305.13	0.00	0.00	0.00
13,600.00	89.18	179.77	10,714.32	-3,393.24	383.73	3,405.07	0.00	0.00	0.00
13,700.00	89.18	179.77	10,715.76	-3,493.22	384.13	3,505.00	0.00	0.00	0.00
13,800.00	89.18	179.77	10,717.19	-3,593.21	384.54	3,604.94	0.00	0.00	0.00
13,900.00	89.18	179.77	10,718.63	-3,693.20	384.94	3,704.88	0.00	0.00	0.00
14,000.00	89.18	179.77	10,720.07	-3,793.19	385.35	3,804.81	0.00	0.00	0.00
14,100.00	89.18	179.77	10,721.50	-3,893.18	385.75	3,904.75	0.00	0.00	0.00
14,200.00	89.18	179.77	10,722.94	-3,993.17	386.16	4,004.68	0.00	0.00	0.00
14,300.00	89.18	179.77	10,724.37	-4,093.16	386.56	4,104.62	0.00	0.00	0.00
14,400.00	89.18	179.77	10,725.81	-4,193.15	386.97	4,204.55	0.00	0.00	0.00
14,500.00	89.18	179.77	10,727.24	-4,293.14	387.37	4,304.49	0.00	0.00	0.00
14,600.00	89.18	179.77	10,728.68	-4,393.12	387.78	4,404.43	0.00	0.00	0.00
14,700.00	89.18	179.77	10,730.11	-4,493.11	388.18	4,504.36	0.00	0.00	0.00
14,800.00	89.18	179.77	10,731.55	-4,593.10	388.59	4,604.30	0.00	0.00	0.00
14,900.00	89.18	179.77	10,732.98	-4,693.09	388.99	4,704.23	0.00	0.00	0.00
15,000.00	89.18	179.77	10,734.42	-4,793.08	389.40	4,804.17	0.00	0.00	0.00
15,100.00	89.18	179.77	10,735.86	-4,893.07	389.80	4,904.11	0.00	0.00	0.00
15,200.00	89.18	179.77	10,737.29	-4,993.06	390.21	5,004.04	0.00	0.00	0.00
15,300.00	89.18	179.77	10,738.73	-5,093.05	390.61	5,103.98	0.00	0.00	0.00
15,400.00	89.18	179.77	10,740.16	-5,193.04	391.02	5,203.91	0.00	0.00	0.00
15,500.00	89.18	179.77	10,741.60	-5,293.02	391.42	5,303.85	0.00	0.00	0.00
15,600.00	89.18	179.77	10,743.03	-5,393.01	391.83	5,403.79	0.00	0.00	0.00
15,700.00	89.18	179.77	10,744.47	-5,493.00	392.23	5,503.72	0.00	0.00	0.00

# Oxy Inc.

## Planning Report

<b>Database:</b>	HOPSPP	<b>Local Co-ordinate Reference:</b>	Well Jeff Smith MDP1 7_18 Fed Com 32H
<b>Company:</b>	ENGINEERING DESIGNS	<b>TVD Reference:</b>	RKB=26.5' @ 3477.50ft
<b>Project:</b>	PRD NM DIRECTIONAL PLANS (NAD 1983)	<b>MD Reference:</b>	RKB=26.5' @ 3477.50ft
<b>Site:</b>	Jeff Smith MDP1 7_18	<b>North Reference:</b>	Grid
<b>Well:</b>	Jeff Smith MDP1 7_18 Fed Com 32H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
15,800.00	89.18	179.77	10,745.90	-5,592.99	392.64	5,603.66	0.00	0.00	0.00
15,900.00	89.18	179.77	10,747.34	-5,692.98	393.04	5,703.59	0.00	0.00	0.00
16,000.00	89.18	179.77	10,748.77	-5,792.97	393.44	5,803.53	0.00	0.00	0.00
16,100.00	89.18	179.77	10,750.21	-5,892.96	393.85	5,903.47	0.00	0.00	0.00
16,200.00	89.18	179.77	10,751.65	-5,992.95	394.25	6,003.40	0.00	0.00	0.00
16,300.00	89.18	179.77	10,753.08	-6,092.94	394.66	6,103.34	0.00	0.00	0.00
16,400.00	89.18	179.77	10,754.52	-6,192.92	395.06	6,203.27	0.00	0.00	0.00
16,500.00	89.18	179.77	10,755.95	-6,292.91	395.47	6,303.21	0.00	0.00	0.00
16,600.00	89.18	179.77	10,757.39	-6,392.90	395.87	6,403.15	0.00	0.00	0.00
16,700.00	89.18	179.77	10,758.82	-6,492.89	396.28	6,503.08	0.00	0.00	0.00
16,800.00	89.18	179.77	10,760.26	-6,592.88	396.68	6,603.02	0.00	0.00	0.00
16,900.00	89.18	179.77	10,761.69	-6,692.87	397.09	6,702.95	0.00	0.00	0.00
17,000.00	89.18	179.77	10,763.13	-6,792.86	397.49	6,802.89	0.00	0.00	0.00
17,100.00	89.18	179.77	10,764.57	-6,892.85	397.90	6,902.83	0.00	0.00	0.00
17,200.00	89.18	179.77	10,766.00	-6,992.84	398.30	7,002.76	0.00	0.00	0.00
17,300.00	89.18	179.77	10,767.44	-7,092.82	398.71	7,102.70	0.00	0.00	0.00
17,400.00	89.18	179.77	10,768.87	-7,192.81	399.11	7,202.63	0.00	0.00	0.00
17,500.00	89.18	179.77	10,770.31	-7,292.80	399.52	7,302.57	0.00	0.00	0.00
17,600.00	89.18	179.77	10,771.74	-7,392.79	399.92	7,402.50	0.00	0.00	0.00
17,700.00	89.18	179.77	10,773.18	-7,492.78	400.33	7,502.44	0.00	0.00	0.00
17,800.00	89.18	179.77	10,774.61	-7,592.77	400.73	7,602.38	0.00	0.00	0.00
17,900.00	89.18	179.77	10,776.05	-7,692.76	401.14	7,702.31	0.00	0.00	0.00
18,000.00	89.18	179.77	10,777.48	-7,792.75	401.54	7,802.25	0.00	0.00	0.00
18,100.00	89.18	179.77	10,778.92	-7,892.74	401.95	7,902.18	0.00	0.00	0.00
18,200.00	89.18	179.77	10,780.36	-7,992.72	402.35	8,002.12	0.00	0.00	0.00
18,300.00	89.18	179.77	10,781.79	-8,092.71	402.76	8,102.06	0.00	0.00	0.00
18,400.00	89.18	179.77	10,783.23	-8,192.70	403.16	8,201.99	0.00	0.00	0.00
18,500.00	89.18	179.77	10,784.66	-8,292.69	403.57	8,301.93	0.00	0.00	0.00
18,600.00	89.18	179.77	10,786.10	-8,392.68	403.97	8,401.86	0.00	0.00	0.00
18,700.00	89.18	179.77	10,787.53	-8,492.67	404.38	8,501.80	0.00	0.00	0.00
18,800.00	89.18	179.77	10,788.97	-8,592.66	404.78	8,601.74	0.00	0.00	0.00
18,900.00	89.18	179.77	10,790.40	-8,692.65	405.18	8,701.67	0.00	0.00	0.00
19,000.00	89.18	179.77	10,791.84	-8,792.64	405.59	8,801.61	0.00	0.00	0.00
19,100.00	89.18	179.77	10,793.28	-8,892.62	405.99	8,901.54	0.00	0.00	0.00
19,200.00	89.18	179.77	10,794.71	-8,992.61	406.40	9,001.48	0.00	0.00	0.00
19,300.00	89.18	179.77	10,796.15	-9,092.60	406.80	9,101.42	0.00	0.00	0.00
19,400.00	89.18	179.77	10,797.58	-9,192.59	407.21	9,201.35	0.00	0.00	0.00
19,500.00	89.18	179.77	10,799.02	-9,292.58	407.61	9,301.29	0.00	0.00	0.00
19,600.00	89.18	179.77	10,800.45	-9,392.57	408.02	9,401.22	0.00	0.00	0.00
19,700.00	89.18	179.77	10,801.89	-9,492.56	408.42	9,501.16	0.00	0.00	0.00
19,800.00	89.18	179.77	10,803.32	-9,592.55	408.83	9,601.10	0.00	0.00	0.00
19,900.00	89.18	179.77	10,804.76	-9,692.54	409.23	9,701.03	0.00	0.00	0.00
20,000.00	89.18	179.77	10,806.19	-9,792.52	409.64	9,800.97	0.00	0.00	0.00
20,100.00	89.18	179.77	10,807.63	-9,892.51	410.04	9,900.90	0.00	0.00	0.00
20,200.00	89.18	179.77	10,809.07	-9,992.50	410.45	10,000.84	0.00	0.00	0.00
20,300.00	89.18	179.77	10,810.50	-10,092.49	410.85	10,100.78	0.00	0.00	0.00
20,400.00	89.18	179.77	10,811.94	-10,192.48	411.26	10,200.71	0.00	0.00	0.00
20,500.00	89.18	179.77	10,813.37	-10,292.47	411.66	10,300.65	0.00	0.00	0.00
20,600.00	89.18	179.77	10,814.81	-10,392.46	412.07	10,400.58	0.00	0.00	0.00
20,700.00	89.18	179.77	10,816.24	-10,492.45	412.47	10,500.52	0.00	0.00	0.00
20,800.00	89.18	179.77	10,817.68	-10,592.43	412.88	10,600.45	0.00	0.00	0.00
20,900.00	89.18	179.77	10,819.11	-10,692.42	413.28	10,700.39	0.00	0.00	0.00
21,000.00	89.18	179.77	10,820.55	-10,792.41	413.69	10,800.33	0.00	0.00	0.00
21,100.00	89.18	179.77	10,821.98	-10,892.40	414.09	10,900.26	0.00	0.00	0.00

**Oxy Inc.**  
Planning Report

<b>Database:</b>	HOPSPP	<b>Local Co-ordinate Reference:</b>	Well Jeff Smith MDP1 7_18 Fed Com 32H
<b>Company:</b>	ENGINEERING DESIGNS	<b>TVD Reference:</b>	RKB=26.5' @ 3477.50ft
<b>Project:</b>	PRD NM DIRECTIONAL PLANS (NAD 1983)	<b>MD Reference:</b>	RKB=26.5' @ 3477.50ft
<b>Site:</b>	Jeff Smith MDP1 7_18	<b>North Reference:</b>	Grid
<b>Well:</b>	Jeff Smith MDP1 7_18 Fed Com 32H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
21,200.00	89.18	179.77	10,823.42	-10,992.39	414.50	11,000.20	0.00	0.00	0.00
21,300.00	89.18	179.77	10,824.86	-11,092.38	414.90	11,100.13	0.00	0.00	0.00
21,400.00	89.18	179.77	10,826.29	-11,192.37	415.31	11,200.07	0.00	0.00	0.00
21,484.22	89.18	179.77	10,827.50	-11,276.58	415.65	11,284.24	0.00	0.00	0.00

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
FTP (Jeff Smith MDP1 - plan hits target center - Point	0.00	0.00	10,677.50	-828.32	373.34	451,005.21	700,462.78	32° 14' 19.828191 N	103° 49' 7.214205
PBHL (Jeff Smith - plan hits target center - Point	0.00	0.00	10,827.50	-11,276.58	415.65	440,557.62	700,505.08	32° 12' 36.440348 N	103° 49' 7.304338

Plan Annotations				
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
7,620.00	7,620.00	0.00	0.00	Build 2°/100'
8,119.88	8,117.35	-28.66	32.73	Hold 10° Tangent
10,208.93	10,174.68	-267.58	305.58	KOP, Build & Turn 10°/100'
11,034.80	10,677.50	-828.32	373.34	Landing Point
21,484.22	10,827.50	-11,276.58	415.65	TD at 21484.22' MD

# Oxy USA Inc. - JEFF SMITH MDP1 7\_18 FED COM 32H

## 1. Geologic Formations

TVD of target	10828'	Pilot Hole Depth	N/A
MD at TD:	21484'	Deepest Expected fresh water:	542'

### Delaware Basin

Formation	TVD - RKB	Expected Fluids
Rustler	542	Brine
Salado	921	Brine
Castile	2,790	Brine
Lamar/Delaware	4,177	Brine
Bell Canyon	4,208	Oil/Gas
Cherry Canyon	5,104	Oil/Gas
Brushy Canyon	6,365	Losses
Bone Spring	8,037	Oil/Gas
1st Bone Spring	9,057	Oil/Gas
<b>2nd Bone Spring</b>	<b>9,775</b>	<b>Oil/Gas</b>

\*H<sub>2</sub>S, water flows, loss of circulation, abnormal pressures, etc.

## 2. Casing Program

Hole Size (in)	Casing Interval		Csg. Size (in)	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	Buoyant	Buoyant
	From (ft)	To (ft)							Body SF Tension	Joint SF Tension
14.75	0	861	10.75	40.5	J-55	BTC	1.125	1.2	1.4	1.4
9.875	0	10109	7.625	26.4	L-80 HC	BTC	1.125	1.2	1.4	1.4
6.75	0	21484	5.5	20	P-110	DQX	1.125	1.2	1.4	1.4
SF Values will meet or Exceed										

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

\*Oxy requests the option to set casing shallower yet still below the salts if losses or hole conditions require this. Cement volumes may be adjusted if casing is set shallower and a DV tool may be run in case hole conditions merit pumping a second stage cement job to comply with permitted top of cement. If cement circulated to surface during first stage, we will drop a cancellation cone and not pump the second stage.

\*Oxy requests the option to run production casing with DQX, SF TORQ, and/or DQW TORQ connections to accommodate hole conditions or drilling operations.

### Annular Clearance Variance Request

As per the agreement reached in the Oxy/BLM meeting on Feb 22, 2018, Oxy requests permission to allow deviation from the 0.422" annular clearance requirement from Onshore Order #2 under the following conditions:

1. Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing coupling only on the first 500' overlap between both casings.
2. Annular clearance less than 0.422" is acceptable for the curve and lateral portions of the production open hole section.

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y

**Oxy USA Inc. - JEFF SMITH MDP1 7 18 FED COM 32H**

Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	Y
If yes, are the first 2 strings cemented to surface and 3 <sup>rd</sup> string cement tied back 500' into previous casing?	Y
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 <sup>nd</sup> string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

### 3. Cementing Program

Casing String	# Sks	Wt. (lb/gal)	Yld (ft3/sack)	H2O (gal/sk)	500# Comp. Strength (hours)	Slurry Description
Surface (Lead)	N/A	N/A	N/A	N/A	N/A	N/A
Surface (Tail)	707	14.8	1.33	6.365	5:26	Class C Cement, Accelerator
Intermediate 1st Stage (Lead)	N/A	N/A	N/A	N/A	N/A	N/A
Intermediate 1st Stage (Tail)	485	13.2	1.65	8.640	11:54	Class H Cement, Retarder, Dispersant, Salt
Intermediate 2nd Stage (Tail Slurry) to be pumped as Bradenhead Squeeze from surface, down the Intermediate annulus						
Intermediate 2nd Stage (Lead)	N/A	N/A	N/A	N/A	N/A	N/A
Intermediate 2nd Stage (Tail)	814	12.9	1.92	10.41	23:10	Class C Cement, Accelerator
Production (Lead)	N/A	N/A	N/A	N/A	N/A	N/A
Production (Tail)	870	13.2	1.38	6.686	3:39	Class H Cement, Retarder, Dispersant, Salt

Casing String	Top (ft)	Bottom (ft)	% Excess
Surface (Lead)	N/A	N/A	N/A
Surface (Tail)	0	861	100%
Intermediate 1st Stage (Lead)	N/A	N/A	N/A
Intermediate 1st Stage (Tail)	6615	10109	5%
Intermediate 2nd Stage (Lead)	N/A	N/A	N/A
Intermediate 2nd Stage (Tail)	0	6615	10%
Production (Lead)	N/A	N/A	N/A
Production (Tail)	9609	21484	20%

Oxy requests a variance to cement the 9.625" and/or 7.625" intermediate casing strings offline in accordance to the approved variance, EC Tran 461365.

The summarized operational sequence will be as follows:

1. Run casing as per normal operations. While running casing, conduct negative pressure test and confirm integrity of the float equipment (float collar and shoe).
2. Land casing.

## Oxy USA Inc. - JEFF SMITH MDP1 7\_18 FED COM 32H

3. Fill pipe with kill weight fluid, and confirm well is static.
  - a. If well is not static notify BLM and kill well.
  - b. Once well is static notify BLM with intent to proceed with nipple down and offline cementing.
4. Set and pressure test annular packoff.
5. After confirmation of both annular barriers and internal barriers, nipple down BOP and install cap flange. If any barrier fails to test, the BOP stack will not be nipped down until after the cement job is completed.
6. Skid rig to next well on pad.
7. Confirm well is static before removing cap flange.
8. If well is not static notify BLM and kill well prior to cementing or nipping up for further remediation.
9. Install offline cement tool.
10. Rig up cement equipment.
  - a. Notify BLM prior to cement job.
11. Perform cement job.
12. Confirm well is static and floats are holding after cement job.
13. Remove cement equipment, offline cement tools and install night cap with pressure gauge for monitoring.

Oxy requests permission to adjust the CBL requirement after bradenhead cement jobs, on 7-5/8" intermediate casings, as per the agreement reached in the OXY/BLM meeting on September 5, 2019.

### Three string wells:

- CBL will be required on one well per pad
- If the pumped volume of cement is less than permitted in the APD, BLM will be notified and a CBL may be run
- Echometer will be used after bradenhead cement job to determine TOC before pumping top-out cement

### 4. Pressure Control Equipment

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	✓	Tested to:
9.875" Hole	13-5/8"	5M	Annular	✓	70% of working pressure
		5M	Blind Ram	✓	250 psi / 5000 psi
			Pipe Ram		
			Double Ram	✓	
			Other*		
6.75" Hole	13-5/8"	5M	Annular	✓	70% of working pressure
		5M	Blind Ram	✓	250 psi / 5000 psi
			Pipe Ram		
			Double Ram	✓	
			Other*		

\*Specify if additional ram is utilized.

Oxy will utilize a 5M annular with a 10M BOPE stack. The BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.



## Oxy USA Inc. - JEFF SMITH MDP1 7\_18 FED COM 32H

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
Y	Are anchors required by manufacturer?
	A multibowl or a unionized multibowl wellhead system will be employed. The wellhead and connection to the BOPE will meet all API 6A requirements. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. We are proposing that we will run the wellhead through the rotary prior to cementing surface casing as discussed with the BLM on October 8, 2015.  See attached schematics.

### BOP Break Testing Request

Oxy requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. A separate sundry will be sent prior to spud that reflects the pad based break testing plan.

BOP break test under the following conditions:

- After a full BOP test is conducted
- When skidding to drill an intermediate section where ICP is set into the third Bone Spring or shallower.
- When skidding to drill a production section that does not penetrate into the third Bone Spring or deeper.

If the kill line is broken prior to skid, two tests will be performed.

- 1) Wellhead flange, co-flex hose, kill line connections and upper pipe rams
- 2) Wellhead flange, HCR valve, check valve, upper pipe rams

If the kill line is not broken prior to skid, only one test will be performed.

- 1) Wellhead flange, co-flex hose, check valve, upper pipe rams

### 5. Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From (ft)	To (ft)				
0	861	Water-Based Mud	8.6-8.8	40-60	N/C
861	10109	Saturated Brine-Based or Oil-Based Mud	8.0-10.0	35-45	N/C
10109	21484	Water-Based or Oil-Based Mud	9.5-12.0	38-50	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite,

**Oxy USA Inc. - JEFF SMITH MDP1 7\_18 FED COM 32H**

Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

What will be used to monitor the loss or gain of fluid?	PVT/MD Totco/Visual Monitoring
---	--------------------------------

**6. Logging and Testing Procedures**

<b>Logging, Coring and Testing.</b>		
Yes	Will run GR from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.	
No	Logs are planned based on well control or offset log information.	
No	Drill stem test? If yes, explain	
No	Coring? If yes, explain	
<b>Additional logs planned</b>		<b>Interval</b>
No	Resistivity	
No	Density	
No	CBL	
Yes	Mud log	ICP - TD
No	PEX	

**7. Drilling Conditions**

<b>Condition</b>	<b>Specify what type and where?</b>
BH Pressure at deepest TVD	6757 psi
Abnormal Temperature	No
BH Temperature at deepest TVD	167°F

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times. Appropriately weighted mud will be used to isolate potential gas, oil, and water zones until such time as casing can be cemented into place for zonal isolation.

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.	
N	H2S is present
Y	H2S Plan attached

**8. Other facets of operation**

	<b>Yes/No</b>
Will the well be drilled with a walking/skidding operation? If yes, describe. <ul style="list-style-type: none"> <li>We plan to drill the two well pad in batch by section: all surface sections, intermediate sections and production sections. The wellhead will be secured with a night cap whenever the rig is not over the well.</li> </ul>	Yes
Will more than one drilling rig be used for drilling operations? If yes, describe. <ul style="list-style-type: none"> <li>Oxy requests the option to contract a Surface Rig to drill, set surface casing, and cement for this well. If the timing between rigs is such that Oxy would not be able to preset surface, the Primary Rig will MIRU and drill the well in its entirety per the APD. Please see the attached document for information on the spudder rig.</li> </ul>	Yes

**Oxy USA Inc. - JEFF SMITH MDP1 7\_18 FED COM 32H**

**Total estimated cuttings volume: 1561.5 bbls.**

**9. Company Personnel**

<b><u>Name</u></b>	<b><u>Title</u></b>	<b><u>Office Phone</u></b>	<b><u>Mobile Phone</u></b>
Linsay Earle	Drilling Engineer		832-596-5507
William Turner	Drilling Engineer Supervisor	713-350-4951	661-817-4586
Simon Benavides	Drilling Superintendent	713-522-8652	281-684-6897
Diego Tellez	Drilling Manager	713-350-4602	713-303-4932



APD ID: 10400054486

Submission Date: 02/26/2020

Highlighted data  
reflects the most  
recent changes

Operator Name: OXY USA INCORPORATED

Well Name: JEFF SMITH MDP1 7-18 FEDERAL COM

Well Number: 32H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

## Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

JeffSmithMDP17\_18FdCom32H\_ExistRoads\_20200226121119.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

## Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

JeffSmithMDP17\_18FdCom32H\_NewRoads\_20200226121159.pdf

New road type: LOCAL

Length: 11230

Feet

Width (ft.): 30

Max slope (%): 0

Max grade (%): 0

Army Corp of Engineers (ACOE) permit required? N

ACOE Permit Number(s):

New road travel width: 14

New road access erosion control: Watershed Diversion every 200' if needed.

New road access plan or profile prepared? Y

New road access plan attachment:

JeffSmithMDP17\_18FdCom32H\_NewRoads\_20200226121801.pdf

Access road engineering design? N

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

**Access road engineering design attachment:**

**Turnout?** N

**Access surfacing type:** OTHER

**Access topsoil source:** ONSITE

**Access surfacing type description:** Caliche

**Access onsite topsoil source depth:** 0

**Offsite topsoil source description:**

**Onsite topsoil removal process:** If available

**Access other construction information:** None

**Access miscellaneous information:** A new access road to the well pad will be constructed running 55.79ft north through pasture to the southwest corner of the proposed pad. A new access road will be constructed to the proposed surface site (CGL) in section 8 T24S R31E NMPM, Eddy County, NM and will followed the surveyed route. The length described as 30 wide and 252.86ft in length across section 8 & 9, T24S R31E, NMPM, Eddy County, NM. See the attached plat showing multiple well pads and proposed roads being 30 and a total of 11,230.32 in length across sections 5, 6, 7 & 8, T24S, R31E, NMPM, Eddy County, NM.

**Number of access turnouts:**

**Access turnout map:**

### Drainage Control

**New road drainage crossing:** CULVERT

**Drainage Control comments:** Watershed Diversion every 200' if needed.

**Road Drainage Control Structures (DCS) description:** Watershed Diversion every 200' if needed.

**Road Drainage Control Structures (DCS) attachment:**

### Access Additional Attachments

### Section 3 - Location of Existing Wells

**Existing Wells Map?** YES

**Attach Well map:**

JeffSmithMDP17\_18FdCom32H\_ExistWells\_20200226122234.pdf

### Section 4 - Location of Existing and/or Proposed Production Facilities

**Submit or defer a Proposed Production Facilities plan?** SUBMIT

**Production Facilities description:** a. In the event the well is found productive, it will flow to an existing CPF. Two new Central Gas Lift pads will be constructed in the NE of Section 8 and/or the SE Section 6 CGL. The necessary production equipment will be installed at the well site. See proposed facilities layout diagrams. b. All flow lines will adhere to API standards. They will consist of (3- 4) surface flowlines per well operating 75% MAWP, lines to follow surveyed route. Survey of a strip of land 30 ft wide and 21,143.70 ft in length crossing USA Land in Sections 6, 7, 8 & 18 of T24S R31E, NMPM Lea County, NM, and being 15 ft left and 15 ft right of the centerline survey, see attached. The CGLs will have two (2) 20-in buried

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

steel suction lines operating at 250 PSIG and (2) 8-inch buried steel gas lift injection trunk lines operating at 1500psig. Each well pad will have (2) 6-inch buried steel gas lift supply lines operating at 1500psig branching off the 2 common 12-inch main lines. These will all follow the surveyed route. Survey of a strip of land 30 ft wide and 26,373.88 ft in length crossing USA land in Sections 5, 6, 7 and 8, T24S, R31E, NMPM, Eddy County, NM and being 15 ft left and 15 ft right of the centerline survey, see attached. c. Electric lines (overhead) will follow a route approved by the BLM to the well pads and CGLs. Survey of a strip of land 30 ft wide and 9,023.17 ft in length crossing USA land in Sections 5, 8 & 9, T24S R31E NMPM, Eddy County, NM and being 15 ft left and 15 ft right of the centerline survey, see attached. Survey of a strip of land 30 ft wide and 17,277.65 ft in length crossing USA land in Sections 6 & 7, T24S R31E NMPM, Eddy County, NM and being 15 ft left and 15 ft right of the centerline survey, see attached.

**Production Facilities map:**

JeffSmithMDP17\_18FdCom32H\_LeaseFacilityInfo\_20200226122254.pdf

## Section 5 - Location and Types of Water Supply

### Water Source Table

**Water source type:** GW WELL

**Water source use type:**

SURFACE CASING

INTERMEDIATE/PRODUCTION  
CASING

OTHER

**Describe use type:** Drilling

**Source latitude:**

**Source longitude:**

**Source datum:**

**Water source permit type:**

WATER WELL

**Water source transport method:**

PIPELINE

TRUCKING

**Source land ownership:** COMMERCIAL

**Source transportation land ownership:** COMMERCIAL

**Water source volume (barrels):** 2000

**Source volume (acre-feet):** 0.25778618

**Source volume (gal):** 84000

**Water source and transportation map:**

JeffSmithMDP17\_18FdCom32H\_GRRWtrSrc\_20200226122356.pdf

JeffSmithMDP17\_18FdCom32H\_MesqWtrSrc\_20200226122401.pdf

**Water source comments:** This well will be drilled using a combination of water mud systems. It will be obtained from commercial water stations (Gregory Rockhouse, Mesquite) in the area and will be hauled to location by transport truck using existing and proposed roads.

**New water well?** N

### New Water Well Info

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

**Well latitude:**

**Well Longitude:**

**Well datum:**

**Well target aquifer:**

**Est. depth to top of aquifer(ft):**

**Est thickness of aquifer:**

**Aquifer comments:**

**Aquifer documentation:**

**Well depth (ft):**

**Well casing type:**

**Well casing outside diameter (in.):**

**Well casing inside diameter (in.):**

**New water well casing?**

**Used casing source:**

**Drilling method:**

**Drill material:**

**Grout material:**

**Grout depth:**

**Casing length (ft.):**

**Casing top depth (ft.):**

**Well Production type:**

**Completion Method:**

**Water well additional information:**

**State appropriation permit:**

**Additional information attachment:**

## Section 6 - Construction Materials

**Using any construction materials:** YES

**Construction Materials description:** Primary - All caliche utilized for the drilling pad and proposed access road will be obtained from an existing BLM/State/Fee approved pit or from prevailing deposits found on the location. Will use BLM recommended extra caliche from other locations close by for roads, if available. Secondary - The secondary way of obtaining caliche to build locations and roads will be by "turning over" the location. This means, caliche will be obtained from the actual well site. A caliche permit will be obtained from BLM prior to pushing up any caliche. 2400 cubic yards is max amount of caliche needed for pad and roads. Amount will vary for each pad. The procedure below has been approved by BLM personnel: a. The top 6" of topsoil is pushed off and stockpiled along the side of the location. b. An approximate 120' X 120' area is used within the proposed well site to remove caliche. c. Subsoil is removed and piled alongside the 120' X 120' within the pad site. d. When caliche is found, material will be stockpiled within the pad site to build the location and road. e. Then subsoil is pushed back in the hole and caliche is spread accordingly across entire location and road. f. Once the well is drilled the stockpiled top soil will be used for interim reclamation and spread along areas where caliche is picked up and the location size is reduced. Neither caliche nor subsoil will be stockpiled outside of the well pad. Topsoil will be stockpiled along the edge of the pad. Caliche will be provided from a pit located in Section 7 T24S R31E. Water will be provided from a frac pond located in Sections 7 T24S R31E.

**Construction Materials source location attachment:**

## Section 7 - Methods for Handling Waste

**Waste type:** DRILLING

**Waste content description:** Water-Based Cuttings, Water-Based Mud, Oil-Based Cuttings, Oil-Based Mud, Produced Water

**Amount of waste:** 1561.5 barrels

**Waste disposal frequency :** Daily

**Safe containment description:** Haul-Off Bins

**Safe containmant attachment:**

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

**Waste disposal type:** HAUL TO COMMERCIAL FACILITY      **Disposal location ownership:** COMMERCIAL

**Disposal type description:**

**Disposal location description:** An approved facility that can process drill cuttings, drill fluids, flowback water, produced water, contaminated soils, and other non-hazardous wastes.

### Reserve Pit

**Reserve Pit being used?** NO

**Temporary disposal of produced water into reserve pit?** NO

**Reserve pit length (ft.)**

**Reserve pit width (ft.)**

**Reserve pit depth (ft.)**

**Reserve pit volume (cu. yd.)**

**Is at least 50% of the reserve pit in cut?**

**Reserve pit liner**

**Reserve pit liner specifications and installation description**

### Cuttings Area

**Cuttings Area being used?** NO

**Are you storing cuttings on location?** Y

**Description of cuttings location** A closed loop system will be utilized consisting of above ground steel tanks and haul-off bins. Disposal of liquids, drilling fluids and cuttings will be disposed of at an approved facility.

**Cuttings area length (ft.)**

**Cuttings area width (ft.)**

**Cuttings area depth (ft.)**

**Cuttings area volume (cu. yd.)**

**Is at least 50% of the cuttings area in cut?**

**WCuttings area liner**

**Cuttings area liner specifications and installation description**

## Section 8 - Ancillary Facilities

**Are you requesting any Ancillary Facilities?:** N

**Ancillary Facilities attachment:**

**Comments:**



**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

## Section 9 - Well Site Layout

### Well Site Layout Diagram:

JeffSmithMDP17\_18FdCom32H\_WellSiteCL\_20200226122448.pdf

**Comments:** V-Door-East CL Tanks - North 330' X 820' 8 Well Pad

## Section 10 - Plans for Surface Reclamation

**Type of disturbance:** New Surface Disturbance

**Multiple Well Pad Name:** JEFF SMITH MDP1 7-18 FEDERAL COM & NUGGET 6-31 FEDERAL COM

**Multiple Well Pad Number:** 1H, 31H, 32H, 43H, 44H & 1H, 43H, 44H

**Recontouring attachment:**

**Drainage/Erosion control construction:** Reclamation to be wind rowed as needed to control erosion

**Drainage/Erosion control reclamation:** Reclamation to be wind rowed as needed to control erosion

<b>Well pad proposed disturbance (acres):</b> 6.21	<b>Well pad interim reclamation (acres):</b> 1.65	<b>Well pad long term disturbance (acres):</b> 4.56
<b>Road proposed disturbance (acres):</b> 7.73	<b>Road interim reclamation (acres):</b> 4.12	<b>Road long term disturbance (acres):</b> 3.61
<b>Powerline proposed disturbance (acres):</b> 18.11	<b>Powerline interim reclamation (acres):</b> 18.11	<b>Powerline long term disturbance (acres):</b> 0
<b>Pipeline proposed disturbance (acres):</b> 32.7	<b>Pipeline interim reclamation (acres):</b> 21.8	<b>Pipeline long term disturbance (acres):</b> 10.9
<b>Other proposed disturbance (acres):</b> 0	<b>Other interim reclamation (acres):</b> 0	<b>Other long term disturbance (acres):</b> 0
<b>Total proposed disturbance:</b> 64.75	<b>Total interim reclamation:</b> 45.68	<b>Total long term disturbance:</b> 19.07

**Disturbance Comments:** See Below

**Reconstruction method:** If the well is deemed commercially productive, caliche from the areas of the pad site not required for operations will be reclaimed. The original topsoil will be returned to the area of the drill pad not necessary to operate the well. These unused areas of the drill pad will be contoured, as close as possible, to match the original topography, and the area will be seeded with an approved BLM mixture to re-establish vegetation. After concluding the drilling and/or completion operations, if the well is found non-commercial, the caliche will be removed from the pad and transported to the original caliche pit or used for other drilling locations. The road will be reclaimed as directed by the BLM. The original topsoil will again be returned to the pad and contoured, as close as possible, to the original topography, and the area will be seeded with an approved BLM mixture to re-establish vegetation.

**Topsoil redistribution:** The original topsoil will be returned to the area of the drill pad not necessary to operate the well.

**Soil treatment:** To be determined by the BLM.

**Existing Vegetation at the well pad:** To be determined by the BLM at Onsite.

**Existing Vegetation at the well pad attachment:**

**Existing Vegetation Community at the road:** To be determined by the BLM at Onsite.

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

**Existing Vegetation Community at the road attachment:**

**Existing Vegetation Community at the pipeline:** To be determined by the BLM at Onsite.

**Existing Vegetation Community at the pipeline attachment:**

**Existing Vegetation Community at other disturbances:** To be determined by the BLM at Onsite.

**Existing Vegetation Community at other disturbances attachment:**

**Non native seed used?** N

**Non native seed description:**

**Seedling transplant description:**

**Will seedlings be transplanted for this project?** N

**Seedling transplant description attachment:**

**Will seed be harvested for use in site reclamation?** N

**Seed harvest description:**

**Seed harvest description attachment:**

### Seed Management

#### Seed Table

#### Seed Summary

**Total pounds/Acre:**

Seed Type	Pounds/Acre
-----------	-------------

**Seed reclamation attachment:**

### Operator Contact/Responsible Official Contact Info

**First Name:** Michael

**Last Name:** Wilson

**Phone:** (575)631-6618

**Email:** Michael\_Wilson@oxy.com

**Seedbed prep:**

**Seed BMP:**

**Seed method:**

**Existing invasive species?** N

**Existing invasive species treatment description:**

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

**Existing invasive species treatment attachment:**

**Weed treatment plan description:** To be determined by the BLM.

**Weed treatment plan attachment:**

**Monitoring plan description:** To be determined by the BLM.

**Monitoring plan attachment:**

**Success standards:** To be determined by the BLM.

**Pit closure description:** NA

**Pit closure attachment:**

## Section 11 - Surface Ownership

**Disturbance type:** WELL PAD

**Describe:**

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

**Disturbance type:** PIPELINE

**Describe:**

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

**Disturbance type:** OTHER

**Describe:** Electric Line

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

**Disturbance type:** NEW ACCESS ROAD

**Describe:**

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

**Disturbance type:** OTHER

**Describe:** CGLs

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

## Section 12 - Other Information

**Right of Way needed?** Y

**Use APD as ROW?** Y

**ROW Type(s):** 281001 ROW - ROADS,285003 ROW – POWER TRANS,288100 ROW – O&G Pipeline,288101 ROW – O&G Facility Sites,289001 ROW- O&G Well Pad

## ROW Applications

**SUPO Additional Information:** Permian Basin MOA - To be submitted after APD acceptance. GIS Shapefiles available for BLM download from shared FTP site after APD submittal.

**Use a previously conducted onsite?** N

**Previous Onsite information:**

## Other SUPO Attachment

JeffSmithMDP17\_18FdCom32H\_GasCapPlan\_20200226122702.pdf

JeffSmithMDP17\_18FdCom32H\_StakeForm\_20200226122711.pdf

JeffSmithMDP17\_18FdCom32H\_SUPO\_20200226122716.pdf

JeffSmithMDP17\_18FdCom32H\_AM\_20200226122724.pdf

JeffSmithMDP17\_18FdCom32H\_Loc\_20200226122738.pdf

JeffSmithMDP17\_18FdCom32H\_VM\_20200226122816.pdf

JeffSmithMDP17\_18FdCom32H\_TOPO\_20200226122825.pdf



**APD ID:** 10400054486

**Submission Date:** 02/26/2020

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

**Well Type:** OIL WELL

**Well Work Type:** Drill

## Section 1 - General

**Would you like to address long-term produced water disposal?** NO

## Section 2 - Lined Pits

**Would you like to utilize Lined Pit PWD options?** N

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Lined pit PWD on or off channel:**

**Lined pit PWD discharge volume (bbl/day):**

**Lined pit specifications:**

**Pit liner description:**

**Pit liner manufacturers information:**

**Precipitated solids disposal:**

**Describe precipitated solids disposal:**

**Precipitated solids disposal permit:**

**Lined pit precipitated solids disposal schedule:**

**Lined pit precipitated solids disposal schedule attachment:**

**Lined pit reclamation description:**

**Lined pit reclamation attachment:**

**Leak detection system description:**

**Leak detection system attachment:**

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

**Lined pit Monitor description:**

**Lined pit Monitor attachment:**

**Lined pit: do you have a reclamation bond for the pit?**

**Is the reclamation bond a rider under the BLM bond?**

**Lined pit bond number:**

**Lined pit bond amount:**

**Additional bond information attachment:**

### Section 3 - Unlined Pits

**Would you like to utilize Unlined Pit PWD options?** N

**Produced Water Disposal (PWD) Location:**

**PWD disturbance (acres):**

**PWD surface owner:**

**Unlined pit PWD on or off channel:**

**Unlined pit PWD discharge volume (bbl/day):**

**Unlined pit specifications:**

**Precipitated solids disposal:**

**Describe precipitated solids disposal:**

**Precipitated solids disposal permit:**

**Unlined pit precipitated solids disposal schedule:**

**Unlined pit precipitated solids disposal schedule attachment:**

**Unlined pit reclamation description:**

**Unlined pit reclamation attachment:**

**Unlined pit Monitor description:**

**Unlined pit Monitor attachment:**

**Do you propose to put the produced water to beneficial use?**

**Beneficial use user confirmation:**

**Estimated depth of the shallowest aquifer (feet):**

**Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?**

**TDS lab results:**

**Geologic and hydrologic evidence:**

**State authorization:**

**Unlined Produced Water Pit Estimated percolation:**

**Unlined pit: do you have a reclamation bond for the pit?**



**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

**Is the reclamation bond a rider under the BLM bond?**

**Unlined pit bond number:**

**Unlined pit bond amount:**

**Additional bond information attachment:**

#### Section 4 - Injection

**Would you like to utilize Injection PWD options?** N

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Injection PWD discharge volume (bbl/day):**

**Injection well mineral owner:**

**Injection well type:**

**Injection well number:**

**Injection well name:**

**Assigned injection well API number?**

**Injection well API number:**

**Injection well new surface disturbance (acres):**

**Minerals protection information:**

**Mineral protection attachment:**

**Underground Injection Control (UIC) Permit?**

**UIC Permit attachment:**

#### Section 5 - Surface Discharge

**Would you like to utilize Surface Discharge PWD options?** N

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Surface discharge PWD discharge volume (bbl/day):**

**Surface Discharge NPDES Permit?**

**Surface Discharge NPDES Permit attachment:**

**Surface Discharge site facilities information:**

**Surface discharge site facilities map:**

#### Section 6 - Other

**Would you like to utilize Other PWD options?** N

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Other PWD discharge volume (bbl/day):**

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

**Other PWD type description:**

**Other PWD type attachment:**

**Have other regulatory requirements been met?**

**Other regulatory requirements attachment:**



U.S. Department of the Interior  
BUREAU OF LAND MANAGEMENT

## Bond Info Data Report

08/31/2020

**APD ID:** 10400054486

**Submission Date:** 02/26/2020

Highlighted data  
reflects the most  
recent changes

**Operator Name:** OXY USA INCORPORATED

**Well Name:** JEFF SMITH MDP1 7-18 FEDERAL COM

**Well Number:** 32H

[Show Final Text](#)

**Well Type:** OIL WELL

**Well Work Type:** Drill

### Bond Information

**Federal/Indian APD:** FED

**BLM Bond number:** ESB000226

**BIA Bond number:**

**Do you have a reclamation bond?** NO

**Is the reclamation bond a rider under the BLM bond?**

**Is the reclamation bond BLM or Forest Service?**

**BLM reclamation bond number:**

**Forest Service reclamation bond number:**

**Forest Service reclamation bond attachment:**

**Reclamation bond number:**

**Reclamation bond amount:**

**Reclamation bond rider amount:**

**Additional reclamation bond information attachment:**