

UNITED STATES DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT**

OCD Artesia

FORM APPROVED

	OMB NO 1004-013:
	Expires: July 31, 201
5.	Lease Serial No

SUNDRY NOTICES AND REPORTS ON WELLS	NMLC028793C
Do not use this form for proposals to drill or to re-enter an	
bandoned well. Use form 3160-3 (APD) for such proposals.	If Indian, Allottee or Tribe Name

apandoned we	,	0. 11 200.200, 1220.000 01 21000 1 2100			
SUBMIT IN TRI	7 If Unit or CA/Agr NMNM88525X	eement, Name and/or No			
1 Type of Well ☐ Oil Well ☐ Gas Well ☒ Otl	8 Well Name and N BURCH KEELY				
2. Name of Operator COG OPERATING LLC	9. API Well No. 30-015-04213	-00-S1			
3a Address 550 WEST TEXAS AVENUE MIDLAND, TX 79701	SUITE 1300	3b. Phone No. (include area code) 10. Field and Pool, or Exploratory Ph: 432-818-2319 GRAYBURG Fx: 432-685-4396			
4. Location of Well (Footage, Sec., I	11. County or Parish	11. County or Parish, and State			
Sec 19 T17S R30E SESE 666	EDDY COUNT	EDDY COUNTY, NM			
ULI					
12. CHECK APPI	ROPRIATE BOX(ES)	TO INDICATE NATURE OF	NOTICE, REPORT, OR OTHE	ER DATA	
TYPE OF SUBMISSION	TYPE OF ACTION				
□ Notice of Intent Subsequent Report	☐ Acidize ☐ Alter Casing ☐ Casing Repair	☐ Deepen ☐ Fracture Treat ☐ New Construction	☐ Production (Start/Resume) ☐ Reclamation ☐ Recomplete	☐ Water Shut-Off	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones Attach the Bond under which the work will be performed or provide the Bond No on file with BLM/BIA Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

□ Plug Back

Plug and Abandon


Final Abandonment Notice

☐ Change Plans

Convert to Injection

8/17/11 MIRU.
8/21/11 UNSET R-4 PACKER. POOH W/ 82 JTS ICP 2-7/8" TBG. FOUND HOLE IN TBG
3 JTS FROM SURFACE. LAYED DOWN ONE ADDITIONAL JOINT.
8/22/11 GIH W/ 79 JTS ICP 2-7/8" TBG AND 7" R-4 PACKER, SET AT 2530'
8/24/11 RICHARD INGE W/NMOCD WAS NOTIFIED AND SAID NO ONE WOULD BE OUT TO
WITNESS MIT. TESTED ANNULUS & PACKER TO 400# FOR 40 MINS. LOST
APPROX 5#, CONTACTED RICHARD INGE OF TEST. HE SAID TO SEND CHART IN
WITH PAPER WORK. CHART ATTACHED. WELL RETURNED TO INJECTION.

SEE ATTACHED FOR CONDITIONS OF APPROVAL



Accepted for record

Temporarily Abandon

Water Disposal



			12 1/10/11	
14 I hereby certify the	hat the foregoing is true and correct. Electronic Submission #117037 verifie For COG OPERATING LI Committed to AFMSS for processing by KUI	.C, sen	it to the Carlsbad	
Name (Printed/Typ	ped) NETHA AARON	Title	AUTHORIZED REPRESENTATIVE	
Signature	(Electronic Submission)	Date	09/07/2011	
•	THIS SPACE FOR FEDERA	L OR	STATE OFFICE USE	
Approved By ACCEPTED			DUNCAN WHITLOCK LEAD PETROLEUM ENGINEERING TECH	Date 09/19/2011
Conditions of approval, if any, are attached Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease				

Office Carlsbad which would entitle the applicant to conduct operations thereon. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Conditions of Approval: Wells with Packers*


COG Operating LLC Burch Keely Unit 100 API 3001504213

September 14, 2011

- 1. Conduct a Mechanical Integrity Test of the tubing/casing annulus after a tubing, packer or casing seal is established. Repair that seal any time more than five barrels of packer fluid is replaced within 30 days.
 - a. The minimum test pressure should be 500 psig for 30 minutes or 300 psig for 60 minutes, with 200 psig differentials between tubing and casing pressure (at test time) but no more than 70% of casing burst pressure as described by Onshore Order 2.III.B.1.h. (The tubing or reservoir pressure may need to be reduced). An alternate method for a BLM approved MIT is to have the fluid filled system open to atmospheric pressure and have a loss of less than five barrels in 30 days witnessed by a BLM authorized officer.
 - b. Document the pressure test on a calibrated recorder chart registering within 25 to 85 per cent of its full range. Greater than 10% pressure leakoff will be viewed as a failed MIT. Less than 10% pressure leakoff will be evaluated site specifically and may restrict injection approval.
 - c. Notify Paul R. Swartz at 575-234-5985 and/or 575-200-7902 at least 24 hours before the test. If there is no response, notify the BLM on call drilling phone, 575-361-2822. In Lea County call 575-393-3612.
 - d. Submit a subsequent Sundry Form 3160-5 relating the MIT activity. Include a copy of the recorded MIT pressure chart. List the name of the BLM witness, or the notified person and date of notification. NMOCD is to retain the original recorded MIT chart.
 - e. Use of tubing internal protection, on/off tubing equipment just above the packer, and a profile nipple installation is required. The setting depths and descriptions of each are to be included in the subsequent sundry. List (by date) descriptions of daily activity of any previously unreported wellbore work.
 - f. Submit the original subsequent sundry with three copies to BLM Carlsbad.
- 2. Compliance with a NMOCD Administrative Order is required, submit documentation of that authorization.
 - a. Approved injection pressure compliance is required.
 - b. If injection pressure exceeds the approved pressure you are required to reduce that pressure and notify the BLM within 24 hours.
 - c. When injection pressure is within 50 psig of the maximum pressure, install automation equipment that will prevent exceeding that maximum.
 - i. Submit a subsequent report (Sundry Form 3160-5) describing the installed automation equipment within 30 days.
 - e. Other unexplained significant variations of rate or pressure to be reported within 5 days of notice.

- 3. The casing/tubing annulus is required to be monitored for communication with injection fluid or loss of casing integrity.
 - a. The annulus is to be maintained full of packer fluid at atmospheric pressure. Installation of equipment that will display on site, continuous open to the air fluid level is required. A BLM inspector may request verification of this fluid level at any time.
 - b. **Submit a subsequent report (Sundry Form 3160-5)** describing the installation of packer fluid level monitoring equipment within 30 days of this approval.
 - The operator shall keep monthly records documenting that the casing annulus is fluid filled.
 A suggested format for these records is available from the BLM Carlsbad Field Office.
 Cópies of those records shall be furnished at the request of a BLM authorized officer.
 - d. Loss of packer fluid above five barrels per month requires notification of the BLM authorized officer within 5 days.
 - a. Gain of annular fluid requires notification within 24 hours. Cease injection and maintain a production casing pressure of Opsia. Notify the BLM's authorized officer (Paul R. Swartz at 575-200-7902). If there is no response, notify the BLM on call drilling phone, 575-361-2822. In Lea County call 575-393-3612.
 - e. Also submit to this office a (Sundry Form 3160-5) Notice of Intent (NOI) for approval by BLM and NMOCD with a detailed plan for correction and the anticipated date of correction. Verbal approval for the plan may be given by a BLM authorized officer, with the NOI filed within five business days.
 - f. After the repairs submit a (Sundry Form 3160-5) Subsequent report, describing the repair(s) and Mechanical Integrity Test as per item 1 above.

^{*}COA's prepared by Paul R Swartz

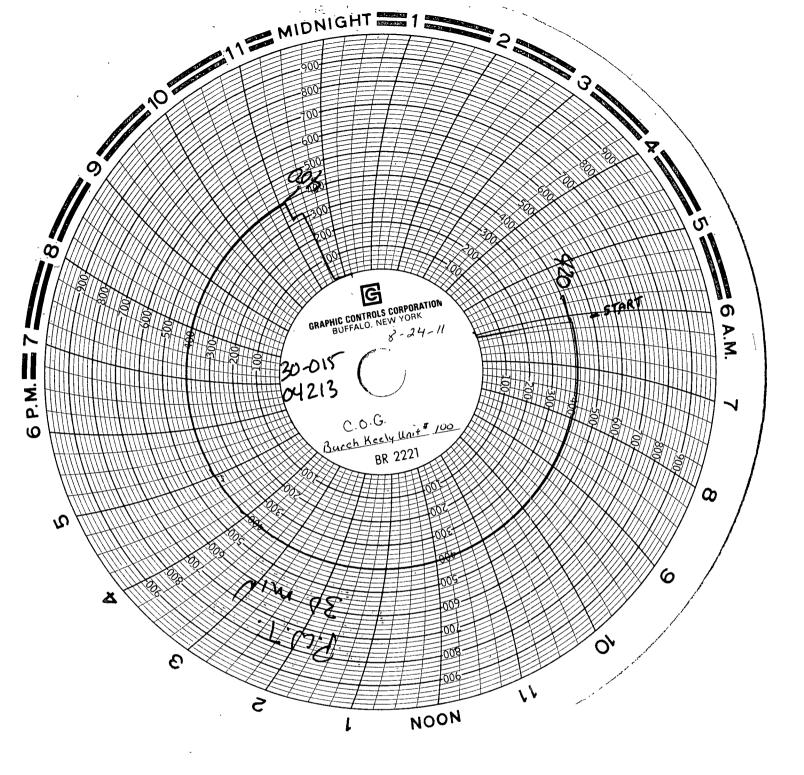

Withess Ilman Hallsburger