

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: P G 4 FEDERAL 1		Field: SAND DUNES WEST	
Location: 900' FNL & 1980' FWL; SEC 9-23S-R31E		County: EDDY	State: NM
Elevation: 3364' KB; 3346' GL; 18' KB to GL		Spud Date: 10/29/90	Compl Date: 5/13/91
API#: 30-015-26509	Prepared by: Ronnie Slack	Date: 12/8/11	Rev:

PROPOSED PLUG & ABANDONMENT

17-1/2" Hole
13-3/8", 48#, H40, ST&C, @ 628'
 Cmt'd w/650 sx to surf

TOC 3280' (CBL)- 6/29/11

12-1/4" Hole
9-5/8", 36#, K55, ST&C, @ 4122'
 Cmt'd w/2300 sx to surf

BELL CANYON (7/1/11)
 4188' - 4220'

Sqz Perfs; Cmt Sqz w/150 sx @ 4230. TOC
 @ 3280 by (CBL) (6/29/11)

Sqz Perfs; Cmt Sqz w/375 sx @ 5098. TOC @
 4240 by (CBL) (7/11/07)

TOC 5675' (TS)

BONE SPRING (7/31/07)
 10513' - 11612'


Top of 4-1/2" Liner @ 11715'

8-3/4" Hole
7", 29# & 26#, P110 & S95, LTC, @ 12075'
 Cmt'd w/2145 sx cmt

ATOKA (8/25/92)
 13718' - 13748'

MORROW (2/19/91)
 14655' - 14738'

6" Hole
4-1/2", 13.5#, S95, @ 15174'
 Cmt'd w/490 sx cmt

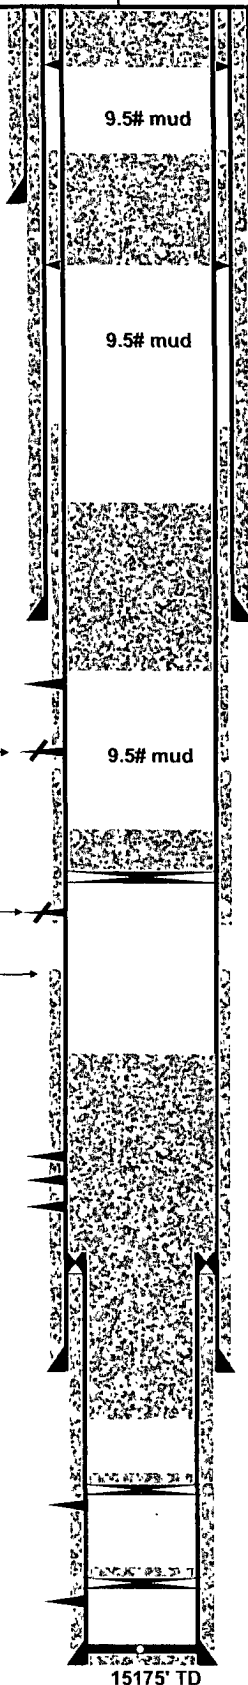

Proposed P&A

1. Perf & Sqz 30 sx cmt In/out from 100' to surf.
2. Cut wellhead off 3' BGL. Set dry hole marker.

Proposed P&A

1. Perf & Sqz 60 sx cmt In/out from 783' to 575'. Tag. Calc. Inside 7"=33 sx, 9 5/8 x 7 annulus=27 sx (top of salt @ 783')

Proposed P&A

1. Spot 75 sx cmt @ 4175'. WOC Tag. CTOC @ 3715' (base of salt @ 3892')

Proposed P&A

1. Spot 25 sx on CIBP @ 5000'. Calc. TOC @ 4847'

CIBP @ 5000 (7/1/11)

TOC tagged @ 7843' (6/28/11)

800 sx cmt plug 7843'- 12145' (6/27/11)

CIBP @ 14100 w/35' cmt (7/5/07)

CIBP @ 14100 w/50' cmt

15175' TD

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: P G 4 FEDERAL 1		Field: SAND DUNES WEST	
Location: 900' FNL & 1980' FWL; SEC 9-23S-R31E		County: EDDY	State: NM
Elevation: 3364' KB; 3346' GL; 18' KB to GL		Spud Date: 10/29/90	Compl Date: 5/13/91
API#: 30-015-26509	Prepared by: Ronnie Slack	Date 12/7/11	Rev:

CURRENT WELLBORE

17-1/2" Hole
13-3/8", 48#, H40, ST&C, @ 628'
 Cmt'd w/650 sx to surf

TOC 3280' (CBL)- 6/29/11

12-1/4" Hole
9-5/8", 36#, K55, ST&C, @ 4122'
 Cmt'd w/2300 sx to surf

BELL CANYON (7/1/11)
 4188' - 4220'

Sqz Perfs; Cmt Sqz w/150 sx @ 4230. TOC
 @ 3280 by (CBL) (6/29/11)

2-7/8", 6.5# N80 Tubing (7/6/11)

TAC @ 4079'

Sqz Perfs; Cmt Sqz w/375 sx @ 5098. TOC @
 4240 by (CBL) (7/11/07)

1 1/4" x 26' rod pump
 SN @ 4244'

CIBP @ 5000 (7/1/11)

TOC 5675' (TS)

TOC tagged @ 7843' (6/28/11)

BONE SPRING (7/31/07)
 10513' - 11612'

Top of 4-1/2" Liner @ 11715'

8-3/4" Hole
7", 29# & 26#, P110 & S95, LTC, @ 12075'
 Cmt'd w/2145 sx cmt

800 sx cmt plug 7843'- 12145' (6/27/11)

ATOKA (8/25/92)
 13718' - 13748'

CIBP @ 14100 w/35' cmt (7/5/07)

MORROW (2/19/91)
 14655' - 14738'

CIBP @ 14100 w/50' cmt

6" Hole
4-1/2", 13.5#, S95, @ 15174'
 Cmt'd w/490 sx cmt

15175' TD