

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
SUNDRY NOTICES AND REPORTS ON WELLS

FORM APPROVED  
OMB NO. 1004-0135  
EXPIRES: March 31, 2007

Do not use this form for proposals to drill or to re-enter an  
abandoned well. Use Form 3160-3 (APD) for such proposals

SUBMIT IN TRIPLICATE

1a Type of Well ☒ Oil Well ☐ Gas Well ☐ Other \_\_\_\_\_

2 Name of Operator  
**DEVON ENERGY PRODUCTION COMPANY, LP**

3. Address and Telephone No.  
20 N Broadway, Oklahoma City, Ok 73102-8260 405-235-3611

4 Location of Well (Report location clearly and in accordance with Federal requirements)\*  
200 FSL 1700 FWL N SEC 2 T25S R31E  
BHL: 2584 FSL & 2226 FWL K SEC 35 T24S R31E PP: 204 FSL 1759 FWL

5. Lease Serial No.  
**NMNM36379; K 4562**

6. If Indian, Allottee or Tribe Name

7 Unit or CA Agreement Name and No.

8 Well Name and No.  
**Cotton Draw Unit 137H**

9. API Well No.  
**30-015-38556**

10. Field and Pool, or Exploratory  
**Paduca; Bone Spring**

11 County or Parish State  
Eddy NM

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

| TYPE OF SUBMISSION                                    | TYPE OF ACTION                                | TYPE OF ACTION                               |
|-------------------------------------------------------|-----------------------------------------------|----------------------------------------------|
| <input type="checkbox"/> Notice of Intent             | <input type="checkbox"/> Acidize              | <input type="checkbox"/> Deepen              |
| <input checked="" type="checkbox"/> Subsequent Report | <input type="checkbox"/> Alter Casing         | <input type="checkbox"/> Fracture Treat      |
| <input type="checkbox"/> Final Abandonment Notice     | <input type="checkbox"/> Casing Repair        | <input type="checkbox"/> New Construction    |
|                                                       | <input type="checkbox"/> Change Plans         | <input type="checkbox"/> Plug and Abandon    |
|                                                       | <input type="checkbox"/> Convert to Injection | <input type="checkbox"/> Plug Back           |
|                                                       |                                               | <input type="checkbox"/> Reclamation         |
|                                                       |                                               | <input type="checkbox"/> Recomplete          |
|                                                       |                                               | <input type="checkbox"/> Temporarily Abandon |
|                                                       |                                               | <input type="checkbox"/> Water Disposal      |
|                                                       |                                               | <input type="checkbox"/> Water Shut-Off      |
|                                                       |                                               | <input type="checkbox"/> Well Integrity      |
|                                                       |                                               | <input checked="" type="checkbox"/> Other    |

Post - Completion Report

13 Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work and approximate duration thereof. If the proposal deepens directionally or recompletes horizontally, give subsurface location and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirement, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection)

11/23/11 - MIRU WSU. NU & Test BOP. Dthru DV. TC 3100 psi, held 15 mins. MIRU WL Run CB L. TOC @ 3204'.  
RDMO WL. MU TCP guns. Frac 21 stages w/ Total 2,450,000 20/40 white sd; 1,192,400 40/70 white sd; 100,200 100  
mesh white sd, 63K gals 7.5% HCL (See attached summary for details). FWB. DO frac plugs. CHC. Set pkr. RIH w/ tbg.  
EOT @ 8115.25' Top of pkr @ 8095'. Circ w/ 260 bbls 2% KCL. RU & RIH w/ swab. FWB. RD Swab. RIH w/ pump. TOP.

*Accepted for record*  
NMOC

14 I hereby certify that the foregoing is true and correct


Signed *Judy A. Barnett* Name Judy A. Barnett X8699  
Title Regulatory Specialist Date 5/1/2012

(This space for Federal or State Office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_  
Conditions of approval, if any

This document is a public record. It is the policy of the Bureau of Land Management to make this document available to the public. It is the policy of the Bureau of Land Management to make this document available to the public. It is the policy of the Bureau of Land Management to make this document available to the public.

\*See Instruction on Reverse Side

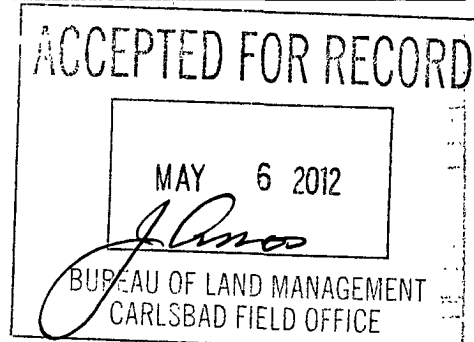



## Stimulations Summary

| District                                                                                                            |                  | County                |                       | Field Name      |            |                   | Project Group        |                | State/Province      |              |                  |              |
|---------------------------------------------------------------------------------------------------------------------|------------------|-----------------------|-----------------------|-----------------|------------|-------------------|----------------------|----------------|---------------------|--------------|------------------|--------------|
| PERMIAN BASIN                                                                                                       |                  | EDDY                  |                       | AVALON SHALE    |            |                   | PB NEW MEXICO        |                | NM                  |              |                  |              |
| Surface Legal Location                                                                                              |                  | API/UWI               |                       | Latitude (DMS)  |            | Longitude (DMS)   |                      | Ground Elev .. |                     | KB - GL (ft) | Ong KB Elev (ft) | TH Elev (ft) |
| SEC 2 T25S R31E                                                                                                     |                  | 3001538556            |                       | 32° 9' 9.927" N |            | 103° 45' 6.243" W |                      | 3,420.00       |                     | 26.20        | 3,446.20         |              |
| HYDRAULIC FRAC, 1/8/2012 19:56, AVALON SHALE, OH, 15,962.0 ftKB - 16,192.0 ftKB, BHI, 29950 LBS; Ottawa 62970 LBS   |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi.. | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 5585.10          | 304.0                 | 1,240.0               | 4,401.0         | 1,673.0    | 5,815.0           | 41                   | 6,102.0        | 63                  | 1.00         |                  |              |
| HYDRAULIC FRAC, 1/9/2012 13:21, AVALON SHALE, OH, 15,620.0 ftKB - 15,850.0 ftKB, BHI, 29995 LBS; Ottawa 62973 LBS   |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi.. | P (max) (psi)  | Rate (max) (bbl/m.. | Max Conc...  |                  |              |
| 202,950.0                                                                                                           | 5685.80          | 1,029.0               | 1,312.0               | 4,401.0         | 1,897.0    | 5,240.0           | 54                   | 5,729.0        | 71                  | 1.00         |                  |              |
| HYDRAULIC FRAC, 1/9/2012 18:12, AVALON SHALE, OH, 15,278.0 ftKB - 15,508.0 ftKB, BHI, 29996 LBS; Ottawa 62965 LBS   |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De..                                                                                                       | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi.. | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 5654.50          | 1,286.0               | 1,383.0               | 5,059.0         | 1,875.0    | 5,183.0           | 55                   | 6,022.0        | 71                  | 1.00         |                  |              |
| HYDRAULIC FRAC, 1/9/2012 23:13, AVALON SHALE, OH, 14,936.0 ftKB - 15,166.0 ftKB, BHI, 29989 LBS; Ottawa 63397 LBS   |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi.. | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc.    |                  |              |
| 202,950.0                                                                                                           | 5632.80          | 1,229.0               | 1,329.0               | 6,018.0         | 2,027.0    | 5,610.0           | 53                   | 6,555.0        | 71                  | 1.00         |                  |              |
| HYDRAULIC FRAC, 1/10/2012 12:50, AVALON SHALE, OH, 14,594.0 ftKB - 14,824.0 ftKB, BHI, 29999 LBS; Ottawa 62975 LBS  |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi.. | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 5805.60          | 1,016.0               | 1,310.0               | 4,909.0         | 2,059.0    | 5,297.0           | 65                   | 6,183.0        | 71                  | 1.00         |                  |              |
| HYDRAULIC FRAC, 1/10/2012 17:12, AVALON SHALE, OH, 14,252.0 ftKB - 14,482.0 ftKB, BHI, Ottawa 82984 LBS; 60031 LBS  |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi   | P (max) (psi)  | Rate (max) (bbl/m.. | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 5827.10          | 1,137.0               | 1,328.0               | 4,339.0         | 2,053.0    | 5,772.0           | 58                   | 6,260.0        | 70                  | 2.00         |                  |              |
| HYDRAULIC FRAC, 1/11/2012 06:06, AVALON SHALE, OH, 13,910.0 ftKB - 14,140.0 ftKB, BHI, Ottawa 83533 LBS; 60015 LBS  |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De..                                                                                                       | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi.. | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc..   |                  |              |
| 202,950.0                                                                                                           | 5919.00          | 978.0                 | 1,287.0               | 3,594.0         | 1,793.0    | 5,511.0           | 60                   | 6,170.0        | 70                  | 2.00         |                  |              |
| HYDRAULIC FRAC, 1/11/2012 10:15, AVALON SHALE, OH, 13,568.0 ftKB - 13,798.0 ftKB, BHI, 60025 LBS; Ottawa 82962 LBS  |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi   | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 5946.00          | 1,124.0               | 1,278.0               | 3,745.0         | 2,091.0    | 5,269.0           | 67                   | 6,355.0        | 71                  | 2.00         |                  |              |
| HYDRAULIC FRAC, 1/11/2012 14:17, AVALON SHALE, OH, 13,226.0 ftKB - 13,456.0 ftKB, BHI, 60014 LBS; Ottawa 82980 LBS  |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi   | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 5627.10          | 1,147.0               | 1,384.0               | 4,134.0         | 2,043.0    | 5,625.0           | 63                   | 6,544.0        | 70                  | 2.00         |                  |              |
| HYDRAULIC FRAC, 1/11/2012 18:14, AVALON SHALE, OH, 12,884.0 ftKB - 13,114.0 ftKB, BHI, 60010 LBS; Ottawa 82988 LBS  |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi.. | P (max) (psi)  | Rate (max) (bbl/m.  | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 5770.80          | 1,217.0               | 1,417.0               | 3,987.0         | 2,619.0    | 6,018.0           | 62                   | 6,831.0        | 70                  | 2.00         |                  |              |
| HYDRAULIC FRAC, 1/12/2012 06:10, AVALON SHALE, OH, 12,542.0 ftKB - 12,772.0 ftKB, BHI, 60019 LBS; Ottawa 82972 LBS  |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De..                                                                                                       | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi   | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 6011.40          | 1,109.0               | 1,425.0               | 4,422.0         | 2,743.0    | 5,512.0           | 60                   | 5,929.0        | 70                  | 2.00         |                  |              |
| HYDRAULIC FRAC, 1/12/2012 10:09, AVALON SHALE, OH, 12,200.0 ftKB - 12,430.0 ftKB, BHI, 60026 LBS; Ottawa 82960 LBS  |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi.. | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 6007.20          | 1,186.0               | 1,366.0               | 4,015.0         | 2,364.0    | 5,215.0           | 64                   | 5,943.0        | 70                  | 2.00         |                  |              |
| HYDRAULIC FRAC, 1/12/2012 13:52, AVALON SHALE, OH, 11,858.0 ftKB - 12,088.0 ftKB, BHI, 16080 LBS; Ottawa 126346 LBS |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi.. | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 6498.30          | 1,160.0               | 1,244.0               | 4,042.0         | 2,107.0    | 5,228.0           | 69                   | 5,907.0        | 70                  | 2.00         |                  |              |
| HYDRAULIC FRAC, 1/13/2012 08:20, AVALON SHALE, OH, 11,516.0 ftKB - 11,746.0 ftKB, BHI, Ottawa 3045 LBS; 59609 LBS   |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi   | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 6221.00          | 945.0                 | 1,491.0               | 4,332.0         | 2,315.0    | 5,265.0           | 68                   | 5,735.0        | 71                  | 2.00         |                  |              |
| HYDRAULIC FRAC, 1/13/2012 12:35, AVALON SHALE, OH, 11,174.0 ftKB - 11,404.0 ftKB, BHI, 59702 LBS; Ottawa 82933 LBS  |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi   | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 6105.40          | 1,169.0               | 1,326.0               | 4,247.0         | 2,215.0    | 5,299.0           | 67                   | 6,495.0        | 72                  | 2.00         |                  |              |
| HYDRAULIC FRAC, 1/13/2012 18:02, AVALON SHALE, OH, 10,832.0 ftKB - 11,062.0 ftKB, BHI, 59887 LBS; Ottawa 102262 LBS |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi   | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 6141.90          | 961.0                 | 1,110.0               | 4,697.0         | 1,806.0    | 5,390.0           | 62                   | 5,790.0        | 72                  | 2.00         |                  |              |
| HYDRAULIC FRAC, 1/14/2012 09:07, AVALON SHALE, OH, 10,490.0 ftKB - 10,720.0 ftKB, BHI, 59717 LBS; Ottawa 82946 LBS  |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi   | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 5910.30          | 723.0                 | 1,177.0               | 5,235.0         | 1,879.0    | 5,195.0           | 61                   | 5,575.0        | 71                  | 2.00         |                  |              |
| HYDRAULIC FRAC, 1/14/2012 12:44, AVALON SHALE, OH, 10,148.0 ftKB - 10,378.0 ftKB, BHI, 59693 LBS; Ottawa 82872 LBS  |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi   | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 5891.30          | 1,000.0               | 1,305.0               | 3,506.0         | 2,047.0    | 5,327.0           | 70                   | 6,243.0        | 72                  | 2.00         |                  |              |
| HYDRAULIC FRAC, 1/14/2012 16:00, AVALON SHALE, OH, 9,806.0 ftKB - 10,036.0 ftKB, BHI, 59892 LBS; Ottawa 82988 LBS   |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi   | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 6131.80          | 1,110.0               | 1,420.0               | 6,510.0         | 2,528.0    | 5,310.0           | 63                   | 6,524.0        | 72                  | 2.00         |                  |              |
| HYDRAULIC FRAC, 1/15/2012 07:23, AVALON SHALE, OH, 9,464.0 ftKB - 9,694.0 ftKB, BHI, 59723 LBS; Ottawa 82933 LBS    |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi   | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 5919.70          | 866.0                 | 1,427.0               | 4,091.0         | 2,241.0    | 4,899.0           | 71                   | 5,359.0        | 74                  | 2.00         |                  |              |
| HYDRAULIC FRAC, 1/15/2012 11:16, AVALON SHALE, OH, 9,122.0 ftKB - 9,352.0 ftKB, BHI, 59912 LBS; Ottawa 82983 LBS    |                  |                       |                       |                 |            |                   |                      |                |                     |              |                  |              |
| Proppant De                                                                                                         | V (pumped) (bbl) | Pre Trt S/I Prs (psi) | Pst Trt S/I Prs (psi) | P(break) (psi)  | ISIP (psi) | P (avg) (psi)     | Rate (avg) (bbl/mi   | P (max) (psi)  | Rate (max) (bbl/m   | Max Conc     |                  |              |
| 202,950.0                                                                                                           | 5913.20          | 1,112.0               | 1,419.0               | 3,087.0         | 2,245.0    | 4,216.0           | 70                   | 4,420.0        | 71                  | 2.00         |                  |              |