

**McVAY DRILLING COMPANY**

P.O. Box 2450
Hobbs, New Mexico 88241
(575) 397-3311
FAX: 39-DRILL

30-015-40207

Well Name and Num: Coral PWU 28-3H
Location: Sec. 28, T19S, R29E
Operator: Devon
Drilling Contractor: McVay Drilling Company


The undersigned certifies that he is an authorized representative of the drilling contractor who drilled the above described well and that he has conducted deviation tests and obtained the following results:

<u>Degrees @</u>	<u>Depth</u>	<u>Degrees @</u>	<u>Depth</u>	<u>Degrees @</u>	<u>Depth</u>	<u>Degrees @</u>	<u>Depth</u>
0.56	173	23.10	7628				
0.796	300	46.11	7851				
0.40	692	52.35	7915				
1.50	1206	71.94	8138				
0.90	1797	78.83	8202				
0.20	2176	85.20	8330				
0.60	2567	89.10	8458				
0.50	2657	93.10	8938				
0.50	3430	90.10	9419				
1.23	3939	89.50	9803				
1.00	5056	90.30	10282				
1.10	5531	92.22	10569				
3.20	5911	92.46	10761				
2.10	6854	91.94	11429				
1.30	7241	89.77	11956				
1.40	7324	90.85	12095				
4.20	7437	90.74	12190				

By: H. H. Cram

Subscribed and sworn to before me this 30th day of July, 2012


Tina Flemens
Notary Public, Lea County, New Mexico

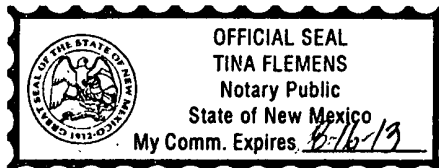



A GYRO TECHNOLOGIES INC. COMPANY

PO Box 261021
Corpus Christi, Texas 78426
(361) 767-0602 • (800) 606-GYRO • Fax (361) 767-0612



July 30, 2012

Devon Energy Production Company
333 West Sheridan Ave
Oklahoma City, Oklahoma 73102-5010

Attn: Mark Cooper

Re: **Coral PWU 28 3H**

Please find enclosed a copy of the survey from 0' to 7,324' ran on the above referenced well.


If I can be of any further service, please do not hesitate to call me at 800-606-4976.

Sincerely,

Keith Havelka
Operations

STATE OF TEXAS §
§
COUNTY OF NUECES §

This instrument was acknowledged before me on the 2nd day of August, A.D., 2012, by Keith Havelka.



Laura Ballew
Notary Public, State of Texas



Company: DEVON ENERGY PRODUCTION CO., LP

Lease/Well: CORAL/PWU 28-3H

Rig Name: MCVAY 6

State/County: NEW MEXICO/EDDY

Latitude: 32.63

GRID North is 0.15 Degrees East of True North

VS-Azi: 0.00 Degrees



Depth Reference : 20 FEET

DRILLOG HA GYRO SURVEY CALCULATIONS

Filename: coral pwu 28-3h.ut

Minimum Curvature Method

Report Date/Time: 7/30/2012 / 14:25

Vaughn Energy Services

Woodward, OK

580-254-5000


Surveyor: Nick Harding

Coral PWU 28 3H / API 30-015-40207

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	TVD FT	+N/-S FT	+E/-W FT	Vertical Section FT	Closure Distance FT	Closure Direction Deg	Dogleg Severity Deg/100
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	****
100.00	0.18	279.28	100.00	0.02	-0.15	0.02	0.15	279.28	0.18
200.00	0.51	256.50	200.00	-0.05	-0.74	-0.05	0.74	265.82	0.35
300.00	0.59	239.45	299.99	-0.42	-1.62	-0.42	1.67	255.41	0.18
400.00	0.30	260.68	399.99	-0.73	-2.32	-0.73	2.43	252.63	0.33
500.00	0.27	262.52	499.99	-0.80	-2.82	-0.80	2.93	254.15	0.03
600.00	0.24	318.24	599.99	-0.68	-3.19	-0.68	3.26	258.03	0.24
700.00	0.52	37.75	699.99	-0.16	-3.05	-0.16	3.06	266.95	0.53
800.00	0.93	51.77	799.98	0.70	-2.13	0.70	2.25	288.24	0.45
900.00	1.32	62.79	899.96	1.73	-0.47	1.73	1.80	344.80	0.44
1000.00	1.43	75.75	999.93	2.56	1.76	2.56	3.11	34.46	0.33
1100.00	1.32	71.13	1099.90	3.24	4.06	3.24	5.19	51.36	0.16
1200.00	1.41	80.18	1199.87	3.82	6.36	3.82	7.42	58.96	0.23
1300.00	1.27	74.56	1299.85	4.33	8.64	4.33	9.66	63.37	0.19
1400.00	1.13	84.08	1399.82	4.73	10.69	4.73	11.69	66.14	0.25
1500.00	1.09	86.27	1499.81	4.89	12.62	4.89	13.53	68.81	0.06
1600.00	1.01	90.77	1599.79	4.94	14.44	4.94	15.27	71.11	0.12
1700.00	1.00	89.77	1699.77	4.93	16.20	4.93	16.93	73.06	0.02
1800.00	0.76	91.54	1799.76	4.92	17.74	4.92	18.41	74.50	0.25

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	TVD FT	+N/-S FT	+E/-W FT	Vertical Section FT	Closure Distance FT	Closure Direction Deg	Dogleg Severity Deg/100
1900.00	0.58	102.87	1899.75	4.79	18.90	4.79	19.49	75.78	0.22
2000.00	0.43	98.69	1999.75	4.62	19.77	4.62	20.30	76.85	0.15
2100.00	0.49	97.97	2099.75	4.50	20.57	4.50	21.05	77.66	0.06
2200.00	0.59	114.91	2199.74	4.23	21.45	4.23	21.87	78.86	0.18
2300.00	0.62	119.98	2299.74	3.74	22.39	3.74	22.70	80.52	0.06
2400.00	0.59	117.95	2399.73	3.23	23.31	3.23	23.53	82.12	0.04
2500.00	0.41	92.46	2499.73	2.97	24.12	2.97	24.30	82.97	0.28
2600.00	0.28	76.59	2599.73	3.02	24.71	3.02	24.89	83.04	0.15
2700.00	0.10	35.07	2699.73	3.14	25.00	3.14	25.20	82.83	0.22
2800.00	0.30	78.74	2799.73	3.27	25.31	3.27	25.52	82.65	0.24
2900.00	0.37	89.61	2899.72	3.32	25.89	3.32	26.10	82.69	0.10
3000.00	0.21	88.71	2999.72	3.33	26.40	3.33	26.61	82.82	0.16
3100.00	0.16	70.15	3099.72	3.38	26.72	3.38	26.93	82.79	0.08
3200.00	0.18	140.69	3199.72	3.30	26.95	3.30	27.15	83.01	0.20
3300.00	0.19	218.20	3299.72	3.05	26.95	3.05	27.12	83.55	0.24
3400.00	0.36	233.74	3399.72	2.73	26.59	2.73	26.73	84.14	0.18
3500.00	0.34	188.56	3499.72	2.25	26.29	2.25	26.39	85.11	0.27
3600.00	0.33	180.68	3599.72	1.67	26.25	1.67	26.30	86.36	0.05
3700.00	0.49	201.32	3699.71	0.98	26.09	0.98	26.11	87.84	0.22
3800.00	0.74	208.22	3799.71	0.02	25.63	0.02	25.63	89.96	0.25
3900.00	0.98	221.96	3899.70	-1.19	24.75	-1.19	24.78	92.75	0.32
4000.00	1.10	209.20	3999.68	-2.66	23.71	-2.66	23.86	96.40	0.26
4100.00	0.95	214.14	4099.66	-4.18	22.78	-4.18	23.16	100.40	0.17
4200.00	0.43	269.21	4199.66	-4.87	21.93	-4.87	22.47	102.52	0.79
4300.00	0.45	267.88	4299.65	-4.89	21.17	-4.89	21.72	103.01	0.02
4400.00	0.56	298.07	4399.65	-4.67	20.34	-4.67	20.87	102.94	0.29
4500.00	0.66	270.81	4499.65	-4.44	19.33	-4.44	19.83	102.92	0.31
4600.00	0.57	273.85	4599.64	-4.39	18.26	-4.39	18.78	103.53	0.10
4700.00	0.97	260.55	4699.63	-4.50	16.92	-4.50	17.51	104.89	0.44
4800.00	1.04	278.10	4799.62	-4.51	15.18	-4.51	15.84	106.55	0.32
4900.00	1.17	283.69	4899.60	-4.14	13.29	-4.14	13.92	107.31	0.17
5000.00	1.23	287.06	4999.57	-3.58	11.27	-3.58	11.82	107.65	0.09
5100.00	1.53	304.70	5099.55	-2.51	9.14	-2.51	9.48	105.34	0.52
5200.00	1.52	313.11	5199.51	-0.84	7.07	-0.84	7.12	96.77	0.22
5300.00	1.60	314.72	5299.47	1.05	5.11	1.05	5.22	78.35	0.09
5400.00	1.58	301.84	5399.43	2.77	2.94	2.77	4.04	46.76	0.36
5500.00	1.21	301.37	5499.41	4.04	0.87	4.04	4.14	12.11	0.37
5600.00	1.59	310.89	5599.38	5.50	-1.09	5.50	5.61	348.84	0.45
5700.00	1.52	310.60	5699.34	7.28	-3.15	7.28	7.93	336.63	0.07

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	TVD FT	+N/-S FT	+E/-W FT	Vertical Section FT	Closure Distance FT	Closure Direction Deg	Dogleg Severity Deg/100
5800.00	2.37	322.53	5799.28	9.78	-5.41	9.78	11.18	331.06	0.93
5900.00	2.59	319.16	5899.19	13.13	-8.14	13.13	15.45	328.19	0.27
6000.00	2.60	316.53	5999.08	16.48	-11.18	16.48	19.91	325.85	0.12
6100.00	2.97	322.12	6098.97	20.17	-14.33	20.17	24.74	324.61	0.47
6200.00	3.41	323.71	6198.81	24.62	-17.68	24.62	30.31	324.31	0.45
6300.00	3.34	315.93	6298.64	29.11	-21.47	29.11	36.17	323.59	0.46
6400.00	3.22	314.07	6398.47	33.16	-25.52	33.16	41.84	322.42	0.16
6500.00	3.24	310.75	6498.31	36.96	-29.68	36.96	47.40	321.24	0.19
6600.00	2.95	317.47	6598.17	40.69	-33.55	40.69	52.74	320.49	0.46
6700.00	2.76	317.60	6698.05	44.37	-36.91	44.37	57.71	320.24	0.19
6800.00	2.62	306.89	6797.94	47.51	-40.36	47.51	62.34	319.65	0.52
6900.00	2.71	330.64	6897.83	50.95	-43.35	50.95	66.89	319.61	1.10
7000.00	2.34	314.01	6997.73	54.43	-45.98	54.43	71.25	319.81	0.81
7100.00	2.39	304.48	7097.65	57.03	-49.17	57.03	75.29	319.23	0.39
7200.00	2.02	314.36	7197.58	59.44	-52.14	59.44	79.07	318.74	0.52
7300.00	1.52	279.26	7297.53	60.88	-54.71	60.88	81.86	318.05	1.17
7324.00	1.40	279.20	7321.52	60.98	-55.32	60.98	82.33	317.79	0.50

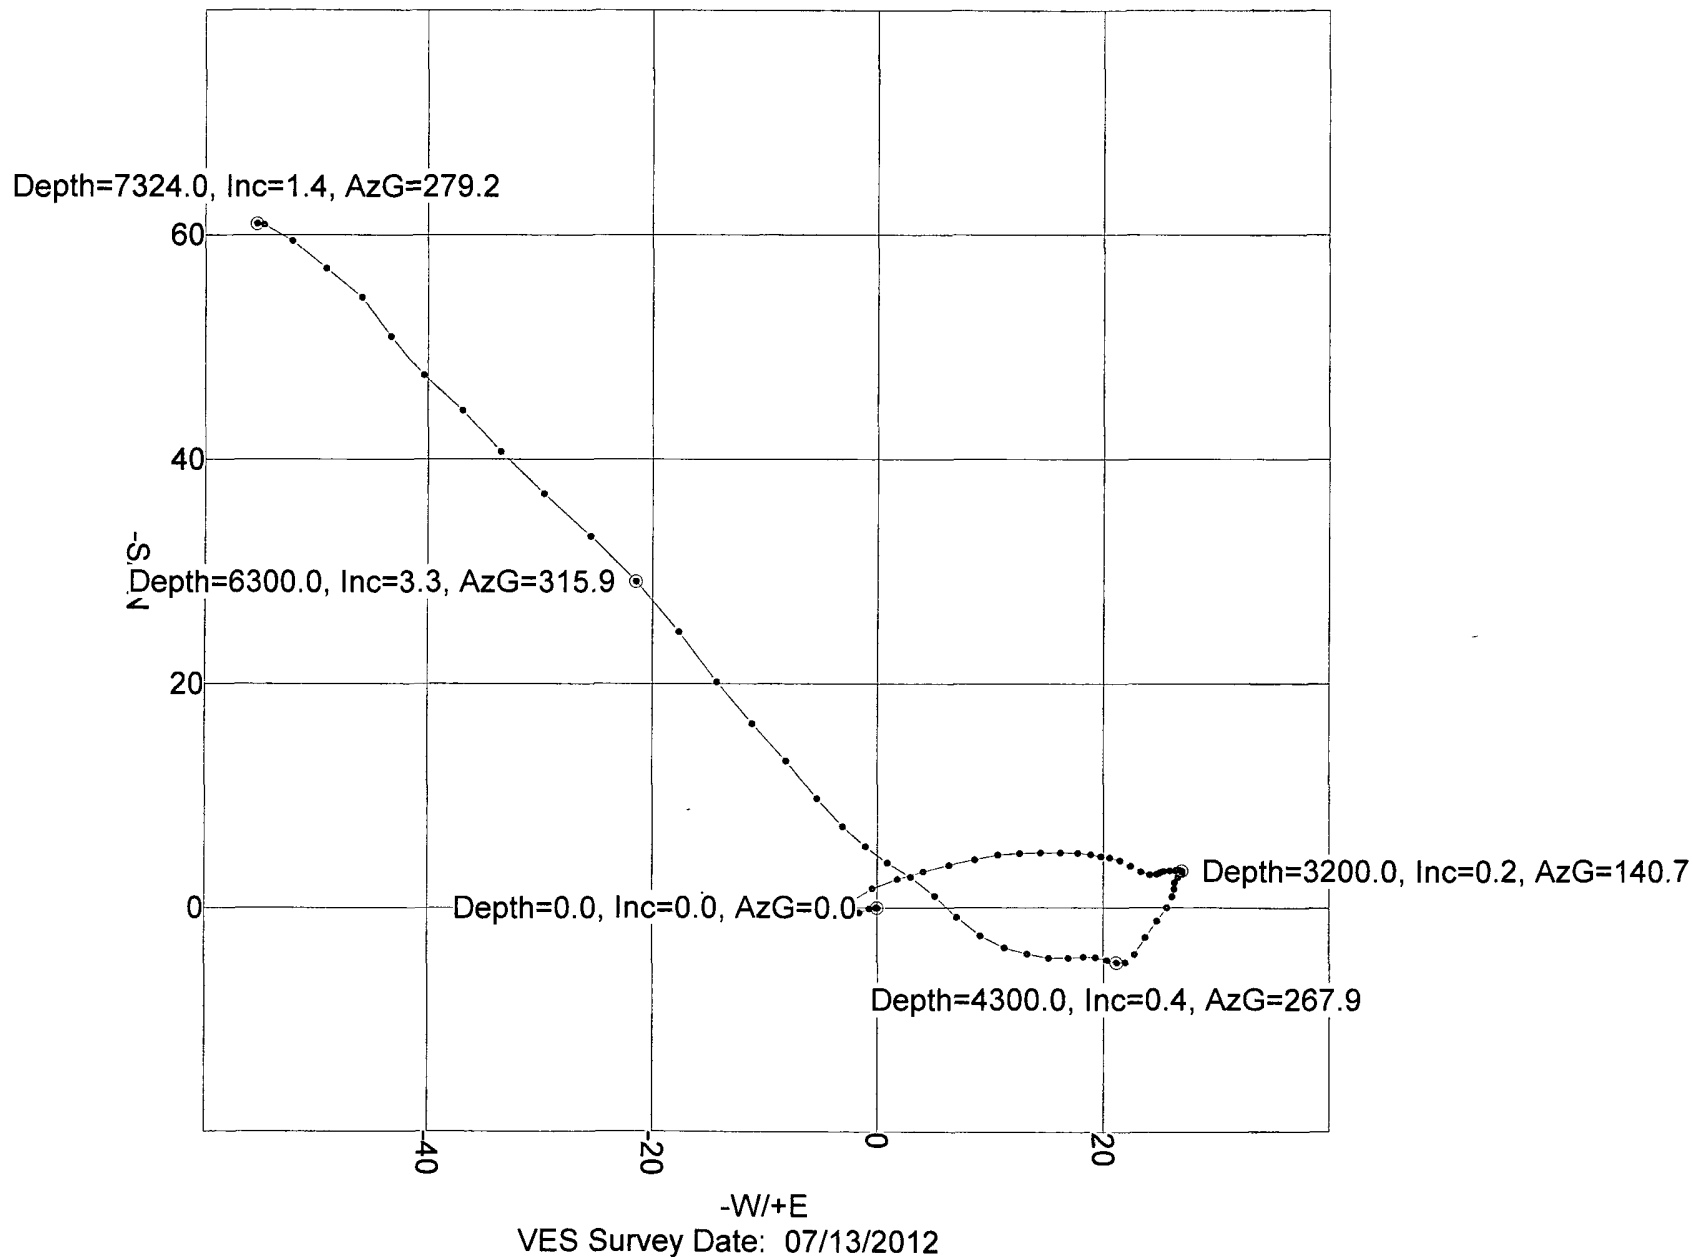



Weatherford[®]

Evaluation, Drilling & Intervention
10000 West County Rd. 116
P.O. Box 61028
Midland, TX USA 79711
Tel. (432) 561-8892 Fax (432) 561-8895

Devon Energy
20 North Broadway
Oklahoma City, OK, 73102

Date: July 24, 2012

30-015-40207


Attention: Stuart Spencer

Re: Devon Energy
Well: Coral PWU 28 3H
Eddy County, New Mexico

Enclosed, please find the original survey performed on the referenced well by Precision Energy Services, Inc. (P-5 No. 676004), a Weatherford company. Other information required by your office is as follows:


<u>Name & Title Of Surveyor</u>	<u>Well Number</u>	<u>Surveyed Depths</u>	<u>Dates Performed</u>	<u>Type of Survey</u>
Jeromy Orona MWD Supervisor	3H	7342' MD 12225' MD	7/12/2012 7/22/2012	Measurement While Drilling


A notarized plan vs. actual is attached to the survey report. If any other information is required, please contact the undersigned at the letterhead address and phone number.


Jesse Aguilar
Area Manager

On this, the 25th day of July, 2012, before me a notary public, the undersigned officer, personally appeared Jesse Aguilar, known to me (or satisfactorily proven) to be the person whose name is subscribed to the within instrument, and acknowledged that he executed the same for the purposes therein contained.

In witness hereof, I hereunto set my hand and official seal.


Notary Public

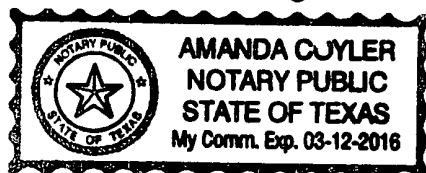



Weatherford International Ltd.

WFT Survey Report X & Y's

**Weatherford**

Company: Devon Energy	Date: 7/23/2012	Time: 07:32:32	Page: 1
Field: Eddy Co., NM (NAD 83)	Co-ordinate(NE) Reference: Well. 3H, Grid North		
Site: Coral PWU 28 3H	Vertical (TVD) Reference: SITE 3320 0		
Well: 3H	Section (VS) Reference: Well (0.00N,0.00E,0 07Azi)		
Wellpath: 1	Survey Calculation Method: Minimum Curvature	Db: Sybase	

Survey: Wft Svy	Start Date: 7/16/2012
Company: Weatherford	Engineer: Russell W. Joyner
Tool: MWD,MWD - Standard	Tied-to: User Defined

Field: Eddy Co , NM (NAD 83)

Map System: US State Plane Coordinate System 1983
Geo Datum: GRS 1980
Sys Datum: Mean Sea Level

Map Zone: New Mexico, Eastern Zone
Coordinate System: Well Centre
Geomagnetic Model: IGRF2010

Site: Coral PWU 28 3H

Site Position:	Northing: 591348 23 ft	Latitude: 32 37 31 443 N
From: Map	Easting: 620331.73 ft	Longitude: 104 4 36.303 W
Position Uncertainty: 0.00 ft		North Reference: Grid
Ground Level: 3301 00 ft		Grid Convergence: 0.14 deg

Well: 3H	Slot Name:
Well Position: +N/-S 0.00 ft	Northing: 591348.23 ft
+E/-W 0.00 ft	Easting : 620331.73 ft
Position Uncertainty: 0.00 ft	Latitude: 32 37 31.443 N
	Longitude: 104 4 36 303 W

Wellpath: 1	Drilled From: Surface
Current Datum: SITE	Tie-on Depth: 0.00 ft
Magnetic Data: 8/15/2012	Above System Datum: Mean Sea Level
Field Strength: 48711 nT	Declination: 7 71 deg
Vertical Section: Depth From (TVD)	Mag Dip Angle: 60 44 deg
ft	+N/-S
	+E/-W
	Direction
	deg
0.00	0 00
0 00	0 00
0 00	0 07

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
7324.00	1 40	279 20	7321.52	60 98	-55 32	0 00	60.91	591409 21	620276 41	Tie On VES First Wft Svy
7342.00	1 33	278.17	7339 52	61.04	-55 74	0 41	60 98	591409 27	620275.99	
7373.00	1.33	271 22	7370.51	61 10	-56.46	0 52	61 03	591409.33	620275 27	
7406 00	2 03	342.38	7403 50	61.67	-57.02	6.17	61 60	591409 90	620274.71	
7437.00	4 20	0 89	7434 45	63.33	-57.17	7 63	63 26	591411 56	620274.56	
7469 00	6.64	3 50	7466.31	66.35	-57.04	7 66	66 28	591414.58	620274 69	
7501 00	10 40	2.42	7497 95	71.08	-56 80	11.76	71 01	591419 31	620274 93	
7533 00	14 26	3 09	7529.20	77 90	-56.47	12 07	77.84	591426.13	620275.26	
7565 00	17 37	2.49	7559 99	86 61	-56.05	9 73	86.55	591434 84	620275 68	
7596 00	20.46	2 05	7589.31	96 65	-55.65	9 98	96 59	591444 88	620276.08	
7628 00	23 10	1.34	7619 02	108.52	-55 31	8.29	108.45	591456 75	620276 42	
7660 00	25.64	359.07	7648 17	121 72	-55.27	8 46	121 65	591469 95	620276.46	
7692 00	28 87	357.14	7676 62	136 36	-55.77	10.46	136 30	591484 59	620275.96	
7724 00	32.64	355 89	7704 11	152.69	-56 77	11.95	152 62	591500.92	620274.96	
7756.00	36 29	356.02	7730 49	170 75	-58 05	11.41	170 68	591518 98	620273 68	
7788.00	39 47	357.04	7755.74	190 36	-59.23	10.13	190.29	591538 59	620272.50	
7820.00	42.72	358 23	7779.86	211 38	-60 09	10.45	211 30	591559 61	620271 64	
7851.00	46 11	358 62	7802.00	233 06	-60.69	10.97	232 99	591581.29	620271 04	
7883.00	48 89	358 73	7823 61	256 64	-61 23	8.69	256.57	591604.87	620270 50	
7915 00	52.35	358.72	7843.91	281.37	-61.78	10.81	281 29	591629 60	620269 95	
7947 00	55.51	359 25	7862.75	307 23	-62 24	9.97	307.15	591655.46	620269.49	
7979 00	59 00	359.49	7880 06	334.14	-62.53	10 92	334.06	591682 37	620269 20	
8011 00	61 28	359 78	7895 99	361.89	-62 71	7 17	361 81	591710 12	620269 02	
8043.00	63.37	0.17	7910.85	390 22	-62 72	6.62	390 15	591738 45	620269.01	



Weatherford International Ltd.

WFT Survey Report X & Y's



Company: Devon Energy	Date: 7/23/2012	Time: 07:32 32	Page: 2
Field: Eddy Co., NM (NAD 83)	Co-ordinate(NE) Reference:	Well: 3H, Grid North	
Site: Coral PWU 28 3H	Vertical (TVD) Reference:	SITE 3320 0	
Well: 3H	Section (VS) Reference:	Well (0.00N,0.00E,0.07Azi)	
Wellpath: 1	Survey Calculation Method:	Minimum Curvature	Db: Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
8075.00	65.71	0.17	7924.61	419.11	-62.63	7.31	419.04	591767.34	620269.10	
8106.00	68.08	0.48	7936.77	447.62	-62.47	7.70	447.55	591795.85	620269.26	
8138.00	71.94	0.72	7947.71	477.69	-62.16	12.08	477.61	591825.92	620269.57	
8170.00	74.86	1.14	7956.85	508.35	-61.66	9.21	508.27	591856.58	620270.07	
8202.00	78.83	2.05	7964.13	539.49	-60.79	12.71	539.41	591887.72	620270.94	
8266.00	83.94	2.53	7973.71	602.70	-58.26	8.02	602.62	591950.93	620273.47	
8330.00	85.19	2.69	7979.78	666.34	-55.36	1.97	666.27	592014.57	620276.37	
8362.00	85.30	2.62	7982.43	698.20	-53.88	0.41	698.13	592046.43	620277.85	
8394.00	85.66	2.57	7984.95	730.06	-52.44	1.14	730.00	592078.29	620279.29	
8426.00	87.42	2.54	7986.88	761.97	-51.01	5.50	761.91	592110.20	620280.72	
8458.00	89.14	2.13	7987.84	793.93	-49.71	5.53	793.87	592142.16	620282.02	
8490.00	90.86	2.04	7987.84	825.91	-48.55	5.38	825.85	592174.14	620283.18	
8522.00	93.03	1.63	7986.76	857.87	-47.52	6.90	857.81	592206.10	620284.21	
8554.00	93.20	1.45	7985.02	889.81	-46.66	0.77	889.75	592238.04	620285.07	
8586.00	92.90	2.21	7983.31	921.75	-45.64	2.55	921.69	592269.98	620286.09	
8618.00	92.75	1.44	7981.74	953.69	-44.62	2.45	953.64	592301.92	620287.11	
8650.00	92.75	1.38	7980.20	985.65	-43.84	0.19	985.59	592333.88	620287.89	
8682.00	92.23	0.86	7978.81	1017.61	-43.21	2.30	1017.56	592365.84	620288.52	
8714.00	91.32	0.63	7977.82	1049.59	-42.80	2.93	1049.54	592397.82	620288.93	
8746.00	90.86	0.89	7977.21	1081.58	-42.37	1.65	1081.53	592429.81	620289.36	
8778.00	91.25	0.55	7976.62	1113.58	-41.97	1.62	1113.52	592461.81	620289.76	
8810.00	92.23	359.99	7975.65	1145.56	-41.82	3.53	1145.51	592493.79	620289.91	
8842.00	92.75	359.92	7974.26	1177.53	-41.85	1.64	1177.48	592525.76	620289.88	
8938.00	93.09	359.80	7969.37	1273.41	-42.08	0.38	1273.35	592621.64	620289.65	
9034.00	90.29	359.96	7966.54	1369.35	-42.28	2.92	1369.30	592717.58	620289.45	
9130.00	90.06	359.66	7966.25	1465.35	-42.60	0.39	1465.30	592813.58	620289.13	
9226.00	90.17	359.65	7966.05	1561.35	-43.18	0.12	1561.30	592909.58	620288.55	
9323.00	90.23	359.45	7965.71	1658.35	-43.94	0.22	1658.29	593006.58	620287.79	
9419.00	90.11	359.41	7965.43	1754.34	-44.89	0.13	1754.29	593102.57	620286.84	
9515.00	89.94	359.59	7965.39	1850.34	-45.73	0.26	1850.28	593198.57	620286.00	
9611.00	90.11	359.05	7965.35	1946.33	-46.87	0.59	1946.27	593294.56	620284.86	
9706.00	89.89	359.36	7965.35	2041.32	-48.19	0.40	2041.26	593389.55	620283.54	
9803.00	89.49	359.46	7965.87	2138.31	-49.19	0.43	2138.25	593486.54	620282.54	
9898.00	88.97	0.34	7967.15	2233.30	-49.35	1.08	2233.24	593581.53	620282.38	
9994.00	89.20	1.21	7968.68	2329.28	-48.06	0.94	2329.22	593677.51	620283.67	
10090.00	88.69	1.57	7970.45	2425.24	-45.73	0.65	2425.18	593773.47	620286.00	
10186.00	89.09	2.22	7972.31	2521.17	-42.55	0.79	2521.11	593869.40	620289.18	
10282.00	90.29	3.15	7972.83	2617.06	-38.06	1.58	2617.01	593965.29	620293.67	
10378.00	90.97	3.57	7971.77	2712.89	-32.43	0.83	2712.84	594061.12	620299.30	
10474.00	90.97	3.35	7970.15	2808.70	-26.64	0.23	2808.66	594156.93	620305.09	
10569.00	92.22	2.97	7967.50	2903.51	-21.40	1.38	2903.48	594251.74	620310.33	
10665.00	92.85	3.16	7963.26	2999.28	-16.27	0.69	2999.26	594347.51	620315.46	
10761.00	92.46	3.30	7958.81	3095.03	-10.87	0.43	3095.01	594443.26	620320.86	
10856.00	91.94	1.70	7955.16	3189.86	-6.73	1.77	3189.85	594538.09	620325.00	
10952.00	92.00	1.41	7951.86	3285.77	-4.13	0.31	3285.76	594634.00	620327.60	
11047.00	92.23	1.47	7948.36	3380.68	-1.74	0.25	3380.67	594728.91	620329.99	
11143.00	92.29	1.96	7944.57	3476.56	1.13	0.51	3476.56	594824.79	620332.86	
11239.00	92.40	1.77	7940.64	3572.43	4.25	0.23	3572.43	594920.66	620335.98	
11335.00	91.89	2.28	7937.05	3668.30	7.64	0.75	3668.30	595016.53	620339.37	
11429.00	91.94	2.12	7933.91	3762.18	11.25	0.18	3762.19	595110.41	620342.98	
11524.00	91.60	0.09	7930.97	3857.11	13.08	2.17	3857.12	595205.34	620344.81	
11620.00	92.25	0.72	7927.75	3953.05	13.76	0.94	3953.06	595301.28	620345.49	



Weatherford International Ltd.

WFT Survey Report X & Y's

**Weatherford**

Company: Devon Energy	Date: 7/23/2012	Time: 07:32 32	Page: 3
Field: Eddy Co , NM (NAD 83)	Co-ordinate(NE) Reference: Well. 3H, Grid North		
Site: Coral PWU 28 3H	Vertical (TVD) Reference: SITE 3320 0		
Well: 3H	Section (VS) Reference: Well (0.00N,0.00E,0.07Azi)		
Wellpath: 1	Survey Calculation Method: Minimum Curvature	Db: Sybase	

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
11715 00	90.91	359.34	7925 13	4048 01	13 81	2 02	4048 02	595396 24	620345 54	
11810 00	90 29	359 71	7924 13	4143 00	13 02	0 76	4143 01	595491 23	620344 75	
11905 00	89 77	0 67	7924 08	4238 00	13 33	1 15	4238.01	595586.23	620345 06	
12000 00	89 83	0 50	7924 42	4332.99	14 30	0 19	4333.01	595681 22	620346.03	
12095.00	90 85	359.45	7923 85	4427.99	14 26	1 54	4428 00	595776 22	620345.99	
12190 00	90 74	359 99	7922 53	4522.98	13 80	0 58	4522 99	595871 21	620345.53	
12225 00	90.57	0 40	7922 13	4557.98	13 92	1 27	4557 99	595906 21	620345 65	Last Wft Svy
12295 00	90.57	0 40	7921 44	4627 97	14 41	0 00	4627 99	595976 20	620346 14	Proj to Bit

Annotation

MD ft	TVD ft	
7324 00	7321 52	Tie On VES
7342 00	7339 52	First Wft Svy
12225 00	7922.13	Last Wft Svy
12295 00	7921.44	Proj to Bit

