

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-015-29337
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. L 1022
7. Lease Name or Unit Agreement Name Oxy Mako State Com.
8. Well Number 1
9. OGRID Number 192463
10. Pool name or Wildcat Turkey Track Morrow, W.

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other
2. Name of Operator OXY USA WTP Limited Partnership
3. Address of Operator P.O. Box 50250 Midland, TX 79710
4. Well Location Unit Letter J : 1370 feet from the south line and 1650 feet from the east line Section 5 Township 19S Range 29E NMPM County Eddy
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3399'

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐


OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including the estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach well log diagram of proposed completion or recompletion.

TD-11370' PBTB-11094' Perfs-10519-10594' 11226-11236' Pkr-11094'
13-3/8" 48# @ 395' w/ 620sx, 17-1/2" hole, TOC-Surf-Circ
8-5/8" 24-32# csg @ 3000' w/ 1550sx, 11" hole, TOC-Surf-Circ
5-1/2" 17-20# csg @ 11370' w/ 450sx, 7-7/8" hole, TOC-8700'-CBL

1. RIH & tag pkr @ 11094', spot 25sx cmt to 10950'
2. RIH & set CIBP @ 10470' M&P 25sx cmt to 10320'
3. M&P 25sx cmt @ 9910-9760' WOC-Tag
4. M&P 25sx cmt @ 8900-8750' WOC-Tag
5. Perf @ 6800', sqz 35sx cmt to 6700' WOC-Tag
6. Perf @ 3800' sqz 45sx cmt to 3675' WOC-Tag
7. Perf @ 3050' sqz 35sx cmt to 2950' WOC-Tag
8. Perf @ 1950' sqz 35sx cmt to 1850' WOC-Tag
9. Perf @ 445' sqz 150sx cmt to surface

Circ 10# MLF between plugs

Spud Date: Rig Release Date: 

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Regulatory Advisor DATE 12/6/12Type or print name David Stewart E-mail address: david.stewart@oxy.com PHONE: 432-685-5717
For State Use OnlyAPPROVED BY David Stewart TITLE Approval Granted providing work is complete by 3/11/2013 DATE 12/11/2012
Conditions of Approval (if any):

OXY USA WTP LP - Proposed
OXY Mako State Com. #1
API No. 30-015-29337

150sx @ 445' - Surface

35sx @ 1950-1850' WOC-Tag

35sx @ 3050-2950' WOC-Tag

45sx 3800-3675' WOC-Tag

35sx @ 6800-6700' WOC-Tag


25sx @ 8900-8750' WOC-Tag

25sx @ 9910-9760' WOC-Tag

CIBP @ 10470' w/ 25sx to 10320'

25sx @ 11094' to 10950'

Phr w/ blk plg @ 11094'

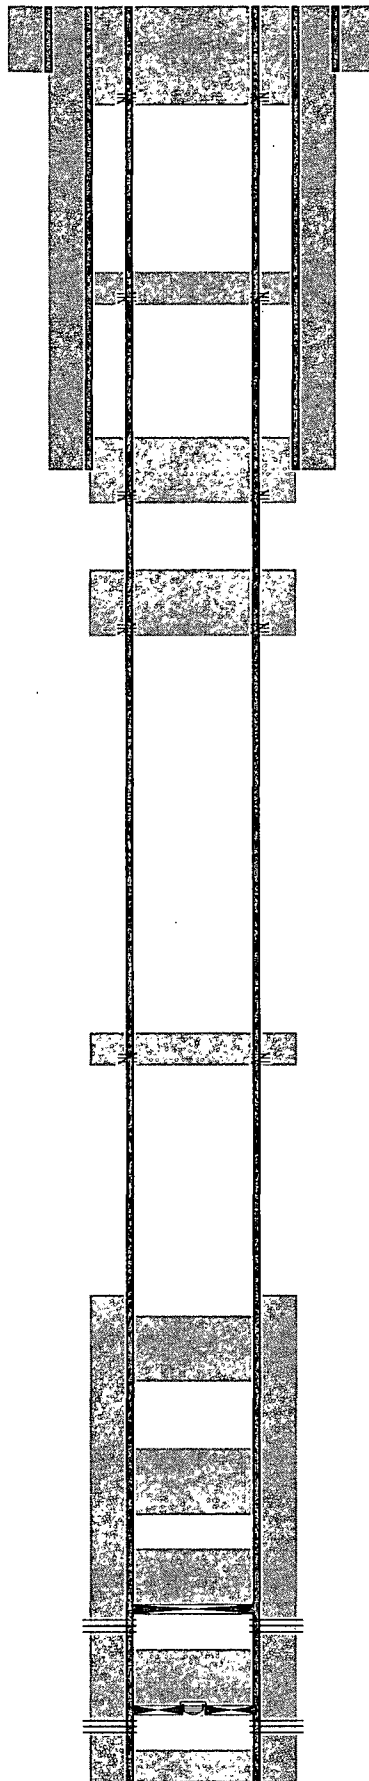

Perf @ 445'

Perf @ 1950'

Perf @ 3050'

Perf @ 3800'

Perf @ 6800'

1/09-Perfs @ 10519-10594'

Perfs @ 11226-11236'


17-1/2" hole @ 395'
13-3/8" csg @ 395'
w/ 620sx-TOC-Surf-Circ

11" hole @ 3000'
8-5/8" csg @ 3000'
w/ 1550sx-TOC-Surf-Circ

7-7/8" hole @ 11370'
5-1/2" csg @ 11370'
w/ 450sx-TOC-8700'-CBL

TD-11370'

OXY USA WTP LP - Current
OXY Mako State Com. #1
API No. 30-015-29337

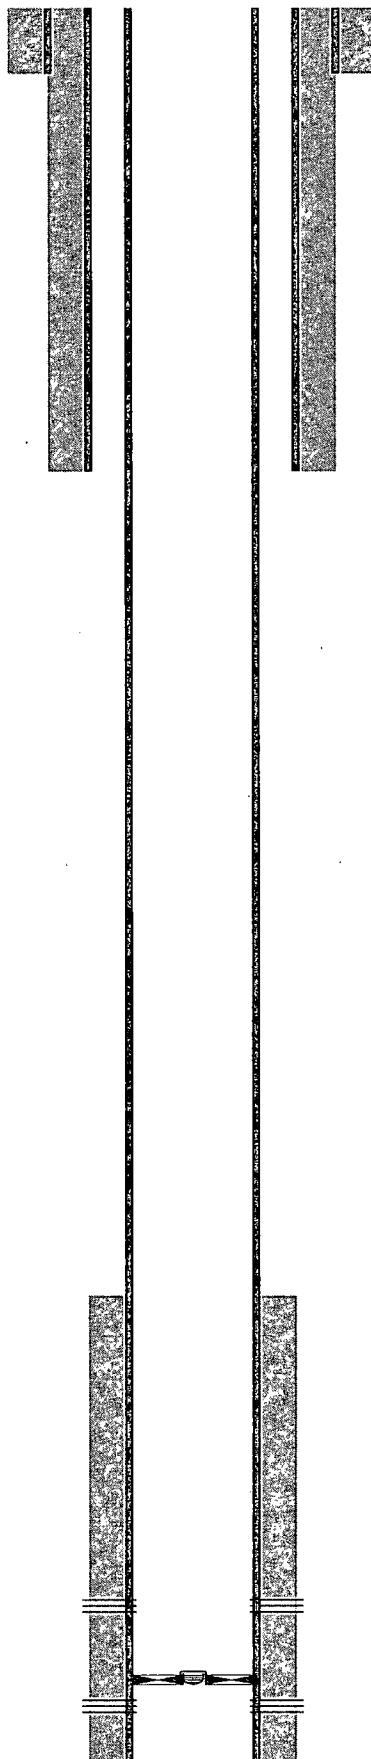

17-1/2" hole @ 395'
13-3/8" csg @ 395'
w/ 620sx-TOC-Surf-Circ

11" hole @ 3000'
8-5/8" csg @ 3000'
w/ 1550sx-TOC-Surf-Circ

7-7/8" hole @ 11370'
5-1/2" csg @ 11370'
w/ 450sx-TOC-8700'-CBL

Perfs @ 10519-10594' - 1/09

Perfs @ 11226-11236'

Phr w/ blk plg @ 11094'

TD-11370'

NEW MEXICO OIL CONSERVATION DIVISION
DISTRICT 2 OFFICE
811 S. FIRST STREET
ARTESIA, NM 88210
(575)748-1283

CONDITIONS OF APPROVAL FOR PLUGGING & ABANDONMENT

Operator: OXY USA WTP Limited Partnership

Well Name & Number: OXY MAKO STATE Com. #1

API #: 30-015-29337

1. Produced water will not be used during any part of the plugging & abandonment operation.
2. Notify NMOCD Dist. 2 office at least 24 hrs before beginning work.
3. Closed Loop System is to be used for entire plugging operation. Upon completion, contents of steel pit are to be hauled to a permitted disposal location.
4. Trucking companies being used to haul oilfield waste fluids to a disposal – commercial or private – shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator, as well as the contractor, to verify that this permit is place prior to performing work. Drivers shall produce a copy upon request of NMOCD Field Inspectors.
5. A subsequent C-103 will serve as notification that the well bore has been plugged ONLY. A C-103 FINAL shall be filed before any bonding can be released on the well. Upon receipt of the Final, an inspection will be performed to verify that the location has been satisfactorily cleaned to NMOCD standards.
6. If work has not begun within 90 days of the approval of this procedure, an extension request must be filed, stating reason that well has not been plugged.
7. Every attempt must be made to clean the well bore out to below the perfs, before any plugs can be set, by whatever means possible.

8. Cement Retainers may not be used.
9. Squeeze pressures not to exceed 500 psi., unless approval is given by NMOCD Plugging Supervisor.
10. Plugs may be combined after consulting with NMOCD P & A Supervisor.
11. Minimum WOC time for tag plugs will be 4 hrs.

DG

Date: 12/11/2012