



Weatherford

Evaluation, Drilling & Intervention

10000 West County Rd. 116

P.O. Box 61028

Midland, TX USA 79711

Tel. (432) 561-8892 Fax (432) 561-8895

BOPCO, LP
PO Box 2760
Midland, TX 79702

Date: November 20, 2012

Attention: Stephen Ordoyne

30-015-39930

Re: BOPCO, LP
Well: Poker Lake Unit 411H
Eddy County, New Mexico

Enclosed, please find the original survey performed on the referenced well by Precision Energy Services, Inc. (P-5 No. 676004), a Weatherford company. Other information required by your office is as follows:

<u>Name & Title Of Surveyor</u>	<u>Well Number</u>	<u>Surveyed Depths</u>	<u>Dates Performed</u>	<u>Type of Survey</u>
Seth Cash MWD Supervisor	411H	1044' MD 13504' MD	10/23/2012 11/12/2012	Measurement While Drilling


A notarized plan vs. actual is attached to the survey report. If any other information is required, please contact the undersigned at the letterhead address and phone number.

Jesse Aguilar
MWD Ops Coordinator

On this, the 20th day of November 2012, before me a notary public, the undersigned officer, personally appeared Jesse Aguilar, known to me (or satisfactorily proven) to be the person whose name is subscribed to the within instrument, and acknowledged that he executed the same for the purposes therein contained.


In witness hereof, I hereunto set my hand and official seal.

Notary Public

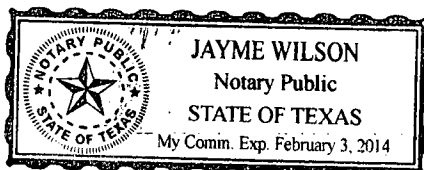


BOPCO, L.P.

**Poker Lake Unit 411H
Eddy Co, NM**

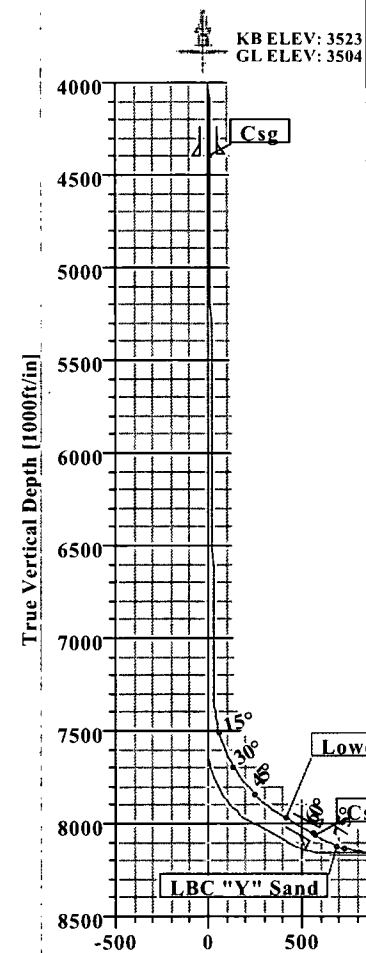

Vertical Section at 132.80° [1000ft/in]

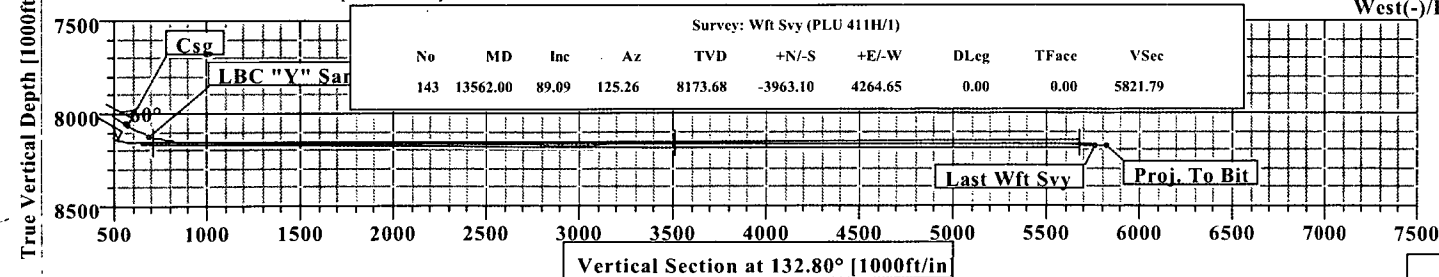

SECTION DETAILS


Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	1806.00	0.25	251.93	1805.91	-3.85	-15.43	0.00	0.00	-8.71	
2	1814.33	0.00	0.00	1814.24	-3.85	-15.45	3.00	180.00	-8.72	
3	7344.83	0.00	0.00	7344.74	-3.85	-15.45	0.00	0.00	-8.72	
4	8094.83	60.00	131.78	7964.99	-242.44	251.59	8.00	131.78	349.32	
5	8294.83	60.00	131.78	8064.99	-357.84	380.75	0.00	0.00	522.50	
6	8667.30	89.78	132.78	8160.98	-597.20	643.67	8.00	2.01	878.04	
7	11302.66	89.78	132.78	8171.00	-2387.00	2578.00	0.00	0.00	3513.38	Tgt 2
8	11310.84	90.03	132.80	8171.01	-2392.56	2584.00	3.00	4.61	3521.56	
9	13469.00	90.03	132.80	8170.00	-3858.82	4167.58	0.00	0.00	5679.72	PBHL

WELL DETAILS

Name	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
PLU 411H	0.00	0.00	434266.30	671261.22	32°11'33.732N	103°46'46.960W	N/A

TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
Tgt 1	8160.00	-480.74	519.21	433785.56	671780.43	Point
PBHL	8170.00	-3858.82	4167.58	430407.48	675428.80	Point
Tgt 2	8171.00	-2387.00	2578.00	431879.30	673839.22	Point



Azimuths to Grid North
True North: -0.29°
Magnetic North: 7.21°


Magnetic Field
Strength: 48458nT
Dip Angle: 60.09°
Date: 11/15/2012
Model: IGRF2010

Total Correction to Grid North: 7.21°

LEGEND

- PLU 411H, Plan #3
- Wft Svy

Drilling Tgt
+/- 5' At LP
+/- 20' At BHL

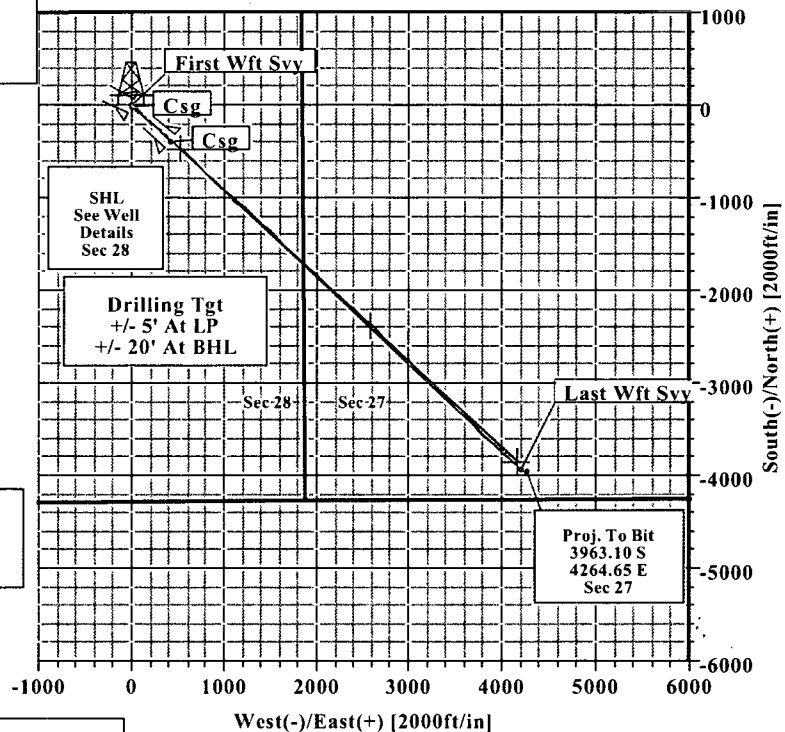

Weatherford

Survey: Wft Svy (PLU 411H/1)

Created By: Russell W. Joyner

Date: 11/12/2012

Weatherford

WFT Survey Report X & Y's



Weatherford

Company: BOPCO, LP Field: Eddy County, NM (Nad 27) Site: Poker Lake Unit 411H Well: PLU 411H Wellpath: 1				Date: 11/12/2012 Time: 07:19:09 Page: 1 Co-ordinate(NE) Reference: Well: PLU 411H Gnd North Vertical (TVD) Reference: SITE 3523.0 Section (VS) Reference: Well: (0.00N, 0.00E, 132.80Azi) Survey Calculation Method: Minimum Curvature Db: Sybase						
Survey: Wft Svy Start Date: 10/24/2012				Company: Weatherford Engineer: Russell W. Joyner Tool: MWD;MWD - Standard Tied-to: From Surface						
Field: Eddy County, NM (Nad 27)										
Map System: US State Plane Coordinate System 1927 Geo Datum: NAD27 (Clarke 1866) Sys Datum: Mean Sea Level				Map Zone: New Mexico, Eastern Zone Coordinate System: Well Centre Geomagnetic Model: IGRF2010						
Site: Poker Lake Unit 411H										
Site Position: From: Map Position Uncertainty: 0.00 ft Ground Level: 3504.00 ft		Northing: 434266.30 ft Easting: 671261.22 ft		Latitude: 32 11 33.732 N Longitude: 103 46 46.960 W North Reference: Grid Grid Convergence: 0.29 deg						
Well: PLU 411H				Slot Name:						
Well Position: +N/-S 0.00 ft +E/-W 0.00 ft Position Uncertainty: 0.00 ft		Northing: 434266.30 ft Easting: 671261.22 ft		Latitude: 32 11 33.732 N Longitude: 103 46 46.960 W						
Wellpath: 1				Drilled From: Surface Tie-on Depth: 0.00 ft Above System Datum: Mean Sea Level Declination: 7.51 deg Mag Dip Angle: 60.09 deg						
Current Datum: SITE Magnetic Data: 11/15/2012 Field Strength: 48458 nT Vertical Section: Depth From (TVD)		Height 3523.00 ft +N/-S ft ft		+E/-W ft ft		Direction deg deg				
0.00		0.00		0.00		132.80				
Survey										
MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	434266.30	671261.22	First Wft Svy
1044.00	1.01	249.68	1043.95	-3.20	-8.63	0.10	-4.16	434263.10	671252.59	
1331.00	0.58	275.89	1330.92	-3.92	-12.45	0.19	-6.47	434262.38	671248.77	
1426.00	0.42	279.50	1425.91	-3.82	-13.27	0.17	-7.14	434262.48	671247.95	
1806.00	0.25	251.93	1805.91	-3.85	-15.43	0.06	-8.71	434262.45	671245.79	
2186.00	0.29	226.27	2185.90	-4.77	-16.91	0.03	-9.17	434261.53	671244.31	
2566.00	0.56	202.67	2565.89	-7.15	-18.32	0.08	-8.59	434259.15	671242.90	
2946.00	0.58	198.15	2945.88	-10.69	-19.64	0.01	-7.15	434255.61	671241.58	
3326.00	0.53	138.65	3325.86	-13.83	-19.08	0.15	-4.60	434252.47	671242.14	
3707.00	0.77	127.93	3706.84	-16.73	-15.89	0.07	-0.29	434249.57	671245.33	
4087.00	1.29	139.70	4086.77	-21.56	-11.11	0.15	6.50	434244.74	671250.11	
4212.00	0.66	136.34	4211.75	-23.16	-9.70	0.51	8.61	434243.14	671251.52	
4337.00	0.50	121.77	4336.75	-23.96	-8.74	0.17	9.87	434242.34	671252.48	
4425.00	0.36	111.62	4424.75	-24.27	-8.16	0.18	10.50	434242.03	671253.06	
4487.00	0.25	110.44	4486.74	-24.39	-7.85	0.18	10.81	434241.91	671253.37	
4550.00	0.25	159.28	4549.74	-24.56	-7.68	0.33	11.06	434241.74	671253.54	
4645.00	0.53	116.84	4644.74	-24.96	-7.21	0.40	11.66	434241.34	671254.01	
4739.00	0.50	101.38	4738.74	-25.23	-6.42	0.15	12.43	434241.07	671254.80	
4834.00	0.45	166.88	4833.74	-25.68	-5.93	0.54	13.10	434240.62	671255.29	
4929.00	0.25	103.19	4928.73	-26.09	-5.64	0.43	13.58	434240.21	671255.58	
5022.00	0.35	113.19	5021.73	-26.25	-5.18	0.12	14.03	434240.05	671256.04	
5115.00	0.43	103.55	5114.73	-26.44	-4.58	0.11	14.60	434239.86	671256.64	
5209.00	0.35	101.19	5208.73	-26.58	-3.96	0.09	15.15	434239.72	671257.26	
5303.00	0.38	102.91	5302.73	-26.70	-3.37	0.03	15.67	434239.60	671257.85	

Weatherford

WFT Survey Report X & Y's



Weatherford

Company: BOPCO, L.P. Field: Eddy County, NM.(Nad 27) Site: Poker Lake Unit 411H Well: PLU 411H Wellpath: 1	Date: 11/12/2012 Time: 07:19:09 Page: 2 Co-ordinate(NE) Reference: Well: PLU 411H, Grid North Vertical (TVD) Reference: SITE 3523.0 Section (VS) Reference: Well (0.00N:0.00E:132.80Azi) Survey Calculation Method: Minimum Curvature Db: Sybase
---	--

Survey

MD ft	Incl. deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
5397.00	0.50	120.51	5396.72	-26.98	-2.72	0.19	16.34	434239.32	671258.50	
5491.00	0.50	128.93	5490.72	-27.45	-2.04	0.08	17.15	434238.85	671259.18	
5584.00	0.22	67.76	5583.72	-27.64	-1.56	0.47	17.63	434238.66	671259.66	
5678.00	0.53	120.85	5677.72	-27.79	-1.02	0.46	18.13	434238.51	671260.20	
5772.00	0.65	129.21	5771.71	-28.35	-0.24	0.16	19.09	434237.95	671260.98	
5866.00	0.63	114.38	5865.71	-28.90	0.65	0.18	20.11	434237.40	671261.87	
5959.00	0.38	132.77	5958.70	-29.32	1.34	0.32	20.90	434236.98	671262.56	
6053.00	0.45	144.67	6052.70	-29.83	1.78	0.12	21.58	434236.47	671263.00	
6147.00	0.56	85.47	6146.70	-30.10	2.45	0.54	22.25	434236.20	671263.67	
6238.00	0.29	135.61	6237.69	-30.23	3.06	0.48	22.78	434236.07	671264.28	
6332.00	0.56	104.11	6331.69	-30.51	3.67	0.37	23.42	434235.79	671264.89	
6426.00	0.71	98.96	6425.69	-30.71	4.69	0.17	24.31	434235.59	671265.91	
6520.00	1.00	101.20	6519.68	-30.96	6.07	0.31	25.49	434235.34	671267.29	
6614.00	0.69	81.00	6613.67	-31.03	7.43	0.45	26.54	434235.27	671268.65	
6708.00	1.16	78.76	6707.65	-30.76	8.93	0.50	27.45	434235.54	671270.15	
6802.00	1.06	100.35	6801.64	-30.73	10.71	0.45	28.74	434235.57	671271.93	
6896.00	0.75	79.39	6895.62	-30.77	12.18	0.48	29.84	434235.53	671273.40	
6990.00	0.85	93.37	6989.61	-30.70	13.48	0.23	30.75	434235.60	671274.70	
7085.00	0.55	81.32	7084.61	-30.67	14.63	0.35	31.57	434235.63	671275.85	
7179.00	0.56	83.38	7178.60	-30.55	15.53	0.02	32.15	434235.75	671276.75	
7274.00	0.53	93.36	7273.60	-30.52	16.43	0.10	32.80	434235.78	671277.65	
7304.00	1.20	143.77	7303.60	-30.79	16.76	3.18	33.21	434235.51	671277.98	
7335.00	2.41	128.29	7334.58	-31.45	17.46	4.17	34.18	434234.85	671278.68	
7367.00	4.57	132.71	7366.52	-32.73	18.92	6.80	36.13	434233.57	671280.14	
7399.00	6.46	129.91	7398.37	-34.75	21.24	5.96	39.20	434231.55	671282.46	
7430.00	8.52	128.06	7429.10	-37.29	24.39	6.69	43.23	434229.01	671285.61	
7462.00	10.69	127.42	7460.65	-40.55	28.61	6.79	48.55	434225.75	671289.83	
7491.00	13.37	127.95	7489.01	-44.25	33.39	9.25	54.57	434222.05	671294.61	
7521.00	15.86	130.27	7518.04	-49.03	39.26	8.52	62.12	434217.27	671300.48	
7552.00	18.69	132.16	7547.64	-55.11	46.17	9.31	71.32	434211.19	671307.39	
7584.00	21.30	133.02	7577.71	-62.52	54.22	8.21	82.26	434203.78	671315.44	
7615.00	23.50	131.59	7606.37	-70.46	62.96	7.31	94.07	434195.84	671324.18	
7646.00	25.82	132.25	7634.54	-79.10	72.59	7.54	107.00	434187.20	671333.81	
7677.00	27.74	132.21	7662.21	-88.49	82.93	6.19	120.97	434177.81	671344.15	
7709.00	29.73	131.72	7690.27	-98.78	94.37	6.26	136.35	434167.52	671355.59	
7740.00	31.79	131.10	7716.91	-109.26	106.26	6.72	152.20	434157.04	671367.48	
7771.00	34.32	130.41	7742.89	-120.29	119.07	8.25	169.10	434146.01	671380.29	
7803.00	36.93	130.05	7768.90	-132.33	133.30	8.18	187.72	434133.97	671394.52	
7834.00	39.39	129.93	7793.27	-144.64	147.97	7.94	206.84	434121.66	671409.19	
7866.00	41.95	130.11	7817.54	-158.05	163.94	8.01	227.67	434108.25	671425.16	
7897.00	44.46	130.01	7840.13	-171.71	180.18	8.10	248.87	434094.59	671441.40	
7928.00	46.68	130.26	7861.83	-185.98	197.11	7.18	270.98	434080.32	671458.33	
7959.00	48.93	130.67	7882.65	-200.88	214.58	7.32	293.93	434065.42	671475.80	
7991.00	51.56	131.24	7903.12	-217.01	233.15	8.33	318.51	434049.29	671494.37	
8023.00	54.13	131.95	7922.44	-233.94	252.22	8.22	344.01	434032.36	671513.44	
8054.00	56.58	132.50	7940.06	-251.08	271.11	8.04	369.51	434015.22	671532.33	
8086.00	57.84	132.34	7957.39	-269.22	290.97	3.96	396.41	433997.08	671552.19	
8117.00	58.20	132.14	7973.81	-286.90	310.43	1.28	422.70	433979.40	671571.65	
8148.00	58.50	132.08	7990.08	-304.59	330.01	0.98	449.09	433961.71	671591.23	
8179.00	58.86	131.44	8006.19	-322.23	349.76	2.11	475.57	433944.07	671610.98	
8211.00	59.02	131.22	8022.70	-340.33	370.35	0.77	502.97	433925.97	671631.57	
8233.00	59.04	130.95	8034.02	-352.73	384.57	1.06	521.83	433913.57	671645.79	

Weatherford

WFT Survey Report X & Y's



Weatherford

Company: BOPCO, LP Field: Eddy County, NM (Nad 27) Site: Poker Lake Unit 411H Well: PLU 411H Wellpath: 1	Date: 11/12/2012 Time: 07:19:09 Page: 3 Co-ordinate(NE) Reference: Well: PLU 411H, Grid North Vertical (TVD) Reference: SITE 3523.0 Section (VS) Reference: Well (0.00N,0.00E,132.80Azi) Survey Calculation Method: Minimum Curvature Db: Sybase
---	--

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
8326.00	61.18	129.92	8080.37	-405.02	445.94	2.49	602.38	433861.28	671707.16	
8357.00	63.01	129.75	8094.87	-422.56	466.97	5.92	629.74	433843.74	671728.19	
8388.00	65.50	130.44	8108.34	-440.55	488.33	8.28	657.63	433825.75	671749.55	
8419.00	69.54	130.50	8120.19	-459.14	510.12	13.03	686.24	433807.16	671771.34	
8450.00	72.71	131.80	8130.22	-478.44	532.20	10.97	715.56	433787.86	671793.42	
8481.00	76.63	132.60	8138.41	-498.52	554.34	12.89	745.45	433767.78	671815.56	
8513.00	79.79	133.20	8144.95	-519.84	577.28	10.04	776.77	433746.46	671838.50	
8544.00	83.04	133.60	8149.58	-540.90	599.55	10.56	807.42	433725.40	671860.77	
8575.00	83.96	133.86	8153.09	-562.19	621.81	3.08	838.21	433704.11	671883.03	
8606.00	84.17	133.80	8156.29	-583.54	644.05	0.70	869.04	433682.76	671905.27	
8637.00	86.49	133.91	8158.81	-604.95	666.33	7.49	899.93	433661.35	671927.55	
8669.00	88.46	133.80	8160.22	-627.09	689.38	6.17	931.89	433639.21	671950.60	
8700.00	90.91	134.23	8160.39	-648.63	711.67	8.02	962.88	433617.67	671972.89	
8731.00	91.19	134.91	8159.83	-670.38	733.75	2.37	993.86	433595.92	671994.97	
8826.00	89.58	133.58	8159.19	-736.66	801.80	2.20	1088.83	433529.64	672063.02	
8919.00	90.63	132.54	8159.02	-800.16	869.75	1.59	1181.82	433466.14	672130.97	
9012.00	89.09	130.72	8159.25	-861.94	939.26	2.56	1274.80	433404.36	672200.48	
9106.00	90.84	132.17	8159.30	-924.15	1009.72	2.42	1368.76	433342.15	672270.94	
9199.00	89.37	131.78	8159.13	-986.35	1078.85	1.64	1461.75	433279.95	672340.07	
9293.00	89.37	130.22	8160.17	-1048.01	1149.79	1.66	1555.70	433218.29	672411.01	
9386.00	90.49	131.08	8160.28	-1108.59	1220.35	1.52	1648.63	433157.71	672481.57	
9480.00	90.84	132.76	8159.19	-1171.39	1290.28	1.83	1742.61	433094.91	672551.50	
9573.00	89.23	133.13	8159.13	-1234.75	1358.36	1.78	1835.61	433031.55	672619.58	
9666.00	91.12	134.40	8158.85	-1299.07	1425.52	2.45	1928.59	432967.23	672686.74	
9759.00	88.88	132.43	8158.85	-1362.98	1493.06	3.21	2021.57	432903.32	672754.28	
9852.00	90.35	132.90	8159.47	-1426.00	1561.44	1.66	2114.56	432840.30	672822.66	
9946.00	89.30	133.27	8159.76	-1490.21	1630.10	1.18	2208.56	432776.09	672891.32	
10039.00	88.60	133.93	8161.46	-1554.33	1697.43	1.03	2301.54	432711.97	672958.65	
10133.00	90.21	134.07	8162.44	-1619.63	1765.04	1.72	2395.51	432646.67	673026.26	
10226.00	90.77	133.77	8161.64	-1684.13	1832.03	0.68	2488.48	432582.17	673093.25	
10320.00	88.04	132.87	8162.62	-1748.61	1900.41	3.06	2582.47	432517.69	673161.63	
10414.00	88.11	133.55	8165.78	-1812.94	1968.88	0.73	2676.41	432453.36	673230.10	
10507.00	88.25	132.66	8168.73	-1876.45	2036.74	0.97	2769.36	432389.85	673297.96	
10600.00	87.42	131.72	8172.25	-1938.87	2105.60	1.35	2862.29	432327.43	673366.82	
10694.00	89.09	131.65	8175.11	-2001.35	2175.76	1.78	2956.22	432264.95	673436.98	
10787.00	92.16	132.00	8174.09	-2063.35	2245.05	3.32	3049.19	432202.95	673506.27	
10882.00	91.96	131.71	8170.68	-2126.70	2315.77	0.37	3144.12	432139.60	673576.99	
10946.00	91.26	132.01	8168.88	-2169.39	2363.41	1.19	3208.08	432096.91	673624.63	
10976.00	90.42	132.05	8168.44	-2189.48	2385.70	2.80	3238.08	432076.82	673646.92	
11072.00	90.77	131.51	8167.44	-2253.43	2457.28	0.67	3334.06	432012.87	673718.50	
11167.00	91.12	132.24	8165.88	-2316.84	2528.01	0.85	3429.03	431949.46	673789.23	
11262.00	91.19	132.84	8163.96	-2381.06	2597.99	0.64	3524.01	431885.24	673859.21	
11357.00	89.72	133.08	8163.21	-2445.79	2667.51	1.57	3619.00	431820.51	673928.73	
11453.00	91.26	134.39	8162.39	-2512.15	2736.87	2.11	3714.98	431754.15	673998.09	
11548.00	91.19	134.73	8160.36	-2578.80	2804.54	0.37	3809.92	431687.50	674065.76	
11643.00	88.32	133.25	8160.76	-2644.77	2872.88	3.40	3904.88	431621.53	674134.10	
11739.00	90.00	133.62	8162.17	-2710.76	2942.58	1.79	4000.86	431555.54	674203.80	
11834.00	88.95	134.45	8163.04	-2776.79	3010.87	1.41	4095.83	431489.51	674272.09	
11929.00	90.77	135.98	8163.27	-2844.21	3077.79	2.50	4190.74	431422.09	674339.01	
12024.00	87.48	134.09	8164.72	-2911.41	3144.90	3.99	4285.64	431354.89	674406.12	
12119.00	89.44	134.76	8167.28	-2977.88	3212.72	2.18	4380.56	431288.42	674473.94	
12214.00	89.65	134.64	8168.03	-3044.70	3280.24	0.25	4475.51	431221.60	674541.46	
12309.00	91.05	134.22	8167.45	-3111.20	3348.08	1.54	4570.46	431155.10	674609.30	

Weatherford

WFT Survey Report X & Y's



Weatherford

Company: BOPCO, L.P. Field: Eddy County, NM (Nad 27) Site: Poker Lake Unit 411H Well: PLU 411H Wellpath: 1	Date: 11/12/2012 Time: 07:19:09 Page: 4 Co-ordinate(NE) Reference: Well: PLU 411H, Grid North Vertical (TVD) Reference: SITE 3523.0 Section (VS) Reference: Well (0.00N, 0.00E, 132.80Azi) Survey Calculation Method: Minimum Curvature Db: Sybase
---	--

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
12404.00	90.21	134.28	8166.40	-3177.49	3416.13	0.89	4665.43	431088.81	674677.35	
12499.00	88.81	134.57	8167.22	-3243.98	3483.97	1.50	4760.38	431022.32	674745.19	
12594.00	89.58	134.18	8168.55	-3310.41	3551.86	0.91	4855.34	430955.89	674813.08	
12689.00	89.86	134.68	8169.02	-3376.91	3619.70	0.60	4950.30	430889.39	674880.92	
12784.00	91.05	136.34	8168.26	-3444.68	3686.27	2.15	5045.18	430821.62	674947.49	
12879.00	89.72	135.27	8167.62	-3512.79	3752.49	1.80	5140.05	430753.51	675013.71	
12975.00	90.14	134.98	8167.74	-3580.82	3820.23	0.53	5235.97	430685.48	675081.45	
13070.00	88.53	132.99	8168.84	-3646.78	3888.57	2.69	5330.93	430619.52	675149.79	
13165.00	90.35	132.83	8169.77	-3711.46	3958.14	1.92	5425.92	430554.84	675219.36	
13260.00	88.60	131.29	8170.64	-3775.09	4028.67	2.45	5520.90	430491.21	675289.89	
13355.00	90.07	131.03	8171.74	-3837.61	4100.18	1.57	5615.86	430428.69	675361.40	
13449.00	89.51	127.41	8172.09	-3897.03	4173.00	3.90	5709.66	430369.27	675434.22	
13504.00	89.09	125.26	8172.76	-3929.62	4217.30	3.98	5764.30	430336.68	675478.52	Last Wft Svy
13562.00	89.09	125.26	8173.68	-3963.10	4264.65	0.00	5821.79	430303.20	675525.87	Proj. To Bit

Annotation

MD ft	TVD ft	
1044.00	1043.95	First Wft Svy
13504.00	8172.76	Last Wft Svy
13562.00	8173.68	Proj. To Bit