



Weatherford

Evaluation, Drilling & Intervention

10000 West County Rd. 116

P.O. Box 61028

Midland, TX USA 79711

Tel. (432) 561-8892 Fax (432) 561-8895


30-015-41327

Occidental Permian Ltd.
5 Greenway Plaza Suite 110
Houston Tx 77046

Date: July 2, 2013

Attention: Carlos Mercado

Re: Occidental Permian Ltd
Well: Cedar Canyon 22 Fee #2H
Eddy County, New Mexico



Enclosed, please find the original survey performed on the referenced well by Precision Energy Services, Inc. (P-5 No. 676004), a Weatherford company. Other information required by your office is as follows:


Name & Title Of Surveyor	Well Number	Surveyed Depths	Dates Performed	Type of Survey
Ben Hernandez	2H	3220' MD	6-10-2013	Measurement
MWD Supervisor		12617' MD	6-24-2013	While Drilling


A notarized plan vs. actual is attached to the survey report. If any other information is required, please contact the undersigned at the letterhead address and phone number.


Jesus Aguilar
MWD Coordinator

On this, the 9th day of July, 2013, before me a notary public, the undersigned officer, personally appeared JESUS AGUILAR, known to me (or satisfactorily proven) to be the person whose name is subscribed to the within instrument, and acknowledged that he executed the same for the purposes therein contained.

In witness hereof, I hereunto set my hand and official seal.

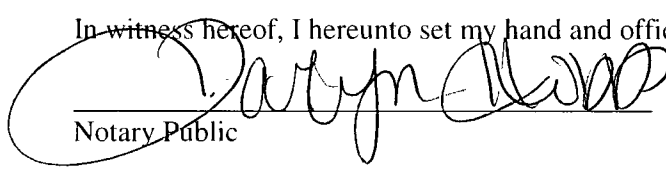
Notary Public

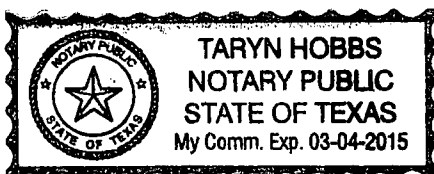



Cedar Canyon 22 FEE #2H
Eddy Co, NM



SECTION DETAILS										
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	9048.00	84.05	89.32	8735.37	69.31	641.83	0.00	0.00	642.16	
2	9293.57	88.73	90.82	8750.83	69.01	886.84	2.00	17.75	887.16	
3	12683.26	88.73	90.82	8826.00	20.77	4275.34	0.00	0.00	4275.39	Updated PBHL

SITE DETAILS	
Cedar Canyon 22 FEE #2H	
Site Centre Northing:	439366.20
Easting:	609855.80
Ground Level:	2927.00
Positional Uncertainty:	0.00
Convergence:	0.19


WELL DETAILS						
Name	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
Cedar Canyon 22 FEE #2H	0.00	0.00	439366.20	609855.80	32°12'26.769N	103°58'41.350W

TARGET DETAILS						
Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
Updated PBHL	8826.00	20.77	4275.34	439366.97	614131.14	Point

KB ELEV: 2951
GL ELEV: 2927

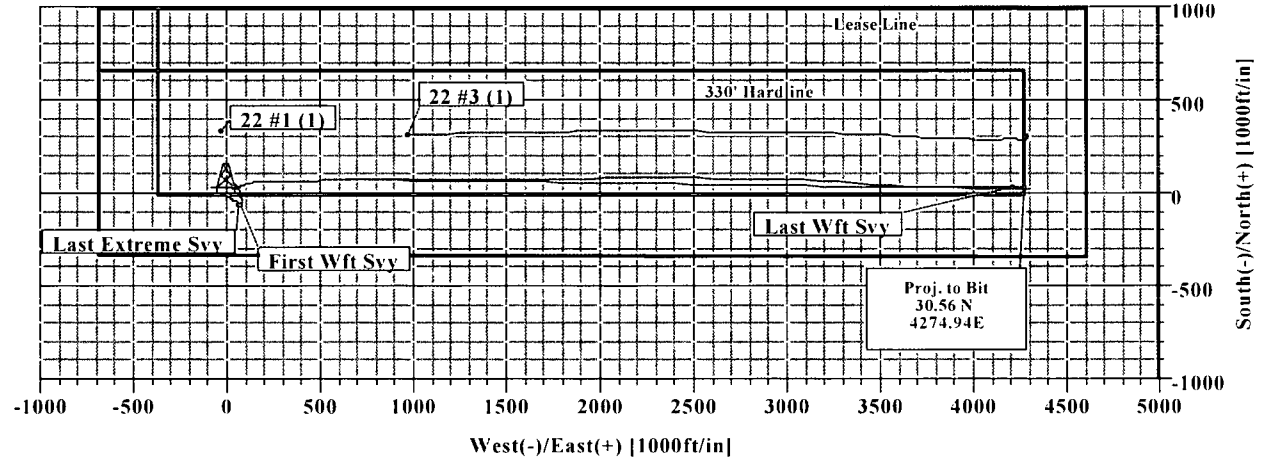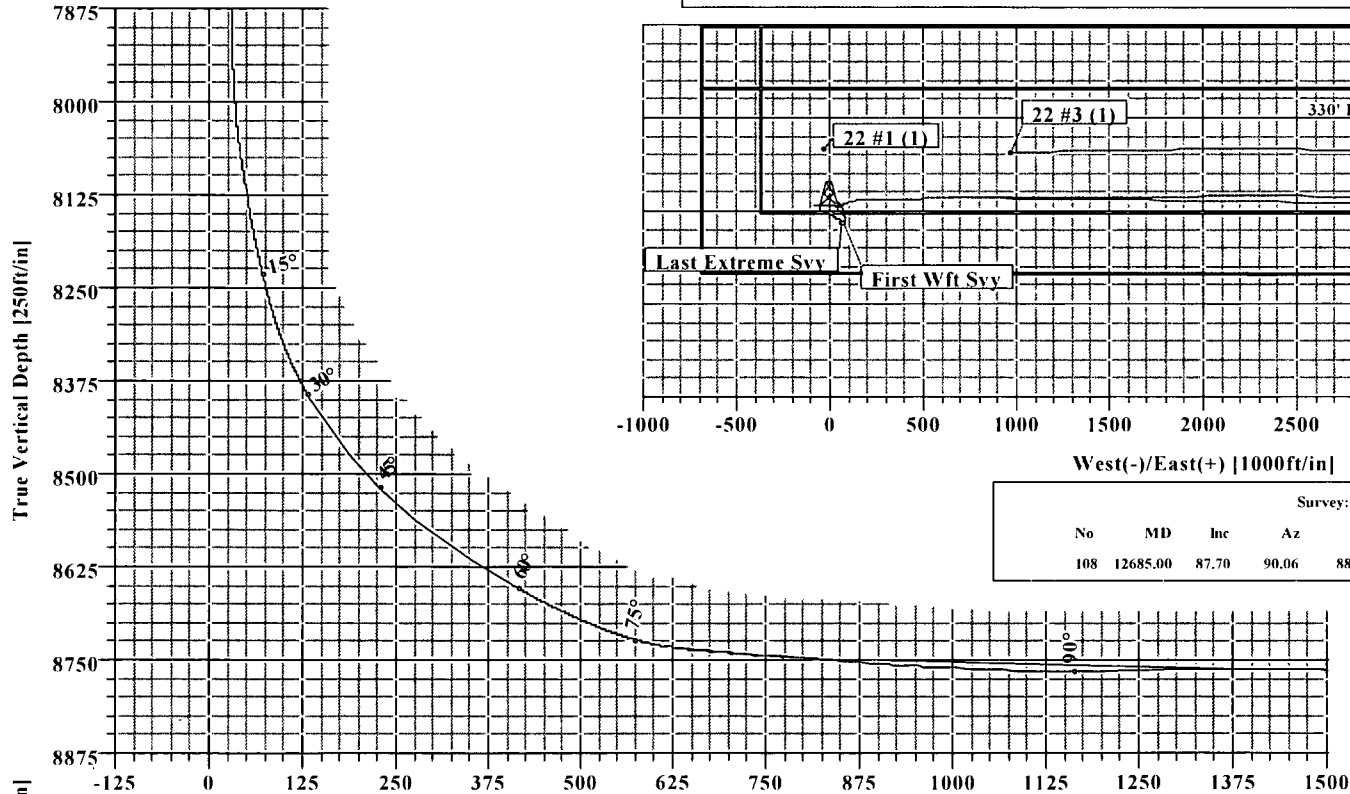

Survey: Wft Svy (Cedar Canyon 22 FEE #2H/1)										
No	MD	Inc	Az	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	
108	12685.00	87.70	90.06	8813.47	30.56	4274.94	0.00	0.00	4275.03	

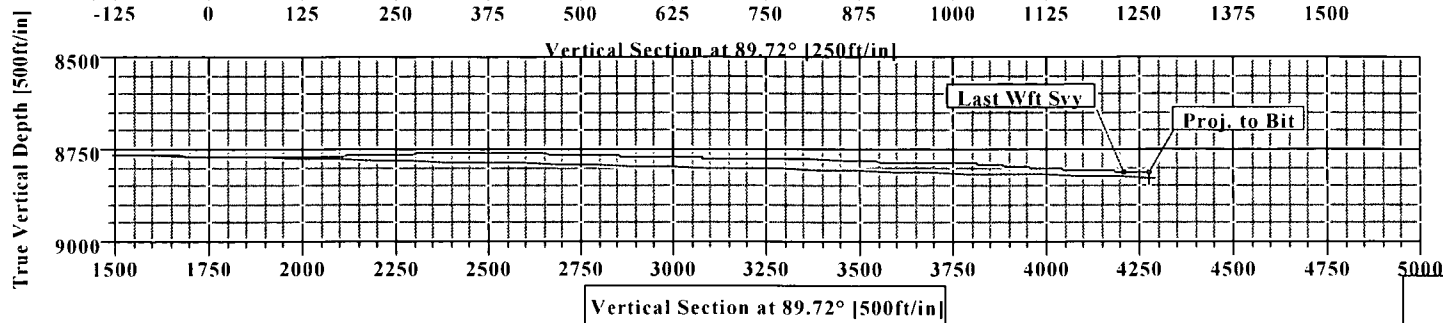

Weatherford®

LEGEND	
	Cedar Canyon 22 FEE #2H.1.Plan #5
	22 #3 (1)
	1
	Wft Svy

Survey: Wft Svy (Cedar Canyon 22 FEE #2H/1)
Created By: Patrick Rudolph
Date: 6/24/2013

Cedar Canyon 22 Fee 2H MWD 0' to 3020' Survey Report

(Def Survey)

Report Date:	June 11, 2013 - 11:20 PM	Survey / DLS Computation:	Minimum Curvature / Lubinski
Client:	Oxy	Vertical Section Azimuth:	0.000 ° (Grid North)
Field:	NM, Eddy (NAD27 CZ) 2012	Vertical Section Origin:	0.000 ft, 0.000 ft
Structure / Slot:	Oxy (Cedar Canyon 22 Fee 2H) H&P 477 / Cedar Canyon 22 Fee 2H	TVD Reference Datum:	RKB
Well:	Cedar Canyon 22 Fee 2H	TVD Reference Elevation:	2952.000 ft above Unknown
Borehole:	Original Hole	Seabed / Ground Elevation:	2927.000 ft above Unknown
UWI / AP#:	Unknown / 30-015-41327	Magnetic Declination:	7.549 °
Survey Name:	Cedar Canyon 22 Fee 2H MWD 0' to 3020'	Total Field Strength:	48332.953 nT
Survey Date:	June 11, 2013	Magnetic Dip Angle:	60.005 °
Tort / AHD / DDI / ERD Ratio:	9.409 ° / 93.248 ft / 2.943 / 0.031	Declination Date:	June 11, 2013
Coordinate Reference System:	NAD27 New Mexico State Plane, Central Zone, US Feet	Magnetic Declination Model:	BGGM 2012
Location Lat / Long:	N 32° 12' 26.76960", W 103° 58' 41.35080"	North Reference:	Grid North
Location Grid N/E Y/X:	N 446608.895 ftUS, E 1202744.138 ftUS	Grid Convergence Used:	1.211 °
CRS Grid Convergence Angle:	1.21132398 °	Total Corr Mag North->Grid North:	6.338 °
Grid Scale Factor:	1.00046567	Local Coord Referenced To:	Well Head

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
Surface	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	446608.89	1202744.14	N 32 12 26.77	W 103 58 41.35
First MWD Survey	426.00	1.89	167.21	425.92	-6.85	-6.85	1.56	0.44	446602.04	1202745.69	N 32 12 26.70	W 103 58 41.33
	571.00	1.71	143.44	570.85	-10.92	-10.92	3.37	0.53	446597.97	1202747.51	N 32 12 26.66	W 103 58 41.31
	764.00	1.71	140.71	763.77	-15.46	-15.46	6.91	0.04	446593.43	1202751.05	N 32 12 26.62	W 103 58 41.27
	947.00	1.80	128.15	946.68	-19.35	-19.35	10.90	0.22	446589.53	1202755.04	N 32 12 26.58	W 103 58 41.23
	1128.00	1.90	130.12	1127.59	-23.04	-23.04	15.43	0.07	446585.84	1202759.58	N 32 12 26.54	W 103 58 41.18
	1223.00	2.02	133.33	1222.53	-25.20	-25.20	17.85	0.17	446583.68	1202762.00	N 32 12 26.52	W 103 58 41.15
	1399.00	1.90	137.45	1398.43	-29.48	-29.48	22.08	0.11	446579.40	1202766.23	N 32 12 26.47	W 103 58 41.10
	1507.00	1.80	141.95	1506.37	-32.14	-32.14	24.34	0.16	446576.74	1202768.49	N 32 12 26.45	W 103 58 41.08
	1696.00	1.41	128.32	1695.30	-35.92	-35.92	27.99	0.29	446572.96	1202772.14	N 32 12 26.41	W 103 58 41.03
	1885.00	1.49	100.02	1884.24	-37.79	-37.79	32.24	0.38	446571.09	1202776.39	N 32 12 26.39	W 103 58 40.98
	2074.00	1.10	91.23	2073.19	-38.25	-38.25	36.47	0.23	446570.63	1202780.63	N 32 12 26.38	W 103 58 40.94
	2263.00	1.41	100.81	2262.15	-38.73	-38.73	40.57	0.20	446570.15	1202784.72	N 32 12 26.38	W 103 58 40.89
	2452.00	1.71	122.04	2451.08	-40.66	-40.66	45.24	0.34	446568.22	1202789.40	N 32 12 26.36	W 103 58 40.83
	2641.00	3.30	135.44	2639.89	-46.03	-46.03	51.45	0.89	446562.84	1202795.61	N 32 12 26.30	W 103 58 40.76
	2830.00	3.30	139.31	2828.58	-54.03	-54.03	58.81	0.12	446554.84	1202802.98	N 32 12 26.22	W 103 58 40.68
Final MWD Survey	3020.00	2.29	136.32	3018.35	-60.92	-60.92	65.00	0.54	446547.94	1202809.17	N 32 12 26.15	W 103 58 40.61

Survey Type: Def Survey

Survey Error Model: ISCWSA Rev 0 *** 3-D 95.000% Confidence 2.7955 sigma

Survey Program:

Description	MD From (ft)	MD To (ft)	EOU Freq (ft)	Survey Tool Type	Borehole / Survey
	0.000	25.000	1/25.000	SLB_MWD-STD-Depth Only	Original Hole / Cedar Canyon 22 Fee 2H MWD 0' to 3020'
	25.000	426.000	1/98.425	SLB_MWD-STD	Original Hole / Cedar Canyon 22 Fee 2H MWD 0' to 3020'
	426.000	3020.000	1/2594.000	SLB_MWD-STD	Original Hole / Cedar Canyon 22 Fee 2H MWD 0' to 3020'



Weatherford International Ltd.

WFT Survey Report X & Y's



Weatherford

Company: Occidental Permian Ltd.	Date: 6/24/2013	Time: 06:44:13	Page: 1
Field: Eddy Co, NM (Nad 27)	Co-ordinate(NE) Reference: Well: Cedar Canyon 22 FEE #2H, Grid Nort		
Site: Cedar Canyon 22 FEE #2H	Vertical (TVD) Reference: SITE 2952.0		
Well: Cedar Canyon 22 FEE #2H	Section (VS) Reference: Well (0.00N,0.00E,89.72Azi)		
Wellpath: 1	Survey Calculation Method: Minimum Curvature	Db: Sybase	

Survey: Wft Svy	Start Date: 6/13/2013
Company: Weatherford International Ltd.	Engineer: Patrick Rudolph
Tool: MWD;MWD - Standard	Tied-to: From: Extreme Svy

Site: Cedar Canyon 22 FEE #2H

Site Position:	Northing: 439366.20 ft	Latitude: 32 12 26.769 N
From: Map	Easting: 609855.80 ft	Longitude: 103 58 41.350 W
Position Uncertainty: 0.00 ft		North Reference: Grid
Ground Level: 2927.00 ft		Grid Convergence: 0.19 deg

Well: Cedar Canyon 22 FEE #2H

Well Position:	+N/-S 0.00 ft	Northing: 439366.20 ft	Latitude: 32 12 26.769 N
	+E/-W 0.00 ft	Easting : 609855.80 ft	Longitude: 103 58 41.350 W
Position Uncertainty: 0.00 ft			

Wellpath: 1

Current Datum: SITE	Height 2952.00 ft	Drilled From: Surface
Magnetic Data: 6/1/2013		Tie-on Depth: 0.00 ft
Field Strength: 48391 nT		Above System Datum: Mean Sea Level
Vertical Section: Depth From (TVD)	+N/-S ft	Declination: 7.53 deg
		Mag Dip Angle: 60.05 deg
		+E/-W ft
		Direction deg
0.00	0.00	0.00 89.72

Survey										
MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
350.04	1.55	167.21	350.00	-4.63	1.05	0.00	1.03	439361.57	609856.85	Csg Last Extreme Svy First Wft Svy
3020.00	2.29	136.32	3018.35	-60.92	65.00	0.05	64.70	439305.28	609920.80	
3220.00	2.41	102.03	3218.19	-64.69	71.87	0.69	71.56	439301.51	609927.67	
3314.00	2.92	74.18	3312.10	-64.45	76.11	1.46	75.79	439301.75	609931.91	
3409.00	3.14	50.96	3406.97	-62.15	80.46	1.30	80.15	439304.05	609936.26	
3503.00	3.20	27.85	3500.83	-58.21	83.69	1.35	83.40	439307.99	609939.49	Csg
3598.00	3.28	7.45	3595.68	-53.17	85.28	1.21	85.02	439313.03	609941.08	
3692.00	3.65	346.04	3689.51	-47.60	84.90	1.42	84.67	439318.60	609940.70	
3787.00	3.64	345.39	3784.32	-41.75	83.41	0.04	83.21	439324.45	609939.21	
3976.00	3.16	344.10	3972.98	-30.93	80.47	0.26	80.32	439335.27	609936.27	
4165.00	3.35	348.03	4161.68	-20.52	77.90	0.16	77.80	439345.68	609933.70	
4354.00	2.96	344.03	4350.39	-10.43	75.41	0.24	75.36	439355.77	609931.21	
4543.00	2.82	348.08	4539.15	-1.19	73.11	0.13	73.10	439365.01	609928.91	
4653.98	2.80	344.03	4650.00	4.09	71.80	0.18	71.82	439370.29	609927.60	
4732.00	2.79	341.15	4727.93	7.72	70.66	0.18	70.70	439373.92	609926.46	
4921.00	2.53	339.36	4916.72	15.97	67.71	0.14	67.78	439382.17	609923.51	Csg
5110.00	2.16	341.47	5105.56	23.25	65.10	0.20	65.22	439389.45	609920.90	
5299.00	1.98	329.62	5294.44	29.45	62.32	0.25	62.46	439395.65	609918.12	
5488.00	1.87	326.11	5483.33	34.82	58.95	0.09	59.12	439401.02	609914.75	
5677.00	1.54	324.92	5672.25	39.46	55.77	0.18	55.96	439405.66	609911.57	
5867.00	1.00	309.53	5862.20	42.61	53.02	0.33	53.23	439408.81	609908.82	
6056.00	1.06	318.98	6051.17	44.98	50.61	0.10	50.82	439411.18	609906.41	
6245.00	0.70	286.73	6240.15	46.63	48.35	0.32	48.58	439412.83	609904.15	
6434.00	0.85	275.13	6429.13	47.09	45.85	0.11	46.08	439413.29	609901.65	
6623.00	0.91	274.39	6618.11	47.33	42.96	0.03	43.19	439413.53	609898.76	
6812.00	1.42	236.07	6807.08	46.13	39.52	0.48	39.74	439412.33	609895.32	Csg
7001.00	1.60	215.68	6996.01	42.68	36.04	0.30	36.24	439408.88	609891.84	
7190.00	1.29	226.81	7184.95	39.08	32.95	0.22	33.14	439405.28	609888.75	
7379.00	2.06	205.85	7373.87	34.57	29.91	0.51	30.08	439400.77	609885.71	
7567.00	1.70	179.36	7561.77	28.74	28.47	0.49	28.61	439394.94	609884.27	



Weatherford International Ltd.

WFT Survey Report X & Y's



Weatherford

Company: Occidental Permian Ltd.	Date: 6/24/2013	Time: 06:44:13	Page: 2
Field: Eddy Co, NM (Nad 27)	Co-ordinate(NE) Reference:	Well: Cedar Canyon 22 FEE #2H, Grid Nort	
Site: Cedar Canyon 22 FEE #2H	Vertical (TVD) Reference:	SITE 2952.0	
Well: Cedar Canyon 22 FEE #2H	Section (VS) Reference:	Well (0.00N,0.00E,89.72Azi)	
Wellpath: 1	Survey Calculation Method:	Minimum Curvature	Db: Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
7757.00	1.69	165.56	7751.69	23.21	29.20	0.21	29.31	439389.41	609885.00	
7846.00	1.82	161.03	7840.65	20.60	29.99	0.21	30.09	439386.80	609885.79	
7900.00	1.77	166.42	7894.62	18.98	30.46	0.33	30.56	439385.18	609886.26	
7931.00	2.36	106.81	7925.61	18.33	31.19	6.82	31.28	439384.53	609886.99	
7963.00	2.76	79.16	7957.57	18.28	32.57	4.01	32.66	439384.48	609888.37	
7994.00	3.78	53.06	7988.53	19.04	34.12	5.74	34.22	439385.24	609889.92	
8026.00	5.87	62.24	8020.41	20.44	36.41	6.94	36.51	439386.64	609892.21	
8057.00	7.73	66.54	8051.19	22.00	39.73	6.22	39.84	439388.20	609895.53	
8089.00	8.75	66.48	8082.86	23.83	43.94	3.19	44.05	439390.03	609899.74	
8120.00	9.94	65.28	8113.45	25.89	48.53	3.89	48.66	439392.09	609904.33	
8134.00	10.35	64.44	8127.23	26.94	50.76	3.11	50.89	439393.14	609906.56	
8166.00	11.54	63.25	8158.65	29.62	56.21	3.78	56.36	439395.82	609912.01	
8197.00	13.07	60.26	8188.93	32.76	62.03	5.34	62.19	439398.96	609917.83	
8229.00	14.44	64.34	8220.02	36.28	68.76	5.24	68.94	439402.48	609924.56	
8260.00	15.86	66.62	8249.94	39.63	76.14	4.97	76.33	439405.83	609931.94	
8292.00	16.91	71.87	8280.64	42.82	84.57	5.67	84.78	439409.02	609940.37	
8323.00	20.30	75.34	8310.02	45.58	94.06	11.50	94.29	439411.78	609949.86	
8355.00	23.50	75.72	8339.70	48.56	105.62	10.01	105.86	439414.76	609961.42	
8386.00	26.57	76.82	8367.79	51.67	118.36	10.02	118.61	439417.87	609974.16	
8418.00	30.48	78.57	8395.90	54.91	133.29	12.49	133.56	439421.11	609989.09	
8449.00	33.97	80.47	8422.12	57.90	149.55	11.72	149.83	439424.10	610005.35	
8481.00	37.40	84.30	8448.11	60.35	168.04	12.79	168.33	439426.55	610023.84	
8513.00	39.38	85.21	8473.19	62.16	187.83	6.43	188.13	439428.36	610043.63	
8544.00	41.97	86.11	8496.70	63.69	207.97	8.57	208.28	439429.89	610063.77	
8576.00	45.36	87.75	8519.85	64.86	230.03	11.17	230.35	439431.06	610085.83	
8607.00	47.92	90.58	8541.13	65.18	252.56	10.59	252.88	439431.38	610108.36	
8639.00	51.67	91.35	8561.78	64.76	276.99	11.86	277.31	439430.96	610132.79	
8670.00	53.91	93.24	8580.53	63.76	301.66	8.71	301.97	439429.96	610157.46	
8702.00	55.41	91.65	8599.04	62.65	327.74	6.20	328.04	439428.85	610183.54	
8733.00	57.11	90.31	8616.26	62.22	353.51	6.56	353.81	439428.42	610209.31	
8765.00	58.58	90.80	8633.29	61.95	380.60	4.77	380.90	439428.15	610236.40	
8796.00	59.08	88.38	8649.34	62.14	407.12	6.87	407.42	439428.34	610262.92	
8828.00	62.21	87.03	8665.02	63.27	434.98	10.45	435.29	439429.47	610290.78	
8859.00	64.61	85.56	8678.90	65.06	462.64	8.83	462.96	439431.26	610318.44	
8891.00	65.71	86.85	8692.34	66.98	491.62	5.02	491.94	439433.18	610347.42	
8922.00	68.35	88.58	8704.44	68.12	520.13	9.95	520.46	439434.32	610375.93	
8954.00	71.21	89.11	8715.50	68.72	550.15	9.07	550.48	439434.92	610405.95	
8985.00	75.73	89.84	8724.31	68.99	579.86	14.75	580.19	439435.19	610435.66	
9017.00	79.95	89.83	8731.05	69.08	611.14	13.19	611.47	439435.28	610466.94	
9048.00	84.05	89.32	8735.37	69.31	641.83	13.33	642.16	439435.51	610497.63	
9066.00	85.11	89.43	8737.07	69.50	659.75	5.92	660.08	439435.70	610515.55	
9129.00	85.73	90.04	8742.10	69.79	722.54	1.38	722.88	439435.99	610578.34	
9223.00	85.95	89.79	8748.92	69.93	816.30	0.35	816.63	439436.13	610672.10	
9317.00	85.53	89.20	8755.90	70.76	910.03	0.77	910.37	439436.96	610765.83	
9412.00	87.70	89.87	8761.51	71.53	1004.86	2.39	1005.19	439437.73	610860.66	
9506.00	88.05	89.43	8764.99	72.10	1098.79	0.60	1099.13	439438.30	610954.59	
9601.00	90.91	90.46	8765.86	72.19	1193.77	3.20	1194.11	439438.39	611049.57	
9695.00	90.98	90.12	8764.31	71.72	1287.76	0.37	1288.10	439437.92	611143.56	
9790.00	90.07	91.22	8763.44	70.61	1382.75	1.50	1383.08	439436.81	611238.55	
9884.00	89.93	90.81	8763.44	68.94	1476.73	0.46	1477.05	439435.14	611332.53	
9979.00	87.90	89.80	8765.23	68.43	1571.71	2.39	1572.02	439434.63	611427.51	
10074.00	88.88	89.36	8767.90	69.13	1666.67	1.13	1666.98	439435.33	611522.47	



Weatherford International Ltd.

WFT Survey Report X & Y's


Weatherford

Company: Occidental Permian Ltd.	Date: 6/24/2013	Time: 06:44:13	Page: 3
Field: Eddy Co, NM (Nad 27)	Co-ordinate(NE) Reference:	Well: Cedar Canyon 22 FEE #2H, Grid Nort	
Site: Cedar Canyon 22 FEE #2H	Vertical (TVD) Reference:	SITE 2952.0	
Well: Cedar Canyon 22 FEE #2H	Section (VS) Reference:	Well (0.00N,0.00E,89.72Azi)	
Wellpath: 1	Survey Calculation Method:	Minimum Curvature	Db: Sybase


Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
10168.00	88.18	89.13	8770.31	70.37	1760.63	0.78	1760.95	439436.57	611616.43	
10263.00	88.81	88.22	8772.81	72.57	1855.57	1.16	1855.90	439438.77	611711.37	
10357.00	91.47	87.88	8772.58	75.76	1949.50	2.85	1949.85	439441.96	611805.30	
10452.00	91.61	88.83	8770.03	78.49	2044.43	1.01	2044.79	439444.69	611900.23	
10547.00	91.81	88.44	8767.19	80.75	2139.36	0.46	2139.73	439446.95	611995.16	
10641.00	91.19	90.14	8764.73	81.92	2233.32	1.92	2233.69	439448.12	612089.12	
10735.00	91.54	89.81	8762.49	81.96	2327.29	0.51	2327.66	439448.16	612183.09	
10830.00	90.56	90.97	8760.75	81.31	2422.27	1.60	2422.64	439447.51	612278.07	
10925.00	89.16	91.26	8760.98	79.46	2517.25	1.50	2517.61	439445.66	612373.05	
11019.00	89.16	90.59	8762.36	77.94	2611.22	0.71	2611.57	439444.14	612467.02	
11114.00	89.37	90.20	8763.58	77.29	2706.21	0.47	2706.56	439443.49	612562.01	
11208.00	87.55	90.87	8766.11	76.41	2800.17	2.06	2800.51	439442.61	612655.97	
11302.00	88.67	92.05	8769.21	74.02	2894.09	1.73	2894.41	439440.22	612749.89	
11397.00	88.40	90.53	8771.64	71.88	2989.03	1.62	2989.34	439438.08	612844.83	
11492.00	89.30	93.65	8773.54	68.42	3083.93	3.42	3084.23	439434.62	612939.73	
11586.00	89.44	93.18	8774.58	62.82	3177.76	0.52	3178.03	439429.02	613033.56	
11681.00	89.72	93.04	8775.27	57.66	3272.62	0.33	3272.86	439423.86	613128.42	
11775.00	87.76	93.85	8777.34	52.02	3366.42	2.26	3366.63	439418.22	613222.22	
11870.00	87.84	93.16	8780.99	46.21	3461.17	0.73	3461.36	439412.41	613316.97	
11964.00	88.60	93.03	8783.91	41.14	3554.99	0.82	3555.15	439407.34	613410.79	
12058.00	89.65	93.03	8785.34	36.17	3648.85	1.12	3648.98	439402.37	613504.65	
12153.00	89.23	91.97	8786.27	32.03	3743.75	1.20	3743.86	439398.23	613599.55	
12247.00	85.33	89.70	8790.73	30.66	3837.61	4.80	3837.71	439396.86	613693.41	
12342.00	86.01	89.25	8797.90	31.53	3932.33	0.86	3932.44	439397.73	613788.13	
12436.00	86.92	89.51	8803.70	32.54	4026.15	1.01	4026.26	439398.74	613881.95	
12531.00	88.25	91.44	8807.70	31.75	4121.05	2.47	4121.16	439397.95	613976.85	
12617.00	87.70	90.06	8810.74	30.63	4206.99	1.73	4207.09	439396.83	614062.79	Last Wft Svy
12685.00	87.70	90.06	8813.47	30.56	4274.94	0.00	4275.03	439396.76	614130.74	Proj. to Bit

Annotation

MD ft	TVD ft	
3020.00	3018.35	Last Extreme Svy
3220.00	3218.19	First Wft Svy
12617.00	8810.74	Last Wft Svy
12685.00	8813.47	Proj. to Bit

OXY USA Inc.
Cedar Canyon 22 #2H
API No. 30-015-41327

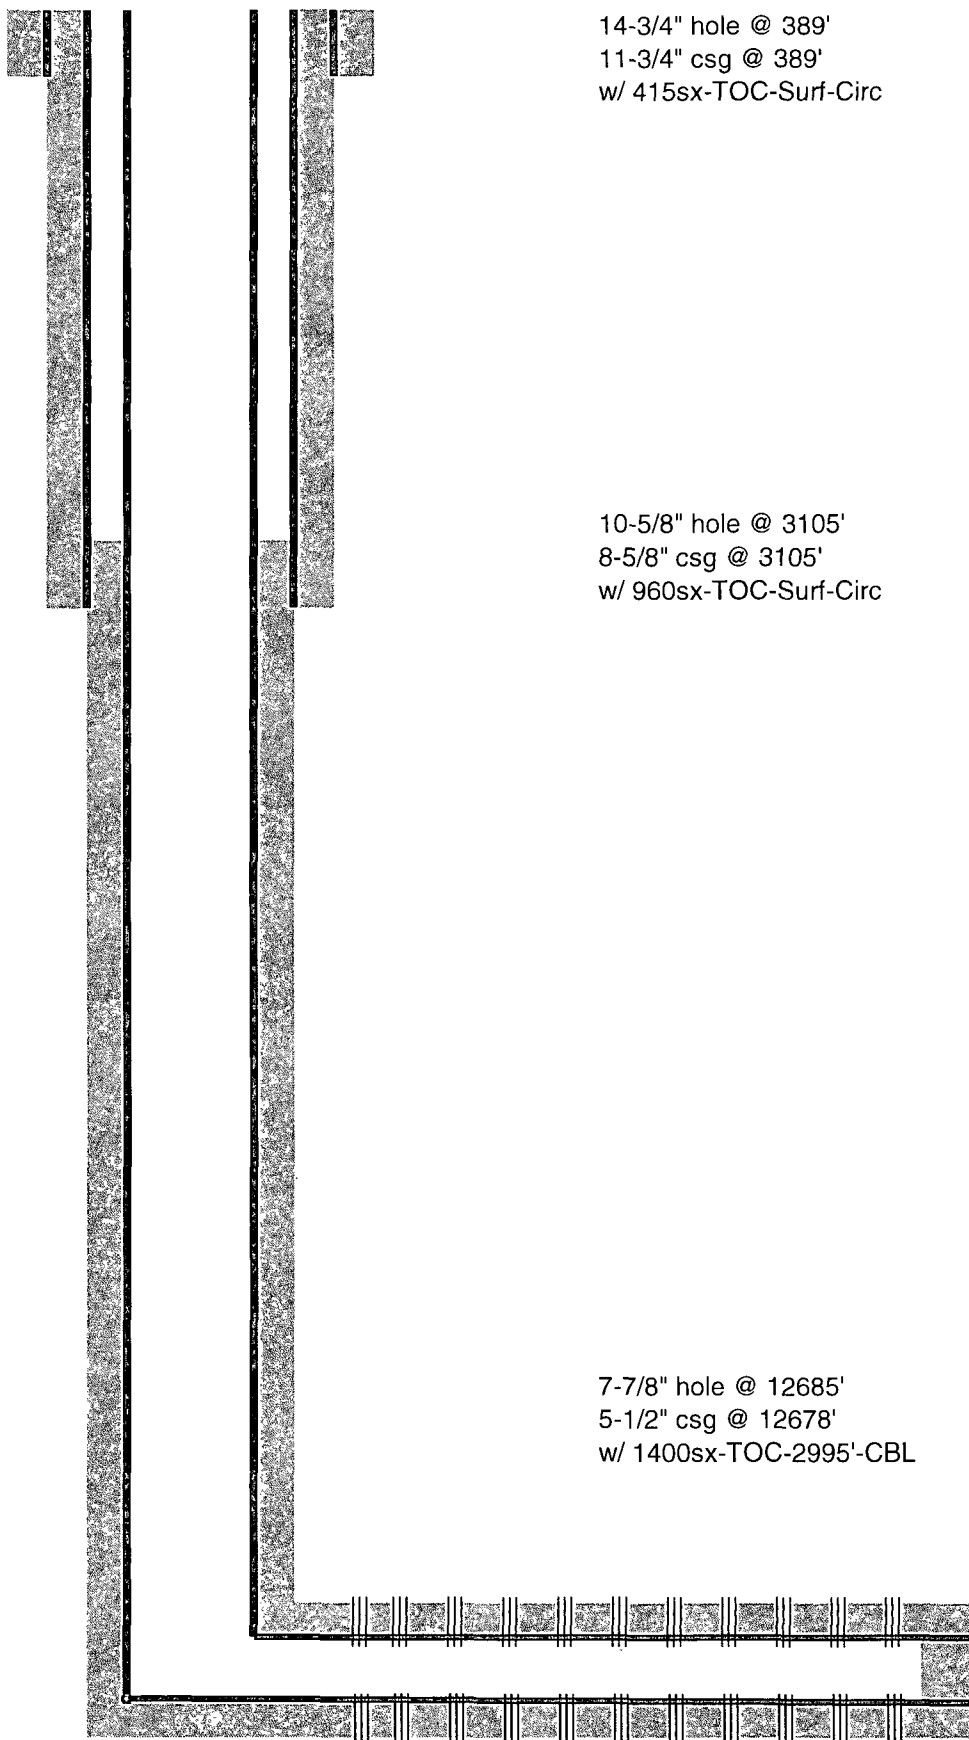

Perfs @ 8920-12520'

TD - 12685'M 8813'V
PB - 12616'M 8811'V