

OXY USA Inc. - Proposed
Federal 26 #1
API No. 30-015-26376

300sx @ 900'-Surface

125sx @ 1300-925' WOC-Tag

165sx @ 1825-1325' WOC-Tag

165sx @ 2350-1850' WOC-Tag

165sx @ 2875-2375' WOC-Tag


190sx @ 4250-2900' WOC-Tag

25sx @ 4542-4395' WOC-Tag

25sx @ 6260-6098' WOC-Tag

CIBP @ 6910' w/ 25sx

PB-8371'

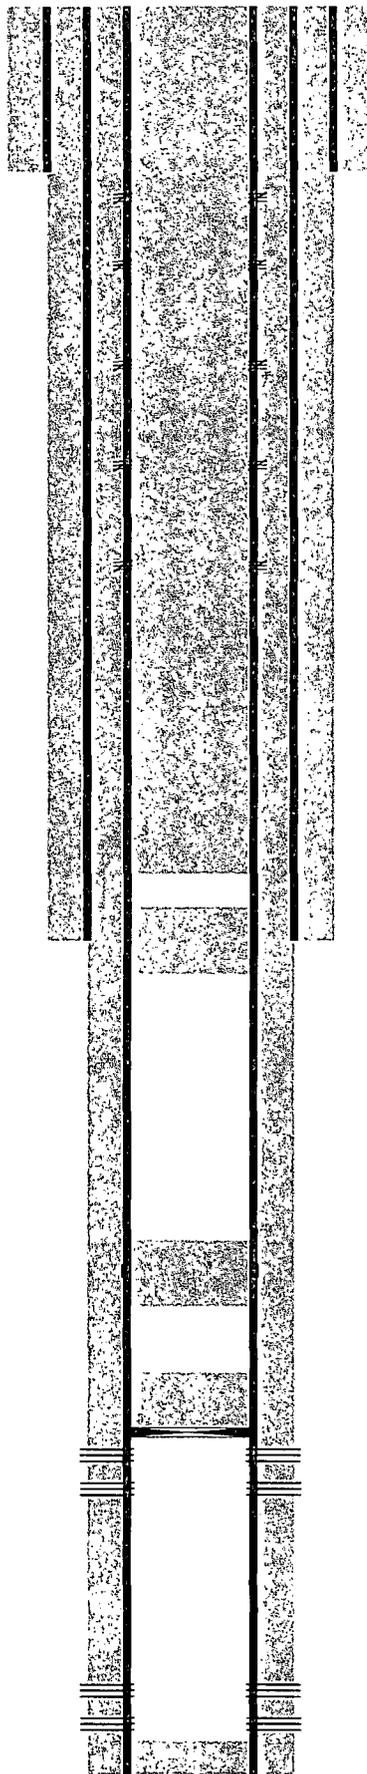

17-1/2" hole @ 850'
13-3/8" csg @ 850'
w/ 900sx-TOC-Surf-Circ

Perf @ 900'

Perf @ 1300'

Perf @ 1825'

Perf @ 2350'

Perf @ 2875'

11" hole @ 4447'
8-5/8" csg @ 4447'
w/ 1280sx-TOC-Surf-Circ


Perfs @ 6960-7107'

7-7/8" hole @ 8415'
5-1/2" csg @ 8415'
DVT @ 6180'
w/ 1220sx-TOC-2900'-CBL

Perfs @ 8127-8318'

TD-8415'

OXY USA Inc. - Current
Federal 26 #1
API No. 30-015-26376

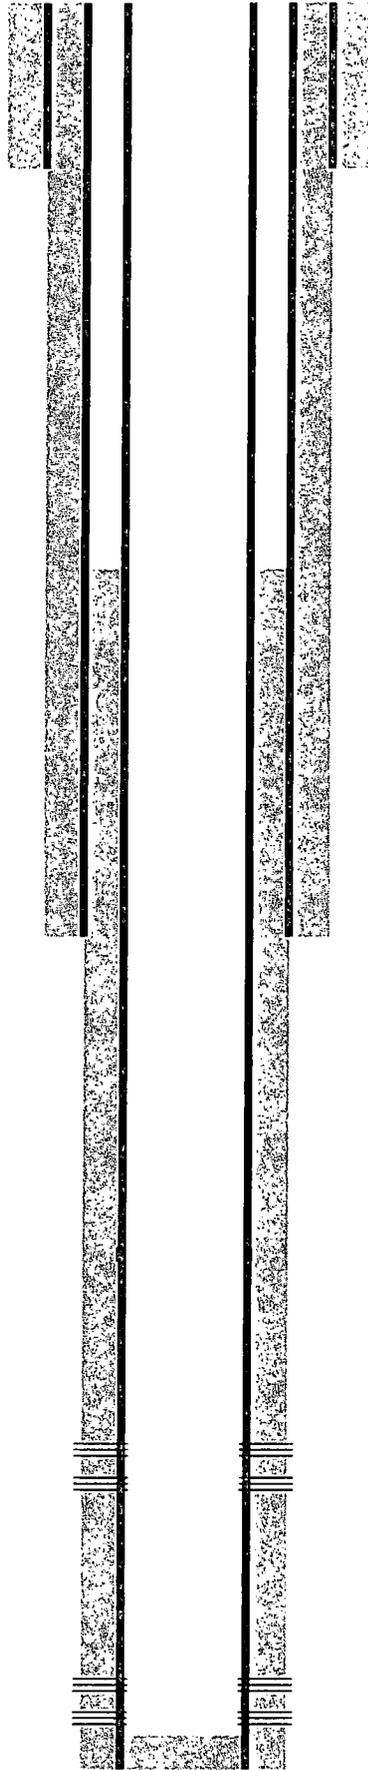

17-1/2" hole @ 850'
13-3/8" csg @ 850'
w/ 900sx-TOC-Surf-Circ

11" hole @ 4447'
8-5/8" csg @ 4447'
w/ 1280sx-TOC-Surf-Circ

Perfs @ 6960-7107'

7-7/8" hole @ 8415'
5-1/2" csg @ 8415'
DVT @ 6180'
w/ 1220sx-TOC-2900'-CBL

Perfs @ 8127-8318'

PB-8371'

TD-8415'