
 UNITED STATES  
 DEPARTMENT OF THE INTERIOR  
 BUREAU OF LAND MANAGEMENT

 FORM APPROVED  
 OMB NO. 1004-0135  
 Expires: July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

**SUBMIT IN TRIPLICATE - Other instructions on reverse side.**

 5. Lease Serial No.  
 NMNM36409

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

 8. Well Name and No.  
 MCCLELLAN MOC FEDERAL 21

 9. API Well No.  
 30-005-63255-00-S1

 10. Field and Pool, or Exploratory  
 PECOS SLOPE-ABO

 11. County or Parish, and State  
 CHAVES COUNTY, NM

 1. Type of Well  
☐ Oil Well ☒ Gas Well ☐ Other

 2. Name of Operator  
 LEGACY RESERVES OPERATING Contact: BLAIN LEWIS  
 E-Mail: blewis@legacyp.com

 3a. Address  
 PO BOX 10848  
 MIDLAND, TX 79702

 3b. Phone No. (include area code)  
 Ph: 432-689-5200 Ext: 5201

 4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
 Sec 29 T5S R25E SENE 1570FNL 1130FEL

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

P&amp;A PROCEDURE ATTACHED ALONG WITH CURRENT &amp; PROPOSED WELLBORE DIAGRAMS.

ESTIMATED START DATE: 03/17/2014

 RD 2/6/2014  
 Accepted for record  
 NMOCD

 RECEIVED  
 FEB 06 2014  
 NMOCD ARTESIA

14. I hereby certify that the foregoing is true and correct.

 Electronic Submission #233676 verified by the BLM Well Information System  
 For LEGACY RESERVES OPERATING, sent to the Roswell  
 Committed to AFMSS for processing by DAVID GLASS on 01/29/2014 (14DRG0643SE)

Name (Printed/Typed) BLAIN LEWIS

Title SENIOR ENGINEER

Signature (Electronic Submission)

Date 01/29/2014

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved By DAVID R GLASS

Title PETROLEUM ENGINEER

Date 01/29/2014

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office Roswell

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

 \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\*  
 SEE ATTACHED FOR  
 CONDITIONS OF APPROVAL APPROVED FOR 3 MONTH PERIOD  
 ENDING APR 29 2014



## McClellan MOC Fed #21 – P&A Procedure

Estimated start date: 3/17/14

### Well Info:

Spudded 8/14/2000

8-5/8", 24# surface casing set at 918' (cemented with 600 sx to surface)

TD 4110'

4-1/2", 10.5# casing set at 4110' (cemented with 350 sx – top of cement at 2690' by CBL)

Perfs: 3709' - 3888' (Abo)

PBTD 4040'

### Procedure:

1. Notify BLM-Roswell (575-627-0272) 48 hrs. prior to commencing operation.
2. MIRU plugging company. NU BOP. Lay down tubing. Move in 3700' work string of 2-7/8" tubing.
3. Cement plug #1 (4-1/2" casing): MIRU wireline unit. RIH with CIBP and set on wireline at 3650'. POH with wireline. RIH with bailer on wireline and dump 35' cement on CIBP. POH with wireline. *WOC & Tag*
4. RIH with tubing to 3600' and circulate hole with plugging mud (60 bbls). Lay down 1100' of tubing and stand remainder in derrick.
5. RU wireline unit. RIH with chemical cutter and cut off 4-1/2" casing at 2500'. POH and RDMO wireline unit.
6. Pull and lay down 2500' of 4-1/2", 10.5# casing.
7. Cement plug #2 (7-7/8" open hole): Spot 45 sx Class "C" cement plug from ~~2400-2500'~~ <sup>2450-2550'</sup> (above 4-1/2" casing stub). Lay down tubing to 968'. *WOC & Tag @ Or Above 2450'*
8. Cement plug #3 (8-5/8" casing and 7-7/8" open hole): Spot 45 sx Class "C" cement plug from 868' - 968' (across 8-5/8" casing shoe). Lay down tubing and ND BOP. *WOC & Tag @ Or Above 868'*
9. Cement plug #4 (8-5/8" casing): Dig out bradenhead. Spot ~~40~~ <sup>20</sup> sx Class "C" cement plug from surface to ~~35'~~ <sup>60'</sup>.
10. Cut casing below bradenhead. Weld steel cap over 8-5/8" surface casing and weld hole marker above steel cap. Clean location.

Blain Lewis  
Senior Engineer



**McCLELLAN MOC FED #21**

LOCATION: Sec 28, T5S, R25E

Current Wellbore Diagram

FIELD: Pecos Slope (Abo)

COUNTY: Chaves

STATE: New Mexico

GL: 3852'


KB: 3859'

SPUD DATE: 8/14/2000

LATEST UPDATE: 01/28/2014

BY: BKL

API No: 30-005-63255

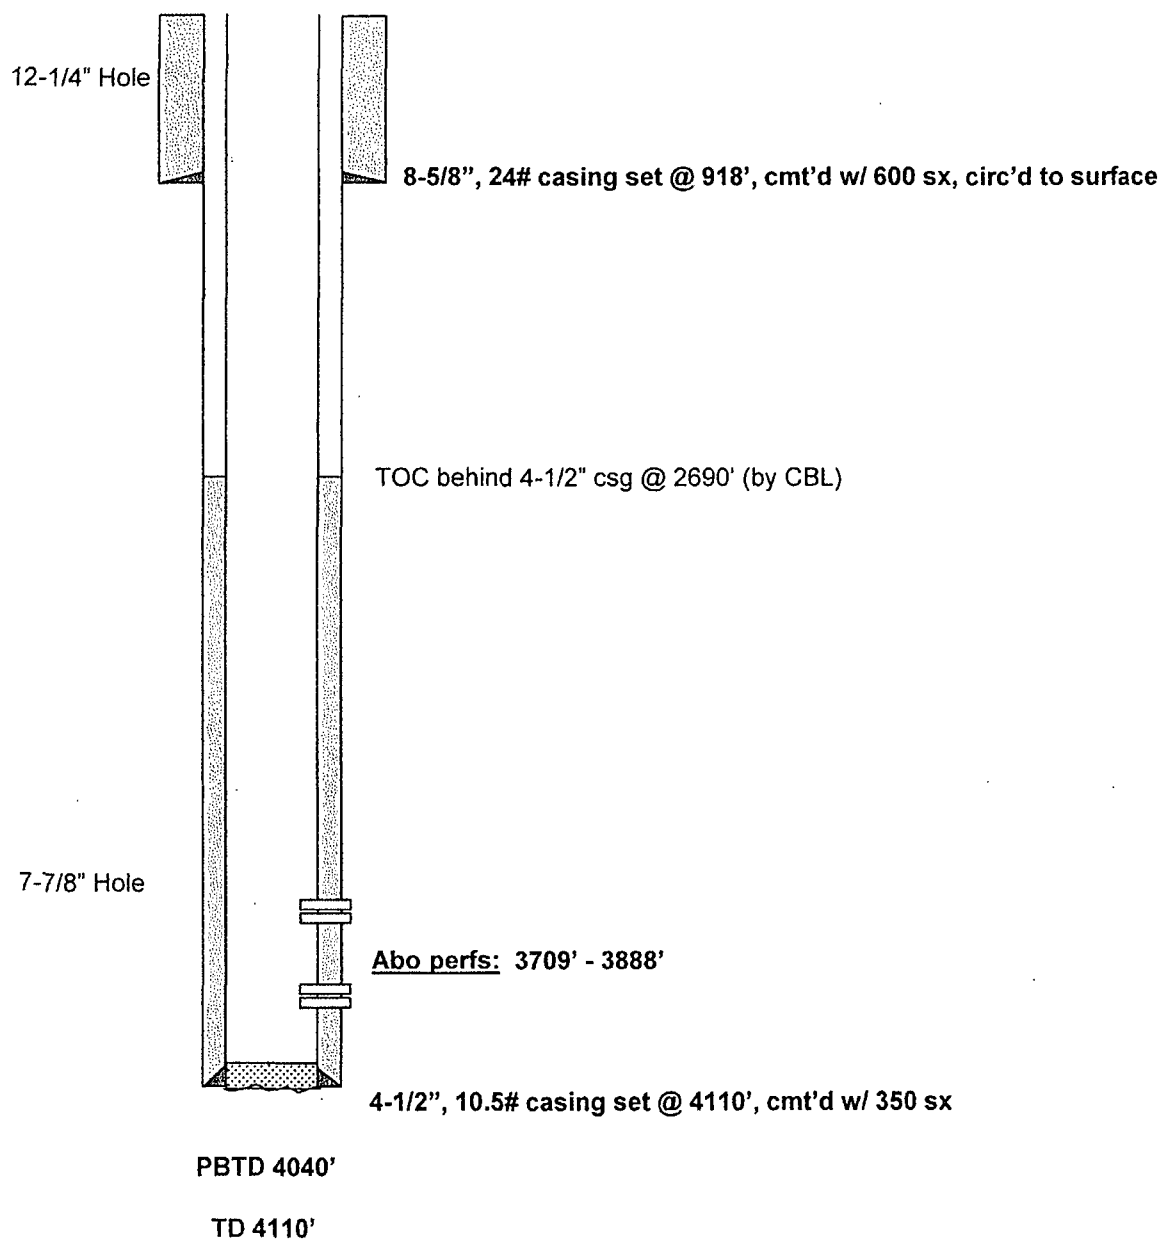



**McCLELLAN MOC FED #21**

LOCATION: Sec 28, T5S, R25E

Proposed Wellbore Diagram

FIELD: Pecos Slope (Abo)

GL: 3852'

LATEST UPDATE: 01/28/2014

COUNTY: Chaves


KB: 3859'

BY: BKL

STATE: New Mexico

SPUD DATE: 8/14/2000

API No: 30-005-63255

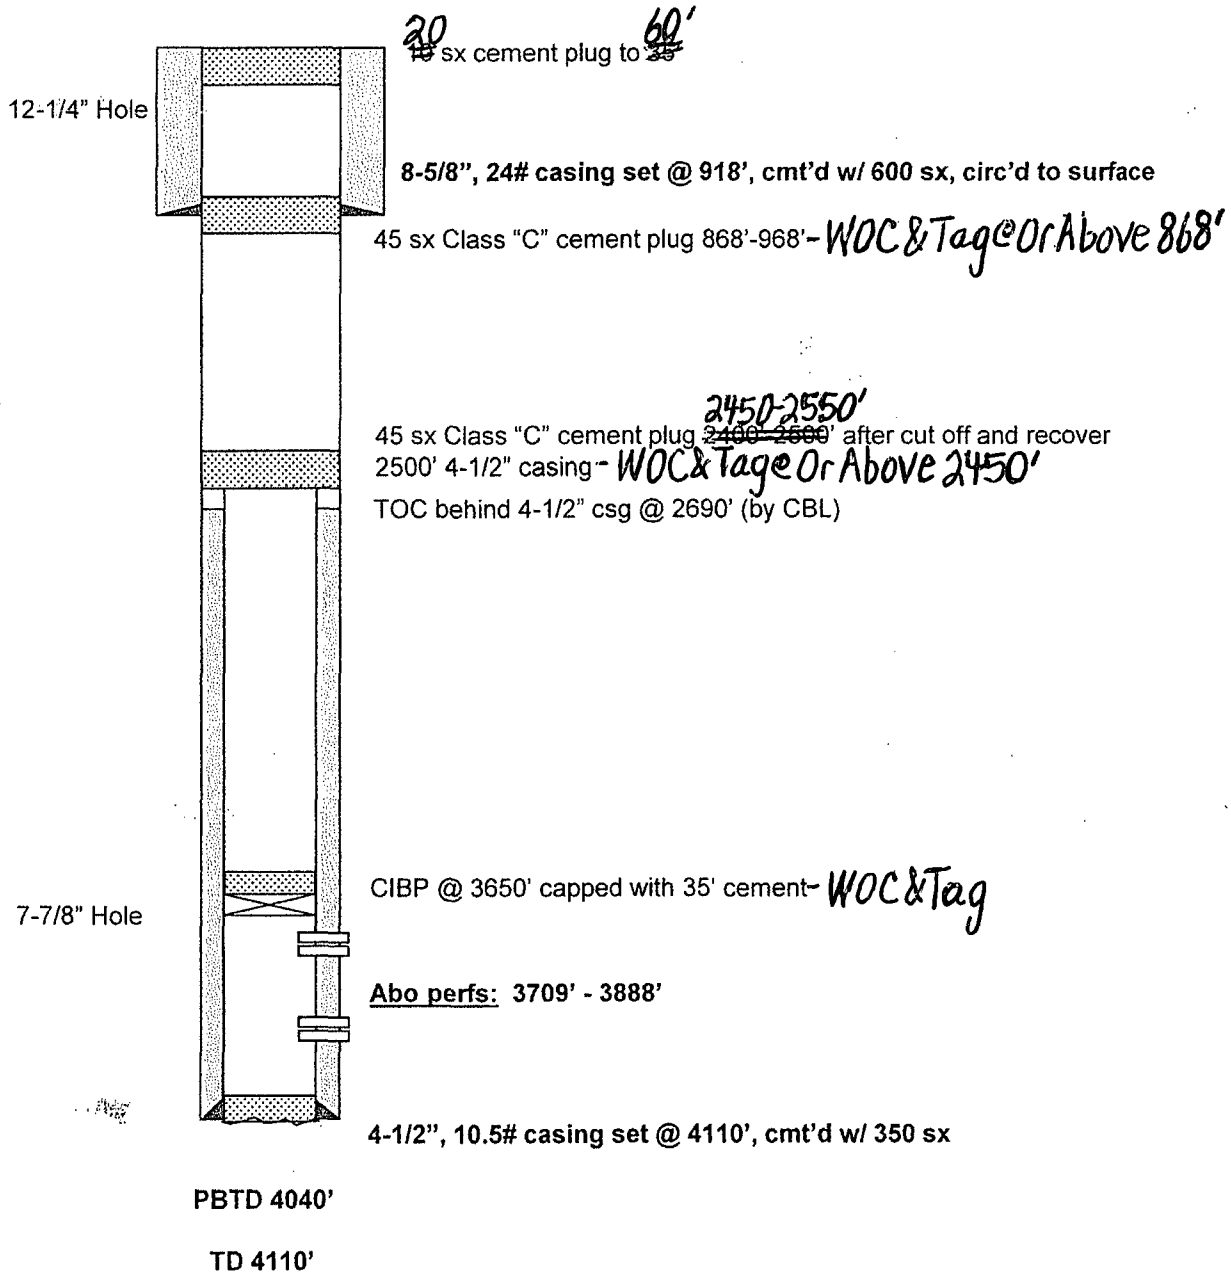

**BUREAU OF LAND MANAGEMENT**  
**Roswell Field Office**  
**2909 West Second Street**  
**Roswell, New Mexico 88201**  
**(575) 627-0272**

**Permanent Abandonment of Federal Wells**  
**Conditions of Approval**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. **Plugging operations** shall commence within **ninety (90) days** from the approval date of this Notice of Intent to Abandon. **If you are unable to plug the well by the 90<sup>th</sup> day provide the BLM Roswell Field Office (RFO), prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when the BLM Roswell Field Office can expect the well to be plugged. Failure to do so will result in enforcement action. Unless the well has been properly plugged, the rig shall not be removed from over the hole without prior approval.**

2. **Notification:** Contact the BLM Roswell Field Office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, during office hours or after office hours call (575) 627-0205. Engineer on call during office hours phone (575) 627-0275 or phone (after hours) call (575) 626-5749.

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The minimum BOP requirement is a 2M system for a well not deeper than 9090 feet; a 3M system for a well not deeper than 13636 feet; and a 5M system for a well not deeper than 22727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at a rate of 25 sacks (50 pounds each) of gel per 100 barrels of water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. In lieu of a cement plug in cased hole, a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 50 feet of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either class "C" for up to 7500 feet of depth, mixed at 14.8 lbs./gal with 6.3 gallons of fresh water per sack or class "H" for deeper than 7500 feet plugs, mixed at 16.4 lbs./gal with 4.3 gallons of fresh water per sack.

6. **Dry Hole Marker:** All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be capped with a 4-inch pipe, 10 feet in length, 4 feet above the ground and embedded in cement. The following information shall be permanently inscribed on the dry hole marker: Well name and number, the name of the operator, the lease serial number, the surveyed location (the quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer; such as metes and bounds).

7. **Subsequent Plugging Reporting:** Within 30 days after plugging work is completed, file one original and five copies of the Subsequent Report of Abandonment, Form 3160-5 to the BLM Roswell Field Office. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

Following the submittal and approval of the Subsequent Report of Abandonment, a Notice of Intent for Final Abandonment with the proposed surface restoration procedure must be submitted for approval.