

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240
Phone (575) 393-6161 Fax: (575) 393-0720

DISTRICT II
811 S. First St., Artesia, NM 88210
Phone (575) 748-1283 Fax: (575) 748-9720

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone (505) 334-6176 Fax: (505) 334-6170

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION
1220 South St. Francis
Santa Fe, New Mexico 87505

RECEIVED

MAR 27 2014

Submit one copy to appropriate
District Office

Form C-102
Revised August 1, 2011

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number 30-015-42253	Pool Code 97565	Pool Name N. Seven Rivers; Glorietta-Yeso
Property Code 12062	Property Name BOYD X STATE COM	Well Number 14H
OGRID No. 025575	Operator Name YATES PETROLEUM CORPORATION	Elevation 3531


Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	16	19 S	25 E		990	NORTH	15	WEST	EDDY

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	16	19 S	25 E		660	NORTH	330	EAST	EDDY
Dedicated Acres 160	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

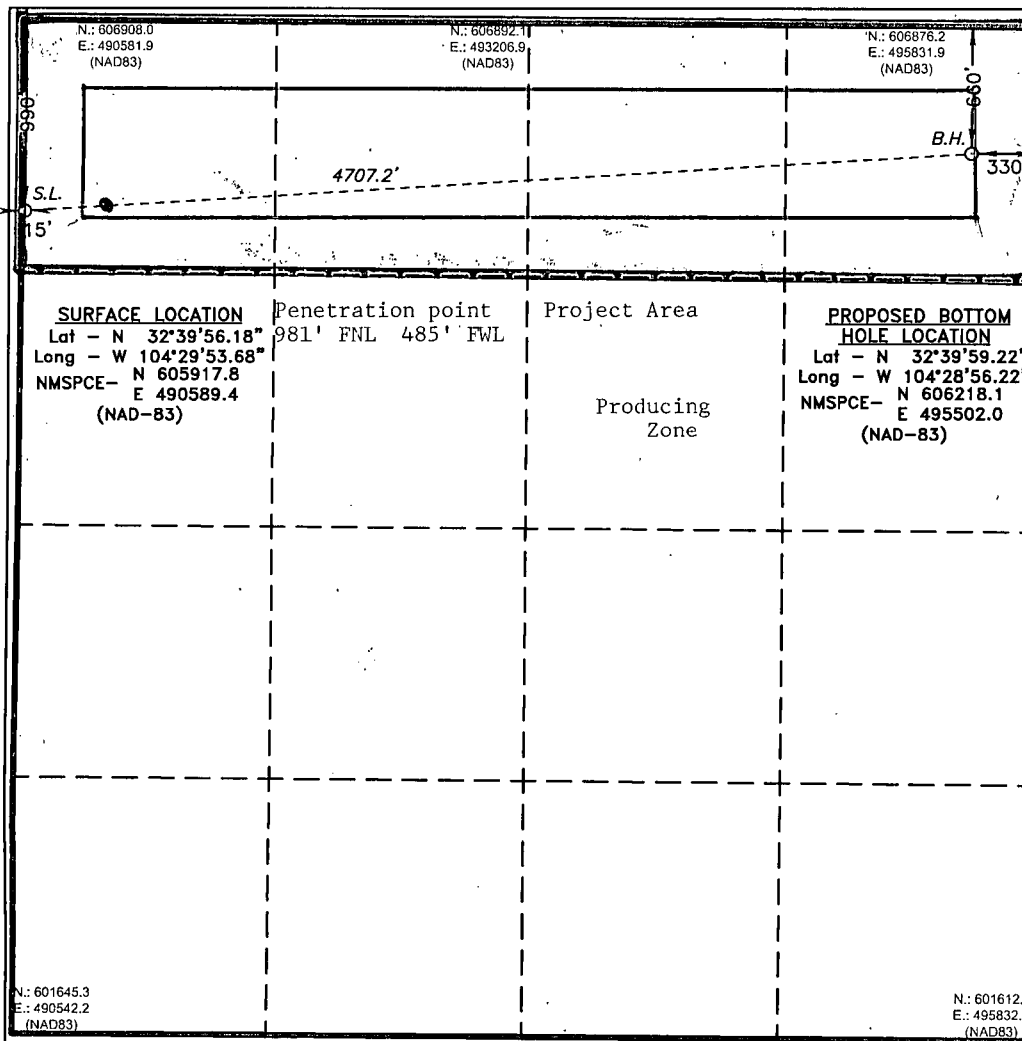

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: Travis Hahn Date: 3/27/14
Printed Name: thahn@yatespetroleum.com
Email Address:

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Date Surveyed: MAR 27 2014
Signature of Professional Surveyor: [Signature]
Certificate No.: 7977


Scale: 1" = 1000'
WO Num.: 30181



Project: Eddy County, NM (NAD83 NME)
Site: Boyd X State Com
Well: #14H
Wellbore: WB1/Job #1410510
Design: Plan #1 03-24-14
Rig: Silver Oak 11



PHOENIX
TECHNOLOGY SERVICES



Azimuths to Grid North
True North: 0.09°
Magnetic North: 7.79°
Magnetic Field
Strength: 48501.2nT
Dip Angle: 60.37°
Date: 03/24/2014
Model: IGRF2010_14

WELL DETAILS

+N-S	+E-W	Nothing	Ground Level	3531.00	Latitude	Longitude
0.00	0.00	605917.80	490589.40	32° 39' 56.18038 N	104° 29' 53.88395 W	

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N-S	+E-W	Dleg	TFace	VSeal	Target	Annotation
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
2	2090.25	0.00	0.00	2090.25	0.00	0.00	0.00	0.00	0.00		KOP: 12°/100' Build
3	2832.50	89.07	88.90	2567.65	9.02	466.63	12.00	88.90	466.26		LP: Hold 89.07° Inc: 88.90° Azm
4	5666.34	89.07	88.90	2613.65	63.41	3302.58	0.00	0.00	3300.00		Begin 2°/100' Turn
5	6083.05	89.07	80.56	2620.41	101.63	3717.10	2.00	-90.04	3716.11		Hold 89.07° Inc: 80.56° Azm
6	7295.10	89.07	80.56	2640.00	300.30	4912.60	0.00	0.00	4921.76	PBHL-Boyd X St #14H	PBHL at 7295.10 MD
7	7395.10	89.07	80.56	2641.62	316.69	5011.23	0.00	0.00	5021.23		TD at 7395.10

DESIGN TARGET DETAILS

Name	TVD	+N-S	+E-W	Nothing	Easting	Latitude	Longitude	Shape
PBHL-Boyd X St #14H	2640.00	300.30	4912.60	606218.10	495532.00	32° 39' 59.22381 N	104° 28' 56.21530 W	Point
- plan hits target center								

Map System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone Name: New Mexico Eastern Zone
Local Origin: Well #14H, Grid North
Latitude: 32° 39' 56.18038 N
Longitude: 104° 29' 53.88395 W
Grid East: 490589.40
Grid North: 605917.80
Scale Factor: 1.000



Geomagnetic Model: IGRF2010_14
Sample Date: 24-Mar-14
Magnetic Declination: 7.70°
Dip Angle from Horizontal: 60.37°
Magnetic Field Strength: 48501
To convert a Magnetic Direction to a Grid Direction, Add 7.79°
To convert a Magnetic Direction to a True Direction, Add 7.70° East
To convert a True Direction to a Grid Direction, Add 0.09°


FORMATION TOP DETAILS

TVDPath	MDPath	Formation	DipAngle	DipDir
725.00	725.00	San Andres	0.93	86.50
2190.17	2190.92	Glorieta	0.93	86.50
2274.60	2279.52	Yeso	0.93	86.50
2567.53	2626.83	Target	0.93	86.50

LEGEND

- #1, WB1, Inc Surveys V0
- #4, WB1, Inc Surveys V0
- #1, WB1, Inc Surveys V0
- #3, WB1, Inc Surveys V0
- Plan #1 03-24-14

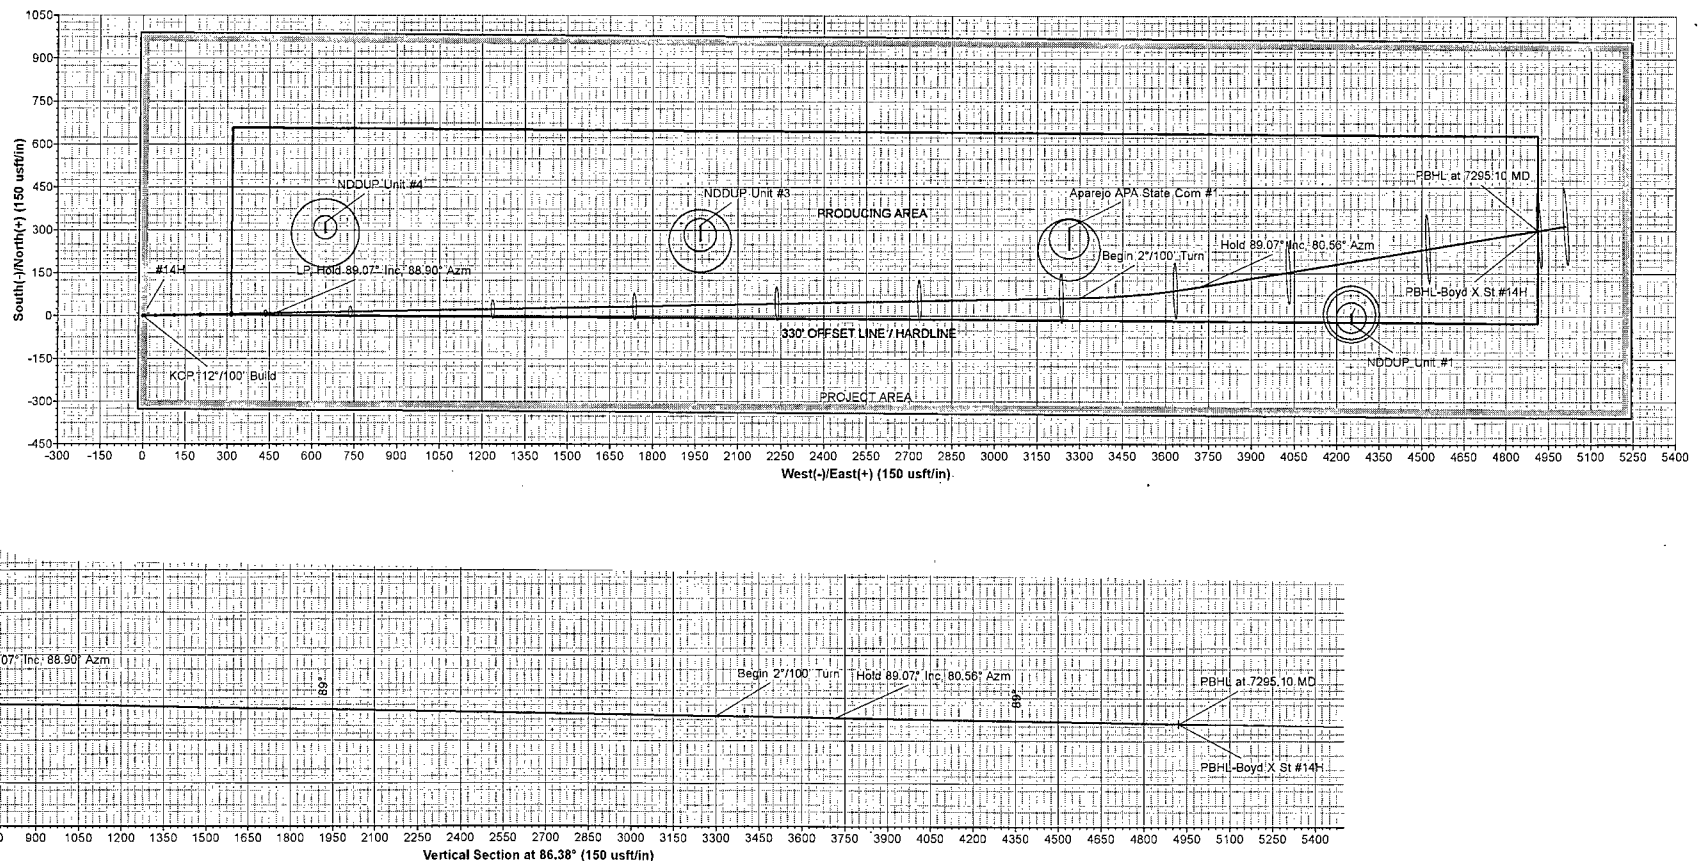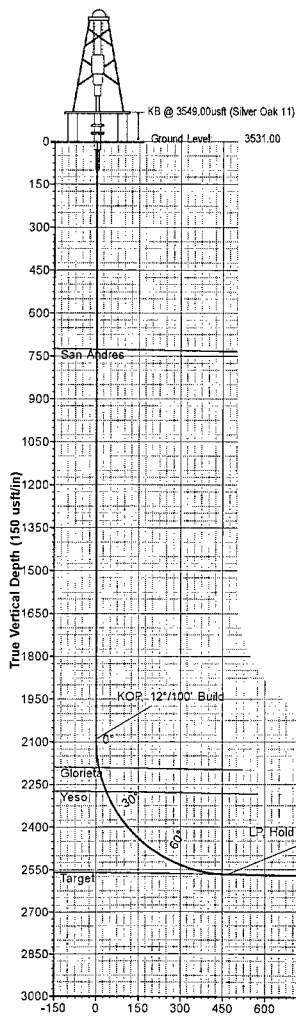



**ATES
PETROLEUM
CORPORATION**

Yates Petroleum Corp.

Eddy County, NM (NAD83 NME)

Boyd X State Com

#14H

WB1/Job #1410510

Plan: Plan #1 03-24-14

Standard Planning Report

24 March, 2014





Phoenix Technology Services

Planning Report



Database:	GCR/DB	Local Co-ordinate Reference:	Well: #14H
Company:	Yates Petroleum Corp	TVD Reference:	KB @ 3549.00usft (Silver Oak 11)
Project:	Eddy County, NM (NAD83 NME)	MD Reference:	KB @ 3549.00usft (Silver Oak 11)
Site:	Boyd X, State, Com	North Reference:	Grid
Well:	#14H	Survey Calculation Method:	Minimum Curvature
Wellbore:	WB1/Job #1410510		
Design:	Plan #1, 03-24-14		

Project:	Eddy County, NM, (NAD83 NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site:	Boyd X, State, Com		
Site Position:		Northing:	605,917.80 usft
From:	Map	Easting:	490,589.40 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 39' 56.18038 N
		Longitude:	104° 29' 53.68395 W
		Grid Convergence:	-0.09 °

Well:	#14H, 990' ENL & 15' FWL		
Well Position	+N/-S	0.00 usft	Northing:
	+E/-W	0.00 usft	Easting:
Position Uncertainty	0.00 usft	Wellhead Elevation:	Ground Level:
			3,531.00 usft

Wellbore:	WB1/Job #1410510		
Magnetics	Model Name	Sample Date	Declination
	IGRF2010_14	03/24/14	7.70
			Dip Angle
			60.37
			Field Strength
			48,501

Design:	Plan #1, 03-24-14		
Audit Notes:			
Version:	Phase:	PLAN	Tie On Depth:
			0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(usft)	(usft)	(usft)
	0.00	0.00	0.00
			Direction:
			86.38

Plan Sections										
Measured Depth	Inclination	Azimuth	Vertical Depth	+N/-S	+E/-W	Dogleg Rate	Build Rate	Turn Rate	TFO	Target
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(°/100usft)	(°/100usft)	(°/100usft)	(°)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,090.25	0.00	0.00	2,090.25	0.00	0.00	0.00	0.00	0.00	0.00	
2,832.50	89.07	88.90	2,567.65	9.02	469.63	12.00	12.00	0.00	88.90	
5,666.34	89.07	88.90	2,613.65	63.41	3,302.58	0.00	0.00	0.00	0.00	
6,083.05	89.07	80.56	2,620.41	101.63	3,717.10	2.00	0.00	-2.00	-90.04	
7,295.10	89.07	80.56	2,640.00	300.30	4,912.60	0.00	0.00	0.00	0.00	PBHL-Boyd X St #14H
7,395.10	89.07	80.56	2,641.62	316.69	5,011.23	0.00	0.00	0.00	0.00	



Phoenix Technology Services

Planning Report



Database:	GCR DB	Local Co-ordinate Reference:	Well #14H
Company:	Yates Petroleum Corp	TVD Reference:	KB @ 3549.00usft (Silver Oak 11)
Project:	Eddy County, NM (NAD83 NME)	MD Reference:	KB @ 3549.00usft (Silver Oak 11)
Site:	Boyd X State Com	North Reference:	Grid
Well:	#14H	Survey Calculation Method:	Minimum Curvature
Wellbore:	WB1/Job #1410510		
Design:	Plan #1/03-24-14		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
725.00	0.00	0.00	725.00	0.00	0.00	0.00	0.00	0.00	0.00
San Andres									
2,090.25	0.00	0.00	2,090.25	0.00	0.00	0.00	0.00	0.00	0.00
KOP: 12°/100' Build									
2,100.00	1.17	88.90	2,100.00	0.00	0.10	0.10	12.00	12.00	0.00
2,190.92	12.08	88.90	2,190.17	0.20	10.57	10.56	12.00	12.00	0.00
Glorieta									
2,200.00	13.17	88.90	2,199.04	0.24	12.56	12.55	12.00	12.00	0.00
2,279.52	22.71	88.90	2,274.60	0.71	37.02	36.99	12.00	12.00	0.00
Yeso									
2,300.00	25.17	88.90	2,293.32	0.87	45.33	45.29	12.00	12.00	0.00
2,400.00	37.17	88.90	2,378.73	1.86	96.98	96.91	12.00	12.00	0.00
2,500.00	49.17	88.90	2,451.53	3.17	165.26	165.13	12.00	12.00	0.00
2,600.00	61.17	88.90	2,508.54	4.75	247.18	246.99	12.00	12.00	0.00
2,700.00	73.17	88.90	2,547.26	6.51	339.16	338.90	12.00	12.00	0.00
2,800.00	85.17	88.90	2,566.02	8.39	437.18	436.84	12.00	12.00	0.00
2,826.83	88.39	88.90	2,567.53	8.91	463.96	463.60	12.00	12.00	0.00
Target									
2,832.50	89.07	88.90	2,567.65	9.02	469.63	469.26	12.00	12.00	0.00
LP Hold 89.07° Inc 88.90° Azm									
2,900.00	89.07	88.90	2,568.75	10.31	537.11	536.69	0.00	0.00	0.00
3,000.00	89.07	88.90	2,570.37	12.23	637.08	636.58	0.00	0.00	0.00
3,100.00	89.07	88.90	2,571.99	14.15	737.04	736.47	0.00	0.00	0.00
3,200.00	89.07	88.90	2,573.62	16.07	837.01	836.36	0.00	0.00	0.00
3,300.00	89.07	88.90	2,575.24	17.99	936.98	936.25	0.00	0.00	0.00
3,400.00	89.07	88.90	2,576.86	19.91	1,036.95	1,036.14	0.00	0.00	0.00
3,500.00	89.07	88.90	2,578.49	21.83	1,136.92	1,136.03	0.00	0.00	0.00
3,600.00	89.07	88.90	2,580.11	23.75	1,236.89	1,235.92	0.00	0.00	0.00
3,700.00	89.07	88.90	2,581.73	25.67	1,336.85	1,335.81	0.00	0.00	0.00
3,800.00	89.07	88.90	2,583.36	27.59	1,436.82	1,435.70	0.00	0.00	0.00
3,900.00	89.07	88.90	2,584.98	29.51	1,536.79	1,535.59	0.00	0.00	0.00
4,000.00	89.07	88.90	2,586.60	31.43	1,636.76	1,635.48	0.00	0.00	0.00
4,100.00	89.07	88.90	2,588.22	33.35	1,736.73	1,735.37	0.00	0.00	0.00
4,200.00	89.07	88.90	2,589.85	35.27	1,836.70	1,835.26	0.00	0.00	0.00
4,300.00	89.07	88.90	2,591.47	37.19	1,936.66	1,935.15	0.00	0.00	0.00
4,400.00	89.07	88.90	2,593.09	39.11	2,036.63	2,035.04	0.00	0.00	0.00
4,500.00	89.07	88.90	2,594.72	41.02	2,136.60	2,134.94	0.00	0.00	0.00
4,600.00	89.07	88.90	2,596.34	42.94	2,236.57	2,234.83	0.00	0.00	0.00
4,700.00	89.07	88.90	2,597.96	44.86	2,336.54	2,334.72	0.00	0.00	0.00
4,800.00	89.07	88.90	2,599.59	46.78	2,436.51	2,434.61	0.00	0.00	0.00
4,900.00	89.07	88.90	2,601.21	48.70	2,536.48	2,534.50	0.00	0.00	0.00
5,000.00	89.07	88.90	2,602.83	50.62	2,636.44	2,634.39	0.00	0.00	0.00
5,100.00	89.07	88.90	2,604.46	52.54	2,736.41	2,734.28	0.00	0.00	0.00
5,200.00	89.07	88.90	2,606.08	54.46	2,836.38	2,834.17	0.00	0.00	0.00
5,300.00	89.07	88.90	2,607.70	56.38	2,936.35	2,934.06	0.00	0.00	0.00
5,400.00	89.07	88.90	2,609.32	58.30	3,036.32	3,033.95	0.00	0.00	0.00
5,500.00	89.07	88.90	2,610.95	60.22	3,136.29	3,133.84	0.00	0.00	0.00
5,600.00	89.07	88.90	2,612.57	62.14	3,236.25	3,233.73	0.00	0.00	0.00
5,666.34	89.07	88.90	2,613.65	63.41	3,302.58	3,300.00	0.00	0.00	0.00
Begin 2°/100' Turn									
5,700.00	89.07	88.23	2,614.19	64.26	3,336.22	3,333.63	2.00	0.00	-2.00
5,800.00	89.07	86.23	2,615.82	69.09	3,436.08	3,433.60	2.00	0.00	-2.00



Phoenix Technology Services Planning Report



Database:	GCR DB	Local Co-ordinate Reference:	Well #14H
Company:	Yates Petroleum Corp	TVD Reference:	KB @ 3549.00usft (Silver Oak 11)
Project:	Eddy County NM (NAD83/NME)	MD Reference:	KB @ 3549.00usft (Silver Oak 11)
Site:	Boyd X State Com	North Reference:	Grid
Well:	#14H	Survey Calculation Method:	Minimum Curvature
Wellbore:	WB1/Job #1410510		
Design:	Plan #1 03-24-14		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
5,900.00	89.07	84.23	2,617.44	77.41	3,535.72	3,533.56	2.00	0.00	-2.00	
6,000.00	89.07	82.23	2,619.06	89.21	3,635.00	3,633.39	2.00	0.00	-2.00	
6,083.05	89.07	80.56	2,620.41	101.63	3,717.10	3,716.11	2.00	0.00	-2.00	
Hold: 89.07° Inc. 80.56° Azm										
6,100.00	89.07	80.56	2,620.68	104.41	3,733.82	3,732.97	0.00	0.00	0.00	
6,200.00	89.07	80.56	2,622.30	120.80	3,832.46	3,832.44	0.00	0.00	0.00	
6,300.00	89.07	80.56	2,623.92	137.19	3,931.09	3,931.92	0.00	0.00	0.00	
6,400.00	89.07	80.56	2,625.53	153.58	4,029.72	4,031.39	0.00	0.00	0.00	
6,500.00	89.07	80.56	2,627.15	169.97	4,128.36	4,130.86	0.00	0.00	0.00	
6,600.00	89.07	80.56	2,628.76	186.37	4,226.99	4,230.33	0.00	0.00	0.00	
6,700.00	89.07	80.56	2,630.38	202.76	4,325.63	4,329.80	0.00	0.00	0.00	
6,800.00	89.07	80.56	2,632.00	219.15	4,424.26	4,429.27	0.00	0.00	0.00	
6,900.00	89.07	80.56	2,633.61	235.54	4,522.90	4,528.75	0.00	0.00	0.00	
7,000.00	89.07	80.56	2,635.23	251.93	4,621.53	4,628.22	0.00	0.00	0.00	
7,100.00	89.07	80.56	2,636.85	268.32	4,720.16	4,727.69	0.00	0.00	0.00	
7,200.00	89.07	80.56	2,638.46	284.71	4,818.80	4,827.16	0.00	0.00	0.00	
7,295.10	89.07	80.56	2,640.00	300.30	4,912.60	4,921.76	0.00	0.00	0.00	
PBHL at 7295.10 MD: PBHL-Boyd X St #14H										
7,300.00	89.07	80.56	2,640.08	301.10	4,917.43	4,926.63	0.00	0.00	0.00	
7,395.10	89.07	80.56	2,641.62	316.69	5,011.23	5,021.23	0.00	0.00	0.00	
TD at 7395.10										

Design Targets										
Target Name	hit/miss target	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
PBHL-Boyd X St #14H	- plan hits target center	0.00	360.00	2,640.00	300.30	4,912.60	606,218.10	495,502.00	32° 39' 59.22381 N	104° 28' 56.21830 W
	- Point									

Formations							
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)		
725.00	725.00	San Andres		0.93	86.50		
2,190.92	2,190.17	Glorieta		0.93	86.50		
2,279.52	2,274.60	Yeso		0.93	86.50		
2,826.83	2,567.53	Target		0.93	86.50		



Phoenix Technology Services

Planning Report



Database:	GCR\DB	Local Co-ordinate Reference:	Well #14H
Company:	Yates Petroleum Corp.	TVD Reference:	KB @ 3549.00usft (Silver Oak 11)
Project:	Eddy County NM (NAD83 NME)	MD Reference:	KB @ 3549.00usft (Silver Oak 11)
Site:	Boyd X State Com	North Reference:	Grid
Well:	#14H	Survey Calculation Method:	Minimum Curvature
Wellbore:	WB1/Job #1410510		
Design:	Plan #1 03-24-14		

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
2,090.25	2,090.25	0.00	0.00	KOP, 12°/100' Build
2,832.50	2,567.65	9.02	469.63	LP, Hold 89.07° Inc, 88.90° Azm
5,666.34	2,613.65	63.41	3,302.58	Begin 2°/100' Turn
6,083.05	2,620.41	101.63	3,717.10	Hold 89.07° Inc, 80.56° Azm
7,295.10	2,640.00	300.30	4,912.60	PBHL at 7295.10 MD
7,395.10	2,641.62	316.69	5,011.23	TD at 7395.10

Yates Petroleum Corporation
105 S. Fourth Street
Artesia, NM 88210



Hydrogen Sulfide (H_2S) Contingency Plan

For

Boyd X State Com 14H
990' FNL & 15' FWL
Section 16, T19S-R25E
Eddy County NM

Boyd X State Com 14h

This is an open drilling site. H₂S monitoring equipment and emergency response equipment will be used within 500' of zones known to contain H₂S, including warning signs, wind indicators and H₂S monitor.

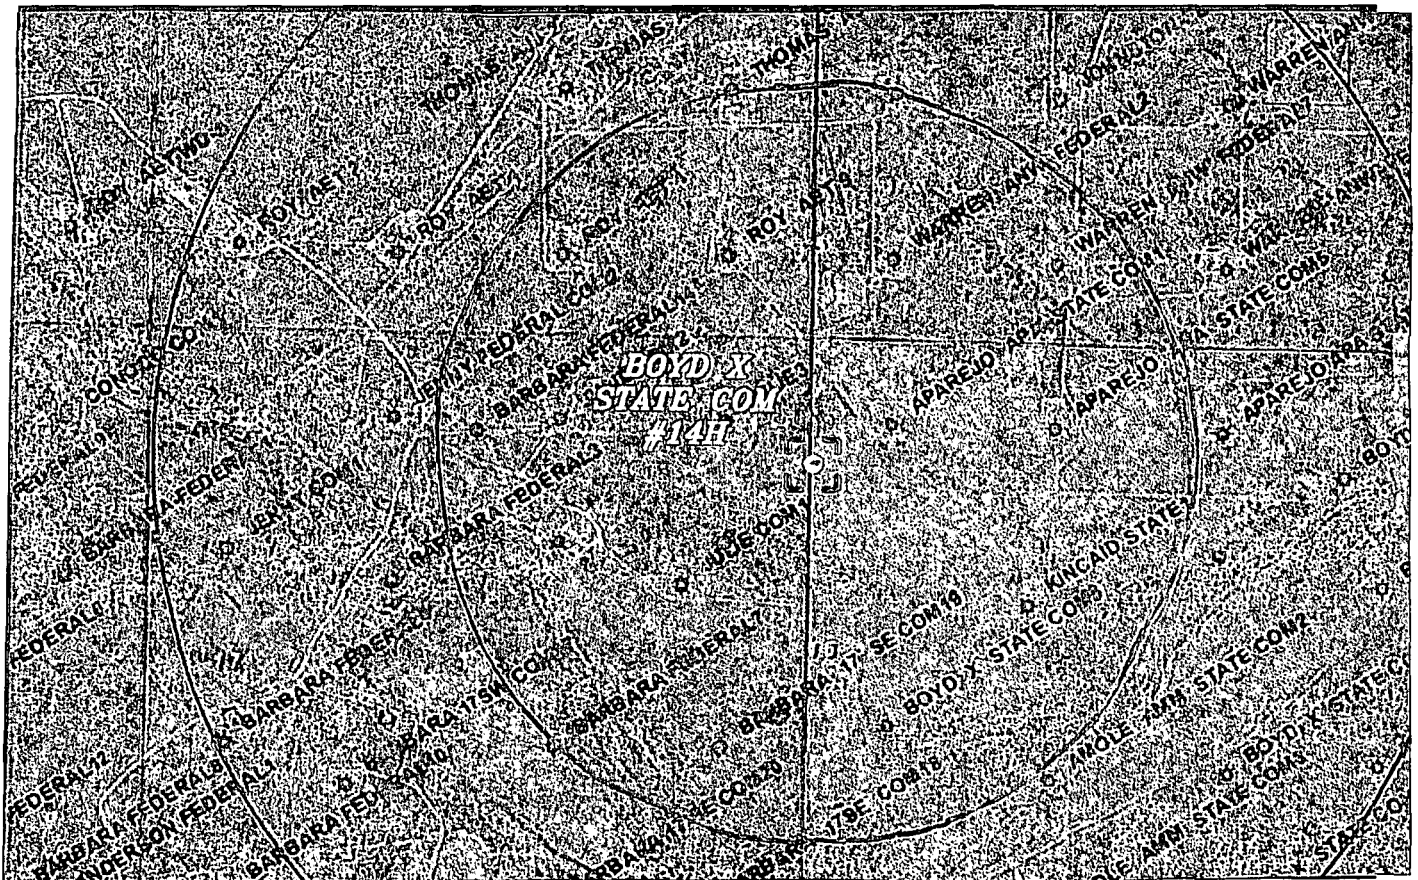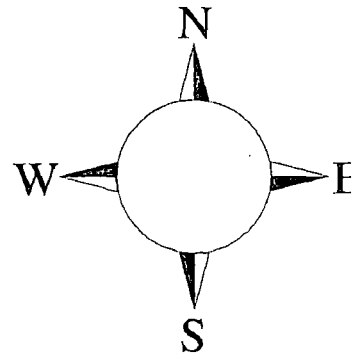

Assumed 100 ppm ROE = 3000'

100 ppm H₂S concentration shall trigger activation of this plan.

Emergency Procedures

In the case of a release of gas containing H_2S , the first responder(s) must isolate the area and prevent entry by other persons into the 100 ppm ROE. Additionally the first responder(s) must evacuate any public places encompassed by the 100 ppm ROE. First responder(s) must take care not to injure themselves during this operation. Company and/or local officials must be contacted to aid in this operation. Evacuation of the public should be beyond the 100 ppm ROE.

All responders must have training in the detection of H_2S , measures for protection against the gas, equipment used for protection and emergency response. Additionally, responders must be equipped with H_2S monitors and air packs in order to control the release. Use the "buddy system" to ensure no injuries during the response.

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO_2). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas

Characteristics of H_2S and SO_2

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H_2S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO_2	2.21 Air = 1	2 ppm	N/A	1000 ppm

Contacting Authorities

YPC personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. YPC Company response must be in coordination with the State of New Mexico's 'Hazardous Materials Emergency Response Plan' (HMER)

Yates Petroleum Corporation Phone Numbers

YPC Office	(575) 748-1471
Wade Bennett/Prod Superintendent	(575) 748-4236
LeeRoy Richards/Assistant Prod Superintendent	(575) 748-4228
Mike Larkin/Drilling	(575) 748-4222
Paul Hanes/Prod. Foreman/Roswell	(575) 624-2805
Tim Bussell/Drilling Superintendent	(575) 748-4221
Artesia Answering Service	(575) 748-4302
(During non-office hours)	

Agency Call List

Eddy County (575)

Artesia

State Police	746-2703
City Police	746-2703
Sheriff's Office	746-9888
Ambulance	911
Fire Department	746-2701
LEPC (Local Emergency Planning Committee)	746-2122
NMOCD	748-1283

Carlsbad

State Police	885-3137
City Police	885-2111
Sheriff's Office	887-7551
Ambulance	911
Fire Department	885-2111
LEPC (Local Emergency Planning Committee)	887-3798
US Bureau of Land Management	887-6544
New Mexico Emergency Response Commission (Santa Fe)	(505) 476-9600
24 HR	(505) 827-9126
New Mexico State Emergency Operations Center	(505) 476-9635
National Emergency Response Center (Washington, DC)	...(800) 424-8802

Other

Boots & Coots IWC	1-800-256-9688 or (281) 931-8884
Cudd Pressure Control	(915) 699-0139 or (915) 563-3356
Halliburton	(575) 746-2757
B. J. Services	(575) 746-3569
Flight For Life -4000 24th St, Lubbock, TX	(806) 743-9911
Aerocare -Rr 3 Box 49f, Lubbock, TX	(806) 747-8923
Med Flight Air Amb 2301 Yale Blvd SE #D3, Albuq, NM	(505) 842-4433
S B Air Med Svc 2505 Clark Carr Loop SE, Albuq, NM	(505) 842-4949