

Operator: XTO Energy
Well/Lease: Nash 43H
County: Eddy, NM

NM OIL CONSERVATION
ARTESIA DISTRICT
MAR 30 2015

STATE OF NEW MEXICO
DEVIATION REPORT

RECEIVED


30-015 - 42206

<u>Footage</u>	<u>Degree</u>
298	0.75
595	0.50
1080	0.25
1269	1.00
1457	0.75
1648	1.00
1934	1.25
2123	0.50
2308	0.75
2591	3.00
2685	3.00
2782	2.50
2877	2.25
2971	1.25
3065	1.25
3352	0.75
3732	0.75
4115	0.25
4487	0.25
4868	0.25
5246	0.50
5623	0.00
6022	0.82
6053	2.63
6084	5.30
6115	7.73


Signed By: Charles Walsh
Charles Walsh, Division Manager
Pioneer Drilling Company

Appeared before me on July 28, 2014.

Staci Riley
Notary Public

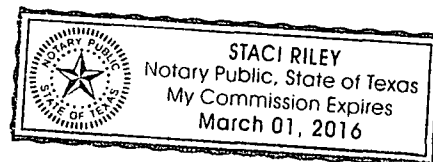

NASH UNIT #43H WW
 SHL: 1890' FEL & 2280' FSL
 SEC 12, T23S, R29E
 BHL: 330' FNL & 1310' FEL
 SEC 1, T23S, R29E
 EDDY CO, NM
 API# 30-015-42206

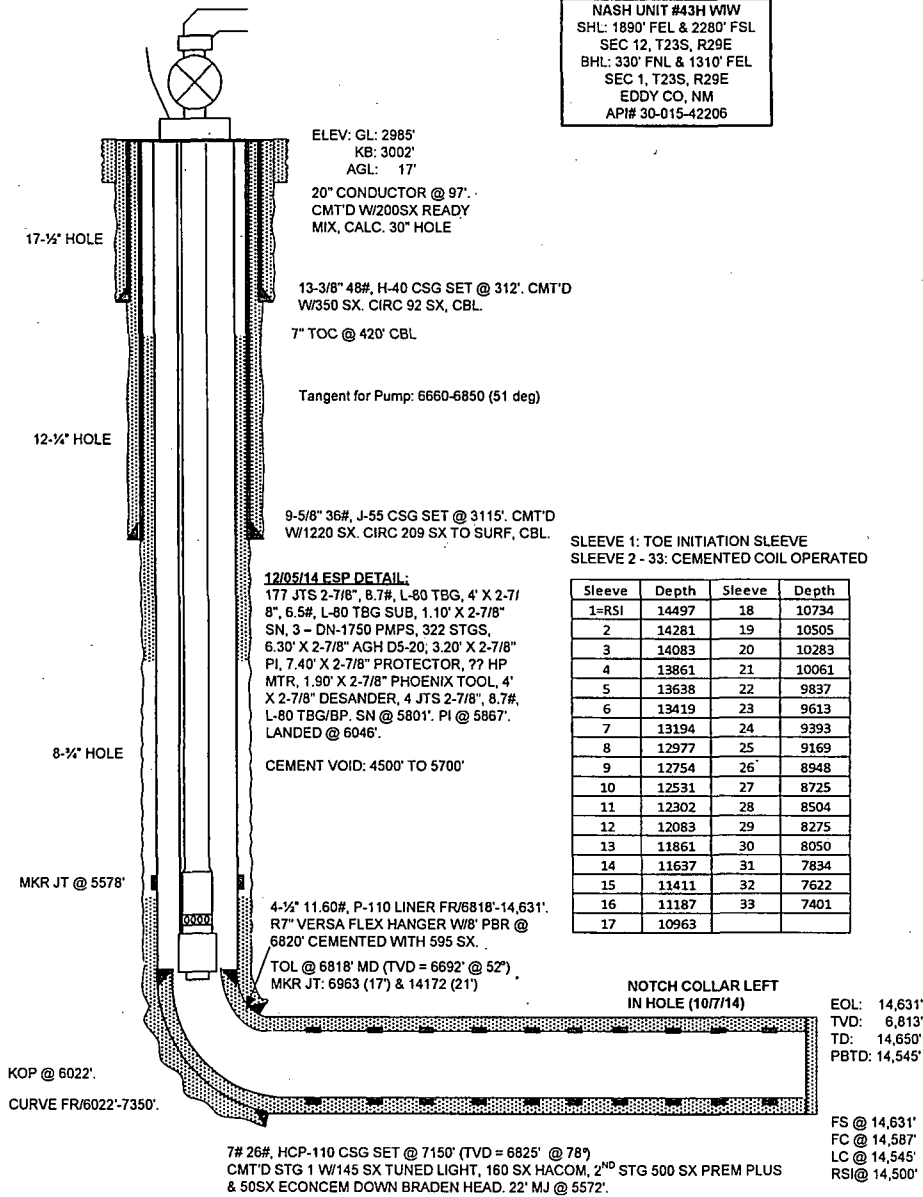

SLEEVE 1: TOE INITIATION SLEEVE
 SLEEVE 2 - 33: CEMENTED COIL OPERATED

Sleeve	Depth	Sleeve	Depth
1=RSI	14497	18	10734
2	14281	19	10505
3	14083	20	10283
4	13861	21	10061
5	13638	22	9837
6	13419	23	9613
7	13194	24	9393
8	12977	25	9169
9	12754	26	8948
10	12531	27	8725
11	12302	28	8504
12	12083	29	8275
13	11861	30	8050
14	11637	31	7834
15	11411	32	7622
16	11187	33	7401
17	10963		


HALLIBURTON

3950 Interwood South Parkway • Houston, TX 77032

PHONE 281.986.4400 • FAX 281.986.4499

State of New Mexico, Eddy County

I, Scott Speer, certify that I am employed by Halliburton Energy Services, Inc. (AKA Sperry Drilling) and that on the dates of June 9, 2014 through June 28, 2014, I did conduct or supervise the taking of a MWD Directional surveys for the well Nash Unit 43H from 6022' MD to 14468' MD. This data is true, correct, complete and within the limitations of the tools as set forth by Halliburton Energy Services, Inc. (AKA Sperry Drilling). I am authorized and qualified to make this report and this survey was conducted at the request of XTO Energy Resources, Inc. for the Nash Unit 43H well, API No. 30-015-42206 in Eddy County, New Mexico. I have reviewed this report and find that it conforms to the principles and procedures as set forth by Halliburton Energy Services, Inc. (AKA Sperry Drilling).



Scott Speer
MWD Field Engineer

XTO Energy Resources, Inc.

Nash Unit 43H

Eddy County, NM

Pioneer 33

API# 30-015-42206

June 9, 2014 – June 28, 2014

HD-MJ-0901359757

Sperry Drilling

Survey Report

Submitted by Scott Speer

3950 Interwood S. Pkwy Houston, TX 77032

Ph: 281.986.4400

HALLIBURTON

**Drilling and Formation
Evaluation**

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

Survey Report for XTO Energy Resources, Inc.

Rig : Pioneer 33
Well Name : Nash Unit 43H
Field Name : Nash
Country : USA
Job Number : HD-XX-0901359757
Job Start Date : 09-Jun-14
API Number : 30-015-42206

NM OIL CONSERVATION
ARTESIA DISTRICT

MAR 30 2015

RECEIVED

DIRECTIONAL SURVEY DATA

Tie-in

0.00

0.00

0.00

0.00

0.00 N

0.00 E

Measured Depth (ft)	Inclination (deg)	Direction (deg)	Vertical Depth (ft)	Latitude (ft)	Departure (ft)	Vertical Section (ft)	Dogleg (%/100)
100.00	0.41	107.31	100.00	0.11 S	0.34 E	-0.08	0.41
200.00	0.27	77.72	200.00	0.16 S	0.91 E	-0.10	0.22
300.00	0.19	42.97	300.00	0.01 N	1.26 E	0.09	0.16
400.00	0.16	33.39	400.00	0.25 N	1.45 E	0.34	0.04
500.00	0.46	24.10	499.99	0.73 N	1.69 E	0.84	0.30
600.00	0.73	58.73	599.99	1.43 N	2.40 E	1.59	0.44
700.00	0.32	92.77	699.99	1.74 N	3.22 E	1.96	0.50
800.00	0.15	138.81	799.98	1.63 N	3.58 E	1.87	0.24
900.00	0.20	235.59	899.98	1.43 N	3.53 E	1.67	0.26
1000.00	0.37	242.42	999.98	1.19 N	3.10 E	1.39	0.17
1100.00	0.44	257.22	1,099.98	0.95 N	2.44 E	1.11	0.13
1200.00	0.47	260.37	1,199.98	0.80 N	1.66 E	0.91	0.04
1300.00	0.60	194.15	1,299.97	0.22 N	1.12 E	0.30	0.59
1400.00	0.57	209.61	1,399.97	0.72 S	0.75 E	-0.67	0.16
1500.00	1.09	203.06	1,499.96	2.03 S	0.13 E	-2.01	0.53
1600.00	1.07	193.58	1,599.94	3.81 S	0.46 W	-3.83	0.18
1700.00	0.62	226.92	1,699.93	5.09 S	1.07 W	-5.15	0.65
1800.00	0.32	278.81	1,799.93	5.41 S	1.75 W	-5.52	0.49
1900.00	0.51	222.83	1,899.92	5.70 S	2.32 W	-5.84	0.42
2000.00	0.50	194.50	1,999.92	6.44 S	2.74 W	-6.61	0.25
2100.00	0.14	215.36	2,099.92	6.97 S	2.92 W	-7.15	0.37
2200.00	0.27	344.54	2,199.92	6.84 S	3.05 W	-7.03	0.37
2300.00	0.31	15.75	2,299.92	6.35 S	3.04 W	-6.54	0.16
2400.00	1.98	116.96	2,399.90	6.87 S	1.42 W	-6.96	2.06
2500.00	2.43	124.82	2,499.82	8.87 S	1.86 E	-8.72	0.54
2600.00	2.54	119.93	2,599.73	11.18 S	5.52 E	-10.79	0.24
2700.00	2.47	126.15	2,699.63	13.56 S	9.18 E	-12.91	0.28
2800.00	2.39	123.80	2,799.54	15.99 S	12.65 E	-15.10	0.13
2900.00	2.13	123.44	2,899.47	18.18 S	15.93 E	-17.06	0.26
3000.00	1.57	135.58	2,999.41	20.18 S	18.44 E	-18.89	0.68
3100.00	0.47	138.41	3,099.40	21.46 S	19.67 E	-20.09	1.10
3200.00	0.58	159.84	3,199.39	22.25 S	20.12 E	-20.84	0.22
3300.00	0.56	145.10	3,299.39	23.12 S	20.57 E	-21.68	0.15
3400.00	0.36	170.85	3,399.39	23.83 S	20.90 E	-22.37	0.28
3500.00	0.83	121.44	3,499.38	24.52 S	21.57 E	-23.01	0.66
3600.00	0.29	127.74	3,599.37	25.05 S	22.39 E	-23.49	0.54
3700.00	0.29	143.98	3,699.37	25.41 S	22.74 E	-23.82	0.08
3800.00	0.73	104.31	3,799.37	25.78 S	23.50 E	-24.13	0.54
3900.00	0.10	110.51	3,899.37	25.96 S	24.20 E	-24.27	0.63
4000.00	0.21	344.57	3,999.37	25.82 S	24.24 E	-24.12	0.28
4100.00	0.16	345.29	4,099.37	25.51 S	24.15 E	-23.82	0.05

DIRECTIONAL SURVEY DATA

Measured Depth (ft)	Inclination (deg)	Direction (deg)	Vertical Depth (ft)	Latitude (ft)	Departure (ft)	Vertical Section (ft)	Dogleg (°/100)
4200.00	0.26	1.18	4,199.36	25.14 S	24.12 E	-23.46	0.11
4300.00	0.09	39.12	4,299.36	24.86 S	24.18 E	-23.17	0.20
4400.00	0.45	30.50	4,399.36	24.46 S	24.42 E	-22.75	0.36
4500.00	0.30	39.28	4,499.36	23.92 S	24.79 E	-22.19	0.16
4600.00	0.41	58.74	4,599.36	23.53 S	25.26 E	-21.77	0.16
4700.00	0.29	43.21	4,699.36	23.16 S	25.74 E	-21.37	0.15
4800.00	0.30	31.20	4,799.36	22.75 S	26.05 E	-20.94	0.06
4900.00	0.38	40.60	4,899.35	22.27 S	26.40 E	-20.44	0.10
5000.00	0.51	68.79	4,999.35	21.86 S	27.03 E	-19.99	0.25
5100.00	0.15	67.33	5,099.35	21.65 S	27.57 E	-19.74	0.36
5200.00	0.58	62.18	5,199.35	21.36 S	28.14 E	-19.41	0.43
5300.00	0.43	97.08	5,299.34	21.17 S	28.96 E	-19.17	0.33
5400.00	0.31	60.37	5,399.34	21.08 S	29.56 E	-19.04	0.26
5500.00	0.54	160.86	5,499.34	21.40 S	29.95 E	-19.33	0.67
5600.00	0.18	260.06	5,599.34	21.87 S	29.95 E	-19.80	0.60
5700.00	0.09	109.98	5,699.34	21.92 S	29.87 E	-19.86	0.26
5800.00	0.56	157.71	5,799.34	22.40 S	30.13 E	-20.32	0.50
5900.00	0.55	181.09	5,899.33	23.33 S	30.31 E	-21.23	0.23
5966.00	0.37	194.53	5,965.33	23.86 S	30.25 E	-21.76	0.32
6022.00	0.82	342.89	6,021.33	23.65 S	30.08 E	-21.56	2.05
6053.00	2.63	346.84	6,052.31	22.74 S	29.86 E	-20.68	5.86
6084.00	5.30	342.16	6,083.24	20.69 S	29.26 E	-18.66	8.67
6115.00	7.73	342.23	6,114.03	17.34 S	28.18 E	-15.40	7.81
6147.00	10.06	343.57	6,145.65	12.61 S	26.73 E	-10.77	7.32
6179.00	12.92	345.01	6,177.00	6.47 S	25.02 E	-4.76	8.99
6210.00	15.81	348.36	6,207.03	1.02 N	23.27 E	2.59	9.69
6241.00	17.72	351.92	6,236.71	9.83 N	21.75 E	11.27	6.99
6272.00	20.17	356.51	6,266.03	19.84 N	20.76 E	21.19	9.24
6304.00	22.65	359.04	6,295.82	31.51 N	20.32 E	32.81	8.26
6335.00	24.76	1.17	6,324.20	43.97 N	20.36 E	45.24	7.36
6366.00	27.26	2.01	6,352.06	57.55 N	20.74 E	58.82	8.15
6398.00	30.26	3.51	6,380.11	72.93 N	21.49 E	74.21	9.63
6430.00	33.01	3.82	6,407.35	89.68 N	22.56 E	90.99	8.62
6461.00	35.23	2.48	6,433.02	107.04 N	23.51 E	108.38	7.57
6493.00	37.18	1.91	6,458.84	125.92 N	24.23 E	127.27	6.17
6524.00	39.97	2.55	6,483.07	145.24 N	24.99 E	146.59	9.08
6555.00	42.61	2.51	6,506.36	165.67 N	25.89 E	167.04	8.52
6587.00	45.05	3.58	6,529.45	187.80 N	27.07 E	189.19	7.99
6619.00	47.50	3.87	6,551.56	210.87 N	28.57 E	212.32	7.66
6651.00	49.16	4.12	6,572.84	234.71 N	30.24 E	236.22	5.22
6681.00	49.75	3.49	6,592.34	257.46 N	31.75 E	259.01	2.54
6712.00	50.26	2.85	6,612.27	281.17 N	33.07 E	282.76	2.29
6744.00	50.72	3.36	6,632.63	305.82 N	34.41 E	307.45	1.87
6775.00	51.35	4.45	6,652.12	329.87 N	36.05 E	331.55	3.41
6807.00	51.66	5.17	6,672.04	354.82 N	38.15 E	356.59	2.02

DIRECTIONAL SURVEY DATA

Measured Depth (ft)	Inclination (deg)	Direction (deg)	Vertical Depth (ft)	Latitude (ft)	Departure (ft)	Vertical Section (ft)	Dogleg (°/100')
6839.00	51.88	5.55	6,691.84	379.85 N	40.50 E	381.72	1.15
6870.00	53.51	6.30	6,710.63	404.38 N	43.05 E	406.36	5.63
6901.00	55.50	7.26	6,728.63	429.44 N	46.03 E	431.56	6.88
6933.00	58.23	9.28	6,746.12	455.95 N	49.89 E	458.28	10.04
6965.00	61.67	9.25	6,762.14	483.28 N	54.35 E	485.85	10.75
6996.00	64.63	8.45	6,776.14	510.61 N	58.60 E	513.40	9.83
7028.00	67.68	8.00	6,789.07	539.57 N	62.79 E	542.58	9.63
7059.00	70.13	6.76	6,800.23	568.25 N	66.50 E	571.45	8.72
7090.00	72.39	6.15	6,810.19	597.42 N	69.80 E	600.77	7.52
7184.00	77.12	4.63	6,834.90	687.69 N	78.30 E	691.40	5.27
7214.00	77.62	5.01	6,841.46	716.86 N	80.76 E	720.67	2.07
7278.00	82.15	4.59	6,852.69	779.63 N	86.03 E	783.65	7.11
7310.00	85.35	4.28	6,856.18	811.34 N	88.49 E	815.46	10.05
7405.00	92.19	2.94	6,858.21	906.07 N	94.47 E	910.38	7.34
7500.00	91.32	2.96	6,855.30	1,000.90 N	99.35 E	1005.32	0.92
7595.00	93.48	3.11	6,851.32	1,095.67 N	104.38 E	1100.22	2.28
7691.00	93.21	2.82	6,845.72	1,191.38 N	109.33 E	1196.04	0.41
7787.00	90.15	2.78	6,842.91	1,287.21 N	114.02 E	1291.98	3.18
7882.00	91.23	4.27	6,841.76	1,382.02 N	119.86 E	1386.96	1.93
7977.00	88.46	2.96	6,842.02	1,476.82 N	125.84 E	1481.95	3.23
8073.00	89.51	4.71	6,843.72	1,572.59 N	132.27 E	1577.93	2.13
8168.00	91.17	4.14	6,843.16	1,667.30 N	139.60 E	1672.92	1.85
8264.00	89.91	2.18	6,842.26	1,763.14 N	144.90 E	1768.90	2.43
8360.00	91.51	2.99	6,841.07	1,859.03 N	149.23 E	1864.87	1.87
8455.00	90.83	2.50	6,839.13	1,953.90 N	153.77 E	1959.83	0.88
8550.00	93.66	3.96	6,835.40	2,048.67 N	159.11 E	2054.74	3.35
8647.00	91.20	3.50	6,831.29	2,145.37 N	165.42 E	2151.64	2.58
8742.00	88.61	2.85	6,831.44	2,240.21 N	170.68 E	2246.63	2.80
8837.00	88.61	3.86	6,833.74	2,335.02 N	176.24 E	2341.59	1.07
8932.00	88.61	5.74	6,836.04	2,429.66 N	184.19 E	2436.55	1.97
9027.00	91.60	7.81	6,835.86	2,523.98 N	195.39 E	2531.41	3.83
9123.00	88.09	6.64	6,836.12	2,619.20 N	207.47 E	2627.23	3.85
9218.00	88.49	5.60	6,838.95	2,713.61 N	217.59 E	2722.11	1.18
9313.00	91.23	6.46	6,839.18	2,808.08 N	227.57 E	2817.03	3.02
9408.00	89.97	1.52	6,838.18	2,902.81 N	234.18 E	2912.00	5.36
9503.00	90.15	359.48	6,838.08	2,997.80 N	235.01 E	3006.83	2.16
9598.00	89.72	0.45	6,838.19	3,092.80 N	234.95 E	3101.61	1.12
9694.00	90.28	1.00	6,838.19	3,188.79 N	236.17 E	3197.46	0.82
9789.00	90.15	1.04	6,837.83	3,283.78 N	237.86 E	3292.34	0.14
9884.00	91.32	4.48	6,836.60	3,378.64 N	242.43 E	3387.30	3.82
9979.00	92.26	4.86	6,833.64	3,473.28 N	250.16 E	3482.24	1.06
10075.00	92.25	5.39	6,829.87	3,568.82 N	258.73 E	3578.15	0.55
10170.00	89.39	4.06	6,828.51	3,663.48 N	266.56 E	3673.11	3.33
10265.00	89.17	4.66	6,829.71	3,758.19 N	273.78 E	3768.10	0.68
10359.00	88.49	5.10	6,831.63	3,851.83 N	281.78 E	3862.07	0.86

DIRECTIONAL SURVEY DATA

Measured Depth (ft)	Inclination (deg)	Direction (deg)	Vertical Depth (ft)	Latitude (ft)	Departure (ft)	Vertical Section (ft)	Dogleg (%/100)
10454.00	88.49	3.52	6,834.14	3,946.53 N	288.92 E	3957.03	1.67
10549.00	89.41	4.43	6,835.87	4,041.28 N	295.50 E	4052.01	1.37
10644.00	90.89	2.78	6,835.62	4,136.09 N	301.48 E	4147.00	2.33
10740.00	90.31	1.43	6,834.61	4,232.01 N	305.01 E	4242.95	1.53
10836.00	89.82	0.55	6,834.51	4,328.00 N	306.66 E	4338.83	1.05
10931.00	91.20	2.31	6,833.67	4,422.96 N	309.04 E	4433.73	2.36
11026.00	93.69	2.93	6,829.61	4,517.76 N	313.38 E	4528.61	2.70
11121.00	93.12	3.06	6,823.97	4,612.47 N	318.33 E	4623.43	0.62
11216.00	90.03	2.09	6,821.36	4,707.32 N	322.60 E	4718.36	3.41
11312.00	90.06	4.85	6,821.28	4,803.14 N	328.40 E	4814.35	2.87
11407.00	89.54	5.64	6,821.62	4,897.74 N	337.08 E	4909.32	1.00
11502.00	88.92	5.13	6,822.89	4,992.31 N	346.00 E	5004.28	0.84
11597.00	90.86	6.59	6,823.06	5,086.81 N	355.70 E	5099.21	2.56
11693.00	88.98	5.80	6,823.20	5,182.24 N	366.07 E	5195.13	2.13
11809.00	90.31	8.03	6,823.92	5,297.38 N	380.04 E	5310.95	2.24
11903.00	91.29	7.64	6,822.60	5,390.49 N	392.85 E	5404.72	1.13
11998.00	88.40	5.71	6,822.86	5,484.84 N	403.89 E	5499.59	3.66
12093.00	88.06	3.89	6,825.79	5,579.45 N	411.83 E	5594.53	1.94
12188.00	89.04	2.54	6,828.19	5,674.27 N	417.16 E	5689.49	1.75
12283.00	89.32	2.17	6,829.54	5,769.18 N	421.07 E	5784.44	0.49
12378.00	91.11	3.31	6,829.18	5,864.07 N	425.61 E	5879.42	2.23
12472.00	87.79	1.25	6,830.09	5,957.97 N	429.34 E	5973.36	4.16
12567.00	89.51	1.33	6,832.33	6,052.91 N	431.48 E	6068.23	1.81
12662.00	89.51	1.82	6,833.15	6,147.88 N	434.09 E	6163.15	0.52
12757.00	89.94	1.65	6,833.61	6,242.83 N	436.97 E	6258.09	0.49
12852.00	90.43	1.64	6,833.30	6,337.79 N	439.70 E	6353.02	0.52
12947.00	88.77	0.26	6,833.97	6,432.77 N	441.28 E	6447.88	2.28
13045.00	88.92	0.64	6,835.94	6,530.75 N	442.05 E	6545.69	0.42
13140.00	91.17	3.87	6,835.87	6,625.65 N	445.79 E	6640.63	4.14
13235.00	92.10	5.18	6,833.16	6,720.32 N	453.28 E	6735.59	1.69
13330.00	91.97	4.33	6,829.79	6,814.93 N	461.15 E	6830.51	0.91
13425.00	88.52	3.17	6,829.38	6,909.71 N	467.36 E	6925.50	3.84
13521.00	91.02	5.01	6,829.77	7,005.45 N	474.20 E	7021.48	3.23
13616.00	89.11	4.11	6,829.66	7,100.15 N	481.76 E	7116.47	2.23
13711.00	90.06	5.77	6,830.35	7,194.79 N	489.93 E	7211.45	2.02
13806.00	89.91	2.64	6,830.38	7,289.52 N	496.89 E	7306.43	3.29
13901.00	94.13	5.76	6,827.03	7,384.17 N	503.84 E	7401.34	5.52
13997.00	94.01	5.37	6,820.22	7,479.48 N	513.12 E	7497.06	0.42
14092.00	94.47	4.72	6,813.20	7,573.85 N	521.46 E	7591.78	0.84
14187.00	88.64	3.71	6,810.61	7,668.52 N	528.44 E	7686.70	6.23
14281.00	89.32	4.53	6,812.28	7,762.26 N	535.20 E	7780.68	1.13
14377.00	93.45	8.10	6,809.96	7,857.61 N	545.75 E	7876.53	5.68
14468.00	88.31	5.65	6,808.57	7,947.91 N	556.63 E	7967.35	6.25
14523.00	88.31	5.65	6,810.19	8,002.62 N	562.04 E	8022.30	0.00

DIRECTIONAL SURVEY DATA NOTES

- Calculation based on minimum curvature method.
- Survey coordinates relative to well system reference point.
- TVD values given relative to drilling measurement point.
- Vertical section relative to well head.
- Vertical section is computed along a direction of 3.87 degrees (Grid)
- A total correction of 7.34 deg from Magnetic north to Grid north has been applied
- Horizontal displacement is relative to the well head.
- Horizontal displacement (closure) at 14,523.00 feet is 8,022.33 feet along 4.02 degrees (Grid)

SURVEYS CALCULATED USING SHORT COLLAR METHOD.

WELL ASSUMED VERTICAL AT WELLHEAD.

SURVEYS FROM 100'MD TO 5966'MD PROVIDED BY VAUGHN ENERGY SERVICES.

SURVEYS FROM 6022'MD TO 14468'MD PROVIDED BY SPERRY DRILLING.

SURVEY AT 14468' MD IS PROJECTED TO TD AT 14523' MD.

SPERRY DRILLING ENGINEERS: S. SPEER, P. WASHER

WARRANTY

HALLIBURTON ENERGY SERVICES, INC. WILL USE ITS BEST EFFORTS TO FURNISH CUSTOMERS WITH ACCURATE INFORMATION AND INTERPRETATIONS THAT ARE PART OF, AND INCIDENT TO, THE SERVICES PROVIDED. HOWEVER, HALLIBURTON ENERGY SERVICES, INC. CANNOT AND DOES NOT WARRANT THE ACCURACY OR CORRECTNESS OF SUCH INFORMATION AND INTERPRETATIONS. UNDER NO CIRCUMSTANCES SHOULD ANY SUCH INFORMATION OR INTERPRETATION BE RELIED UPON AS THE SOLE BASIS FOR ANY DRILLING, COMPLETION, PRODUCTION, OR FINANCIAL DECISION OR ANY PROCEDURE INVOLVING ANY RISK TO THE SAFETY OF ANY DRILLING VENTURE, DRILLING RIG OR ITS CREW OR ANY THIRD PARTY. THE CUSTOMER HAS FULL RESPONSIBILITY FOR ALL DRILLING, COMPLETION, AND PRODUCTION OPERATION. HALLIBURTON ENERGY SERVICES, INC. MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WITH RESPECT TO THE SERVICES RENDERED. IN NO EVENT WILL HALLIBURTON ENERGY SERVICES, INC. SERVICES BE LIABLE FOR FAILURE TO OBTAIN ANY PARTICULAR RESULTS OR FOR ANY DAMAGES, INCLUDING, BUT NOT LIMITED TO, INDIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES, RESULTING FROM THE USE OF ANY INFORMATION OR INTERPRETATION PROVIDED BY HALLIBURTON ENERGY SERVICES, INC.

HALLIBURTON

Sperry Drilling

Halliburton/Sperry Drilling
3950 Interwood S. Pkwy
Houston, Texas 77032
Phone 281.986.4400
Fax 281.986.4498