Form 3160-5 (August 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR

BUREAU OF LAND MANAGEMENT

	FORM APPROVED
	OMB No. 1004-0131
	Expires: July 31, 201
Lease Serial No.	

	Expires:	July	31,	20	10
5. Lease Serial No.	M-	06	2	6	7

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals

Do not use this	form for proposals to drill o Use Form 3160-3 (APD) for	r to re-enter an	6. If Indian, Allottee o	r Tribe Name	
	IT IN TRIPLICATE - Other instruction		7. If Unit of CA/Agree	ment, Name and Or No.	=
1. Type of Well				1 apleton	
☑ Oil Well ☐ Gas V	Well Other		8. Well Name and No.	NI 10	
2. Name of Operator Shackelford Oil Company	okelford of Cos		9. API Well No. 3001 504	638000	_
3a. Address 203 W. Weel Specific Sec. T., 4. Location of Well (Footage, Sec., T.,	200 MULANTY 7920 432	No. (include area code) -682-9784	10. Field and Pool or E	Seven Rivers	
990 FSL	660 FEL Ser 2	5 195-30E	- Eddy	Co.	·
12. CHEC	CK THE APPROPRIATE BOX(ES) TO	INDICATE NATURE OF I	OTICE, REPORT OR OTHE	ER DATA	
TYPE OF SUBMISSION		TYPE OF	ACTION		
Notice of Intent		Peepen	Production (Start/Resume) Reclamation	☐ Water Shut-Off ☐ Well Integrity	,
Subsequent Report	1 = /	New Construction	Recomplete	Other	_
Final Abandonment Notice	. — . —		Temporarily Abandon Water Disposal		
testing has been completed. Final determined that the site is ready for 1st Plug @ 213 2nd Plug @ 18 3rd Plug @ 60 4th Plug Pert	red operations. If the operation results in Abandonment Notices must be filed only final inspection.) 35 to 1900 w/ 1 60 to 1660 w/ 144 to 498 w/ 60 to 60 th Circular	after all requirements, incl 20 sx cement 25 sx cement 25 sx cemen te to Surface	- Tag	completed and the operator has	inhy.
Cleur + res	eed location	4-1-15			ed for record MOCD
4. I hereby certify that the foregoing is to Name (Primed/Typed)	de and correct.	Title 8000	ations		77
Signature Ug//	/	Date 3-//-	15		_
	THIS SPACE FOR FED	ERAL OR STATE	OFFICE USE		_
Approved by	1. Oms	Title SA	ET Da	3.27-15	
nat the applicant holds legal or equitable tit title the applicant to conduct operations th	Approval of this notice does not warrant of the to those rights in the subject lease which hereon;	r certify would Office	20.		-
	J.S.C. Section 1212, make it a crime for any entations as to any matter within its jurisdic		lly to make to any department of	r agency of the United States any fals	e,
Instructions on page 2)					AARIL

NM OIL CONSERVATION


ARTESIA DISTRICT

RECLAMATION PROCEDURE ATTACHED

APR 06 2015

RECEIVED

SEE ATTACHED FOR CONDITIONS OF APPROVAL

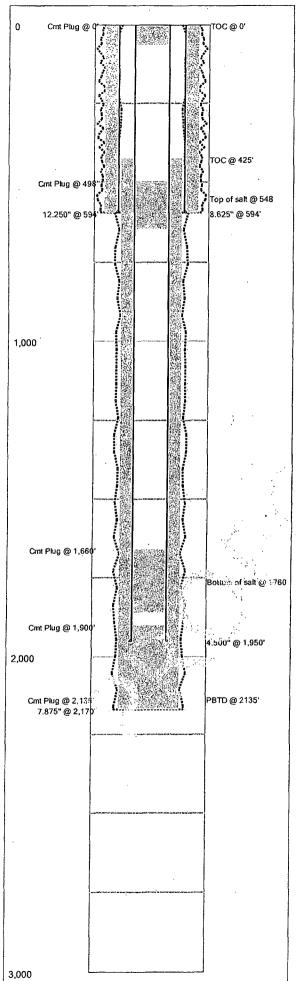

Last Updated: 3/11/2015 09:42 AM

Field Name	,	٠.		L	ease	Name				Well No.	
Hackberry S	ev.	en River	S	L	ebow					10	
County				State	-				API N	lo.	
Eddy				New	Mexic	0			3001	5046380000	
Version		Version	Tag								
	2	Propos	ed								
GL (ft)	KΒ	(ft)	Sec	tion	Tow	nship	Block		Rang	je/Survey	
			25		198				30E		
Operator				Well	Stati	ıs	Latit	ude		Longitude	
Shackelford	Oil	Compa	ıy	<u> </u>			1				
Dist. N/S (f	t)	N/S Line	, D	ist. E	/W (fi	t) E/V	Lìne	Fo	otage	From	
.99	90	FSL	_		66	0 FEL		+	-		
Prop Num				· · · · ·		Spud	Date		Comp. Date		
									1		
Additional I	nfc	rmation	1								
										······································	
Other 1		Oth	er 2	A 444	;	Other	3		Oti	ner 4	
									1		
Prepared By. Update					Ву		T	ast l	t Updated		
Prepared B		Shackelford Shack						3/11/2015 9:42 AM			

Date	O.D. (in)	Top / ((MD ft)	Bottam (MD it)	Comments
	12.250	ing o	59⊈	
	7.875	.0	2,170	

Tubular Summar

Date	Description	C.D.	Wt	Grade		Bottom
	ev.	(iñ)	(lb/ft)		(MD ft)	(MD ft)
·	Surface Casing	8.625	24.00		0	594
7,	Producting Casing	4:500	9.50	J-55	Ō	1,950

Casing Cement Summar


C	Date	Sx		Top (MD ft)	Bottom (MD ft)	Comments
13		400	8.625	0	594	Circulated to Surface
E		.:∜550	4:500	425	: 1,950	Circulated to 425'

Cemer!! Plug Summary

Date	No.	O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
	80	7.875	1,900	2,135	
	10	7.875	2,135	2,170	
	7	4.500	0	63	
···	25	4.500	498	644	
	25	4:500	1,660	1,860	······································

					me	- 75		Well No.	Count	ý <u>.</u>	Stat	9	API No.		
Hackberry	Seven F	Rivers	Le	bow.				10	Eddy		New Mexico		30015	0463800	000
Version	Ver	sion Tag				· · · · · · · · · · · · · · · · · · ·			. 1	Spud D	ate ·	Comp. Date	GL (ft))	KB (ft)
	2 Pro	posed		-											
Section	Towns	ship/Block	k	Rai	nge/Surv	<u>:</u> ∋y		Dist. N/S (ft)	N/S Line	Dist. E/\	N (ft)	E/W Line Fo	ootage l	From	
25	198			30E				990	FSL	 	660	FEL			
Operator ·						Well Status Lati						Longitude		Prop N	lum
Shackelfor	rd Oil Co	mpany				1				··					
Other 1				Other	2	· ·		Other:	3			Other 4			
				,											
Last Upda	ated			Pre	pared By					Update	d By	• • • • • • • • • • • • • • • • • • • •			
03/11/2015	5 9:42 AN	Й.		Sha	ckelford					Shacke	lford				
Additional	Informa	ation								·	•				
								***			_				
Hole Sumr	mary							•		<u> </u>					
Date	O.D. (i	n) Top (MD f			Comments										
	12,2	50	0	594			·								
	7.8	75	0 . 2	,170											
Tubular Su	ummary									· · · · · · · · · · · · · · · · · · ·	_				
Date	T	· · · · · · · · · · · · · · · · · · ·							•						
	1	Descripti	on		O.D. (in)		Grade	Тор	Bottom	T	·	Comn	nents		
	1		on	No. Jts	ľ	(lb/ft)		Top (MD ft)	(MD.ft)	V		Comn	nents		
	Surface	Casing			8.62	(lb/ft) 24.00		(MD ft)	(MD ft)	34	· · · · · · · · · · · · · · · · · · ·	Comn	nents		
Zaalna Car	Surface	Casing			ľ	(lb/ft) 24.00			(MD.ft)	50 .	· · · · · · · · · · · · · · · · · · ·	Comn	nents		
	Surface Product	Casing tion Casing	g	Jts	8.625 4.500	(lb/ft) 5 24.00 9.50	J-55	(MD ft) 0	(MD ft) 59 1,99	50		1 m.			
	Surface Product	Casing tion Casing Immary	g Vol.	Jts Cs	8.625 4.500	(lb/ft) 5 24.00 9.50	J-55 Bottom	(MD ft) 0	(MD ft)	50		1 m.	nen ts omment	ts	
C Date	Surface Product ement Su	Casing tion Casin immary Yield (ft3/sk)	g Vol. (ft3)	Jts Cs O.D.	8.625 4.500	(lb/ft) 5 24.00 9.50	J-55	(MD ft) 0 0	(MD ft) 59 1,99 scription	50	i i	1 m.		ls.	
C Date	Surface Product ement Su No Sx	Casing tion Casing mmary Yield (ft3/sk)	g Vol. (ft3) 0 400	Jts Cs O.D.	8.625 4.500 g. (in) ((lb/ft) 5 24.00 9.50 Top MD ft)	J-55 Bottom (MD ft)	(MD ft)	(MD ft) 59 1,99	50		Co		15	
C Date	Surface Product Product No Sx 40	Casing tion Casing immary Yield (ft3/sk) 00 1.0	g Vol. (ft3) 0 400	Jts Cs O.D.	8.625 4.500 9. (in) (8.625	(lb/ft) 5 24.00 9.50 Top MD ft)	J-55 Bottom (MD ft)	(MD ft)	(MD.ft) 59 1,95 scription	50	Circulat	Cc ুীlo Surface		is .	
C Date	Surface Product Product Product No. 34	Casing tion Casing tion Casing Immary Yield (ft3/sk) 00 1.0 mary O.D.	g Vol. (ft3) 0 400 0 350	Uts Cs O.D.	8.625 4.500 (in) (8.625 4.500	(lb/ft) 5 24.00 9.50 Top MD ft)	J-55 Bottom (MD ft)	(MD ft)	(MD.ft) 59 1,95 scription	Company	irculal الم	Cc ুীlo Surface		IS.	
C Date	Surface Product Product Product No. Sx No. Sx	Casing tion Casing mmary Yield (ft3/sk) 00 1.0 50 1.0 mary O.D (in)	g Vol. (ft3) 0 400 0 350 Top (MD ft)	Uts Cs O.D.	8.625 4.500 (in) (8.625 4.500	(lb/ft) 5 24.00 9.50 Top MD ft)	J-55 Bottom (MD ft)	(MD ft)	(MD.ft) 59 1;99 scription	Comment	irculal الم	Cc ুীlo Surface		ts.	
C Date	Surface Product Product Product Product No Sx 40 39 40 No. Sx 80	Casing tion Casing Immary Yield (ft3/sk) 00 1.0 50 1.0 mary O.D. (in) 7.875	g Vol. (ft3) 0 400 0 350 Top (MD ft) 1,900	O.D. Botton (MD f	8.625 4.500 (in) (8.625 4.500	(lb/ft) 5 24.00 9.50 Top MD ft)	J-55 Bottom (MD ft)	(MD ft) 0 0 0	(MD ft) 58 1,98 scription	Comment	irculal الم	Cc ুীlo Surface		is.	
C Date	Surface Product Product Product No. Sx No. Sx	Casing tion Casing mmary Yield (ft3/sk) 00 1.0 50 1.0 mary O.D. (in) 7.875 7.875	g Vol. (ft3) 0 400 0 350 Top (MD ft)	O.D. Botton (MD f	8.625 4.500 (in) (8.625 4.500	(lb/ft) 5 24.00 9.50 Top MD ft)	J-55 Bottom (MD ft)	(MD ft)	(MD ft) 59 1;99 scription	Compens	irculal الم	Cc ুীlo Surface		DS .	
C Date	Surface Product Months Surface Product Surface Product Surface No. Sx No. Sx 80 10 7	Casing tion Casing mmary . Yield (ft3/sk) 00 1.0 ft0 mary O.D. (in) 7.875 7.875 4.500	g Vol. (ft3) 0 400 0 350 Top (MD ft) 1,900 2,135 0	Os O.D. Botton (MD f	8.625 4.500 (in) (8.625 4.500	(lb/ft) 5 24.00 9.50 Top MD ft)	J-55 Bottom (MD ft)	(MD ft)	(MD ft) 59 1;99 scription	Commend	irculal الم	Cc ুীlo Surface		is.	
Cement Pl	Surface Product Product Product Product No Sx 40 39 40 No. Sx 80	Casing tion Casing mmary Yield (ft3/sk) 00 1.0 50 1.0 mary O.D. (in) 7.875 7.875	g Vol. (ft3) 0 400 0 350 Top (MD ft) 1,900	Osto (MD f	8.625 4.500 (in) (8.625 4.500	(lb/ft) 5 24.00 9.50 Top MD ft)	J-55 Bottom (MD ft)	(MD ft) 0 0 0	(MD.ft) 55 1,95 scription	Commend	irculal الم	Cc ুীlo Surface		is	

www.WellShadow.com Page 2 of 2

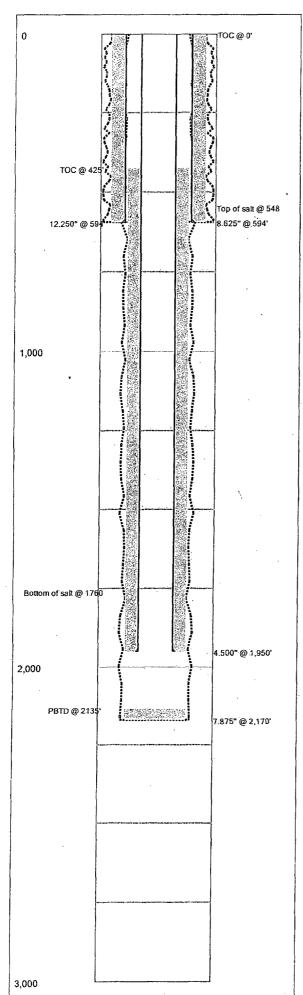

Last Updated: 3/10/2015 01:52 PM

Field Nar	ne				L	ease	Na	me					Well No.	
Hackbern	y Sev	en R	ivers		L	ebow						_	10	
County					State	tate AF						N	о.	
Eddy	Eddy Ne						0				300	15	046380000	
Version Version Tag							•	_				_		
	1	-	_											
GL (ft)	K	3 (ft)		Seç	tion	Tow	nsl	hip/	Block		Ran	ıġ	e/Survey	
				25		198					30E		***************************************	
Operator					Well	Stati	us		Latit	ude		Ī	Longitude	
Shackelfo	rd O	l Cor	npan	у								7		
Dist. N/S	(ft)	N/S	Line	D	ist. E.	E/W (ft) E/W Line Foo			ootag	e l	From			
	990	FSL		.	· ·	660 FEL					-:			
Prop Nun	n						Sp	ud	Date	Comp. Date			np. Date	
							-							
Additiona	il Inf	orma	tion		-									
							_							
Other 1			Othe	er 2			Ot	her	3		0	th	er 4	
											$\neg \vdash$	_		
Prepared	Ву			Upo	ated	Ву	Ь		L	ast	Upda	Updated		
Shackelford Shacke					ckelfo	lford				3	3/10/2015 1:52 PM			
Hole Sum	mar	<i>i</i>										•		

Date	O.D. (in)	Top (MD ft)	Bottom (MD`ft)	Comments
	12.250	0	5,94	
	7.875	.0	2,170	

Tubular Summary

İ	Date	Description	O.D. (in)	Wt (lb/ft)	Grade	Top (MD ft)	Bottom (MD ft)	
-		Surface Casing	8.625	24.00		0	594	
i		Production Casing	4.500	9.50	J~55	0	1,950	

Casing Cement Summary

C	Date	No. Sx	Csg. O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments			
100		400	8:625	0	594	Circulated to Surface			
137		350	4.500	425	1,950	Circulated to 425'			

Cement Plug Summary

Date	No.	O.D. (in)	Top (MD ft)	Bottom (MD ft)	Comments
	10	7.875	2,135	2,170	

Last Updated: 3/10/2015 01:52 PM

Field Name	é	Lea	se Na	me			Well N	lo.	Coun	ty	- T	State		API	No.		
Hackberry Seven Rivers Lebo			ow				10 Eddy			1		Mexico	3001	30015046380000			
Version Version Tag									_	Spud Date		Comp. Date	GL (GL (ft) KB (ft)			
	1										-			+		+	
Section	Township/Block		Ran	ge/Surv	ey	T.	Dist. N	V/S (ft)	N/S Lir	ie .	Dist. E/W	(ft)	E/W Line	Footage	From	ــــــــــــ	
25	19S		30E				990 FSL		660		FEL						
Operator	 -			Well Status			Lati		atit	itude		Longitude		Prop Num			
hackelford	d Oil Company				· · · · · ·										1		
Other 1	-		Other	ther 2				Other 3			Other 4						
.ast Updat	ted		Pre	pared By	,						Updated	Ву					
03/10/2015	1:52 PM		Sha	ckelford	rd -				Shackelfo	rd							
Additional	Information										_1						
Tubular Su	12.250 7.875	0 .	594 170			· · · · · · · · · · · · · · · · · · ·											
Date	Description	on	No. Jts	O.D. (in) Wt (lb/ft)	Grade		op D ft)	Botton (MD ft)				Con	nments			
	Surface Casing			8.62	5 24.00		1	0		94							
	Production Casing)		4.50	9:50	J-55		· 0	1,9	950							
Casing Cen	nent Summary						,				*						
Sx (ft3/sk) (ft3) O.D. (in) (MD ft) (MD				Bottom (MD ft)	Description			Comments									
(E)	400 1.00	1		8.625 0 594			J.,			Cir	Circulated to Surface						
	350 1.00	350		4.500	425	1,950					Circ	culati	ed to 425'				
ement Plu	ug Summary																
Date	No. O.D. Sx: (in)		Bottor (MD ft)						С	omments						
	1 101 / 8751	2 1 3 5	.21	/ (N													

• "	<u>`</u> .	Operator Shackerore U. G
1-1/	1111-111	Well Home /NO. Lekow Fed 10
Hole Size 121/4		E API 30015 04638:
	Pech	, 990 NO 660 (DW) SEC. 25
	C'CK	T 19 S R 30 E ENY CTY
400 SXS Cement	Suc	f.
		K-111-P
Toc At		Secretary Potash X
29 th		Case/Karst
85/8' Casing Set at 594	UNIE	LPC Habitat
- 7/ 1	1/2(3)	Top Salt 548
Hole Size 778"		Top Salt 548
		Base Sait 1760
		,
350 SXS Cement		FORMATIONS
TOS A+ 425 (TS)		Yates 1935
		7-Rivers 2146
		2000-2000 see the first of the see the second of the secon
		Profiles and Charles are record and the part of participation of the Charles and the Charles a
		TEXT TO THE PART OF THE TOTAL O
		Nagarity (19 to 1995) processor (1998) to a processor of the control of the contr
		Social pure where the social control of the social social control of the social
		State (1) (2) (2) (3) (4) (1) (1) (1) (1) (1) (1) (1) (1) (1) (1
		Egypty April - Allindrich seried section (All vives 152 date 364 - All 2011) Verland 164 and 2014 Allindrich 164 and 2014 Alli
		DVT
		Y english composition of the first and the condition and the condition of
		PERFORATIONS
	4710	1860-1600 WOC Tag
		And an invalid required a construction and particles are seen a realized and a second and a seco
	111	Adaptive COLD STATE VARIETY (COLD COLD AND AND AND STATE COLD STATE COLD COLD COLD COLD COLD COLD COLD COLD
		AND TOTAL CONTROL OF THE STREET OF THE STREE
		China and China
1£:		A refer that the CO I The COUNTY AND A second of the COUNTY AND A SECOND ASSESSMENT OF THE COUNTY AND A SECOND ASSESSMENT OF THE COUNTY AND A SECOND ASSESSMENT OF THE COUNTY ASSESSMENT OF THE COUN
1,1 9.5" J-55/R.Z	1/20	2135 - 1900, woc Tag
4/2 Casing Set at 196D	1/1/	
TO AT 2170 PETO 2135		James A. Amos
		575-234-5909
	125	575-361-2648
openhole.	14	2/- 30/ 6040

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

- 6. <u>Dry Hole Marker</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.
- The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).
- 7. <u>Subsequent Plugging Reporting:</u> Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. <u>Show date well was plugged.</u>
- 8. <u>Trash</u>: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation procedure.

J. Amos 3/6/11



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its predisturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any and all contaminants, scrap/trash, equipment, pipelines and powerlines. Strip and remove caliche, contour the location to blend with the surrounding landscape, redistribute the native soils, provide erosion control as needed, rip and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- 1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
- 3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation

equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos Supervisory Petroleum Engineering Tech 575-234-5909, 575-361-2648 (Cell)

Duncan Whitlock Environmental Protection Specialist 575-234-5926

Linda Denniston Environmental Protection Specialist 575-234-5974 Cody Layton Supervisory Multi Resources 575-234-5959

Trishia Bad Bear Natural Resource Specialist 575-393-3612

Jeffery Robertson Natural Resource Specialist 575-234-2230

Solomon Hughes Natural Resource Specialist 575-234-5951