

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

NM OIL CONSERVATION
ARTESIA DISTRICT

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

JUN 11 2015

RECEIVED

SUNDRY NOTICES AND REPORTS ON WELLS
*Do not use this form for proposals to drill or to re-enter and
Abandoned well. Use Form 3160-3 (APD) for such proposals*

SUBMIT IN TRIPLICATE – Other instructions on page 2.

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

APACHE CORPORATION <873>

3. Address

303 VETERANS AIRPARK LN, #3000
MIDLAND, TX 79705

3b. Phone No. (include area Code)

432-818-1000 / 432-818-1168

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

UL C, SEC 19, T17S, R31E, 29S FNL & 1140' FWL

5. Lease Serial No.

NMLC-029395A

6. If Indian, Allottee or Tribe Name

7. If Unit of CA/Agreement, Name and/or No.

8. Well Name and No.

TONY FEDERAL 54 <308738>

9. API Well No.

30-015-42000

10. Field and Pool or Exploratory Area

CEDAR LAKE; GLORIETA-YESO <96831>

11. County or Parish, State

EDDY COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment Notice

☐ Acidize

☐ Alter Casing

☐ Casing Repair

☐ Change Plans

☐ Convert to Injection

☐ Deepen

☐ Fracture Treat

☐ New Construction

☐ Plug and Abandon

☐ Plug Back

☐ Production (Start/Resume)

☐ Reclamation

☐ Recomplete

☐ Temporarily Abandon

☐ Water Disposal

☐ Water Shut-Off

☐ Well Integrity

☒ Other

DRILLING OPS: CASING
& CEMENT REPORT

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directional or recompleting horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attached the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleting in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

Bond No: BLM-CO-1463

4/26/2014 SPUD;

4/26/2014

DRILLED 51' TO 253'; DRILLED 253' TO 327' TD

CIRC; TOH T/ RUN 13.375" CASING; CIRC HOLE CLEAN F/ CSG; NOTIFIED BLM

4/26/2014

SURFACE CSG 13.375, HOLE 17.5, H-40, 48# SET 327'; FC @ 287'; RAN 5 CENTRALIZERS; CIRC

CMT WITH: 200 SX, CLASS C (14.4 WT, 1.62 YLD)

525 SX, CLASS C (14.8 WT, 1.34 YLD);

CIRC 0 CMT TO SURFACE; WOC; WAIT FOR BLM ORDERS; TAG CMT @ 127' W/1";

CMT WITH: 175 SX, CLASS C, (14.8 WT, 1.33 YLD) CIRC 11 SX TO SURFACE

SURFACE CSG PRESSURE TEST: 1200 PSI/30 MIN -OK

REPORT CONTINUED ON PAGE 2.

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)

MICHELLE COOPER

Title DRILLING TECH

Signature

Michelle Cooper

Date 6/02/2014


THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

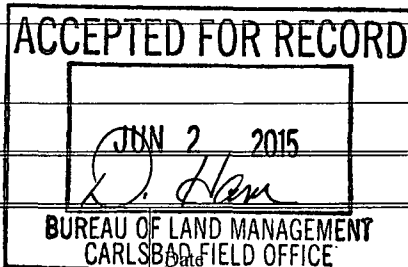

BUREAU OF LAND MANAGEMENT
CARLSBAD FIELD OFFICE

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

TONY FEDERAL 54 - Csg & Cmt End of Well Sundry

4/27/2014 DRILL CEMENT AND SHOE TRACK

4/27/-5/01 DRLG F/327' TO 3508' TD; CIRC TOO H TO RUN 8 5/8 CSG

5/01/2014 NOTIFIED BLM OF CASING JOB AND CEMENT JOB ;

5/06/2014 INTERMEDIATE CSG 8 5/8, HOLE 11, J-55, 32# SET @ 3508' FC @ 3462' 27 CENTRALIZERS; CIRC
CMT: 750 SX CLASS C, 12.9 WT, 1.92 YLD
460 SX CLASS C, 14.8 WT, 1.33 YLD
CIRC 0 SKS TO SURFACE; WOC; CONTACTED TERRY W/ BLM

5/02/2014 TAG W/1" @ 340' W/O BLM ORDERS;
CMT: 150 SX CLASS C, 14.8 WT, 1.33 YLD;
DID NOT CIRC; WOC; TAG W/ 1" @ 338' W/O ORDERS FROM BLM;
CMT: 150 SX CLASS C, 14.8 WT; YLD 1.33;
DID NOT CIRCULATE CEMENT; TAG W/1" @ 330' W/O ORDERS FROM BLM;
CMT: 50 SX CLASS C; 14.8 PPG; YLD @ 1.33;
DID NOT CIRCULATE CEMENT; WOC; TAG W/1" @ 200';
CMT: 100 SX CLASS C; 14.8 PPG; YLD @ 1.33;
CIRC 22 SX TO SURFACE
INTERMEDIATE CSG PRESSURE TEST: 1200 PSI/30 MIN -OK

5/3/2014 TAG CMT @ 3422'; DRILL CMT PLUG, SHOE TRACK AND SHOE TRACK

5/3/- 5/5 DRLG F/ 3508-6410' ; TD CIRC HOLE CLEAN; TOO H F/ LOGS; RU SCHLUMBERGER LOGGERS

5/6/2014 NOTIFIED BLM OF CASING & CMT JOB;

5/6/2014 PRODUCTION CSG 5.5, HOLE 7.875, J55, 17# SET @ 6410' FC @ 6365'; 50 CENTRALIZERS; CIRC
CMT: 410 SX CLASS C, 12.6 WT, 2.0 YLD,
540 SX CLASS C, 14.2 WT, 1.3 YLD,
CIRC 55 SX; PRODUCTION CSG PRESSURE TEST 2500 PSI/ 30 MIN- OK

5/6/2014 RIG RELEASED