Form 3160-5 (August 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

OCD Artesla

FORM APPROVED OMB NO. 1004-0135 Expires: July 31, 2010

. Lease Serial No.

SUNDRY	NMNM0540701 6. If Indian, Allottee or Tribe Name							
Do not use th abandoned we								
SUBMIT IN TRI	7. If Unit or CA/Agreement, Name and/or No.							
Type of Well Oil Well	8. Well Name and No. JESTER 19/30 WOAH FED COM 1H							
Name of Operator MEWBOURNE OIL COMPAN	9. API Well No. 30-015-42830-00-X1							
3a. Address P O BOX 5270 HOBBS, NM 88241)	10. Field and Pool; or Exploratory FOREHAND RANCH						
4. Location of Well (Footage, Sec., T	11. County or Parish, and State							
Sec 19 T23S R27E NENE 189 32.296940 N Lat, 104.222478		EDDY COUNTY, NM						
12. CHECK APPI	ROPRIATE BOX(ES) TO IN	NDICATE NATURE OF	NOTICE, R	EPORT, OR OTHE	R DATA			
TYPE OF SUBMISSION	TYPE OF ACTION							
Motice of Intent	☐ Acidize	Deepen	☐ Production (Start/Resume)		■ Water Shut-Off			
	☐ Alter Casing	☐ Fracture Treat	Reclamation		☐ Well Integrity			
☐ Subsequent Report	Casing Repair	■ New Construction	□ Recomp	olete	Other			
☐ Final Abandonment Notice	Change Plans	Plug and Abandon		arily Abandon	Drilling Operations			
	☐ Convert to Injection	Plug Back	■ Water Disposal					
13. Describe Proposed or Completed Ope If the proposal is to deepen directions Attach the Bond under which the wor following completion of the involved testing has been completed. Final Abdetermined that the site is ready for fi	ally or recomplete horizontally, give k will be performed or provide the operations. If the operation results andonment Notices shall be filed or inal inspection.) ng a variance for the use of a	esubsurface locations and measu Bond No. on file with BLM/BIA in a multiple completion or reco nly after all requirements, includ	ared and true versions. Required su completion in a sling reclamation	ertical depths of all pertin bsequent reports shall be new interval, a Form 316 n, have been completed,	ent markers and zones. filed within 30 days 0-4 shall be filed once			
choke manifold. See attached					JUN 11 2015			
Accep ,~ccep	D 6/17/15 ted for record NMOCD	SEE	ATTA NDITIO	CHED FOR NS OF APP	RECEIVED ROVAL			
14. I hereby certify that the foregoing is	true and correct. Electronic Submission #3037	732 verified by the BLM Wel	I Information	System				

14. I hereby certify that the foregoing is true and correct. Electronic Submission #303732 verified by the BLM Well Information System For MEWBOURNE OIL COMPANY, sent to the Carlsbad Committed to AFMSS for processing by JENNIFER SANCHEZ on 06/05/2015 (15JAS0365SE) Name(Printed/Typed) JAKE NAVE Title REQULATORY							/		
Signature (Electronic St	ıbmission)	Date	06/02/201	5		11111	E ANIE		
THIS SPACE FOR FEDERAL OR STATE OFFICE USE									
Approved By		Title		By	<i>XU J</i> REAU CARI	OF LAN	D MANAGE	MEIIT _{Date}	
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office	i		Critic				
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and will fully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.									



GATES E & S NORTH AMERICA, INC. 134 44TH STREET CORPUS CHRISTI, TEXAS 78405 PHONE: 361-887-9807 FAX: 361-887-0812

EMAIL: Tim.Cantu@gates.com

WEB: www.gates.com

10K CEMENTING ASSEMBLY PRESSURE TEST CERTIFICATE

Customer : Customer Ref. :

Invoice No.:

AUSTIN DISTRIBUTING 4060578 500506

Test Date: Hose Serial No.:

Created By:

4/30/2015 D-043015-7 JUSTIN CROPPER

Product Description:

10K3.548.0CK4.1/1610KFLGE/E LE

End Fitting 1 :
Gates Part No. :
Working Pressure :

4 1/16 10K FLG 4773-6290 10,000 PSI

4/30/2015

End Fitting 2 : Assembly Code :

Assembly Code Test Pressure: 4 1/16 10K FLG

L36554102914D-043015-7

15,000 PSI

Gates E & S North America, Inc. certifies that the following hose assembly has been tested to the Gates Oilfield Roughneck Agreement/Specification requirements and passed the 15 minute hydrostatic test per API Spec 7K/Q1, Fifth Edition, June 2010, Test pressure 9.6.7 and per Table 9 to 15,000 psi in accordance with this product number. Hose burst pressure 9.6.7.2 exceeds the minimum of 2.5 times the working pressure per Table 9.

Quality Manager:

Date:


Signature:


QUALITY Produciton:

Date : Signature : **PRODUCTION**

4/30/2015

Form PTC - 01 Rev 0 7



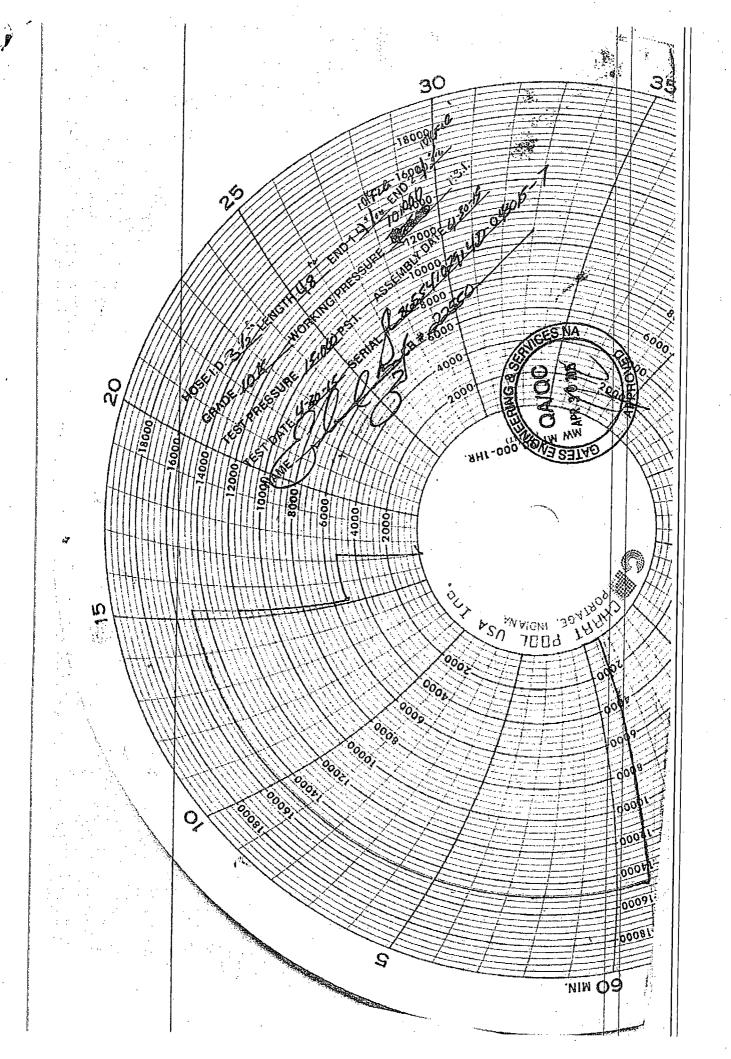

JUN 11 2015

PECOS DISTRICT CONDITIONS OF APPROVAL

RECEIVED

OPERATOR'S NAME: M

Mewbourne Oil Company

LEASE NO.:

NMNM--0540701

WELL NAME & NO.:

Jester 19/30 WOAH Fed Com 1H

SURFACE HOLE FOOTAGE:

0185' FNL & 0710' FEL

BOTTOM HOLE FOOTAGE

2310' FNL & 0660' FEL

LOCATION:

Section 19, T. 23 S., R 27 E., NMPM

COUNTY:

Eddy County, New Mexico

Flex hose COAs:

1. Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor. If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).

JAM 060515