

WELL NAME: HUMMINGBIRD FEDERAL COM 2H
API: 30-015-42632
SPUD DATE: 4/10/2015
PRODUCING FORMATION: YESO UPR BLINEBRY
FIELD: FREN
COUNTY: EDDY
STATE: NEW MEXICO
WORKING INTEREST: 75.00%

SURFACE LOC: 1750' FSL & 100' FWL
SECTION: 1
TOWNSHIP: 17-S
RANGE: 31-E
SURVEY: RONALD J. EIDSON
BOTTOM HOLE LOC: 1755' FSL & 331' FEL
SECTION: 1
TOWNSHIP: 17-S
RANGE: 31-E
SURVEY: RONALD J. EIDSON

DRILL RIG: CAPSTAR 114
RIG RELEASE: 4/23/2015

KB (ft): 4,014.00
GL (ft): 4,003.00
KB/GL DIFF (ft): 11.00
TMD (ft): 10,607.00
TD OF PILOT HOLE (ft): N/A
FC DEPTH (ft): 10,583.00
PBMD (ft): 10,607.00
RDV DEPTH (ft): N/A
ORIO VALVE (ft): N/A
DEEPEST TVD (ft): 5,922.00

TAPERED CASING STRING:

7" 29# L-80 TO X-OVER @ 5,438'
TAPERING TO 5.5" 20# L-80 SET @ 10,592'

KOP (ft): 5,420
LATERAL LENGTH (ft): 4,354
TD OF PILOT HOLE (ft): N/A

PACKERS & SLEEVES

TOP PERF (MD): 6,430
BOTTOM PERF (MD): 10,580


TMD (ft): 10,607
FC DEPTH (ft): 10,583
PBMD (ft): 10,607
RDV DEPTH (ft): N/A
ORIO VALVE (ft): N/A

COMPLETION:

STIMULATION:

STATUS:

COMMENTS:

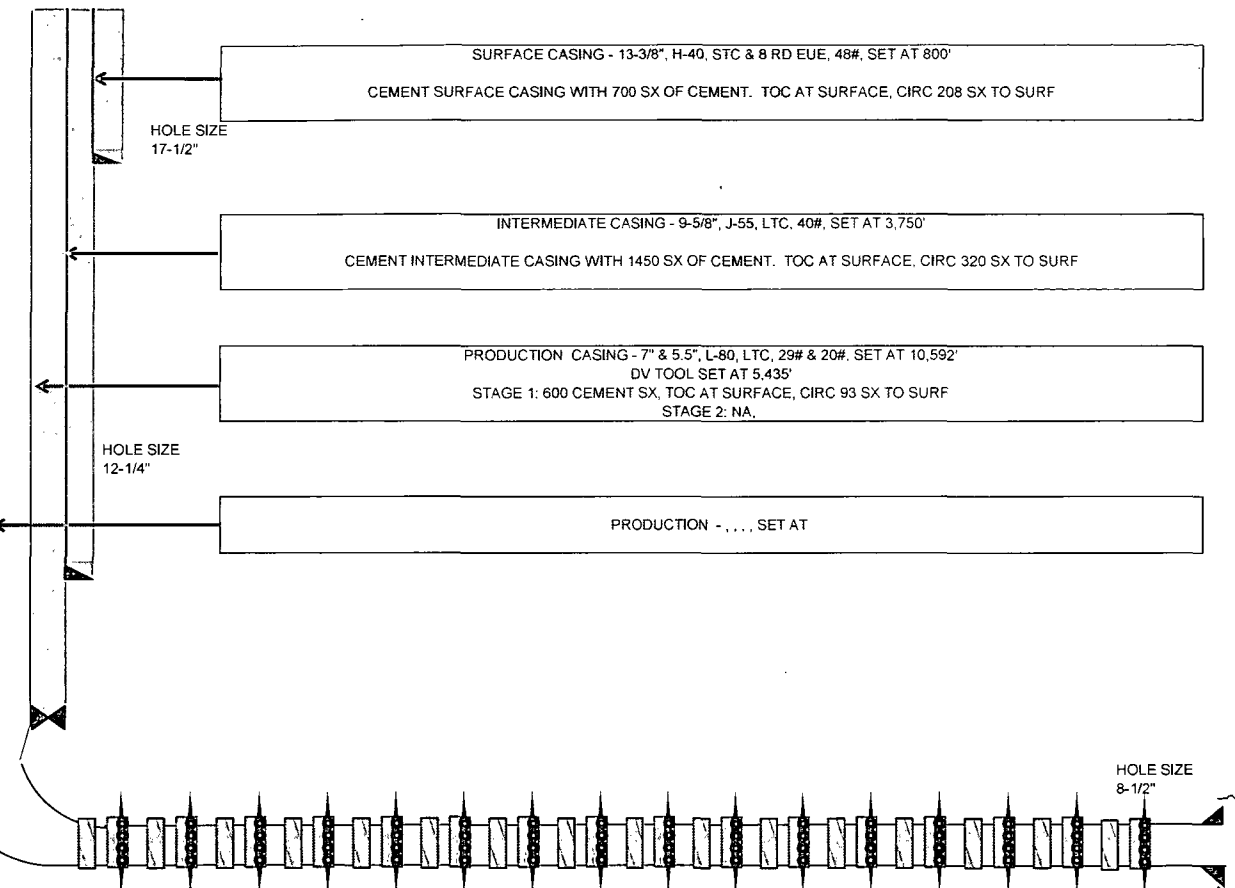

PACKERS & SLEEVES - 15 STAGES

TOTAL ACID (gal)	TOTAL LTR (bbl)	TOTAL PROPPANT (lbs)	MAX WH RATE (bpm)	MAX WH PRESSURE (psi)
2.722	72.564	2,908,752	95.00	7,210

PRODUCTION METHOD	LIFT TYPE	SETTING DEPTH
0	0	0

CROSSOVER SUB @ 5,438'

LAST UPDATED BY: HILLARI GOULD
LAST UPDATED: 6/25/2015