

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-24765
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
2. Name of Operator COG Operating LLC		6. State Oil & Gas Lease No. LG-1637
3. Address of Operator 600 W Illinois, Midland, Texas 79701		7. Lease Name or Unit Agreement Name New Mexico DC State
4. Well Location Unit Letter B : 660 feet from the N line and 1980 feet from the E line Section 18 Township 19S Range 29E NMPM County Eddy		8. Well Number 4
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3377 GR		9. OGRID Number 229137
		10. Pool name or Wildcat East Millman, Queen - Grayburg

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPL <input type="checkbox"/> DOWNHOLE COMMINGLE <input type="checkbox"/>		SUBSEQUENT REPORT OF: REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS. <input type="checkbox"/> P AND A <input type="checkbox"/> CASING/CEMENT JOB <input type="checkbox"/>	
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14.NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Set 5 1/2 CIBP @ 1960'. Circulate hole w/ mud laden fluid.
2. Spot 25 sx cement on top of CIBP 1960-1713.
3. Spot 70 sx cement @ 820-160'. (Btm of salt, shoe, and Top of Salt). WOC & tag
4. Spot 10 sx surface plug.
5. Cut off wellhead and weld on Dry Hole Marker.

Approved for plugging of well bore only.
Liability under bond is retained pending receipt of C-103 (Subsequent Report of Well Plugging) which may be found at OCD Web Page under Forms, www.enr.d.state.nm.us/oed.

* well bore must be plugged by 9/15/2016

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Ben Montgomery TITLE Agent DATE 9-14-15
 Type or print name Ben Montgomery E-mail address: benmontgomery@bennmontgomery.com PHONE: 432-580-7161
For State Use Only
 APPROVED BY: JD Dade TITLE District Supervisor DATE 9/15/15
 Conditions of Approval (if any):

* See Attached COA's

NTS

API 30-015-24765

New Mexico DC St. #4

3-Sec 18-T195-K29E

Eddy County, Nm

NTS

Spud 3/3/1984
Completed 3/18/1984

GL 3377'
KB 3389'
(KB 12')

Cement

Surface - 200 SX (+ 190 SX w/ 1")
Production - 900 SX
1st TOC 290' (+ 98 SX w/ 1")
Circulate 10 SX.

Tubing (June 2015)

(72) jts. 2 7/8, 6.5#, J55 EUE

(1) 2 7/8" seating nipple on btm.
2323' +/-Formation Tops:

Queen 1904'
Grayburg 2112'

Rods (June 2015)

(3) 3/4" x 4', 4', 2' subs

(73) 3/4" D-rods

(11) 1" N97 rods

(1) 4' guided sub

(1) 2 1/2" x 1 1/4" x 12'

RHBC-TS pump
(George Young)
Sales

Queen

Grayburg


1984
1989 6 holes

2152
2270 60 holes

5 1/2" 14# K55, STC
15.5# J55 LTVC
@ 2614' RKB w/ 998 SX
cement

PBTD - unknown
TD - 2620'

Subs Limit 9/21/2015 Concho

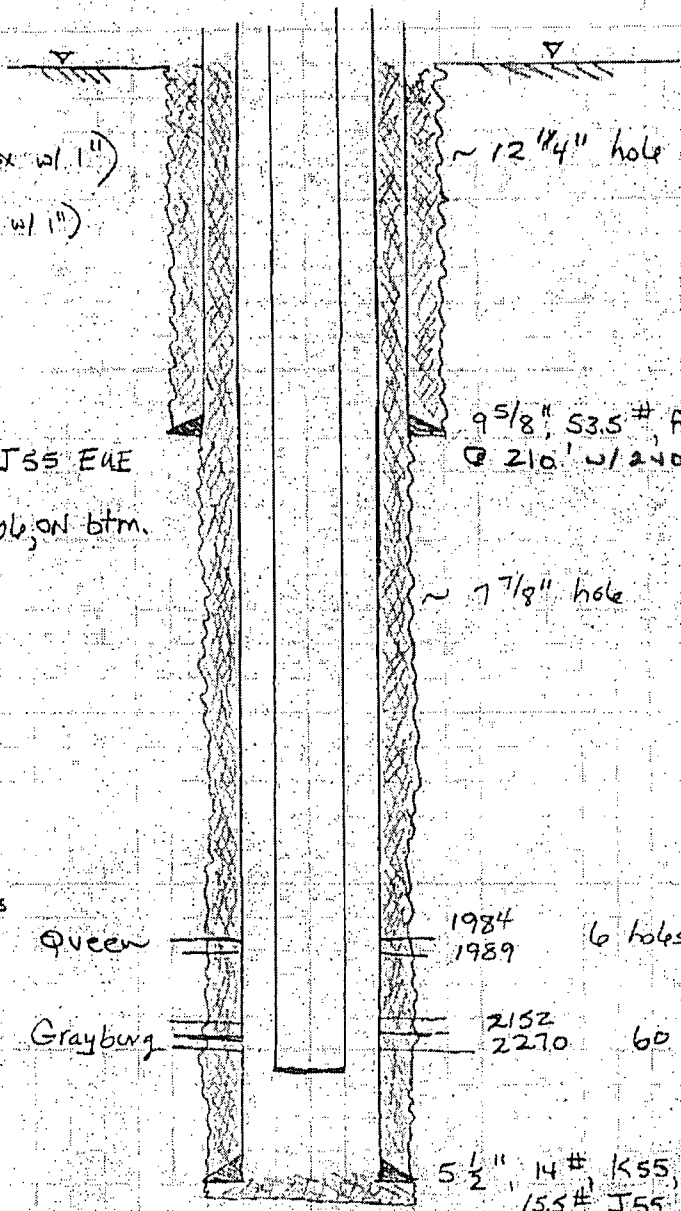

Lot 32.6663666

Long -104-11203

NTS

API 30-015-24765

New Mexico DC St. #4

S-XC 10-1175-127E
Eddy County, Nm

NTS

Spud 3/3/1984
Completed 3/18/1984GL 3377'
KB 3389'
(KB 12')CementSurface - 200 SX (+190 SX w/1")
Production - 900 SX
1" ST TOC 290' (+98 SX w/1")
Circulate 10 SXTubing (June 2015)

(72) jts. 2 7/8, 6.5#, J55 EUE

(1) 2 7/8" seating nipple on btm.
2323' +/-Formation Tops:Queen 1904'
Grayburg 2112'Rods (June 2015)

(3) 3/4" x 4' 4' 2' subs

(73) 3/4" D-rods

(11) 1" N97 rods

(1) 4' guided sub

(1) 2 1/2 x 1 1/4 x 12'

RHBC-TS pump
(George Young)
Sales

Queen

Grayburg

CIAPC 1968 w/25 st

1984 6 holes
19892152 60 holes
22705 1/2", 14# K55, STC
155# J55, LT, RC
@ 2614' RKB w/998 st
Cement C/Ac.PBTD - unknown
TD - 2670'

Cased Liner 9/2/2015 Cased

Lot 32.6663.666

Young -104-11203

NEW MEXICO OIL CONSERVATION DIVISION
DISTRICT 2 OFFICE
811 S. FIRST STREET
ARTESIA, NM 88210
(575)748-1283

CONDITIONS OF APPROVAL FOR PLUGGING & ABANDONMENT

Operator: COG

Well Name & Number: New Mexico DC State 4

API #: 30-015-24765

1. Produced water **will not** be used during any part of the plugging & abandonment operation.
2. Notify NMOCD Dist. 2 office at least 24 hrs before beginning work.
3. Closed Loop System is to be used for entire plugging operation. Upon completion, contents of steel pit are to be hauled to a permitted disposal location.
4. Trucking companies being used to haul oilfield waste fluids to a disposal – commercial or private – shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator, as well as the contractor, to verify that this permit is place prior to performing work. Drivers shall produce a copy upon request of NMOCD Field Inspectors.
5. A subsequent C-103 will serve as notification that the well bore has been plugged ONLY. A C-103 FINAL shall be filed before any bonding can be released on the well. Upon receipt of the Final, an inspection will be performed to verify that the location has been satisfactorily cleaned to NMOCD standards.
6. If work has not begun within 90 days of the approval of this procedure, an extension request must be filed, stating reason that well has not been plugged.
7. Every attempt must be made to clean the well bore out to below the perms, before any plugs can be set, by whatever means possible.
8. Cement Retainers may not be used.
9. Squeeze pressures are not to exceed 500 PSI, unless approval is given by NMOCD.
10. Plugs may be combined after consulting with and getting approval from NMOCD.
11. Minimum WOC time for tag plugs will be 4 Hrs.

RD

9/15/15

GUIDELINES FOR PLUGGING AND ABANDONMENT

DISTRICT II / ARTESIA

- All cement plugs will be a minimum of 100' in length or a minimum of 25 sacks of cement, whichever is greater.
- Mud laden fluids must be placed between all cement plugs.
- Mud laden fluids must be mixed at 25 sacks of gel per 100 bbls of water.
- A cement plug is required to be set 50' below and 50' above all casing shoes and casing stub plugs. These plugs must be tagged.
- A CIBP with 35' of cement on top may be set in lieu of 100' cement plug.
- A plug as indicated above must be placed within 100' of top perforation. This plug must be tagged.
- Plugs set below and above salt zones must be tagged.
- No more than 2000' is to be allowed between cement plugs in open hole and no more than 3000' in cased hole.
- DV tools are required to have a 100' cement plug set 50' above and below the tool and must be tagged.
- Formations to be isolated with plugs placed at the top of each formation are:
 - Fusselman
 - Devonian
 - Morrow
 - Wolfcamp
 - Bone Spring
 - Delaware
 - Any Salt Section (Plug at top and bottom)
 - Abo
 - Glorieta
 - Yates (this plug is usually at base of salt section)
- If cement does not exist behind casing strings at recommended formation depths, the casing must be cut and pulled with plugs set at these depths or casing must be perforated and cement squeezed behind casing at the formation depths.
- In the R-111-P area (Potash Mine area) a solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts common to the section penetrated and in suitable proportions, but not more than a 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible (50' below and 50' above).