Title FOR .D MANAGER

Office BLM-CARLSBAD FIELD OFFICE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

APPROVAL FOR TWO YEARS

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

APPROVAL SUBJECT TO **GENERAL REQUIREMENTS AND** SPECIAL STIPULATIONS ATTACHED

SEE ATTACHED FOR CONDITIONS OF APPROVAL

ARTESIA DISTRICT

APR 18 ZUIB

Witness Surface & Intermediate Casing

Carlsbad Controlled Water Basin RECEIVED

submit accordingly in a timely manner



Certification

July 15, 2015

Stephanie Rabadue XTO Energy Inc. 500 W. Illinois St Ste 100 Midland, TX 79701 432-620-6714 stephanie_rabadue@xtoenergy.com

Bureau of Land Management 620 E. Greene Carlsbad, NM 88220 575-234-5972

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access road proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct, and that the work associated with the operations proposed herein will be performed in conformity with this APD package and terms and conditions under which it is approved. I also certify that I, or XTO Energy, Inc., am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements. Executed this 15th day of July, 2015.

Thank you,

Stephanie Rabadue Regulatory Analyst

Dupani Rabadue

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
DISTRICT II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
DISTRICT III

Phone: (575) 748-1283 Fax: (575) 748-9720 DISTRICT III 1000 Rio Birazos Road, Aziec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 DISTRICT IV

1220 S. St. Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462

Property Code

API Number

18

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, New Mexico 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

□AMENDED REPORT


Well Number

WELL LOCATION AND ACREAGE DEDICATION PLAT


Pool Code

96464

31412	3)4121 CORRAL CANYON FEDERAL								21H		
OGRIDN	lo.				Operator Na XTO ENE			<u>. </u>		Elevation 2998'	
006381		J <u>.</u>			Surface Loca					2990	
UL or lot No.	Section	Township	Range	Lot Idr		North/South line	Feet	from the	East/West line	County	
M	3	25-S	29-E	DOLIGI:	170	SOUTH		34	WEST	EDDY	
			1 -2 -	Rottom F	<u> </u>	ferent From Surface	٠.				
UL or lot No.	Section	Township	Range	Lot Idn		North/South line	Feet	from the	East/West line	County	
4	3	25-S	29-E	DOI 141	330	NORTH		510	WEST	EDDY	
Dedicated Acres	Joint or	<u> </u>	Consolidation C	ode (Order No.		`				
159 95											
NO ALLOWADIE DU	II DE ACCIO	TED TO MIND O	O O TOTO I IN	707 ATT D.	PERDECIPO II A SIE DEEN	CONTROL TO ATTEND ON A 1	TON UT A	ייים או מודי ביות	CHACDEEN ADDOOR	CD DV THE DIRECTOR	
NO ALLOWABLE WI	LL DE MOSIGI		OMPLETION ON	IIL ALL IN	HERESIS HAVE BEEN	CONSOLIDATED OR A N	NON-SIA	MDAKD UNI.	HAS BEEN APPROVI	ED BY THE DIAIDION	
A to	В	LOT	T 3	 	LOT 2	LOT 1		OPER	ATOR CERTIF	CATION	
1 12		. 39.85			39.75 AC.	39.65 AC.		I hereby cert	ify that the information h	erein is true and	
610' QB.H	1.				ETIC COORDINATES NAD 27 NME	GEODETIC COORDIN NAD 83 NME	IATES	that this orga	the best of my <u>kn</u> owledge mization either owns a w neral interest in the land i	orking interest or	
	 LOT 4			'	OM HOLE LOCATION '=424108.8 N K=609812.8 E L=32.165494 N	ВОПОМ НОLE LOC Y=424167.3 N X=650997.2 E LAT.=32.165618*	<u> </u>	proposed bo well at this le of such mine pooling agre	ttom hole location or has ocation pursuant to a con wal or working interest, o ement or a compulsory p ntered by the division.	a right to drill this tract with an owner or to a voluntary	
39	9.95 AC.			LONG	G.=103.978455° W 	LONG.=103.97894	1. M				
j		,						Signature	nnu kab	Date (17)	
	. 1				CORNER COOR NAD 2			Printed Na	imie Rata	bec	
6.28'19" =4843.3'				 _	A - Y=424436.1 B - Y=424441.8 C - Y=419135.7 D - Y=419127.2	N, X=610533.9 E N, X=610558.0 E		E-mail Ad	Nie - Vabar dress XX	tue @ renergy.com	
- <u>GRIO</u> 42.= <u>0</u> 6'28'19" HORIZ. DIST.=4843.3'	— — 	-			B - 424500.3 M C - 419194.1 M	I, X=650385.2 E I, X=651718.3 E		I hereby cert was plotted i me or under	EYOR CERTIFI ify that the well location from field notes of actual my supervision, and that to the best of my belief.	shown on this plat surveys made by	
				 		 			APRIL 28, 20 vey		
	ļ 	. <u>DE</u> 2987.7* 	TAIL 2991.0' 	l	ETIC COORDINATES NAD 27 NME	GEODETIC COORDIN NAD 83 NME		PPO P	3239 3239	A GO	
35' S.L. 3 170' SEE DET	 	·	O 00'' 3011.1'	LAT	RFACE LOCATION Y=419297.4 N X=609267.8 E I=32.152273 N D=103.980267 W	SURFACE LOCATI Y=419355.8 I X=650452.4 I LAT.=32.152396 LONG.=103.98075	N E N	Certificate	Will ESSICROMATO	5/20/20/4 Eidson 12641 J. Eidson 3239 SC W.O.: 14.11.0431	
IrD	c l			1		<u></u>					

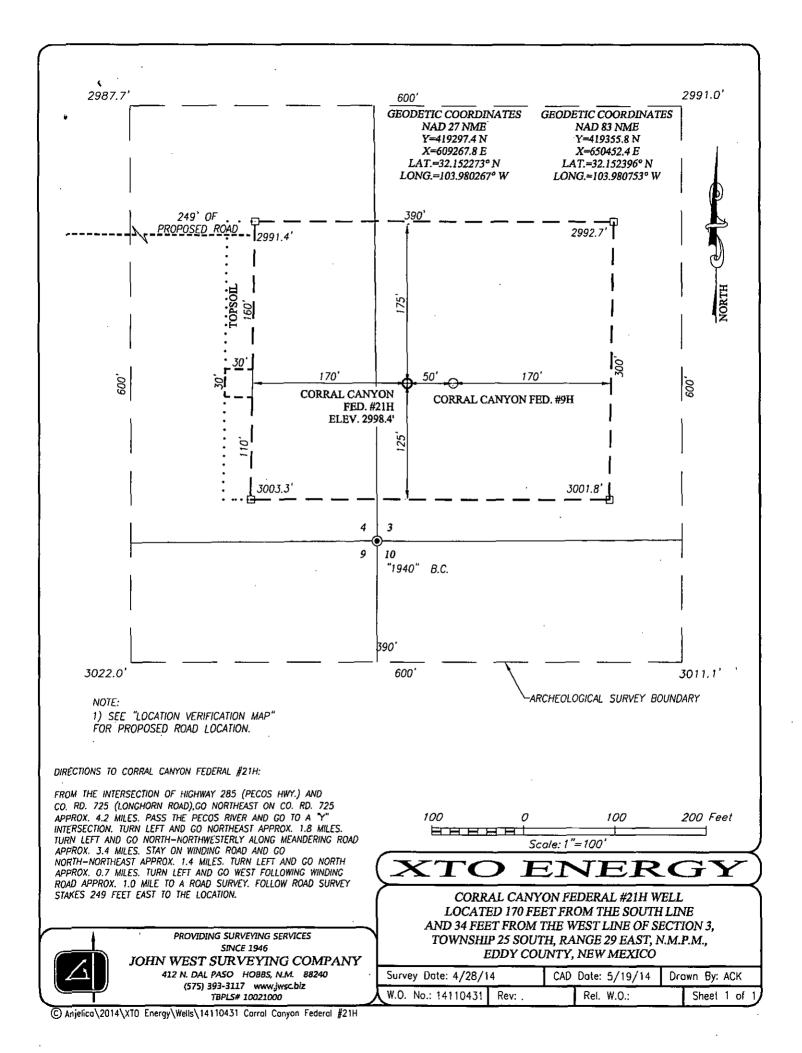

VICINITY MAP

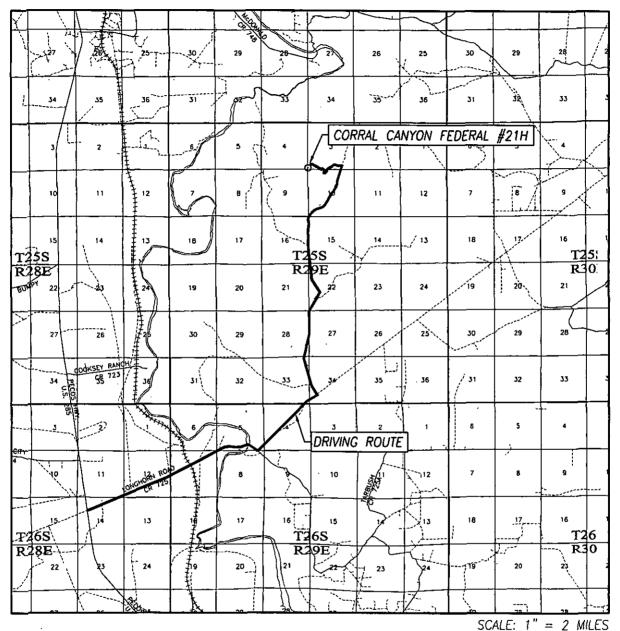

DRIVING ROUTE: SEE LOCATION VERIFICATION MAP


SEC. 3 TWP. <u>25-S</u> RGE. <u>29-E</u>
SURVEYN.M.P.M.
COUNTY <u>EDDY</u> STATE <u>NEW MEXICO</u>
DESCRIPTION 170' FSL & 34' FWL
ELEVATION2998'
OPERATOR XTO ENERGY
LEASE CORRAL CANYON FEDERAL



PROVIDING SURVEYING SERVICES SINCE 1946

JOHN WEST SURVEYING COMPANY
412 N. DAL PASO HOBBS, N.M. 88240
(575) 393-3117 www.jwsc.biz
TBPLS# 10021000

LOCATION VERIFICATION MAP

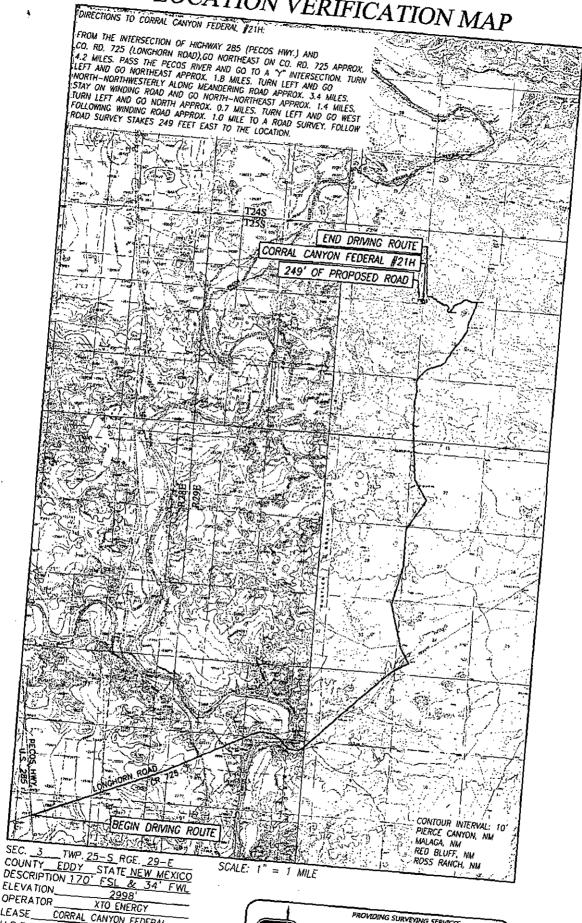

OPERATOR CORRAL CANYON FEDERAL LEASE U.S.C.S. TOPOGRAPHIC MAP MALAGA, N.M. SURVEY M SURVEY N.M.P.M.



PROVIDING SURVEYING SERVICES JOHN WEST SURVEYING COMPANY SINCE 1945 412 N. DAL PASO HOBBS, N.M. 88240 (575) 393-3117 www.jwsc.bb TBPLS# 10021000

DRILLING PLAN: BLM COMPLIANCE (Supplement to BLM 3160-3)

XTO Energy Inc. Corral Canyon Fed 21H

Projected TD: 11134' MD / 6610' TVD

SHL: 170' FSL & 34' FWL, SECTION 3, T25S, R29E BHL: 330' FNL & 610' FWL, SECTION 3, T25S, R29E

Eddy County, NM

1. GEOLOGIC NAME OF SURFACE FORMATION:

A. Quaternary

2. ESTIMATED TOPS OF GEOLOGICAL MARKERS & DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:

Formation	Well Depth (TVD)	Water / Oil / Gas
Rustler	313'	Water
Top of Salt	733'	
Base of Salt	2796'	
Delaware	3011'	Water
Cherry Canyon	3871'	Water
Brushy Canyon	5500'	Water/Oil/Gas
Basal Brushy Canyon	6522'	Water/Oil/Gas
Brushy Canyon "E3"	6590'	Water/Oil/Gas
LP	6610'	Water/Oil/Gas

^{***} Hydrocarbons @ Brushy Canyon

No other formations are expected to yield oil, gas or fresh water in measurable volumes. The surface fresh water sands will be protected by setting 13-3/8" casing @ 625' above the salt and circulating cement back to surface. The salt will be isolated by setting 9-5/8" casing at 2875' and circulating cement to surface. An 8-3/4" curve and lateral hole will be drilled to MD/TD and 5-1/2" casing with sliding frac sleeves will be set at TD and cemented back up to the 9-5/8" casing shoe.

3. CASING PROGRAM:

Hole Size	Depth	OD Csg	Weight	Collar	Grade	New/Used	SF Burst	SF Collapse	SF Tension
17-1/2"	0' - 625'	13-3/8"	48#	STC	H-40	New	5.77	2.59	10.73
12-1/4"	0' -2875' 2000	9-5/8"	36#	LTC	J-55	New	2.82	1.32	4.38
8-3/4"	0'-11134'	5-1/2"	17#	BTC	P-110	New	1.12	2.42	3.00

^{***} Groundwater depth 40' (per NM State Engineers Office).

WELLHEAD:

- A. Starting Head: 13-5/8" 3000 psi top flange x 13-3/8" SOW bottom
 - B. 'B' Section/ Drilling Spool: 13-5/8" 3000psi bottom flange x 11" 5M top flange
 - C. Tubing Head: 11" 5000psi bottom flange x 7-1/16" 10,000psi top flange

4. CEMENT PROGRAM:

A. Surface Casing: 13-3/8", 48#, NEW H-40, STC casing to be set at \pm 625'.

643 sx HalCem-C + 2% CaCl (mixed at 14.8 ppg, 1.35 ft³/sk, 6.39 gal/sx wtr) Compr Strengths: 12 hr - 900 psi 24 hr - 1500 psi ***All volumes 100% excess in open hole. Cement to surface.

B. Intermediate Casing: 9-5/8", 36#, NEW J-55, LTC casing to be set at ± 2875'.

Lead: 20 bbls FW, then 791 sx EconoCem-HLC + 5% salt + 5 lbm/sk Kol-Seal (mixed at 12.9 ppg, 1.88 ft³/sk, 9.61 gal/sx wtr) Compr Strengths 12 hr -320 psi 24 hr -623 psi

Tail: 235 sx HalCem-C (mixed at 14.8 ppg, 1.33 ft³/sk, 6.34 gal/sx wtr) Compr Strengths: 12 hr - 900 psi 24 hr - 1500 psi ***All volumes 100% excess in open hole. Cement to surface.

C. <u>Production Casing:</u> 5-1/2", 17#, NEW P-110, BTC casing to be set at ± 13253'. Casing will be cemented and will include sliding sleeves for the completion.

Lead: 20 bbls FW, then 354 sx Tuned Light + 0.5 lbm/sk CFR-3 + 1.5 lbm/sk salt + 0.1% HR601 (mixed at 10.5 ppg, 2.69 ft³/sk, 12.26 gal/sx wtr) Compr Strengths 12 hr - 126 psi 16 hr - 500 psi 48 hr - 1106 psi

Tail: $1209 \text{ sx VersaCem} + 0.5\% \text{ LAP-2} + 0.25 \text{ lbm/sk D-air } 5000 + 0.2\% \text{ HR } 601 \text{ (mixed at } 13.2 \text{ ppg, } 1.59 \text{ ft}^3/\text{sk, } 8.29 \text{ gal/sx wtr)}$

Compr Strengths: 12 hr - 1375 psi 24 hr - 2285 psi

***All volumes 30% excess in open hole. Planned top of cement 500' into intermediate casing shoe

5. PRESSURE CONTROL EQUIPMENT:

The blow out preventer equipment (BOP) for this well consists of a 13-5/8" minimum 3M Hydril and a 13-5/8" minimum 3M Double Ram BOP. Max bottom hole pressure should not exceed 3093 psi.

All BOP testing will be done by an independent service company. Annular pressure tests will be limited to 50% of the working pressure. When nippling up on the 13-5/8" 3M bradenhead and flange, the BOP test will be limited to 3000psi. When nippling up on the 9-5/8", the BOP will be tested to a minimum of 3000 psi. All BOP tests will include a low pressure test as per BLM regulations. The 3M BOP diagrams are attached. Blind rams will be functioned tested each trip, pipe rams will be functioned tested each day.



A variance is requested to use a flex hose as the choke line between the BOP and choke manifold. Proneer 33 is outfitted with a Gates E&S flex hose rated to 5,000 psi working pressure (serial # D-060814-1). A copy of the test certificate and test pressure chart will be kept on the rig. The manufacturer does not require anchors.

6. PROPOSED MUD CIRCULATION SYSTEM:

INTERVAL	Hole Size	Mud Type	MW (ppg)	Viscosity (sec/qt)	Fluid Loss (cc)
0' to 625'	17-1/2"	FW/Native	8.4-8.8	35-40	NC
625' to 2875'	12-1/4"	Brine/Gel Sweeps	9.8-10.2	30-32	NC
2875' to 13253'	8-3/4"	FW / Cut Brine / Poly-Sweeps	8.4-9.0	29-32	NC - 20

The necessary mud products for weight addition and fluid loss control will be on location at all times.

Spud with fresh water/native mud. Drill out from under 13-3/8" surface casing with brine solution. A 9.8ppg-10.2ppg brine mud will be used while drilling through the salt formation. Use fibrous materials as needed to control seepage and lost circulation. Pump viscous sweeps as needed for hole cleaning. Pump speed will be recorded on a daily drilling report after mudding up. A Pason or Totco will be used to detect changes in loss or gain of mud volume. A mud test will be performed every 24 hours to determine: density, viscosity, strength, filtration and pH as necessary. Use available solids controls equipment to help keep mud weight down after mud up. Rig up solids control equipment to operate as a closed loop system.

7. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT:

- A. A Kelly cock will be in the drill string at all times.
- B. A full opening drill pipe stabbing valve having appropriate connections will be on the rig floor at all times.
- C. H2S monitors will be on location when drilling below the 13-3/8" casing.

8. LOGGING, CORING AND TESTING PROGRAM:

Mud Logger: Mud Logging Unit (2 man) on @ 2875'. Catch 20' samples from 2875' to landing point

Catch 30' samples from landing point to TD/MD.

Send 1 set of dry samples to Midland Sample Library.

Open hole logging to include Density/Neutron/PE/Dual Laterlog/Spectral Gamma from kick-off point to intermediate casing shoe.

9. ABNORMAL PRESSURES AND TEMPERATURES / POTENTIAL HAZARDS:



None anticipated. BHT of 130 F is anticipated. No H2S is expected but monitors will be in place to detect any H2S occurrences. Should these circumstances be encountered the operator and drilling contractor are prepared to take all necessary steps to ensure safety of all personnel and environment. Lost circulation could occur but is not expected to be a serious problem in this area and hole seepage will be compensated for by additions of small amounts of LCM in the drilling fluid.

10. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS:

Road and location construction will begin after Santa Fe and BLM have approved the APD. Anticipated spud date will be as soon after Santa Fe and BLM approval and as soon as a rig will be available. Move in operations and drilling is expected to take 40 days. If production casing is run, an additional 30 days will be needed to complete well and construct surface facilities and/or lay flow lines in order to place well on production.



Company: XTO Energy Site: Corral Canyon Federal Well: 21H

Project: Eddy County, New Mexico (NAD 27) Rig: Pioneer 33



G Magnetic Field Strength: 48192.8snT

Azimuths to Grid North True North: -0.19* Magnetic North: 7.21

Dip Angle: 59,96* Date: 10/13/2014 Model: WMM_2010

Azi 0.00 33.50 33.50 2.89 5778.77 6403.77 6583.77 7071.31 0.00 50.00 50.00 90.00 11134.42 90.00

5778.77 6327.41 6443.12 6610.00 0.00 213.34 328.32 753.46 6610.00 4811.40

+N/-S 0.00 141.20 217.31 340 17 545.00

ANNOTATIONS

Departure 0.00 0.00 227.87 350.69 255.83 393.72 786.96 4842.17 641.21 4904.31

Annotation KOP, 8.00*/100' Build Hold 50.00° Inc, 33.50° Azm Begin 10.00°/100' Build & Turn Begin 90.00° Lateral PBHI

US State Plane 1927 (Exact solution) New Mexico East 3001

Created By: CAD Date: 17:06, October 13 2014

Brushy Canyon

Basal Brushy Canyor

Bone Spring

Rrushy Canyon "Е4" Brushy Canyon "E5<u>"</u>

5500

5750

6000

6250

6500 6750 7000

7250

		Plan: De	sign #1									
	0-				1 1						 -	-
	250-	Rustler	-}- 			77.			-			1
	500-			<u> </u>			i;;;		Ħ	111		
	750-	Top Salt					叫					-
	1000-						拱					
	1250-		<u> </u>					: - - - -			II E	11.
			- 1-1				4			127	14.7	
	1500-				1,4	-L	- : : T	111		1		
	1750-			f. 1	44				: []			<u>.</u>
	2000-	3:13:1	: ::.1:			11:1	: 1:±‡		:: ::::			- -
	2250-		1 :				-;11 ;-1 ;-1		1777	3.1	35-1	·
	2500-	Base Sa	4 : : ÷		: :;			11:1			L	1.
	2750-		- 111-1		· i	34.1†	<u>-</u>	-4.1		-1	-117	<u>;</u>
	3000~				1	- 1222	- [1 : : 1 : : :	-2. [į
usitin)	3250-	Delawar	11-7-7-1						15.4	ΞĒ		<u>f</u> .
200	3500-					1		EL.				: : 1
딉	3750-	Cherry C	anyon :		提.		17. 11.7	j;!;	17.11 1 1			.i.
<u>8</u>	4000-				i i i	<u>: [</u>						 7 1
e Ver	3500- 3750- 4000- 4250-			計准		• •						:
2	4500-				-17 1 1		ŹĦ		11.1		Trail	:
	4750-						H			111	: 	:
	5000-								:: <u>:</u> :::: ;::::::		111	1
		3				: ; ; ; ; - ; ; ; ;				171		:
	5250-	1			, _ : ` 					 -		_

141 5000 †!--4500 4000 3750 3250 (i) 19 2750 2500 2000 1500 1250 Begin 90.00° Later 1000 750 Begin 10.00*/100' Build & Tua Hold 50.00° Inc, 33.50° Azm 250 KOP, 8.00*/100* Build -250 -2000 -1750 -1500 -1250 -1000 -750 -500 -250 Ó 250 500 750 1000 1250 1500 1750

KOP, 8.007100' Build West(-)/East(+) (1000 usft/in) Hold 50.00° Inc, 33.50° Azn Begin 10.00 100 Build & Tu Begin 90.00° Lateral PBHI 250 500 750 1000 1250 1500 1750 2000 2250 2500 2750 3000 3250 3500 3750 4000 4250 4500 4750 5000 5250 5500 5750 6000



Company: XTO Energy Site: Corral Canyon Federal Well: 21H

Project: Eddy County, New Mexico (NAD 27)

Rig: Pioneer 33



T G M

Azimuths to Grid North True North: -0.19* Magnetic North: 7.21*

Magnetic Field Strength: 48192.8snT Dip Angle: 59.96* Date: 10/13/2014 Model: WMM_2010

ANNOTATIONS

MD Inc Azi TVD 5778.77 0.00 0.00 5778.77 6403.77 50.00 33.50 6327.41 6583.77 50.00 33.50 6443.12 7071.31 90.00 2.89 6610.00 11134.42 90.00 2.89 6610.00

+N/-S +E/-W 0.00 0.00 213.34 141.20 328.32 217.31 753.46 340.17 4811.40 545.00 4

VSect Departure 0.00 0.00 227.87 255.83 350.69 393.72 786.96 841.21 4842.17 4904.31

a Annotation COP, 8.00°/100' Build 3 Hold 50.00° Inc, 33.50° Azm 2 Begin 10.00°/100' Build & Turn Begin 90.00° Lateral PBHL

US State Plane 1927 (Exact solution) New Mexico East 3001

> Created By, CAD Date: 17:05, October 13 2014 Plan: Design #1

> > West(-yEast(+) (20 usft/in)

4 - -	- ه الله الله	35 - 	30 - Luu 	1	20 - - 	15 -	10	5 (hun	0 1 	5 2 	0 2	25 3	0 3	5 4	10 4 11111 1-1-1-1	45 5	50 S 	5 6 	0 6 	5 7	'0 7	5 8	بببا	بيبا)D 1 1
	1-1-												24.12 24.1 1877	(4) (4)		11.1.1.2 11.1.1.2	#17 F			477		2		-1			<u>-</u> ,
	Ė	E	4	: :5:	11.7		3 1		1.7			1 - 1	::5	11.71.	I		iil,		-1	/		I_{1}		14.1 13.14		措	E-9
1111	1111	4	1 L	12 17			111		7.1		11.1	171- 17.1.	(† 1) 2111 2412	1114	:::::		100		1						1		ŧ.
ultu	F		1. I.		417			70:11				i de				; <u>11</u>	:	1-1	/	: 51 -11	11:5	##					Τ,
-	13-14							1 :	***			4.41		51;; 5:;	: :: : ;			/-			aati MFE				I alai		皇 - 7 - 1 - 1 - 1
1			TH.	177		크를			.: 1	1:		Ţij			117		6,0		:			di					E 6
1111		莊	H			35	11			::::::::::::::::::::::::::::::::::::::					::: <u> </u>			-111	. Epi	11/2	44.	### ###	11	-14	/-	: 1	E,
= = = = = = = = = = = = = = = = = = = =			1-1						93 :†:†			抽造					j Turi	15127 11177 11177					祖是	1821	b ::-F		<u>-</u> 5
4		irt E		1											/::: <u>.</u> [1]							.4.1		(4 : 1-1 (1 : 1-1	1 - 1 - 1		<u>E</u> 4
-	901				1111					FFÅL TEL		T.d			1777 1777 1774	THE	777	File	11. 1 11.1.1		-11		/	71.	Harr	11 -	F
-				1.	4 <u>[</u>		E1:	- 11-7		75	1:1: 1:1:	: 44		ļij.	14		177 12 127 127	1	: ;:-	H		/			-115	14	-3 -3 -3
-					1114 1144 1144 1144				15				000	7:14 7:41 7:41	77.7			1111	141. 						1412 1412 1-141		Ē,
=		1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.	37	- +	714		:: † :::1	-4: <u>†</u> -4: †			1		7112 157	1112	71.7	14 F.					6100	70.1					<u> </u>
1	<u>11-</u>		200 100	}		i ji ji		1.1.1 1.1.1		/		11-1	- (e)-						3.5				ih				<u>-</u> 1
=	1+1	Er:			.00*/10	f-1-;			1/	5900			14:			:: i::			1					Œ		- 1	1 2 5
=	1 m 1 2 j. j. z 			1	1		/	~	<u>/</u>	11.7		1.4			- 1 - 1				800	o-∷-			13) 201				Ē.,
= = = = = = = = = = = = = = = = = = = =						7		:	*						5 : L.			##		9Н.	TELL.		TFIL				Ē.,
7			21		 		= 1-1			21H							(42) 11:11:1 12:3		14-	. 9,1					17-1		<u>E</u> .,
=					#1			1,1	: <u>i</u> ;		1			11	1111												<u> </u>
= = = = = = = = = = = = = = = = = = = =						111			[]- 	1.111. 1.11.	7171 7441	191			المنظائة المنظمة المنظمة	1,11		# <u> </u>	1 1.	1 1 1		11 M	::.T		掛	4	<u> </u>
=======================================	ill; tork					erti rist	114 114			ii-t	11.7	31. : 31; :		15			:: <u> 1</u> :: 7	11.			- T.:	11) 11) 11)			15.1 11.1		E .
1	tile Til				1 24 ten	irit H	17(); 						1.5 ·	- - - - - - - - - -		1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.											E .
4	1111 0 -3	11111	11111	1111	20 -	1137	1111		ļ	1 1 5 1	1111	11111	0 2	5 3	0 3	11111 5 4	1111	15 5		1111	1111	1111			30 B	1111	



XTO Energy

Eddy County, New Mexico (NAD 27) Corral Canyon Federal 21H

Wellbore #1

Plan: Design #1

Standard Planning Report

13 October, 2014





Planning Report



Conroe Server Database XTO Energy Company:

Project: Eddy County, New Mexico (NAD 27)

Site: Corral Canyon Federal

3 21H

Wellbore: Wellbore #1 Design #1 Design:

Local Co-ordinate Reference:

TVD Reference: MD Reference:

North Reference:

Survey Calculation Method:

Well 21H

WELL @ 3015.00usft (Pioneer 33) WELL @ 3015.00usft (Pioneer 33)

Grid

Minimum Curvature

Project		

Map System: Geo Datum:

Map Zone:

US State Plane 1927 (Exact solution)

NAD 1927 (NADCON CONUS)

New Mexico East 3001

System Datum:

Mean Sea Level

Well ∄ 21H

Well Position +N/-S 419,297.40 usft 609.267.80 usft Northing: Easting:

419,297,40 usft 609,267,80 usft Latitude:

32° 9' 8.182 N

+E/-W **Position Uncertainty**

0.00 usft

Wellhead Elevation:

Longitude: **Ground Level:** 103° 58' 48.960 W 2,998.00 usft

Wellbore Wellbore #1

Magnetics Model Name

Declination
 ∴
 Declination
 ∴
 ∴
 Declination
 ∴
 ∴
 ∴
 ∴
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □
 □

Field Strength

Audit Notes:

Version:

Phase:

PROTOTYPE

Tie On Depth:

0.00

Vertical Section:

Depth From (TVD) (usft)

(usft) 0.00

Direction
 ∴

Measured			Vertical		et and leading	Dogleg	Build	Turn		
Depth (usft)	inclination (°)	Azimuth	Depth (usft)	+N/-S (usft)		**Rate */100usft);;(TFO:=2 (°)	Target
	Market E. W.	Endocted Fig.		ALLES ALLES		Little State Ship				Tanana and make
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5,778.78	0.00	0.00	5,778.78	0.00	0.00	0.00	0.00	0.00	0.00	
6,403.78	50.00	33.50	6,327.41	213.34	141.20	8.00	8.00	0.00	33.50	
6,583.78	50.00	33.50	6,443.12	328.32	217.31	0.00	0.00	0.00	0.00	
7,071.31	90.00	2.89	6,610.00	753.46	340.17	10.00	8.20	-6.28	-42.63	
11,134.42	90.00	2.89	6,610.00	4,811.40	545.00	0.00	0.00	0.00	0.00 PBHI	- Corral Cany



Planning Report



The region of the second of the second secon Database: Conroe Server XTO Energy Company: Project.

Eddy County, New Mexico (NAD 27)

Corral Canyon Federal

Site: Well: Wellbore: Wellbore #1 Design: Design #1

Local Co-ordinate Reference: Well 21H

Local Co-ordinate Reference: vveil 2111
TVD Reference: WELL @ 3015.00usl
MD Reference: WELL @ 3015.00usl
North Reference: Grid
Survey Calculation Method: Minimum Curvature

LOTE CONTROL OF THE PROPERTY STATES OF THE STATES

WELL @ 3015.00usft (Pioneer 33) WELL @ 3015.00usft (Pioneer 33)

Design. Yang Sanga De	alyii # i	ومنية ليؤون والوجالة فينوث والريادة		right to the fifth		A STATE OF THE PARTY	and for the second seco	a hought and empty of the Policy of the confidence of	وأدمانه فننج باليواواليات وواحا فالماسين بالمواوين
Planned Survey	מיניבר האיני איניה אל מיני מיניבר האיני איניה אל מיני	alustra des propries des des des des des des des des des d	CANAGE ALTERS & CANAGE STORES	er andre en trensmenden sekon	ii. Aprikan iir istikainesi .	RANGE AND DESCRIPTION OF STREET	an de freez statetas, vast	C CONTRACTOR TO SERVICE OF THE SERVI	The LOST CARSON STREET
		MARKE III	NOTES OF				The state of the s	m was die	
Measured	Palvel District	zimuth	Vertical .	Trans.	电影电影	Vertical	Dogleg	Builder	Turn
Depth	lination	zimuth	Depth	April 11 🖜 🖜 A Sara	+E-W:	Section	Rate	Rate	Rate
(usft)		(°)	(usft)	ர் (usft) ்	្ត (usft) ំ្ង	(usft)	(°/100usft): '((°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00 (124 (125)	0.00	0.00		0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00 0.00	0.00 0.00	0.00
200.00	0.00	0.00		0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
313.00	0.00	0.00	313.00	0.00	0.00	0.00	0.00	0.00	0.00
Rustler									
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00 0.00	0.00 0.00	700.00 733.00	0.00 0.00	0.00 00.0	0.00 0.00	0.00 0.00	0.00 0.00	0.00 0.00
733.00 Top Salt	0.00	0.00	733.00	0.00	0.00	0.00	0.00	0.00	0.00
	_							•	
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00 0.00	0.00 0.00	900.00 1,000.00	0.00 0.00	0.00 0.00	0.00 0.00	0.00 0.00	0.00 0.00	0.00 0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00 2,100.00	0.00 0.00	0.00 0.00	2,000.00 2,100.00	0.00 0.00	0.00 0.00	0.00 0.00	0.00 0.00	0.00 0.00	0.00 0.00
2,200.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,796.00	0.00	0.00	2,796.00	00.0	0.00	00.0	0.00	0.00	0.00
Base Salt									
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00 3,000.00	0.00 0.00	0.00 0.00	2,900.00 3,000.00	0.00 00.0	00.0 00.0	0.00 0.00	0.00 0.00	0.00 0.00	00.0 00.0
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
Delaware	5.0-	0.00	5,55	0.02	0.114	5.55	5.55	3.33	V
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,871.00	0.00	0.00	3,871.00	0.00	0.00	0.00	0.00	. 0.00	0.00
Cherry Canyor 3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00



Planning Report



THE TO SELECT A SERVICE CONTRACTOR SERVICES SERVICES TO THE SERVICE SERVICES SERVICES. THE SERVICE CONTRACTOR AND ADMINISTRATION OF THE SERVICES AND ADMINISTRATION OF THE SERVICES SERVICES.

Conroe Server Database: XTO Energy Company: 2

Project: Eddy County, New Mexico (NAD 27)

Corral Canyon Federal Site:

21H Well: Wellbore: Wellbore #1 Design: Design #1

Local Co-ordinate Reference:

TVD Reference: WELL @ 3015.00ust
MD Reference: WELL @ 3015.00ust
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Well 21H

WELL @ 3015.00usft (Pioneer 33) WELL @ 3015,00usft (Pioneer 33)

AND AND THE PROPERTY OF THE PR	-	er i maneral en	a para antiqua de mario de la mario de la como de la co	ar agus an an an An Sill Sill Sill Sill Sill Sill Sill Sil	ist. Ma est a files	name de la marchia		na programa de la composição de la compo	na deletar a construente aportamente del proprieta del proprieta del proprieta del proprieta del proprieta del Construente del proprieta
Planned Survey		- Publication	Manage (Alex 1 April	rate who are are are with the con-	CADO BACANTESTAN	Strategy and Addition of presenting	THE SALES OF THE PARTY OF THE P	LEA LUMPINO DI CAL	diam'r grasic (c. 1
						STATE OF THE	Dogleg		AL NEW LAA.
Measured	Inclination	Sandari att	Verticál 🚜 🔞	建新发物		Vertical:	Dogleg	e Build i carro	Sx Turn School St
Depth	Inclination	Azimuth Ser	Denth &	/+N/-S	+E/-W	Section	Rate	Rate	Rate
(usft)	3/10/11/20	701	(ueft)	(usft)	(usft)	A TIE HOT TO	Rate (°/100usft) (Monietti	(°/100 peff):
A STATE OF THE PARTY OF THE PAR	(e) (e)		(usft)	and and the second	recusity		MET THE COLD IN	and the last	PERSONAL PROPERTY.
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
1				0.00					
5,000.00	0.00 0.00	0.00 0.00	5,000.00 5,100.00	0.00	0.00 0.00	0.00 0.00	0.00 0.00	0.00 0.00	0.00 0.00
5,100.00 5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00
5,400.00	0.00	0.00	5,400.00	0.00	0.00	0.00	0.00	0.00	0.00
	'								
5,500.00	0.00	0.00	5,500.00	0.00	0.00	0.00	0.00	0.00	0.00
Brushy Ca									
5,600.00	0.00	0,00	5,600.00	0.00	0.00	0.00	0.00	0.00	0.00
5,700.00	0.00	0.00	5,700.00	0.00	0.00	0.00	0.00	0.00	0.00
5,778.78	0.00	0.00	5,778.78	0.00	0.00	0.00	0.00	0.00	0.00
	°/100' Build								
5,800.00	1.70	33.50	5,800.00	0.26	0.17	0.28	8.00	8.00	0.00
5,850.00	5.70	33,50	5.849.88	2.95	1.95	3.15	8.00	8.00	0.00
5,900.00	9.70	33.50	5,899.42	8.53	5.65	9.12	8.00	8.00	0.00
5,950.00	13.70	33.50	5,948.37	16.99	11.24	18.14	8.00	8.00	0.00
6,000.00	17.70	33.50	5,996.50	28.27	18.71	30.19	00.8	00.8	0.00
6,050.00	21.70	33.50	6,043.56	42.32	28.01	45.20	8.00	8.00	0.00
6,100.00	25.70	33.50	6,089.34	59.07	39.10	63.10	8.00	8.00	0.00
6,150.00	29.70	33.50		78.45	51.92	83.79	8.00	8.00	0.00
6,200.00	33.70	33.50	6,176.13	100.35	66.42	107.19	8.00	8.00	0.00
6,250.00	37.70	33.50	6,216.73	124.67	82.52	133.17	8.00	8.00	0.00
6,300.00	41.70	33.50	6,255.19	151.30	100.14	161.61	8.00	8.00	0.00
			•						
6,350.00	45.70	33.50	6,291.33	180.10	119.21	192.37	8.00	8.00	0.00
6,403.78	50.00	33.50	6,327.41	213.34	141.20	227.87	8.00	8.00	0.00
)° Inc, 33.50° Azı			07.00					
6,500.00	50.00	33.50	6,389.27	274.80	181.89	293.53	0.00	0.00	0.00
6,583.78	50.00	33.50	6,443.12	328.32	217.31	350.69	0.00	0.00	0.00
	30°/100' Build &		0.450.44	000.00	004.40	204.00	40.00	7.44	0.00
6,600.00	51.20	32.09	6,453.41	338.86	224.10	361.93	10.00	7.41	-8.69
6,650.00	55.01	28.03	6,483.43	373.47	244.09	398.57	10.00	7.61	-8.12
6,700.00	58.93	24.33	6,510.69	411.08	262.55	438.02	10.00	7.85	-7.39
6,722.50	60.73	22.77	6,522.00	428.91	270.32	456.61	10.00	8.00	-6.94
Basal Bru	shy Canyon								
6,750.00	62.96	20.94	6,534.98	451.41	279.34	479.98	10.00	8.08	-6.68
6,800.00	67.05	17.78	6,556.10	494.16	294.33	524.15	10.00	8.20	-6.32
6,850.00	71.21	14.80	6,573.91	538.99	307.42	570,17	10.00	8.32	-5.95
6,900.00	75.41	11.97	6,588.27	585.57	318.49	617.70	10.00	8.41	-5.66
6,907.02	76.01	11.59	6,590.00	592.23	319.88	624.47	10.00	8.45	-5.52
	anyon "E3"								_
6.950.00	79.65	9.25	6.599.06	633.54	327.47	666,38	10.00	8.47	-5.43
7,000.00	83.91	6.60	6,606.21	682.54	334.29	715.83	10.00	8.52	-5.30
7,050.00	88.18	4.00	6,609.66	732.19	338.89	765.68	10.00	8.54	-5.22 5.40
7,071.31	90.00	2.89	6,610.00	753.46	340.17	786.96	10.00	8.55	-5.19
	00° Lateral			700					
7,100.00	90.00	2.89	6,610.00	782.11	341.62	815.59	0.00	0.00	0.00
7,200.00	90.00	2.89	6,610.00	881.99	346.66	915.40	0.00	0.00	0.00
7,300.00	90.00	2.89	6,610.00	981.86	351.70	1,015.21	0.00	0.00	0.00



Planning Report



Database: Company:

Project:

TO SEET A CONTRACT OF THE SECOND PROPERTY OF Conroe Server XTO Energy

Eddy County, New Mexico (NAD 27)

Corral Canyon Federal

Site: Well: 21H Wellbore: Wellbore #1 Design #1 Design: _.

Local Co-ordinate Reference: 3 Well 21H

TVD Reference:

North Reference: Survey Calculation Method: Minimum Curvature

WELL @ 3015.00usft (Pioneer 33) WELL @ 3015.00usft (Pioneer 33)

Measured		44 76 70	Vertical			Vertical	Dogleg	Bulld	Turn
Depth	Inclination A	zimuth	Depth		+E/-₩	Section	Rate	Rate	Rate
نات (usft)		(2) The second	(usft)	(usft)	(usft)	, (usft)	(°/100üsft) (°		'/100usft)
7,400.00	90.00	2.89	6,610.00	1,081.73	356.74	1,115.01	0.00	0.00	0.00
7,500.00	90.00	2.89	6,610.00	1,181.61	361.78	1,214.82	0.00	0.00	0.00
7,600.00	90.00	2.89	6,610.00	1,281.48	366.82	1,314.62	0.00	0.00	0.00
7,700.00	90.00	2.89	6,610.00	1,381.35	371.86	1,414.43	0.00	0.00	0.00
7,800.00	90.00	2.89	6,610.00	1,481.22	376.91	1,514.23	0.00	0.00	0.00
7,900.00	90.00	2.89	6,610.00	1,581.10	381.95	1,614.04	0.00	0.00	0.00
8,000.00	90.00	2.89	6,610.00	1,680.97		1,713.85	0.00	0.00	0.00
8,100.00	90.00	2.89	6,610.00	1,780.84	392.03	1,813.65	0.00	0.00	0.00
8,200.00	90.00	2.89	6,610.00	1,880.72	397.07	1,913.46	0.00	0.00	0.00
8,300.00	90.00	2.89	6,610.00	1,980.59	402.11	2,013.26	0.00	0.00	0.00
8,400.00	90.00	2.89	6,610.00	2,080.46	407.15	2,113.07	0.00	0.00	0.00
8,500.00	90.00	2.89	6,610.00	2,180.33	412.19	2,212.87	0.00	0.00	0.00
8,600.00	90.00	2.89	6,610.00	2,280.21	417.23	2,312.68	0.00	0.00	0.00
8,700.00	90.00	2.89	6,610.00	2,380.08	422.28	2,412.49	0.00	0.00	0.00
8,800.00	90.00	2.89	6,610.00	2,479.95	427.32	2,512.29	0.00	0.00	0.00
8.900.00	90.00	2.89	6,610.00	2,579.83	432.36	2,612.10	0.00	0.00	0.00
9,000.00	90.00	2.89	6,610.00	2,679.70	437.40	2,711.90	0.00	0.00	0.00
9,100.00	90.00	2.89	6,610.00	2,779.57	442.44	2,811.71	0.00	0.00	0.00
9,200.00	90.00	2.89	6,610.00	2,879.44	447.48	2,911.51	0.00	0.00	0.00
9,300.00	90.00	2.89	6,610.00	2,979.32	452.52	3,011.32	0.00	0.00	0.00
9,400.00	90.00	2.89	6,610.00	3,079.19	457.56	3,111.12	0.00	0.00	0.00
9,500.00	90.00	2.89	6,610.00	3,179.06	462.61	3,210.93	0.00	0.00	0.00
9,600.00	90.00	2.89	6,610.00	3,278.94	467.65	3,310.74	0.00	0.00	0.00
9,700.00	90.00	2.89	6,610.00	3,378.81	472.69	3,410.54	0.00	0.00	0.00
9,800.00	90.00	2.89	6,610.00	3,478.68	477.73	3,510.35	0.00	0.00	0.00
9,900.00	90.00	2.89	6,610.00	3,578.55	482.77	3,610.15	0.00	0.00	0.00
10,000.00	90.00	2.89	6,610.00	3,678.43	487.81	3,709.96	0.00	0.00	0.00
10,100.00	90.00	2.89	6,610.00	3,778.30	492.85	3,809.76	0.00	0.00	0.00
10,200.00	90.00	2.89	6,610.00	3,878.17	497.89	3,909.57	0.00	0.00	0.00
10,300.00	90.00	2.89	6,610.00	3,978.05	502.94	4,009.38	0.00	0.00	0.00
10,400.00	90.00	2.89	6,610.00	4,077.92	507.98	4,109.18	0.00	0.00	0.00
10,500.00	90.00	2.89	6,610.00	4,177.79	513.02	4,208.99	0.00	0.00	0.00
10,600.00	90.00	2.89	6,610.00	4,277.66	518.06	4,308.79	0.00	0.00	0.00
10,700.00	90.00	2.89	6,610.00	4,377.54	523.10	4,408.60	0.00	0.00	0.00
10,800.00	90.00	2.89	6,610.00	4,477.41	528.14	4,508.40	0.00	0.00	0.00
10,900.00	90.00	2.89	6,610.00	4,577.28	533.18	4,608.21	0.00	0.00	0.00
11,000.00	90.00	2.89	6,610.00	4,677.16	538.22	4,708.01	0.00	0.00	0.00
11,100.00	90.00	2.89	6,610.00	4,777.03	543.27	4,807.82	0.00	0.00	0.00
11,134.42	90.00	2.89	6,610.00	4,811.40	545.00	4,842.17	0.00	0.00	0.00
PBHL.						•			

Design Targets

+N/-S Northing +E/-W Easting ... ('); (usft) (usft)

PBHL - Corral Canyor

0.00

0.01 6,610.00

4,811.40

545.00

424,108.80

609,812.80

32° 9' 55.779 N 103° 58' 42.436 W

- plan hits target center

- Point



Project:

MS Energy Services

Planning Report



Conroe Server Database: Company: XTO Energy

Eddy County, New Mexico (NAD 27)

Corral Canyon Federal

11,134.42

6,610.00

4,811.40

Site: Well: Wellbore: 21H Wellbore #1 Design: Design #1

Local Co-ordinate Reference:

TVD Reference: North Reference:

Survey Calculation Method:

Well 21H

WELL @ 3015.00usft (Pioneer 33) WELL @ 3015.00usft (Pioneer 33)


Minimum Curvature


Formations	en en en en en en en en	tion described and market and the entire course of the section of	niani bilangan kanasan miningan mangan kanasan palaman kanasan ing kanasan baharata.	والمائك الاستعادية والمنافقة فاستنافها والمنافع والمنافعات
Measured	Vertical.			Dip
Depth (vieth)	Depth		Dip	Direction
	ingsity		Lithology (°)	CONTRACTOR OF THE SECOND
313.00	313.00	Rustler	, 0.00	0 6.46
733.00	733.00	Top Salt	0.00	0 6.46
2,796.00	2,796.00	Base Salt	0.00	6.46
3,011.00	3,011.00	Delaware	0.00	6.46
3,871.00	3,871.00	Cherry Canyon	0.00	6.46
5,500.00	5,500.00	Brushy Canyon	0.00	6.46
6,722.50	6,522.00	Basal Brushy Canyon	0.00	6.46
6,907.02	6,590.00	Brushy Canyon "E3"	0.00	6.46


Plan Annotations Measured Depth (usft)	Vertical Depth (usft)	Local Coordi +N/-S (usft)	nates +E/-W (usft)	Comment		
5,778.78	5,778.78	0.00	0.00	KOP, 8.00°/100' Build	١	
6,403.78	6,327.41	213.34	141.20	Hold 50.00° inc, 33.50° Azn	n	
6,583.78	6,443.12	328.32	217.31	Begin 10.00°/100' Build & T	urn	
7,071.31	6,610.00	753.46	340.17	Begin 90.00° Lateral		

545.00

PBHL

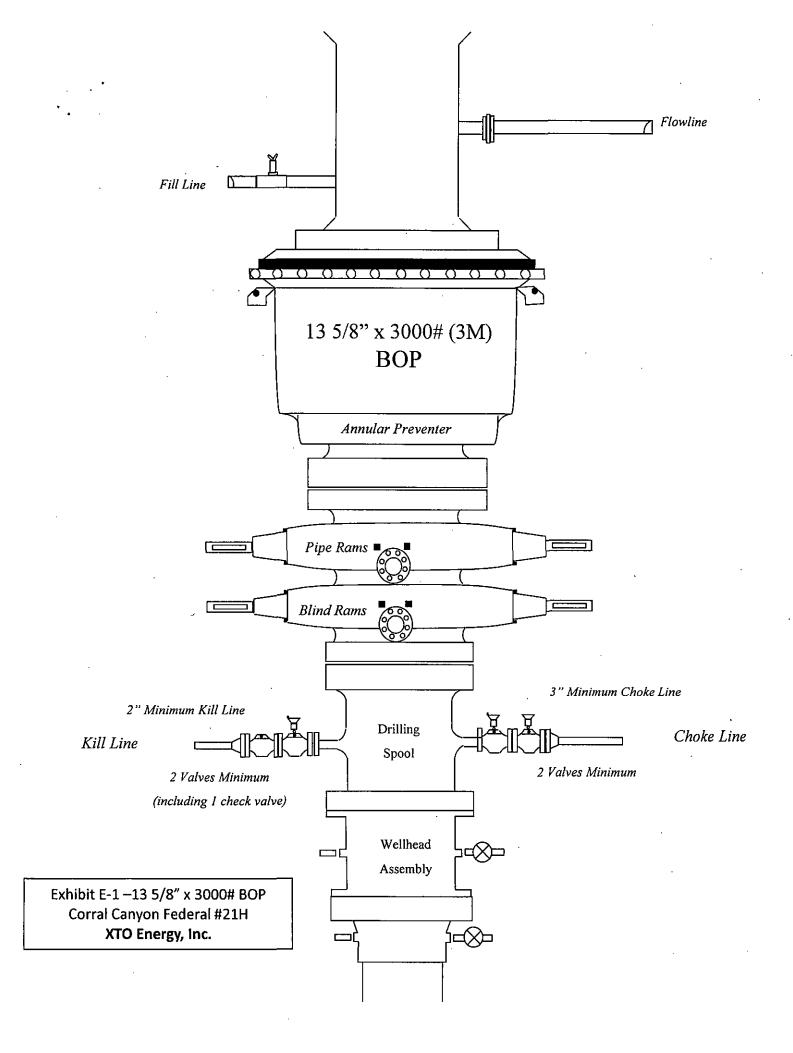

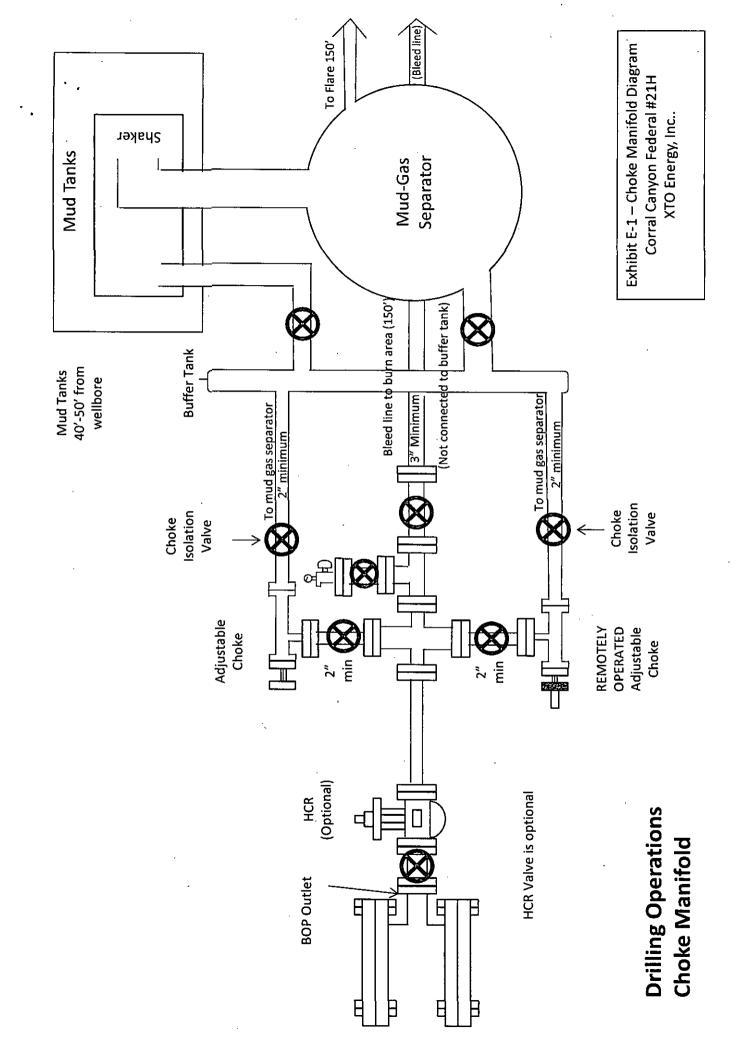

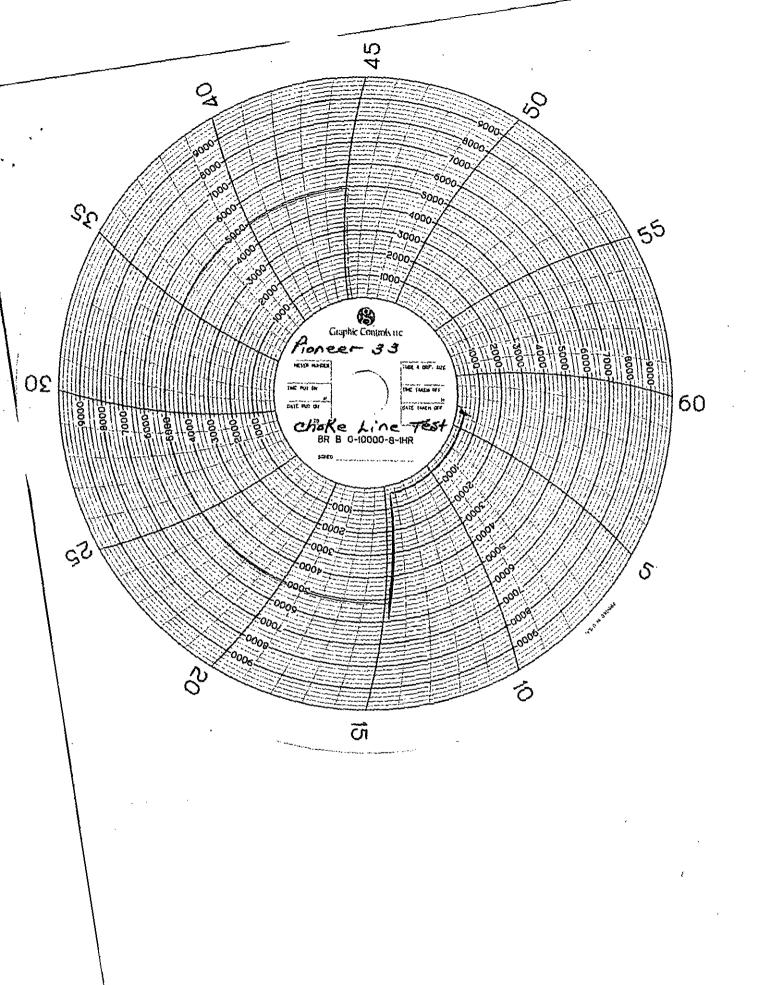



GATES E & S NORTH AMERICA, INC

DU-TEX

134 44TH STREET

CORPUS CHRISTI, TEXAS 78405

PHONE: 361-887-9807

FAX: 361-887-0812

EMAIL: crpe&s@gates.com

WEB: www.gates.com

GRADE D PRESSURE TEST CERTIFICATE

Customer :	Austin distributing	Test Date:	6/8/2014	
Customer Ref. :	PENDING	Nose Senal No.:	D-06081-1-1	
Invaice No. :	201709	Created By:	NORMA	
•	•			
_	·			
Product Description:	·	FD3.042.0R41/16.5KFLGE/E	,f:	
Product Description:		FD3.042.0R41/16.5KFLGE/E	,ī:	
<u> </u>	4 1/16 u1.5K FLG	FD3.042.0R41/16.5KFLGE/E End Fitting 2 :	.F: 4 1/16 in.5K FLG	
Product Description: End Filting 1 : Gales Part No. :	4 1/16 m.5K FLG 4774-6001			


Gates E & S North America, Inc. certifies that the following hose assembly has been tested to the Gates Oilfield Roughneck Agreement/Specification requirements and passed the 15 minute hydrostatic test per API Spec 7K/Q1, Fifth Edition, June 2010, Test pressure 9.6.7 and per Table 9 to 7,500 psi in accordance with this product number. Hose burst pressure 9.6.7.2 exceeds the minimum of 2.5 times the working pressure per Table 9.


Quality: QUALITY Technical Supervisor: PRODUCTION

Date: 5/8/2014

Signature: Signature:

Form PTC - 01 Rev.0 2

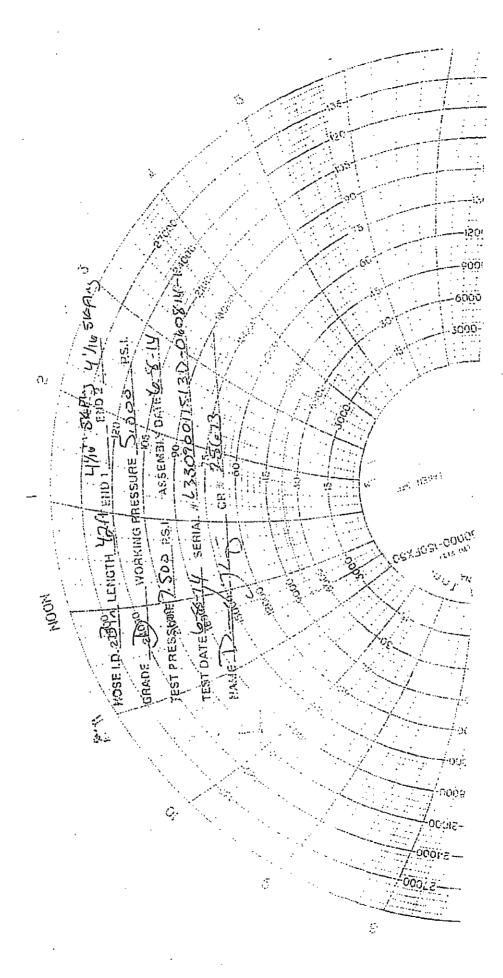

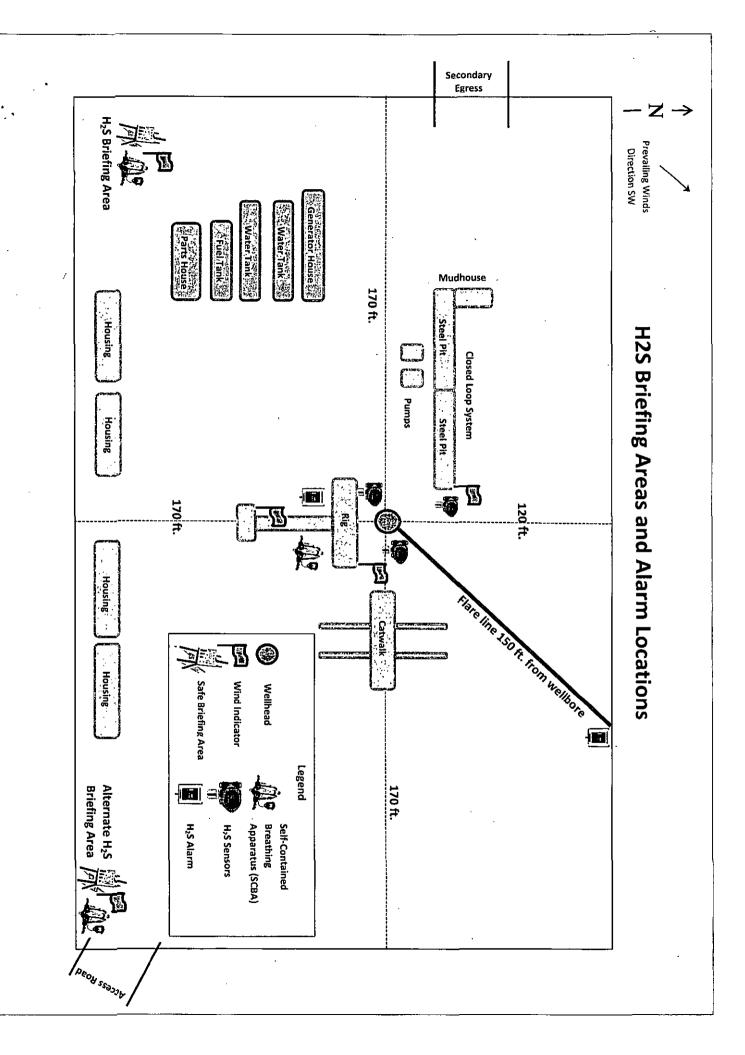



July 15, 2015

Stephanie Rabadue XTO Energy Inc. 500 W. Illinois St Ste 100 Midland, TX 79701 432-620-6714 stephanie_rabadue@xtoenergy.com

Bureau of Land Management 620 E. Greene Carlsbad, NM 88220 575-887-6544

Dear Sirs:

XTO Energy Inc. does not anticipate encountering H2S while drilling the Corral Canyon Federal #21H located in Section 3, T25S, R29E, in Eddy County, New Mexico. As a precaution, I have attached an H2S contingency plan along with a gas analysis of our well stream. If you need anything further, please contact me at the telephone number or email listed above.

Thank you,

Stephanie Rabadue Regulatory Analyst



HYDROGEN SULFIDE (H2S) CONTINGENCY PLAN

Assumed 100 ppm ROE = 3000'

100 ppm H2S concentration shall trigger activation of this plan.

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must

- · Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- Evacuate any public places encompassed by the 100 ppm ROE.
- Be equipped with H₂S monitors and air packs in order to control the release.
- Use the "buddy system" to ensure no injuries occur during the response
- Take precautions to avoid personal injury during this operation.
- Contact operator and/or local officials to aid in operation. See list of phone numbers attached.
- · Have received training in the
 - o Detection of H₂S, and
 - o Measures for protection against the gas,
 - o Equipment used for protection and emergency response.

Ignition of Gas source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever this is an ignition of the gas.

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H ₂ S				600 ppm
Sulfur Dioxide	SO ₂	2.21 Air = I	2 ppm	N/A	1000 ppm

Contacting Authorities

XTO Energy Inc's personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available including directions to site. The following call list of essential and potential responders has been prepared for use during a release. (Operator Name)'s response must be in coordination with the State of New Mexico's "Hazardous Materials Emergency Response Plan" (HMER).

EUNICE OFFICE – EDDY & LEA COUNTIES

EMSU @ Oil Center, NM, 8/10ths mile west of Hwy 8 on Hwy 175 Eunice, NM	575-394-2089
XTO ENERGY INC PERSONNEL:	
Boogie Armes, Sr. Drilling Superintendent Bob Chance, Drilling Superintendent Jeff Raines, Construction Foreman Dudley McMinn, EH & S Manager Rick Wilson, Production Foreman	432-556-7403 432-296-3926 432-557-3159 432-557-7976 575-441-1147
SHERIFF DEPARTMENTS:	
Eddy County Lea County	575-887-7551 575-396-3611
NEW MEXICO STATE POLICE:	575-392-5588
FIRE DEPARTMENTS:	911
Carlsbad Eunice Hobbs Jal Lovington	575-885-2111 575-394-2111 575-397-9308 575-395-2221 575-396-2359
HOSPITALS:	011
Carlsbad Medical Emergency Eunice Medical Emergency Hobbs Medical Emergency Jal Medical Emergency Lovington Medical Emergency	911 575-885-2111 575-394-2112 575-397-9308 575-395-2221 575-396-2359
AGENT NOTIFICATIONS:	
Bureau of Land Management New Mexico Oil Conservation Division Mosaic Potash - Carlsbad	575-393-3612 575-393-6161 575-887-2871
CONTRACTORS:	
ABC Rental – Light Towers Bulldog Services – Trucking/Forklift Champion – Chemical Indian Fire & Safety Key – Dirt Contractor Key Tools – Light Towers Sweatt – Dirt Contractor RWI – Contract Gang	575-394-3155 575-391-8543 575-393-7726 575-393-3093 575-393-3180 575-393-2415 575-397-4541 575-393-5305

Corral Canyon Oil and Gas Exploration Project

Master Surface Use Plan Eddy County, New Mexico

XTO Energy, Incorporated 500 W. Illinois St., Suite 100 Midland, TX 79701

Original: July 2014
Revised: August 2014 (typographical errors, per J. Rice)

Corral Canyon Oil and Gas Exploration Project

Master Surface Use Plan

Introduction

The following Exhibits are attached to this Surface Use Plan of Operations (SUPO):

Exhibit "A"	Project Map				
LAHIDIL A	Displays: Existing roads, proposed roads, proposed well pads, proposed facility location, proposed				
	flowline route, proposed gas pipeline route, proposed salt water disposal flowline route, proposed				
	electrical route				
•	A.1 Legend & Distance Summary				
Exhibit "B"	Proposed Well List (includes v-door orientation)				
Exhibit "C"	One-Mile Radius Maps				
	C.1 Section 6				
	C.2 Section 5				
	C.3 Section 4				
	C.4 Section 3				
Exhibit "D"	Production Facilities .				
	D.1 Facilities Plat				
	D.2 Facilities Diagram				
	D.3 Salt Water Disposal Permit				
	D.4 Facilities Berm Diagram				
Exhibit "E"	New Mexico Office of the State Engineer Water Documents				
Exhibit "F"	Rig Layout Diagrams				
	F.1 V-Door East				
	F.2 V-Door West				
Exhibit "G"	600'x600' Well Maps (24 Total)				
Exhibit "H"	Interim Reclamation Diagrams				
	H.1 Corral Canyon #1H/#13H				
	H.2 Corral Canyon #2H/#14H				
	H.3 Corral Canyon #3H/#15H				
	H.4 Corral Canyon #4H/#16H				
	H.5 Corral Canyon #5H/#17H				
	H.6 Corral Canyon #6H/#18H				
	H.7 Corral Canyon #7H/#19H				
	H.8 Corral Canyon #8H/#20H				
	H.9 Corral Canyon #9H/#21H				
	H.10 Corral Canyon #10H/#22H				
	H.11 Corral Canyon #11H/#23H				
	H.12 Corral Canyon #12H/#24H				

XTO Energy, Incorporated (XTO Energy) proposes to conduct an oil and gas exploratory drilling program in the Rustler Bluff/Corral Draw, North project area which includes drilling, completion and abandonment of a maximum of 24 wells with a centralized tank battery on Bureau of Land Management (BLM) administered lands located 6.7 miles Southeast of Malaga in Eddy County, New Mexico. XTO Energy has identified and staked 12 dual-well pad locations and 1 Central Tank Battery pad with BLM representatives present.

One drilling rig and one completion team will be required throughout the duration of the project.

Well Site Locations

The results of the Corral Canyon Exploration Program will determine whether economic quantities of oil and gas can be produced in the Corral Canyon area with two primary formations targeted. Fewer wells may be drilled during exploration than are proposed due to well test results and geologic and market uncertainties. Well locations will be determined based on cross-section variations and details. Locations will be selected to minimize the likelihood of encountering faults and/or drilling hazards while still targeting suitably productive zones.

If drilling results in an unproductive well, the well will be plugged and abandoned as soon as practical after the conclusion of production testing. Productive wells may be shut-in temporarily for BLM authorization for production activities and facilities.


Surface Use Plan

1. Existing Roads

- A. The Corral Canyon area is accessed by existing U.S. Highway 285 (Pecos Hwy.) and County Road 725 (Longhorn Road). Going Northeast on Co. Rd. 725 approximately 4.2 miles, across the Pecos River and unnamed State and BLM roads adjacent to and within the project area. A Transportation Plan identifying existing roads that will be used to access the project area is included in Exhibit "A".
- B. There is 16,168' of existing roads in the Corral Canyon lease area. Existing roads will be maintained in as good or better condition as they existed prior to commencement of the exploration program. All equipment and vehicles will be confined to the routes shown in Exhibit "A". Maintenance of the access roads will continue until abandonment and reclamation of the well pads is completed.

2. New or Upgraded Access Roads

- A. New Roads. There is a total of 6,233' of proposed and staked access roads in the Corral Canyon lease area.
- B. Well Pads. The well pads selected for development will determine which existing roads will be upgraded and which new roads will be built. The Project Map (Exhibit "A") shows the locations of existing and proposed roads that will need to be upgraded or constructed to access the well pads.
- C. Anticipated Traffic. After well completion, travel to each well site will included one lease operator truck and two oil trucks per day until the Central Tank Battery is completed. Upon completion of the Central Tank Battery, one lease operator truck will continue to travel to each well site to monitor the working order of the wells and to check well equipment for proper operation. Two oil trucks will continue to travel to the Central Tank Battery only for oil hauling. Additional traffic will include one maintenance truck periodically throughout the year for pad upkeep and weed removal. Well service trips will include only the traffic necessary to work on the wells or provide chemical treatments periodically and as needed throughout the year.
- D. Routing. All equipment and vehicles will be confined to the travel routes laid out in Exhibit "A" unless otherwise approved by the BLM and applied for by XTO Energy.
- E. Road Dimensions. The maximum width of the driving surface of new roads will be 14 feet. The roads will be crowned and ditched with a 2% slope from the tip of the crown to the edge of the driving surface. The ditches will be 1 foot deep with 3:1 slopes. The driving surface will be made of 6" rolled and compacted caliche.



- F. Surface Material. Surface material will be native caliche. The average grade of all roads will be approximately 3%.
- G. Fence Cuts: No.
- H. Fences:
 - a. Corral Canyon Federal #3H/#15H: A 3-strand fence will be constructed around the Southeast corner extending 60' North and 60' West to keep people and traffic from encroaching on a water run-off as agreed upon during the well staking dated 3/4/2014.
 - b. Corral Canyon Federal #6H/#18H: A 3-strand fence will be constructed around the Southwest corner extending 60' North and 60' east to keep people and traffic from encroaching on a water run-off as agreed upon during the well staking dated 4/1/2014.
- I. Cattle Guards: No
- J. Turnouts: No
- K. Culverts: A minimum of 1 culvert will be installed every 240' on the proposed lease road from the #9H/#21H well (#9H/#21H location: 170 FSL & 85 FWL, Section 3-T25S-R29E) to the #10H/#22H (#10H/#22H location: 500 FNL & 2410 FEL, Section 10-T25S-R29E) well pad. Appropriate plat diagrams and Right-of-Ways (SF-299) will be filed if the exploration project continues to this point.
- L. Cuts and Fills: Not significant
- M. **Topsoil**. Approximately 6 inches of topsoil (root zone) will be stripped from the proposed access road prior to any further construction activity. The topsoil that was stripped will be spread along the edge of the road and within the ditch. The topsoil will be seeded with the proper seed mix designated by the BLM.
- N. Maintenance. The access road will be constructed and maintained as necessary to prevent soil erosion and accommodate all-weather traffic. The road will be crowned and ditched with water turnouts installed as necessary to provide for proper drainage along with access road route.
- O. Drainage. The access road and associated drainage structures will be constructed and maintained in accordance with road guidelines contained in the joint BLM/USFS publication: Surface Operating Standards for Oil and Gas Exploration and Development, The Gold Book, Fourth Edition and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction.

3. Location of Proposed Wells

A. All proposed wells will be on the proposed pads shown on Exhibit "A" and are listed in Exhibit "B".

4. Location of Existing Wells

A. See Exhibit "C" Figures C.1, C.2, C.3, C.4" displaying wells within a one-mile radius of all well locations.

5. Location of Proposed Production Facilities

- A. Ancillary Facilities. No off-pad ancillary facilities are planned during the exploration phase including, but not limited to: campsites, airstrips or staging areas.
- B. Production Facilities. A separate 250' x 400' pad was staked with the BLM for construction and use as a Central Tank Battery (Corral Canyon Central Tank Battery). This pad is located in the SE/4 of Section 5-T25S-R29E of Eddy County, New Mexico [See Exhibit "D"] directly adjacent to the Corral Canyon Federal #4H & #16H dual well pad.
- C. Facility Equipment. In the event that all 24 wells are drilled, the facility pad is expected to contain: 8-1000bbl oil tanks, 8-1000bbl water tanks, 2-LACT meters, 1-flare scrubber, 1-gas scrubber, 1-compressor pad, 1-dehy pad and 2-heater treaters as well as additional equipment as depicted on Exhibit "D" D.2. This equipment list and the development of these facilities are variable and subject to the number of wells drilled, production results based on well tests and geologic and market uncertainties. In the event that the planned 24 wells are not drilled, excess facility pad will be

- reduced in size and reclaimed with prior submission of appropriate 3160-5 sundry notices to the Bureau of Land Management.
- D. Oil Flowlines. In the event the wells are found productive, 4" composite spoolable HDE poly pipe flowlines with a maximum pressure rating of 125psi (anticipated pressure: 80psi) will be laid on the surface within existing and proposed lease road corridors from the well to the Corral Canyon Central Tank Battery (SE/4 Section 5) [See Exhibit "A" for flowline route & Exhibit "D" Figure D.1 for facility location.] where the oil, gas and water will be metered and appropriately separated. Oil will be hauled from the location by truck following existing and proposed lease roads. The total distance of proposed oil flowline is: 22,401' (4.24mi) following existing and proposed lease road surface corridors.
- E. Gas Pipeline. A gas pipeline is anticipated to be staked and installed along 7949' of existing roads in the area within lease road corridors. All compressor and dehydration facilities for gas sales purchasing will be located on XTO Energy, Incorporated's Corral Canyon Tank Battery facility pad as depicted on Exhibit "D" D.2.
- F. Disposal Facilities. All disposal lines will be 4" composite spoolable poly pipe flowlines with a maximum pressure rating of 125psi and will lay on the surface following 7949' of existing and proposed lease road corridors from the proposed Corral Canyon Central Tank Battery located in the SE/4 Section 5-T25S-R29E to the existing Goldenchild 6 State SWD #1, API #: 30-015-41846, NMOCD Order: SWD-1458, located 800 FSL & 330 FEL, Unit P-Section 6-T25S-R29E. A copy of the Goldenchild 6 State SWD #1 C-102 and NMOCD approved SWD permit is included (see Exhibit "D" Figure D.3).
- G. Flare. The flare stack will be 50'x50', located at the Southeastern corner of the Corral Canyon Federal #4/#16 well pad (see Exhibit "H" F.4) and will be sized for 10 to 15mmscf/d. The flare will be built only after the Corral Canyon Federal #4/#16 wells are drilled and completed.
- H. Aboveground Structures. All permanent (on site six months or longer) aboveground structures constructed or installed on location and not subject to safety requirements will be painted earthtone colors such as 'desert tan' that reduce the visual impacts of the built environment.
- Containment Berms. Containment berms will be constructed completely around any production facilities designed to hold fluids. The containment berms will be constructed of compacted subsoil, be sufficiently impervious, hold 1 ½ times the capacity of the largest tank and away from cut or fill areas.
- J. Electrical. All electrical poles and lines will be placed within existing and proposed lease roads corridors. The electrical provider is anticipated to be Excel Energy. All powerlines will be tied into the Goldenchild lease located in Section 6-T25S-R29E (surface owner: New Mexico State Lands), directly adjacent to the Corral Canyon project area (see Exhibit "A"). All electrical lines will be primary 12,740 volt to properly run expected production equipment. Provided that all 24 wells are developed, no more than 5.5 miles of electrical lines will be run. This distance is a maximum approximation and may vary based on the lease road corridors, varying elevations and terrain in the area.

6. Location and Types of Water Supply

The well will be drilled using a combination of water mud systems as outlined in the Drilling Program. The water will be obtained from commercial water stations in the area and hauled to the location by transport truck using the existing and proposed roads depicted in the attached exhibits. No water well will be drilled on the location.

Water for drilling, completion and dust control will be purchased from the following company:

SB Oilfield Services 213 S. Mesa Carlsbad, NM 88220

Water for drilling, completion and dust control will be supplied to SB Oilfield Services for sale to XTO Energy, Inc from the following two sources (see Exhibit "E"):

1st Well: C3423

Section 26-T24S-R28E, SW/NE quarter

Latitude: 32 degrees, 11 minutes, 26.2 seconds Longitude: 104 degrees, 03 minutes, 29.1 seconds

2nd Well: C3358

Section 26-T24S-R28E, SE/NW quarter

Latitude: 32 degrees, 11 minutes, 31.58 seconds Longitude: 104 degrees, 03 minutes, 43.11 seconds

Anticipated water usage for drilling includes an estimated 30,000 barrels of water to drill a horizontal well in a combination of fresh water and brine as detailed in the mud program in the drilling plans. These volumes are calculated for ~1.5bbls per foot of hole drilled with 40% excess to accommodate any lost circulation or wash out that may occur. Actual water volumes used during operations will depend on the depth of the well, length of horizontal sections, and the losses that may occur during the operation.

Well completion is expected to require approximately 50,000 barrels of fresh water per horizontal well. Actual water volumes used during operations will depend on the depth of the well and length of horizontal sections. After production is established, XTO may complete wells with approximately 50,000 barrels of produced water. If this decision is made, the BLM will be notified appropriately, proper permitting will ensue with the New Mexico Oil Conservation division and this surface use plan will be amended as needed.

A fresh water frac pond is anticipated after the wells are drilled. The maximum size anticipated for 24 wells is 250'x250'x15' with a HDPE 30mil liner. The potential location of the frac pond is unknown at this time but will be staked with a BLM representative present in order to make certain all wildlife habitat and hydrological areas are protected with minimal environmental impact.

7. Construction Activities

- A. Construction, reclamation, and/or routine maintenance will not be conducted during periods when the soil conditions for construction could lead to impacts to the surrounding environment, or when watershed damage is likely to occur as a result of these activities.
- B. Any construction material that may be required for surfacing of the drill pad and access road will be from a contractor having a permitted source of materials within the general area. No construction materials will be removed from federal lands without prior approval from the appropriate surface management agency. All roads and well pads will be constructed of 6" rolled and compacted caliche.

8. Methods for Handling Waste

- Cuttings. The well will be drilled utilizing a closed-loop mud system. Drill cuttings will be held in roll-off style mud boxes and taken to a New Mexico Oil Conservation Division (NMOCD) approved disposal site.
- **Drilling Fluids.** These will be contained in steel mud pits and then taken to a NMOCD approved commercial disposal facility.
- Produced Fluids. Water produced from the well during completion will be held temporarily in steel
 tanks and then taken to a NMOCD approved commercial disposal facility. Oil produced during
 operations will be stored in tanks until sold.
- Sewage. Portable, self-contained toilets will be provided for human waste disposal. Upon completion of
 drilling and completion activities, or as required, the toilet holding tanks will be pumped and the
 contents thereof disposed of in an approved sewage disposal facility. All state and local laws and
 regulations pertaining to the disposal of human and solid waste will be complied with. This equipment
 will be properly maintained during the drilling and completion operations and will be removed when all
 operations are complete.
- Garbage and Other Waste Materials. All garbage, junk and non-flammable waste materials will be
 contained in a self-contained, portable dumpster or trash cage, to prevent scattering and will be
 removed and deposited in an approve sanitary landfill. Immediately after drilling all debris and other
 waste materials on and around the well location not contained in the trash cage will be cleaned up and
 removed from the location. No potentially adverse materials or substances will be left on the location.
- Debris. Immediately after removal of the drilling rig, all debris and other waste materials not contained in the trash cage will be cleaned and removed from the well location. No potential adverse materials or substances will be left on location.

Hazardous Materials.

- i. All drilling wastes identified as hazardous substances by the Comprehensive Environmental Response Compensation Liability Act (CERCLA) removed from the location and not reused at another drilling location will be disposed of at a hazardous waste facility approved by the U.S. Environmental Protection Agency (EPA).
- ii. XTO Energy, Incorporated and its contractors will comply with all applicable Federal, State and local laws and regulations, existing or hereafter enacted promulgated, with regard to any hazardous material, as defined in this paragraph, that will be used, produced, transported or stored on the oil and gas lease. "Hazardous material" means any substance, pollutant or contaminant that is listed as hazardous under the CERCLA of 1980, as amended, 42 U.S.C 9601 et seq., and its regulation. The definition of hazardous substances under CERLCA includes any 'hazardous waste" as defined in the RCRA of 1976, as amended, 42 U.S.C. 6901 et seq., and its regulations. The term hazardous material also includes any nuclear or nuclear by-product material as defined by the Atomic Energy Act of 1954, as amended, 42 U.C.S. 2011 et seq. The term does not include petroleum, including crude oil or any fraction thereof that is not otherwise specifically listed or designated as a hazardous substance under CERCLA Section 101 (14) U.S.C. 9601 (14) nor does the term include natural gas.
- iii. No hazardous substances or wastes will be stored on the location after completion of the well.
- iv. Chemicals brought to location will be on the Toxic Substance Control Act (TSCA) approved inventory list.
- v. All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in Notice to Lessees (NTL) 3A will be reported to the BLM Carlsbad Field Office. Major events will be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days.

9. Well Site Layout

A. Rig Plat Diagrams: A drawing of a typical dual-drilling pad is shown in figures F.1 and F.2 in Exhibit "F". A typical drilling pad will be 430 feet by 300 feet. This will allow enough space for cuts and fills, topsoil storage, and storm water control.

- B. Closed-Loop System: There will be no reserve pit as each well will be drilled utilizing a closed loop mud system. The closed loop system will meet the NMOCD requirements 19.15.17.
- C. V-Door Orientation: V-door orientation will vary from well-to-well due to the surface conditions and agreed upon standards with Jesse Rice, BLM Natural Resource Specialist, present at on-site inspections. For individual well v-door orientations, see Exhibit "B" and Exhibit "F".
- D. A 600' x 600' area has been staked and flagged around each well pad. (Exhibit "G").
- E. All equipment and vehicles will be confined to the approved disturbed areas of this APD (i.e., access road, well pad and topsoil storage areas).

10. Plans for Surface Reclamation

Non-Commercial Well (Not Productive), Interim & Final Reclamation:

Definition: Reclamation includes disturbed areas where the original landform and a natural vegetative community will be restored and it is anticipated the site will not be disturbed for future development.

Reclamation Standards:

The portions of the pad not essential to production facilities or space required for workover operations will be reclaimed and seeded as per BLM requirements for interim reclamation. (See Exhibit "H" Figures H.1-12)

All equipment and trash will be removed, and the surfacing material will be removed from the well pad and road and transported to the original caliche pit or used to maintain other roads. The location will then be ripped and seeded.

The original stock piled topsoil will be spread over the areas being reclaimed and the original landform will be restored for all disturbed areas including well pads, production facilities, roads, pipelines, and utility corridors as close as possible to the original topography. The location will then be ripped and seeded

A self-sustaining, vigorous, diverse, native (or otherwise approved) plan community will be established on the site with a density sufficient to control erosion and invasion by non-native plants and to re-establish wildlife habitat or forage production. At a minimum, the established plant community will consist of species included in the seed mix and/or desirable species occurring in the surrounding natural vegetation.

Erosion features are equal to or less than surrounding area and erosion control is sufficient so that water naturally infiltrates into the soil and gullying, headcutting, slumping, and deep or excessive rills (greater than 3 inches) are not observed.

The site will be free of State-or County-listed noxious weeds, oil field debris and equipment, and contaminated soil. Invasive and non-native weeds will be controlled.

Seeding:

<u>Seedbed Preparation</u>: Initial seedbed preparation will consist of recontouring to the appropriate interim or final reclamation standard. All compacted areas to be seeded will be ripped to a minimum depth of 18 inches with a minimum furrow spacing of 2 feet, followed by recontouring the surface and then evenly spreading the stockpiled topsoil. Prior to seeding, the seedbed will be scarified to a depth of no less than 4-6 inches. If the site is to be broadcast seeded, the surface will be left rough enough to trap seed and snow, control erosion, and increase water infiltration.

- If broadcast seeding is to be used and is delayed, final seedbed preparation will consist of
 contour cultivating to a depth of 4-6 inches within 24 hours prior to seeding, dozer tracking, or
 other imprinting in order to break the soil crust and create seed germination micro-sites.
- <u>Seed Application</u>. Seeding will be conducted no more than two weeks following completion of final seedbed preparation. A certified weed-free seed mix designed by the BLM to meet reclamation standards will be used.
- If the site is harrowed or dragged, seed will be covered by no more than 0.25 inch of soil.

11. Surface Ownership

- A. Within the Corral Canyon project area, 92% of the surface is under the administrative jurisdiction of the Bureau of Land Management and 8% of the surface is under the administrative jurisdiction of the New Mexico State Land Office. (See Exhibit "A").
- B. The surface is multiple-use with the primary uses of the region for grazing and for the production of oil and gas.
- C. The grazing lessee of note for this area is: W.P. Ranches Family Limited Partnership.

12. Other Information

Surveying

- Well Sites. Well pad locations have been staked. Surveys of the proposed access roads and well pad locations have been completed by John West Surveying, a registered professional land surveyor. Center stake surveys with access roads have been completed on State and Federal lands with Jesse Rice, Bureau of Land Management Natural Resource Specialist, in attendance.
- Cultural Resources. A Class III Cultural Resources Examination has been completed on all wells by Boone
 Archaeological Services and the results will be forwarded to the BLM Office. XTO has entered into the PA
 with the BLM on 2/18/2014 where all necessary applications and dues will be paid prior to any
 construction activities based on the extent of the project development.
- Dwellings and Structures. There are no dwellings or structures within 2 miles of this location.

Soils and Vegetation

- Environmental Setting. Soil area is a combination of Pajarito-Dune land complex, loamy sand with 0-3% slopes, and Potter-Simona complex, shallow sandy soil with 5 to 25% slopes. These soils support grassland dominated by black grama throughout with dropseeds and bluestems more prevalent in the loamier areas. The areas with shallower soil have fewer shrubs and more litter cover with shrubs such as sand sage, shinnery oak and mesquite appearing as the soil presents more loam. Other vegetation such as creosote, mesquite, catclaw, snakeweed, and soapweed yucca grow within the area.
- Traffic. No truck traffic will be operated during periods or in areas of saturated ground when surface
 rutting could occur. The access road will be constructed and maintained as necessary to prevent soil
 erosion and accommodate all-weather traffic. The road will be crowned and ditched with water turnouts
 installed as necessary to provide for proper drainage along the access road route.
- Water. There is permanent or live water in the immediate area lying approximately 1-3 miles to the North/Northeast and West (Pecos River) variable to well pad location.

13. Bond Coverage

Bond Coverage is Nationwide. Bond Number: UTB000138

Operator's Representatives:

The XTO Energy, Incorporated representatives for ensuring compliance of the surface use plan are listed below:

Surface:

Stephanie Rabadue
Regulatory Analyst
XTO Energy, Incorporated
500 W. Illinois St., Suite 100
Midland, Texas 79701
432-620-6714
stephanie_rabadue@xtoenergy.com

Jeff Raines
Construction Superintendent
XTO Energy, Incorporated
500 W. Illinois St., Suite 100
Midland, Texas 79701
432-620-4349
jeff_raines@xtoenergy.com

Drilling:

Weston Turner
Drilling Engineer
XTO Energy, Incorporated
500 W. Illinois St., Suite 100
Midland, Texas 79701
432-620-4380
weston_turner@xtoenergy.com

Production:

David Luna
Production Engineer
XTO Energy, Incorporated
500 W. Illinois St., Suite 100
Midland, Texas 79701
432-620-6742
david_luna@xtoenergy.com

Facilities:

Gary Hoke
Facilities Engineer
XTO Energy, Incorporated
500 W. Illinois St., Suite 100
Midland, Texas 79701
432-620-4368
gary_hoke@xtoenergy.com

Corral Canyon Oil and Gas Exploration Project Master Surface Use Plan

Exhibit A.1 Legend & Distance Summary

Line	Total Distance	Depicted By
Existing Roads	16,168'	Track Line
Proposed Roads	6,233,	Solid Black Line
Proposed Electrical & Pipeline	23,379′	Dashed Line
Proposed SWD & Anticipated Gas Route	7,949′	Yellow Highlighted Area

Corral Canyon Project Development Exhibit "B" - List of Proposed Wells XTO Energy, Incorporated

1000						-	
Well Name & Number	Footages	Section	Township	Range	Surface Owner	Elevation	V-Door
Corral Canyon Federal 1H	190 FSL & 470 FEL	9	255	29E	State (Fed Minerals)	2912'	East
Corral Canyon Federal 2H	110 FSL & 1810 FWL	5	255	29E	Federal	2941	East
Corral Canyon Federal 3H	170 FSL & 2210 FEL	5	255	29E	Federal	3004	East
Corral Canyon Federal 4H	200 FSL & 760 FEL	2	255	29E	Federal	2948'	West
Corral Canyon Federal 5H	180 FSL & 171 FWL	4	255	29E	Federal	2945'	East
Corral Canyon Federal 6H	175 FNL & 1980 FWL	6	255	29E	Federal	2947	East
Corral Canyon Federal 7H	170 FSL & 1980 FEL	4	255	29E	Federal	2976'	East
Corral Canyon Federal 8H	170 FSL & 610 FEL	4	255	29E	Federal	2998	West
Corral Canyon Federal 9H	170 FSL & 85 FWL	3	255	29E	Federal	2998	West
Corral Canyon Federal 10H	500 FNL & 2410 FWL	10	255	29E	Federal	3032	West
Corral Canyon Federal 11H	5 FNL & 2155 FEL	10	255	29E	Federal	3024'	West
Corral Canyon Federal 12H	185 FNL & 835 FEL	10	255	29E	Federal	3035'	East
Corral Canyon Federal 13H	190 FSL & 520 FEL	9	255	29E	State (Fed Minerals)	2912'	East
Corral Canyon Federal 14H	120 FSL & 1760 FWL	5	255	29E	Federal	2942'	East
Corral Canyon Federal 15H	170 FSL & 2260 FEL	5	255	29E	Federal	3005'	East
Corral Canyon Federal 16H	200 FSL & 710 FEL	5	255	29E	Federal	2947	West
Corral Canyon Federal 17H	180 FSL & 221 FWL	4	255	29E	Federal	2944'	East
Corral Canyon Federal 18H	175 FNL & 2030 FWL	6	255	29E	Federal	2948'	East
Corral Canyon Federal 19H	170 FSL & 2030 FEL	4	255	29E	Federal	2973'	East
Corral Canyon Federal 20H	170 FSL & 560 FEL	4	255	29E	Federal	2998'	West
Corral Canyon Federal 21H	170 FSL & 35 FWL	3	255	29E	Federal	2998'	West
Corral Canyon Federal 22H	500 FNL & 2460 FWL	10	255	29E	Federal	3030'	West
Corral Canyon Federal 23H	5 FNL & 2205 FEL	10	255	29E	Federal	3025'	West
Corral Canyon Federal 24H	185 FNL & 885 FEL	10	255	29E	Federal	3035'	East

Exhibit "C" C.1 Section 6

One-Mile Radius Map

\ 10 [A 211 21	JARTET	ABAUNIT T	FRORT'7	COM1 B	9 HAFRU	10 10 10 10 10 10 10 10 10 10 10 10 10 1	11			
N M	PAINARRA 1	MALAGAI	JNIT TR91	A 1 FORT '7 MALAGAUNIT TR1 "18"COM1 F COM1 SAUNIT TR5 1	TOPDAR CANYON	TANKS THE STATE OF	ARROUN 1514CED.	RCANYON-	POKERLAKEU	IT 274 POKERTAKE UNIT 26 POKER LAK	ANITAS Ini-
'nΫ́	1.7	CRAFT1	FOR	18°COM1	BL	F 154 BAB W	ARROUN 158HA	RROUN 153	POKÉR	LAKE UNIT 208POK	FE AKE 49
KM.	CRAI	F † 1	FORT'1	COMI		HARR	158 HARRO	ARROUN 153			7
Z_{-1}	LIGHTE	COT1	13 MALA	AUNITARS1	17 BUCK H	STATE 716 HARRO	15 16 ¹⁵	ARROUN 15 4	13 POKE	T 18 RLAKE UNIT 210	17
	HTFOOM LIGHTF	COTCOM	12MALAGA	UNITTR71	מי	HARRO	1517 HARROU	N 15 13	POKER LAN	E UNIT 2000 OKER I	AKE UNIT 226
114					AR 1	BUCK H STATE 9	HARROUN 22	N 15 13 ORE IDA '14' FEDE	RAL9 POKERLA	KE UNIT 2172	Mirer
W	DEWE	YIREED	GUY 1	B BAFR 1 BEAR	IBEAR X AV	10000000	LCHARROUN 223	İ	POKER CAKE DI	17290POKER LAKE POKER LAK	UNIT 215
ll.	SUN-F	IĘED 1	DOCFE	ERAL 10UEEN LKE	"19'FĚDRL1	RWERBEND FEDI	FINARROUN 223 RAL 1 CEDAR C	ANYON 23 1H		POKER LAKE UNI	7216
22	23 GUMB1	rh	24	19	₂₀ COYO	TE '21' 1 ₂₁ YOTE '21' 4			2.1	ا ا	20
<u>}</u>	REED GUY AV	vþ.2	-,		0	YOTE 21 4	CEDAR CAN	ND '221' FEDERAL .	POKER ČŘKE UNIT	220POKER LAKE U	UT 220
PNING	(\$TATE1 / 1 24S 2	<u>.</u>		QUEEN LAKE	20 FEDERAL 2HC	GAINES '21' 1	29E VORTE	MD 257 FEDERAL.	SPOKER DAKE UNI	KE UNIT 2 245	00
** -	245 21 MO1	-CRAF	F'25-COM		COLDN COLD	GAINES 28. 6243	Zae Aoute	77 10010-20-00	POKEKL	POKER LAKE	DNIT-238
	MC1 CRAF	1,50,00	F*25*GOM M1	ROCK RIDGE	EDERAL COM CEDERAL 3H	SAIF 2		SPUD 26 FE SPUDS 6 27 3	25 FEDERAL 2PO	ER LAKE UNIT 239	
- ti. 1	TATE 1 MONGO B	AV STATE	1H	Į ROCK RI	DGE FEDERAL 3H		VORTE	C 273	SPUDS '25'	FEDERAL 5	
.27	// 25	ا پ	25 MALAGA				YON '28' FEDERAL	EC 27 2H	25	PÅRER LAKE	UMT 229
		MCK	EE STATE 1	TO FEDERAL COM	DESIGNATION OF THE PERSON OF T	FEDERAL 1MOBIL-I	LOW SO LEDSTONE	? OWEN MESA 2	51		NETTLES
: J	<u>Հ</u> write	JYV CAKE	25.1	⊢	1.22.1		EDERAL 27 1		S '25A' FEDERAL		*****
	EDERALI-	 s	TATE:BUEN	AGEL 3	GERLACH32FEE.1			aguna-	36 STATE 1 POKE	RLAKE UNIT 228	McOar=
ייטין ומש ולאו	E '34' FEDERAL 1 V LAKE '35' FEDE			AMETHY	ST STATE COM1	ast L		ATS 36° SOUGS	POKER LAKE UNIT	POKERLAK	UNIT 255
11		11		115.7/	此人产生人	5 4	DDY		OSCAR	STATE 1	
34	PĒČOS GA	SCOM1	36	31	Jepa 232 STAT	E1 33 C	LONEL ÃOE FEDI	RAL1 35	OSCAR 36 PC	KER LAKE UNIT 24	32
#				OND 31 STATE 1	U	\		<u>}</u>		POKER I	AKE LINIT 245
#	= SYLVE	STERT	UEEN LAKE TIRANO C&C	STA(E1	RUSTLER BLUI	FF 33 24 29 FEDERA	LCOM 1H.~	OD DRAW 35 FEDER	AL5	KAY RHH STATE 2	
្យកាចអ	HHENENEN	OPI FEDE	RAL 2	RUSTLERBE	UFF-30/24/29 FEDE	WE COM (H)	SPAN CORRAL 2	TATE OF CHO	OHKAY BHH STATE	1 250	OPERIORSIALE
	MA' COM 1	HOPI FEI	DERAL1	RUSTLER BLUFF	1 GULNS FEO	ERAL 4)	DD DRAW 35 FEDER R34 STATE 6H CORPAL FLYUNI	T1		
	Junee e	1)		/ _c \		1	١ ,	,	4		5
Н	SS BHK STATE	III RUS	TLER BLUF	75 RUSTY	ERBLUFFT BAR	1' FEDERAL2	CORRAL FL	Y UNIT4	, DO	C BHU STĂTE COM	•
	· ~	RYSTLER	RBLUFF7	RUSTLER BLUFF	18 14 × 12 1	1) Ju	KARLSBAD CORR	AL 2STATE 4HCAR	R-HANSN-SRIOR C	ORIOR SWOS	DOC BHILSTATE
	RAW 10 STATE CO	≓ iuu U	STRATED	ANFEE COM 1H	DOXONFE	ERAL-IPICKETT DE	AW FEDERAL-1-TO	MRS PONE PINE ST	MUY WAYNO	STATE 1HBACON S	68-88 88
SALI L	nui 1	m i	J	6 RUSTI FRUSTI ER BLUFF RUSTI ER BLUFF AN FEE COM 1H EXXO SUPERIO	N'8 FEDERAL1EX	KON '8' FEDERAL1	TOME	STORE BMB STATE	MUT WATNOS	ALE THE EPSTATI	E1 I TRBSTATE
	25S 2	8 .	i	SUPERIO	K-FEDERAL 81	255	29E	KARLSBAD COR	AL 11 STATE 41 _{SA}	SAGE SWD 1255	BOE, GLOWIE
10	11	1 j	12	7	CHINER BEENEDA	an 9	10	ORRAI DRAW 10 11	12	7 TOAST S	TATE 1 8
		1)			Chinks 4	"SHRIKE COM 1	PH 1 PICKETT DRA	ORRAL DRAW 10 11 W FEDERAL 2	[]	POKER LAKE STATI	
CHICK	EN HAMK STATE 1	LEGA-	FREND 40	FEDERAL	SUPERIOR 1] .	KARLEBAD	CORRAL SWD 2ELK	Wallow 11 State	BISCUIT:	
—s	LT 23 AV 15 STAT	acont i		FEDERAL SH VERBEND 13 FEDE	RAL IH CH	MAYO18-STATE-1 ^C	Charles A	2 1 1 2 1 1 2 1 1 1 1 1 1 1 1 1 1	ERAL 5H	JENNINGS 1F	&B FEDERALA1)
	NAD	ا ا]	CHIM	AYO 16 STATE 3	-	BRADLEPTSPED	ERALSH 13' FEDERAL 1POR	K&BFEDERAL1 GRIAKEINITEDH	RZOG-FEDERALA
15	14	٦ ۱	13	18	17	15	15				
ÄÀ.	IRRIGATION 1		,,	"	PICKETT DRAY	V 16STATE 2H	LATHAMFED	CORRAL DRAW UN	UT 1	POKERI	KE UNIT 66
		l i					ŧ	CORRAL DR	AWUNII	POKER	AKE UNIT 11
	<u>'</u>	<u> </u>				<u> </u>	<u> </u>		<u>'</u>	1 11	<u> </u>
									÷	ストルリー・	1 10
									•	기H ~ -	t mond

Enerdeq Browser

Exhibit "C" C.2 Section 5

One-Mile Radius Map


THE PRINT OF THE P											
LUCYTOOM LIGHTFOOT COM_AMAGA UNITTRY 1 WALFARD LIGHTFOOT COM_AMAGA UNITTRY 1 WALFARD LIGHTFOOT COM_AMAGA UNITTRY 1 WALFARD LIGHTFOOT COM_AMAGA UNITTRY 1 DEVEL 1 REDG GUY 1 % 19 EART 1	∖ 10	A	AND ALZA LINET	FORT'7	COM1 8	HARKOI	N 9 1 10	l ti			
LUCTION LIGHTFOOT COM_AMAGA UNITTRY 1 WASTE STATE THE HARROLING 15 13 DEVEL 1 REED GLY 1	laga: 7	FAINARRA1 M	ALAGAUNITTR91	MALAGA UNIT TR1	1CEDAR CANYON	TO THE PROPERTY OF	RROUN1514CED	AR CANYON 1	POKERLAKE U	VIT 2/4POKER LAKE	ENIT45—Imi
LUCTION LIGHTFOOT COM_AMAGA UNITTRY 1 WASTE STATE THE HARROLING 15 13 DEVEL 1 REED GLY 1	K YI	C	AFT1 FOR	18 COM1	R	L HEAVAGE OF CHILD	ARROUN 158 A	RROUN 153			
LUCHTFOOT COM 2004 AGAINT 1897 BEAR 1	TN&X	CRAF	fort'1	COM1	17 0000	HARR	THE B ST NE	ARROUN 153			ž.
HARROWN 25 AND ARCHIVE 25 TO CONTROL TO THE PROPERTIES AND THE PROPERT	//US	TEDOM	OT1 MALA	GAUNITTR51		I HARRO	H#44515'° ∟	ARROUN 15 4	13 POKE	ELAKEUNIT210	17
DEMONITOR TO DOC FEDERAL 1QUEEN LIKE 19 FEDRAL 1 22 22 GUMBN 23 19 20 COYOTE '21 19 4 GANES '22 14 GANES '	1.//_1	LIGHTFO	OT COM 2MALAGA	וואָן דאָר זוואָן	3	HARRO	AT 1517 HARROU	v 15 13	POKER LAN	E UNIT 2007 OKER, I	AKE UNIT 226
DEMONITOR TO DOC FEDERAL 1QUEEN LIKE 19 FEDRAL 1 22 22 GUMBN 23 19 20 COYOTE '21 19 4 GANES '22 14 GANES '	110		WEY-1-DEWEY/280	B.BAFR 1 BE	AR 1 5	BUCK HISTATE 8	HARROUN 22	ORE IDA '14' FEDE	RAL9 POKERLA	KE UNIT 212 LI	HNIT-55-
22 2 SUMBY 21 19 20 COYOTE 21 21 20 COYOTE 21 19 20 COYOTE 21 21 20 COYOTE 21 19 20 COYOTE 21 21 20 COYOTE 21 20 COYOTE 21 21 20 COYOTE 21 20 COYOT	1 1	/ DEWEY	1 REED GUY 1 😘		CM3.	EDAD CANNON DO	THARROUN 223		POKER LAKE UN	POKERLAK	UNT 215
ANNOLIS TATE 1 24 S 28 E CULENTAKE 20 FEDERAL 2H CHYOTE 21 3 2 4 S 29E WILLOW LAKE 25 FEDERAL 2H CHYOTE 21 3 2 4 S 29E WORTEG 23 2 M S 20E WORTEG 25 COM 3 SPUDS 25 FEDERAL 2H CHYOTE 21 3 2 M S 20E WORTEG 27 SPUDS 25 FEDERAL 2H CHYOTE 21 3 2 M S 20E WORTEG 27 SPUDS 25 FEDERAL 2H CHYOTE 21 3 2 M S 20E WORTEG 27 SPUDS 25 FEDERAL 2H CHYOTE 21 3 2 M S 20E WORTEG 27 SPUDS 25 FEDERAL 3H M S 3 S 20E WILLOW LAKE 25 T M S 3		\	Į.	DERAL TOUEEN LK		I MYERBEND FEDE	RAL CEDAR C	Амуон 23 1н		POKER LAKE UNI	216
ANNOTED THE PROPERTY OF THE PR	22			19	20' 00Y0	TE '21' 1 ₂₁	-22 040 044	∐ 5001.00 <i>2</i> 3	24/25 11/15		UT 220 20
SPUDS 28 FEDERAL 3 SOURCE BMF FEDERAL SPOKEN LAKE UNIT 28 SOURCE CONTROL SPUD 28 FEDERAL 3 SOURCE CONTROL SPUD 38 FEDERAL 3 SOURCE C	AMINO		0-2				RIVERBE	ND '22J' FEDERAL 1	3POKER LAKE UNI	220 POKEK BIKE UI È 74	111 220
STATE I MONGO BLO STATE I I MONGO BLO STATE I I MONGO BLO STATE I		∖∖ 2 4S 28	E	QUEENLAKE	20 FEDERAL 2HC	YOTE 21' 3 24S	29E 40KIE	923°	POKERL	KEUNITES 24S	BOE
STATE I MONGO BLO STATE I I MONGO BLO STATE I I MONGO BLO STATE I	y h	NC1 CPA	CRAFT 25 COM	SPRUCE BNH	EDEKAL COM	SAINES 28 B	VORTER	1-7/-10-00-00-00-00-00-00-00-00-00-00-00-00-	hense	POKERHAKE	UNIT-238-
MALACATO FEDERAL COMMELLIS FEDERAL MORE STATE 1 MIJ STATE 1. MILLOW LAKE 227 1 MILLOW	5	TATE 1 MONGO BU	LISTATE 1H	ROCK RIDGE R	EDERAL 3H	AINES '28' ळM 1	باول VORTE	I SPUDS	[25] FEDERAL 2PO	SEK LAKE UNIT 239 FEDERAL 5	•
WILLOW LAKE 251 1 SEPTIER BLUFF FEDERAL 1 MOBIL FEDERAL 271 SPUDS 25A FEDERAL MAJ STATE 1 NETTLES 1 SPUDS 25A FEDERAL MAJ STATE 1 SPUDS 36 STATE 1 POKER LAKE UNIT 23 MODIFIED AND STATE 1 SPUDS 36 STATE 1 POKER LAKE UNIT 23 MODIFIED AND STATE 1 SPUDS 36 STATE 2 STATE 1 SPUDS 36 STATE 2 STATE 32 SCAR STATE 2 STATE 1 SPUDS 36 STATE 2 STATE 2 SCAR STATE 32 SCAR STATE 32 STATE 31 SPUDS 36 STATE 2 STATE 32 SCAR STATE 32 STATE 31 SPUDS 36 STATE 32 STATE 32 SCAR STATE 32 STATE 31 SPUDS 36 STATE 32 STATE 32 STATE 31 SPUDS 36 STATE 32 STA	1 0 1	# ! !!	9	20	2021122642011	Men.	VORT				50
WILLOW LAKE 35 IT THE STATE 1. BUSTLER BLUFF FEDERAL 1 MOBIL FEDERAL 27 1 SPUDS 25 STATE 1 POKER LAKE UNIT 28 WOOD FROM 35 STATE 1 SPUDS 36 STATE 1 POKER LAKE UNIT 28 WOOD FROM 35 STATE 2 STATE 20 SCAR STATE 32 STATE 1 TORAT 38 STATE 2 STATE 38 STATE 38 STATE 2 STATE 38 S	127	26	25 MALAG	ST FEDERAL COM	HELLIS FEDERAL	CÉTIRACIAN	YON '28 FEDERAL	A 26 A OWEN MESA 2	· ·		UNIT 235
THE EBERAL STATE-BUEN AGEL SERIAM STATE OF THE STATE OF T		wi).a	MCKEE STATE 1	THU STATE 1-Y	ÆUSTLER BLUFF			SPU	S '25A' FEDERAL 4	MWJ STATE 1	NETTLES 1
AMETHY STATE COM 1 AMETHY STATE 1 AMETHY STATE 1 AMETHY STATE 1 AMETHY STATE COM 1 AMETHY STATE COM 1 AMETHY STATE 1 AM	WEE	- 1		IAGEL-1	GERLACH32.FEE.1	1		FRUDE	POKE	RLAKE UNIT 228	
PÈCOS GAS COM 1 36 DIAMOND 3 STATE 1 TOPAZ 38 STATE 1 33 COLONEL 20E FEDERAL 1 35 36 POKER LARÈ UNIT 244 32 SYLVESTER 1 JUEN LAKE STATE 2 POKER LAKE UNIT 245 SYLVESTER 1 TIRANO CAS STATE 1 TOPAZ 38 STATE 1 TOPA	ΚŸŪ	E'34' FEDERAL 1.		11 11 1		\		1	DOKED LAKE HART	732	LINIT 255
PECOS GAS COM 1 36 DIAMOND 31 STATE 1 TOPS 2 STATE 1 33 COLONEL AGE FEDERAL 35 36 POKER LAKE UNIT 24 32 STATE 1 AUGUST AND	MILLOY	VLAKE '35' FEDER	AL1 MILANDST	TE 1 AMETHY	ST STATE COM 1	١ ١ .	000	SPUDS 36 STA	יי יOSCARSIAIEI	1	
STATE MA' COM 1 10PI FEDERAL 1 ROSTLER BLUFF 1 GULF 5 FEDERAL 2 CORRAL FLY UNIT 1 3 HOSS STATE 1 RUSTLER BLUFF 5 RUSTLER BLUFF 1 BAR FEDERAL 2 CORRAL FLY UNIT 4 DOC BHU STATE COM CONKAY SWD 3 DOC BHU STATE 1 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 8 RUSTLER BLUFF 8 RUSTLER BLUFF 9 RUSTLER BLUFF	3/4	D35-05 CAS	CO14 36	/31	TODA FAR STAT	33	1000 370000	35	36	STATE 1	32
STATE MA' COM 1 10PI FEDERAL 1 ROSTLER BLUFF 1 GULF 5 FEDERAL 2 CORRAL FLY UNIT 1 3 HOSS STATE 1 RUSTLER BLUFF 5 RUSTLER BLUFF 1 BAR FEDERAL 2 CORRAL FLY UNIT 4 DOC BHU STATE COM CONKAY SWD 3 DOC BHU STATE 1 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 8 RUSTLER BLUFF 8 RUSTLER BLUFF 9 RUSTLER BLUFF	1 // N	AOSAIC 34 FEDERA	L3H DIA	OND3 STATE 1	198 A 3 A	7 PU	LONEL AUE FEDI	PAL 1	l i	l í	
STATE MA' COM 1 10PI FEDERAL 1 ROSTLER BLUFF 1 GULF 5 FEDERAL 2 CORRAL FLY UNIT 1 3 HOSS STATE 1 RUSTLER BLUFF 5 RUSTLER BLUFF 1 BAR FEDERAL 2 CORRAL FLY UNIT 4 DOC BHU STATE COM CONKAY SWD 3 DOC BHU STATE 1 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 7 RUSTLER BLUFF 7 RUSTLER BLUFF 8 RUSTLER BLUFF 8 RUSTLER BLUFF 8 RUSTLER BLUFF 9 RUSTLER BLUFF	1# F	SYLVES	TER 1 QUEEN LAKE	STATE 2	2	Dric	Woo	D DRAW 35 FEDER	AL5	POXER L	AKE UNIT 245
STATE MA' COM 1 10PI FEDERAL 1 ROSTLER BLUFF 1 GULF 5 FEDERAL 2 CORRAL FLY UNIT 1 3 HOSS STATE 1 RUSTLER BLUFF 3 RUSTLER BLUFF 1 BAR. FEDERAL 2 CORRAL FLY UNIT 4 DOC BHU STATE COM 6 1 HOSS BHK STATE 1 RUSTLER BLUFF 7 RUSTLER BLUFF 1 BAR. FEDERAL 2 CORRAL FLY UNIT 4 CARRA-HANSN-SRIOR C OHKAY SWD 3 1 GARLSBAD CORRAL 2 STATE 4H CARRA-HANSN-SRIOR C OHKAY SWD 3 1 GARLSBAD CORRAL 2 STATE 4H CARRA-HANSN-SRIOR C OHKAY SWD 3 1 GARLSBAD CORRAL 2 STATE 4H CARRA-HANSN-SRIOR C OHKAY SWD 3 1 GARLSBAD CORRAL 2 STATE 4H CARRA-HANSN-SRIOR C OHKAY SWD 3 1 GARLSBAD CORRAL 1 MUY WAYNO STATE 1 HBACON STATE 1 HBAC	;;HIGH	NEW STATE OF THE	PI FEDERAL 2	RUSTLER BE	UFF 39 24 29 FEDE	RAL COMJUH	SUPERIO	RG-1	OHKAY BHH STATE	TRAY DEB STATE 2	UPERIOR-STATE-
3 2HOSS STATE 1 1 6 RUST LERBLUFF 1. BAR FEDERAL 2 CORRAL FLY UNIT 4 DOC BHU STATE COM 6 THE STATE OF THE STA	STATE	MA' COM 1 1	DEI FEDERAL 1	RYST) ER BLUEF	_	1 / - 1.00	LSBAD CORRAL 25	מואור הוו אפשר	71	-	
DEX.CON '6' FEDERAL 12 XON '8' FEDERAL 1 25S 26E 10 11 12 7 SUDER 6' FEDERAL 3H SHRIKE COM 10 H 1 PICKETT DRAW FEDERAL 2 CHIMAYO 1 SUPERIOR 1 SUPERIOR 1 CHIMAYO 1 STATE 1 FINAL SAMD CORRAL DRAW 10 1H 12 7 TOAST STATE 1 8 POKER LAKE STATE 3 CHIMAYO 1 SUPERIOR 1 SUPERIOR 1 SUPERIOR 1 SUPERIOR 1 CHIMAYO 1 STATE 3 SUPERIOR 1 SUPERIOR 1 SUPERIOR 1 CHIMAYO 16 STATE 3 BRADLE 1 STEDERAL 1 R & BFEDERAL 1 R & B		· · · · · · · · · · · · · · · · · · ·				ERALS .	_	j	[]		_
DEX.CON '6' FEDERAL 12 XON '8' FEDERAL 1 25S 26E 10 11 12 7 SUDER 6' FEDERAL 3H SHRIKE COM 10 H 1 PICKETT DRAW FEDERAL 2 CHIMAYO 1 SUPERIOR 1 SUPERIOR 1 CHIMAYO 1 STATE 1 FINAL SAMD CORRAL DRAW 10 1H 12 7 TOAST STATE 1 8 POKER LAKE STATE 3 CHIMAYO 1 SUPERIOR 1 SUPERIOR 1 SUPERIOR 1 SUPERIOR 1 CHIMAYO 1 STATE 3 SUPERIOR 1 SUPERIOR 1 SUPERIOR 1 CHIMAYO 16 STATE 3 BRADLE 1 STEDERAL 1 R & BFEDERAL 1 R & B	3 HQ	ZHOSS ST SS BHK STATE!!]	ATE 1 1 I BUSTLERBLUE	V ₅ € RUST	ERBLUFT 1 BAR	FEDERAL2	CORRALEI		¹ DO	BHU STATE COM	,
DEX.CO. '6' FEDERAL 12 XON '8' FEDERAL 1 25S 26E 10 11 12 7 SUDER 6' FEDERAL 31 SHRIKE COM 10 H 1 PICKETT DRAW 10 1H 12 7 TOAST STATE 1 CHICKEN HAWK STATE 1 TRIVETBEEND 13 FEDERAL 1H SUPERIOR 1 SUPERIOR 1 SUPERIOR 1 CHIMAYO 1 STATE 1 SUPERIOR 1 CHIMAYO 1 STATE 3 SHRIKE COM 10 H 1 STATE 3 SHRIKE CO	1 7		NSTI FR BILIFE 7	RUSTLER SLUEE	3 20 1 25	الماح حالا	N	CA 22	R-HANSN-SRIOR C	OHKAY ZMD3	DOC BHU STATE 1
DEX.CON '6' FEDERAL 12 XON '8' FEDERAL 1 25S 26E 10 11 12 7 SUDER 6' FEDERAL 3H SHRIKE COM 10 H 1 PICKETT DRAW FEDERAL 2 CHIMAYO 1 SUPERIOR 1 SUPERIOR 1 CHIMAYO 1 STATE 1 FINAL SAMD CORRAL DRAW 10 1H 12 7 TOAST STATE 1 8 POKER LAKE STATE 3 CHIMAYO 1 SUPERIOR 1 SUPERIOR 1 SUPERIOR 1 SUPERIOR 1 CHIMAYO 1 STATE 3 SUPERIOR 1 SUPERIOR 1 SUPERIOR 1 CHIMAYO 16 STATE 3 BRADLE 1 STEDERAL 1 R & BFEDERAL 1 R & B	1	-0) -0)	HUSTRATED N	AN FEE COM 18		ERAL-IPICKETTOR	AAMEEDERAL-1-TO	Ma SONE BAR ST	MUY WAYNO	STATE THRACON S	⊗⊗ ⊗—
25S 28E SUPERIOR-FEDERAL 81 25S 29E KARLSBAD CORRAL 11 STATE 41 SAUSAGE SWD 125S DOE 1 2 PSIAIE 1 10 11 12 7 SLIDER 8 FEDERAL 31 SHRIKE COM 10 H 1 PICKETT DRAW 10 1E 12 7 TOAST STATE 1 8 CHIMAYO 1 SUPERIOR 1 CHIMAYO 1 SUPERIOR 1 SU	SALTU	ON IN SINIE CO	ויי ן	EXXO	N'6' FEDERALIEX	KON 'B' FEDERAL 1	TOMB	STORE BMB STATE			
10 11 12 7 SILDER & FEDERAL 3H SHRIKE COM 10 H 1 PICKETT DRAW 10 1H 12 POKER LAKE STATE 1 8 POKER LAKE STATE 1 CHIMAYO 1 STATE 3H SHRIKE COM 10 H 1 PICKETT DRAW FEDERAL 2 KARL SPAD CORRAL SWD 2ELK WALLOW 11 STATE 3H BISCUIT STATE 1 SUPERIOR 1	!		<u> </u>	SUPERIO	R-FEDERAL 6 1			KARLSBAD COR	RAI. 11 STATE 4H _{SA}	SAGE SWD 125S	DOET &PSIALET
CHICKEN HAWK STATE 1 TRIVETREND 13 FEDERAL 1H SUPERIOR 1 SALT PART 13 STATE COM 19 FEDERAL 1H SUPERIOR 1 CHIMAYO 16 STATE 1 BRADLEY 13 FEDERAL 5H R & BFEDERAL 1A & BFEDE	10		F 1	7.	CIDES SECOSON	/			ł 1	l	TATE 1 8
CHICKEN HAWK STATE 1 TRIVETSEND 13 FEDERAL 1H SUPERIOR 1 SALT DEATH 15 STATE COM 10 FEDERAL 1H SUPERIOR 1 CHIMAYO 16 STATE 1 RADIAN 13 THE PEDERAL 1H SUPERIOR 1 CHIMAYO 16 STATE 3 BRADLEY 13 FEDERAL 1POKER LAKE UNIT 62 HERZOG FEDERAL 1 BRADLEY 13 FEDERAL 1POKER LAKE UNIT 62 HERZOG FEDERAL 1 BRADLEY 13 FEDERAL 1 BRADLEY 13 FEDERAL 1 BRADLEY 13 FEDERAL 1 10 10 10 10 10 10 10 10 10 10 10 10 10 1		:	}		OLUCIA O FEDERAL	SHRIKE COM	H1 PICKETT DRA	W FEDERAL 2	ſ	POKER LAKE STATI	3
PICKETT DRAW 16STATE 2H LATE AM FED CORRAL DRAW UNIT 1 13 BOKER LAKE UNIT 56	CHICKE	N HAWK STATE 1	LKINEBSENU 12	FEDERAL1H	SUPERIOR 1		KARI SBAD	DORRAL SWD 2ELK	WALLOW 11 STATE	SH BISCUITS	_
PICKETT DRAW 16STATE 2H LATE AM FED CORRAL DRAW UNIT 1 13 18 POKER LAKE UNIT 66	— sa	LI PER TO STATE		VERBEND TO FEDE	ва∟н сн	MAYO 16 STATE 1	Carried Control	BRADI (SA)	PLY 13 FEDERAL S	JENNINGS 1F	AD FEDERAL-A1X
15 IRRIGATION 1 13 18 PICKETT DRAW 16STATE 2H LATE AM FED CORRAL DRAW UNIT 1 19 POKER LAVE UNIT 56	1				CHIM	AYO 16 STATE 3		BRADIEY	Ervicon 13' FEDERAL 1POR	r α D FEDERAL 1 ŒR LAKE UNIT62HI	RZOG-FEDERAL1
PICKETT UNAW 16-5 IAIE 2H LATHAM FED CORRALDRAW UNIT 1 POKER LAVE UNIT 65	15.	4.4	l ⁻ 4	18	nic 17		15			18	17
POKER AKE UNIT11		IRRIGATION 1] "	PICKETTORAY	V 16STATE ZH	LATHAM FED	CORRAL DRAW UN	AWIINT 1	1	-
			\	!	A -			CONTRACT DA	CIT VINI I	POKER	AKĘ UNIT 11
5/11/-1.10			·		A-3	·			·······························	1.11	

3/4" = 1 mile

Enerdeq Browser

Exhibit "C" C.3 Section 4

One-Mile Radius Map

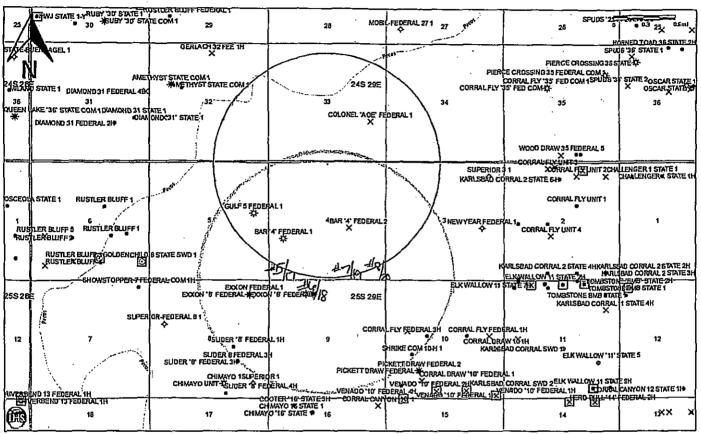


1.25" = 1 rule


Enerdeq Browser


Exhibit "C" C.4 Section 3

One-Mile Radius Map

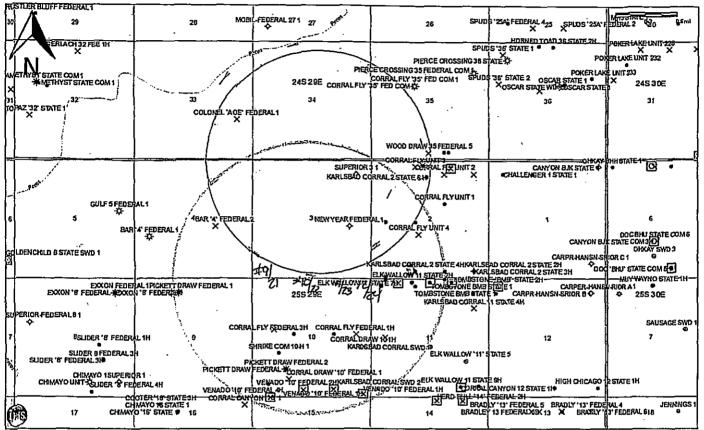

1.25" = 1 rule

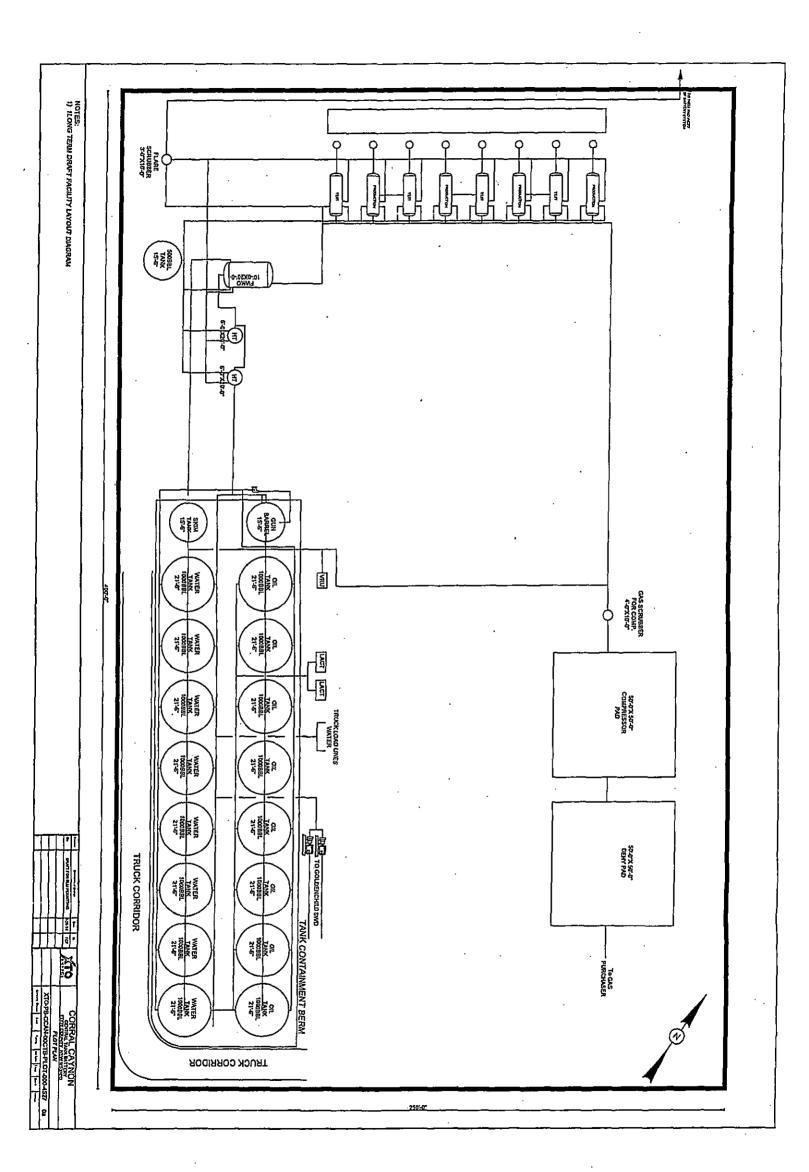

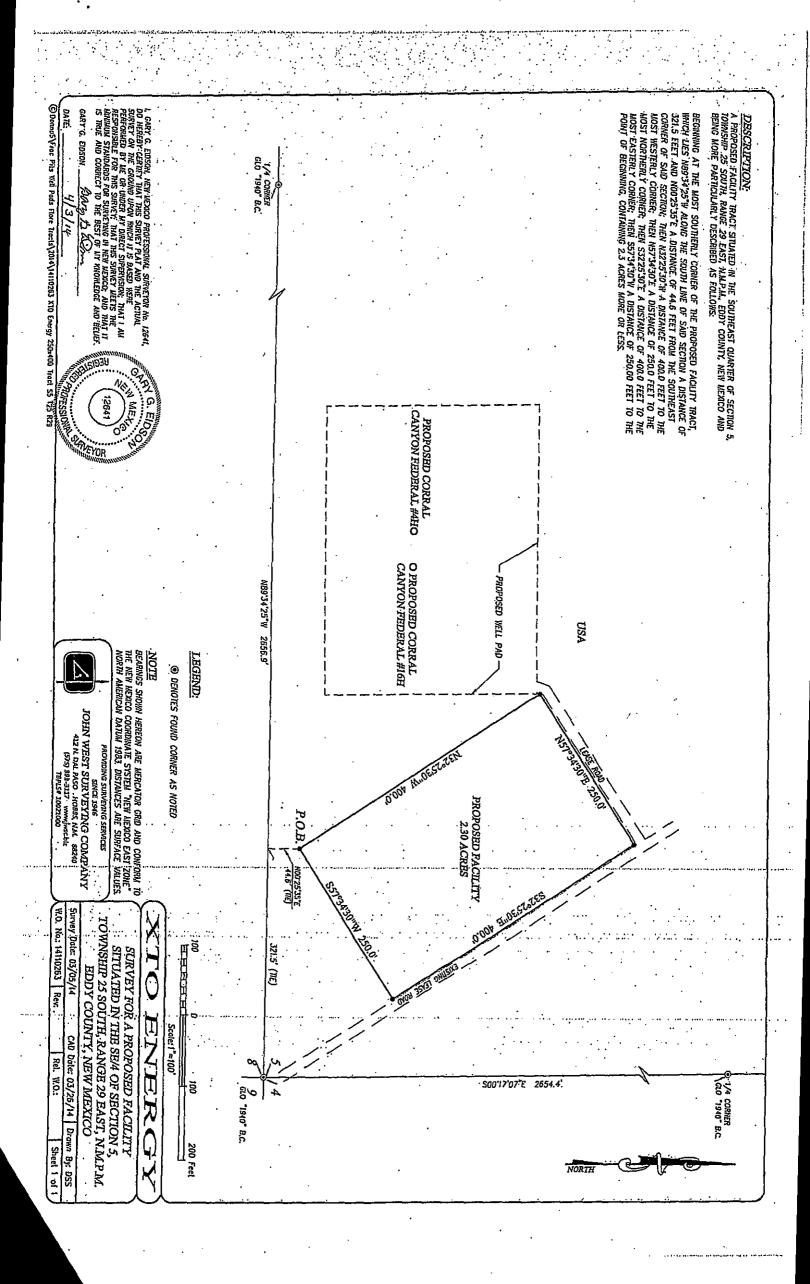

State of New Mexico Energy, Minerals and Natural Resources Department

Susana Martinez Governor

David Martin Cabinet Secretary-Designate

Brett F. Woods, Ph.D. Deputy Cabinet Secretary Jami Bailey, Division Director Oli Conservation Division



Administrative Order SWD-1458 January 22, 2014

ADMINISTRATIVE ORDER OF THE OIL CONSERVATION DIVISION

Pursuant to the provisions of 19.15.26.8B. NMAC, XTO Energy, Incorporated (the "operator") seeks an administrative order for its proposed Goldenchild 6 State Well No. 1 with a location of 800 feet from the South line and 330 feet from the East line, Unit letter P of Section 6, Township 25 South, Range 29 East, NMPM, Eddy County, New Mexico, for produced water disposal purposes.

THE DIVISION DIRECTOR FINDS THAT:

The application has been duly filed under the provisions of 19.15.26.8B. NMAC and satisfactory information has been provided that affected parties as defined in said rule have been notified and no objections have been received within the prescribed waiting period. The applicant has presented satisfactory evidence that all requirements prescribed in 19.15.26.8 NMAC have been met and the operator is in compliance with 19.15.5.9 NMAC.

IT IS THEREFORE ORDERED THAT:

The applicant, XTO Energy, Incorporated (OGRID 5380), is hereby authorized to utilize its Goldenchild 6 State Well No. 1 (API 30-015-41846) with a location of 800 feet from the South line and 330 feet from the East line, Unit letter P of Section 6, Township 25 South, Range 29 East, NMPM, Eddy County, for disposal of oil field produced water (UIC Class II only) into the Devonian formation through perforations from approximately 14935 feet to approximately 16500 feet. Injection will occur through 4 ½-inch, internally-coated tubing and a packer set within 100 feet of the permitted interval.

IT IS FURTHER ORDERED THAT:

The operator shall take all steps necessary to ensure that the disposed water enters only the approved disposal interval and is not permitted to escape to other formations or onto the surface. This includes the well construction proposed and described in the application.

The operator shall supply the Division with a copy of a mudlog over the permitted disposal interval and an estimated insitu water salinity based on open-hole logs. If significant hydrocarbon shows occur while drilling, the operator shall notify the Division's district II and the operator shall be required to receive written permission prior to commencing disposal.

After installing tubing, the casing-tubing annulus shall be loaded with an inert fluid and equipped with a pressure gauge or an approved leak detection device in order to determine leakage in the casing, tubing, or packer. The casing shall be pressure tested from the surface to the packer setting depth to assure casing integrity.

The well shall pass an initial mechanical integrity test ("MIT") prior to initially commencing disposal and prior to resuming disposal each time the disposal packer is unseated. All MIT testing procedures and schedules shall follow the requirements in Division Rule 19.15.26.11A. NMAC. The Division Director retains the right to require at any time wireline verification of completion and packer setting depths in this well.

The wellhead injection pressure on the well shall be limited to no more than 2987 psig. In addition, the disposal well or system shall be equipped with a pressure limiting device in workable condition which shall, at all times, limit surface tubing pressure to the maximum allowable pressure for this well.

The Director of the Division may authorize an increase in tubing pressure upon a proper showing by the operator of said well that such higher pressure will not result in migration of the disposed fluid from the target formation. Such proper showing shall be demonstrated by sufficient evidence including but not limited to an acceptable Step-Rate Test.

The operator shall notify the supervisor of the Division's district II office of the date and time of the installation of disposal equipment and of any MIT test so that the same may be inspected and witnessed. The operator shall provide written notice of the date of commencement of disposal to the Division's district office. The operator shall submit monthly reports of the disposal operations on Division Form C-115, in accordance with Division Rules 19.15.26.13 and 19.15.7.24 NMAC.

Without limitation on the duties of the operator as provided in Division Rules 19.15.29 and 19.15.30 NMAC, or otherwise, the operator shall immediately notify the Division's district II office of any failure of the tubing, casing or packer in the well, or of any leakage or release of water, oil or gas from around any produced or plugged and abandoned well in the area, and shall take such measures as may be timely and necessary to correct such failure or leakage.

The injection authority granted under this order is not transferable except upon division approval. The Division may require the operator to demonstrate mechanical integrity of any injection well that will be transferred prior to approving transfer of authority to inject.

The Division may revoke this injection permit after notice and hearing if the operator is in violation of 19.15.5.9 NMAC.

The disposal authority granted herein shall terminate two (2) years after the effective date of this order if the operator has not commenced injection operations into the subject well. One year after the last date of reported disposal into this well, the Division shall consider the well abandoned, and the authority to dispose will terminate *ipso facto*. The Division, upon written

request mailed by the operator prior to the termination date, may grant an extension thereof for good cause.

Compliance with this order does not relieve the operator of the obligation to comply with other applicable federal, state or local laws or rules, or to exercise due care for the protection of fresh water, public health and safety and the environment.

Jurisdiction is retained by the Division for the entry of such further orders as may be necessary for the prevention of waste and/or protection of correlative rights or upon failure of the operator to conduct operations (1) to protect fresh or protectable waters or (2) consistent with the requirements in this order, whereupon the Division may, after notice and hearing, terminate the disposal authority granted herein.

JAMI BAILEY

Director

JB/prg

cc: Oil Conservation Division – Artesia District Office
New Mexico State Land Office – Oil, Gas and Minerals Division

REC'D/MIDLAND

01ST(UCT 1 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 Planiet (575) 393-4161 Fax; [575] 393-0720

<u>DISTRICT II</u>
411 S. Finst St., Artesia, NM 88210

Planiet (575) 748-9720

<u>DISTRICT III</u>
1000 Rio Brazos Road, Aztec, NM 87410

Whone (505) 334-6178 Fax; (505) 334-6170

<u>DISTRICT IV</u>
1220 S. St. Francis Dr., Santa Fe, NM 87505

Planiet (505) 476-3460 Fax; (505) 476-3462

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, New Mexico 87505

Form C-102 OCT 2 9 2013 Revised August 1, 2011 Submit one copy to appropriate District Office

DAMENDED REPORT

		WEL	T LOCA		AND ACREA	AGE DEDICA	ATION PLA	Γ	
2/)~(\)/	Number /	24/0	ala	Pool Code		<u>~</u> .	Paul Num	-	
Property,C	<u> // ()</u> 였년	14K			Property Num		1757 J787	ankn me	Il Number
4021	7			GOLDE	ENCHILD 6 S	STATE SWD			1
OGRID N					Operator Nam		· · · · · · · · · · · · · · · · · · ·		levation
00538	<u> </u>	<u> </u>			XTO ENER				2931'
		· - · · · -	 -		Surface Locati				
UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	6	25-S	29-E	<u> </u>	800	SOUTH	330	EAST	EDDY
·	_			Bottom Ho	le Location If Diffe	rent From Şurface		٠	
UL or lot No.	Section	Township	Runge	- Lat Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres	Joint a	r Insiti (Consolidation C	ode O	der No.	1			
		į		l					
	. 1					CONSOLIDATED OR A 1			
	·			t			11	ATOR CERTIFIE if y that the information by	
	j				1		complete to	the best of my knowledge unization either owns a we	and belief, and
	1			1	i		unleased mit	neral interest in the land it Itom hole location or has	eluding the
	j	•		I			well at this I	ocation pursuant to a cont	ract with an owner
	i				í		pooling agre	eral or working interest, or erneat or a compulsory po	
	!			!-	: <u></u> [-			ntered by the division.	
				}			المريد ال	sania Paha	odina II la
					}		Signoture	XWNT. KOM	Daic II-E
	İ				1		Steph	nove Patr	odue
	ļ						chocho	nie tehade	of khonor
· ·				<u> </u>	. <u> </u>		E-mail Ad	nie_tabrdier	CS ASLRA JEI
	. • .			ł .	l ,		SURV	EYOR CERTIFI	CATION
	·			ļ	{			ify that the well Incotion : from field notes of actual	
	1	' }		ı	·	:	nte ar under	my supervision, and that	
			GEODETIC (ES		and contect	to the best of my belief.	2012
	1		NAU 2	27 NME	1		Date of Su	OCTOBER 17,	
}		 .		LOCATION	' \			Sept by probability	Surveyor.
		_ 		1932.5 N 1279.7 E				AN MEXICO	O.W
		[, t	_		\$ \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	2
Į.		1		.154113' N 4,015765'		S.L.	330	(3538)	
		ŀ		1		t	1 2/3.		
		1			. 1	**************************************		11 Bidsia	310/28/2013
_		l		I	1		Gertilicalo	Allumiter Gary Gary Gary Gary Gary Gary Gary Gar	Feldson 12641 J. Eldson 3239
<u>-</u> 		1		<u> </u>			BKr.		SC W.O.: 13.11.1168



New Mexico Office of the State Engineer Water Column/Average Depth to Water

(A CLW#### in the POD suffix indicates the POD has been replaced & no longer serves a water right file.)

(R=POD has been replaced, O=orphaned,

C≈the file is closed)

Sub-

(quarters are 1=NW 2=NE 3=SW 4=SE)

(quarters are smallest to largest) (NAD83 UTM in meters) POD

(In feet)

Depth Depth Water

POD Number C 03358 POD1

Q Q Q Code basin County 64 16 4 Sec Tws Rng 1 4 1 26 24S 28E

588416 3562115

-Well-Water Column 135

C 03423

2 4 1 26 24S 28E

3561658 🛞 543750

126

Average Depth to Water:

Minimum Depth:

Maximum Depth:

Record Count: 2

PLSS Search:

Section(s): 26

Township: 24S

Range: 28E



New Mexico Office of the State Engineer

Point of Diversion Summary

(quarters are 1=NW 2=NE 3=SW 4=SE)

(quarters are smallest to (argest)

(NAD83 UTM in meters)

POD Number C 03358 POD1 Q64 Q16 Q4 Sec Tws Rng

Х

26 24S 28E

588416 3562115

Driller License: 1229

Driller Name:

RICHARD CARTER

Drill Start Date:

04/01/2014

Drill Finish Date:

04/06/2014

Plug Date:

Log File Date:

04/11/2014

PCW Rcv Date:

Source:

Shallow

Pump Type:

Pipe Discharge Size:

Casing Size:

16,00

Depth Well:

135 feet

Depth Water:

Estimated Yield:

Water Bearing Stratifications:

Top Bottom Description

55

35

Limestone/Dolomite/Chalk

115

135 Limestone/Dolomite/Chalk -

Casing Perforations:

Top Bottom

35

115 126

/10/14 11:58 AM

Page 1 of 1

POD SUMMARY - C 03358 POD1



New Mexico Office of the State Engineer

Point of Diversion Summary

(quarters are 1=NW 2=NE 3=SW 4=SE)

(quarters are smallest to largest)

(NAD83 UTM in meters)

POD Number

Q64 Q16 Q4 Sec Tws Rng

X Υ

C 03423

1 26 24S 28E

543750 3561658

Driller License: 410

Driller Name:

A.M. BRININSTOOL

Drill Start Date:

Drill Finish Date:

12/06/1965

Plug Date:

Log File Date:

12/07/1965

PCW Rcv Date:

Source:

Pump Type:

Pipe Discharge Size:

Shallow

Casing Size:

16.00

Depth Well:

126 feet

Depth Water:

Estimated Yield:

Water Bearing Stratifications:

Top Bottom Description

115

125 Limestone/Dolomite/Chalk


Casing Perforations:

Top Bottom

45


125

Rig Plat Diagram Only — Dual Well Pad Layout Corral Canyon Federal Wells: #1H, #2H, #3H, 5H, #6H, #7H, #12H, #13H, #14H, #15H, #17H, #18H, #19H, #24H V-Door East

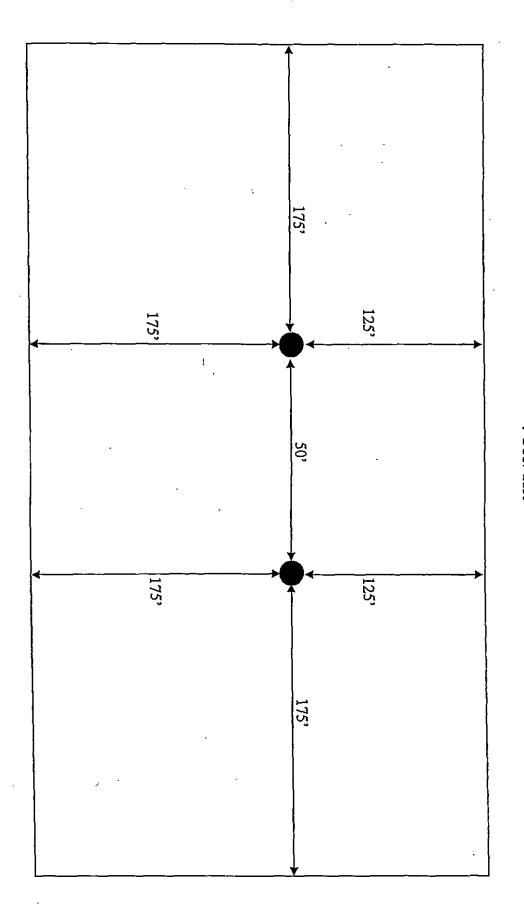





Rig Plat Diagram Only- Dual Well Pad Layout
Corral Canyon Federal Wells: #4H, #8H, #9H, #10H, #11H, #16H, #20H, #21H, #22H, #23H
V-Door West

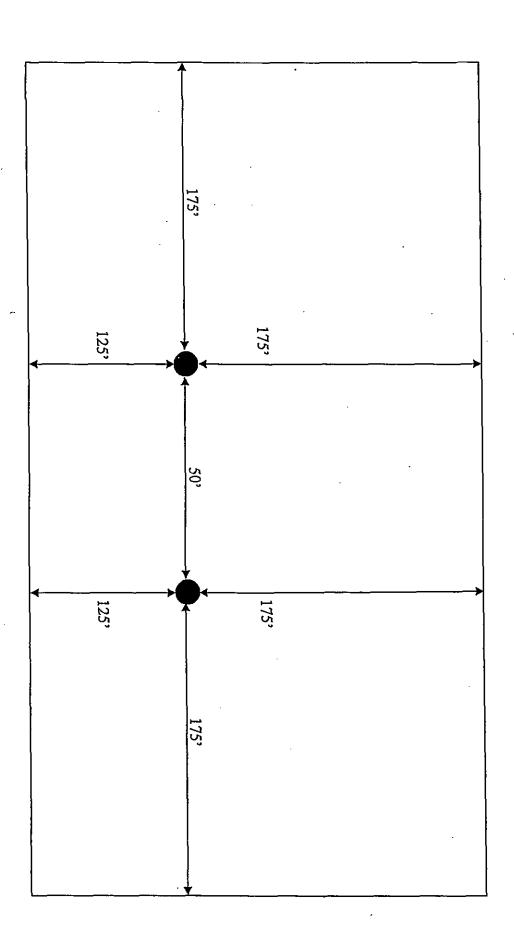



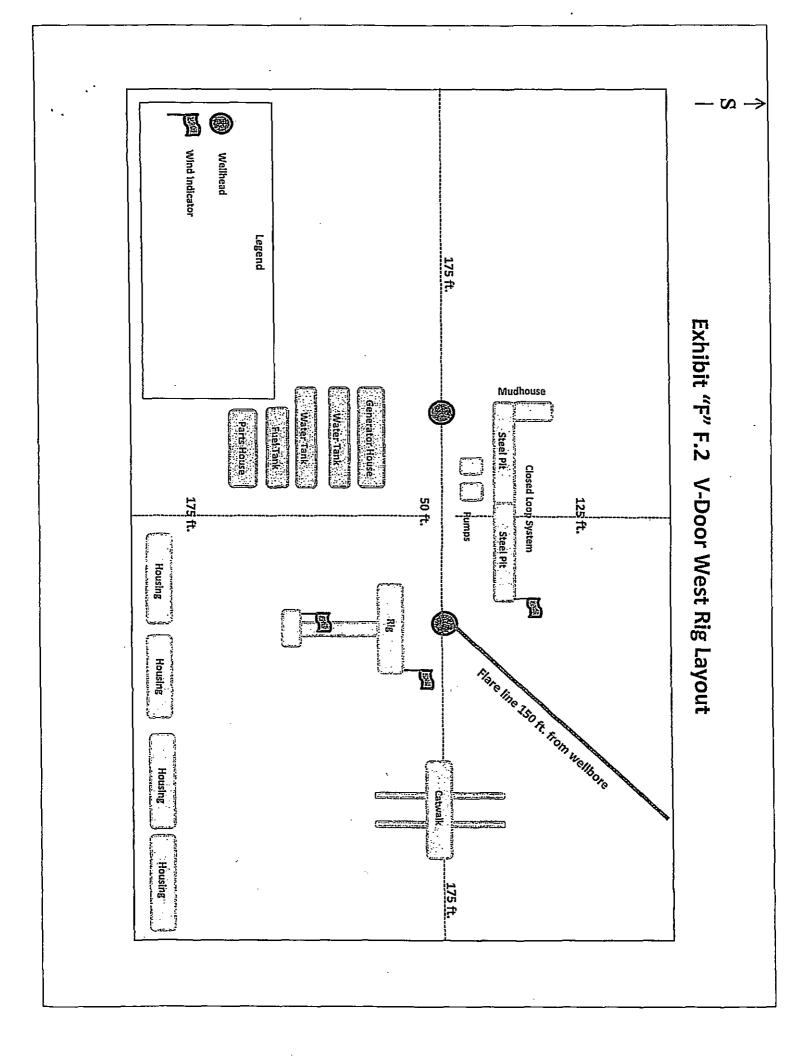

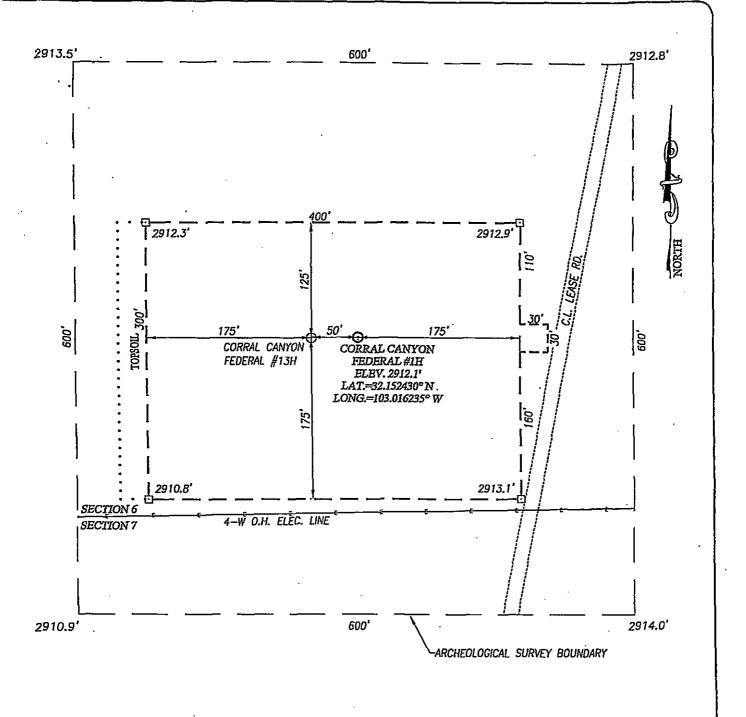

RECTIONS TO CORRAL CANYON FEDERAL #2H:

ROM THE INTERSECTION OF US HIGHWAY 285 (PECOS HWY.)

VD CO. RD. 725 (LONGHORN ROAD),GO NORTHEAST ON CO.

D. 725 APPROX. 4.2 MILES. PASS THE PECOS RIVER AND GO

) A "Y" INTERSECTION. TURN LEFT AND GO NORTHEAST

PPROX. 1.8 MILES. TURN LEFT AND GO

ORTH—NORTHWESTERLY ALONG MEANDERING ROAD APPROX. 5.0

ILES. TURN LEFT AND FOLLOW WINDING ROAD WEST APPROX.

3 MILES. THE LOCATION STAKE IS APPROX. 400 FEET SOUTH.

100 0 100 200 Feet

| Scale: 1"=100'

XTO ENERGY

CORRAL CANYON FEDERAL #1H WELL LOCATED 190 FEET FROM THE SOUTH LINE AND 470 FEET FROM THE EAST LINE OF SECTION 6, TOWNSHIP 25 SOUTH, RANGE 29 EAST, N.M.P.M., BDDY COUNTY, NEW MEXICO


| Survey Date: 4/2/14 | CAD Date: 5/16/14 | Drawn By: ACK | W.O. No.: 14110214 | Rev: . | Rel. W.O.: | Sheet 1 of





PROVIDING SURVEYING SERVICES SINCE 1946

JOHN WEST SURVEYING COMPANY
412 N. DAL PASO HOBBS, N.M. 88240

12 N. DAL PASO HOBBS, N.M. 88. (575) 393-3117 www.jwsc.biz TBPLS# 10021000

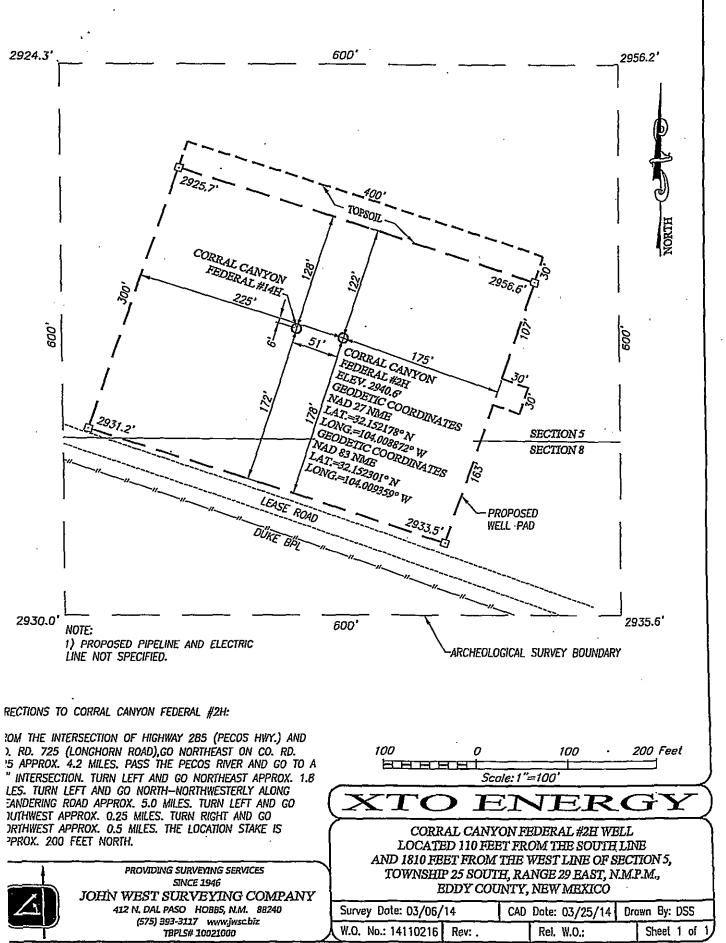

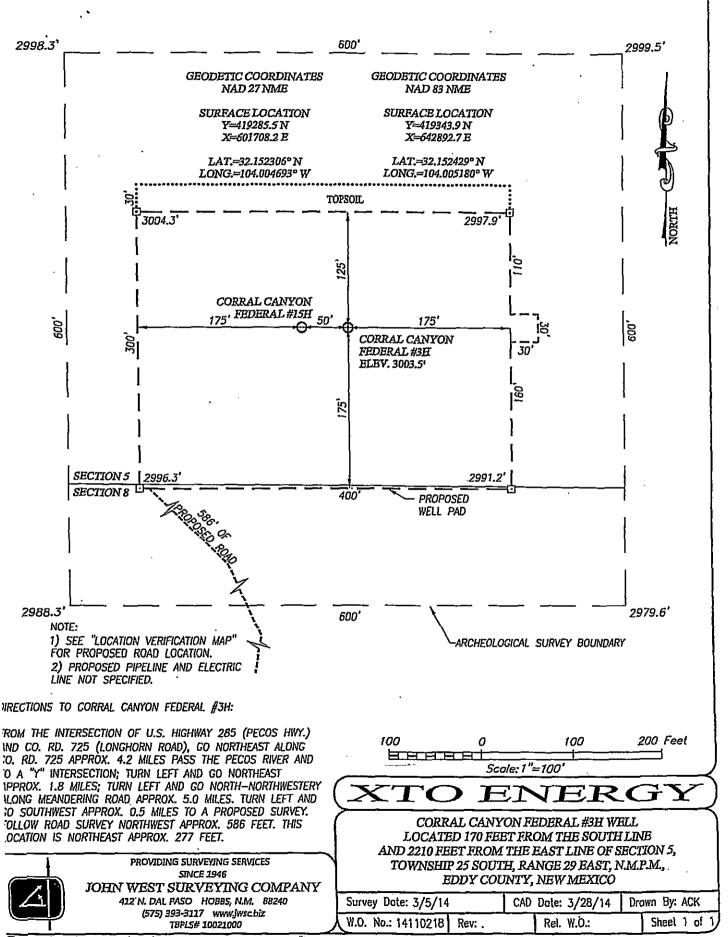

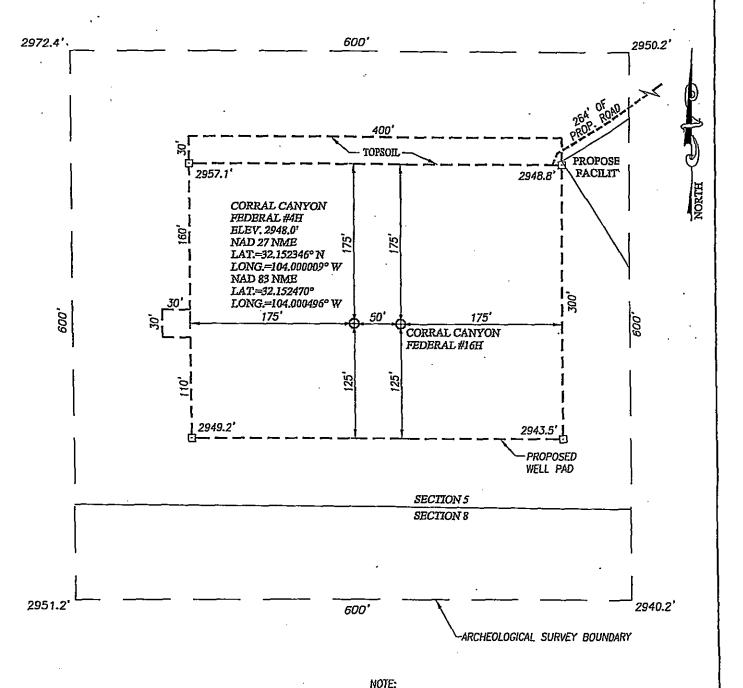

RECTIONS TO CORRAL CANYON FEDERAL #4H:

OM THE INTERSECTION OF HIGHWAY 285 (PECOS HWY.) AND CO. 1. 725 (LONGHORN ROAD),GO NORTHEAST ON CO. RD. 725 'PROX. 4.2 MILES. PASS THE PECOS RIVER AND GO TO A "Y" TERSECTION, TURN LEFT AND GO NORTHEAST APPROX. 1.8 MILES. RN LEFT AND GO NORTH-NORTHWESTERLY ALONG MEANDERING VAD APPROX. 5.0 MILES. VEER LEFT AND GO NORTH-NORTHWEST PROX. 1.5 MILES TO PROPOSED ROAD SURVEY. FOLLOW ROAD IRVEY STAKES SOUTHWEST APPROX. 264 FEET TO THE IRTHEAST CORNER OF PROPOSED WELL PAD. THIS LOCATION AKE IS APPROX. 277 FEET SOUTHWEST.



PROVIDING SURVEYING SERVICES SINCE 1946

JOHN WEST SURVEYING COMPANY 412 N. DAL PASO HOBBS, N.M. 88240 (575) 393-3117 www.jwsc.biz TBPLS# 10021000

CORRAL CANYON FEDERAL #4H WELL LOCATED 200 FEET FROM THE SOUTH LINE AND 760 FEET FROM THE EAST LINE OF SECTION 5, TOWNSHIP 25 SOUTH, RANGE 29 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO

1) SEE "LOCATION VERIFICATION MAP" FOR PROPOSED ROAD LOCATION.

100

200 Feet


2) PROPOSED PIPELINE AND ELECTRIC LINE NOT SPECIFIED.


Survey Date: 03/05/14 CAD Date: 03/26/14 Drawn By: DSS Sheet 1 of Rel. W.O.:


100

W.O. No.: 14110220 Rev: .

DonnoS\Welis\XTO Energy\2014\14110220 Corrol Conyon Fed #4H

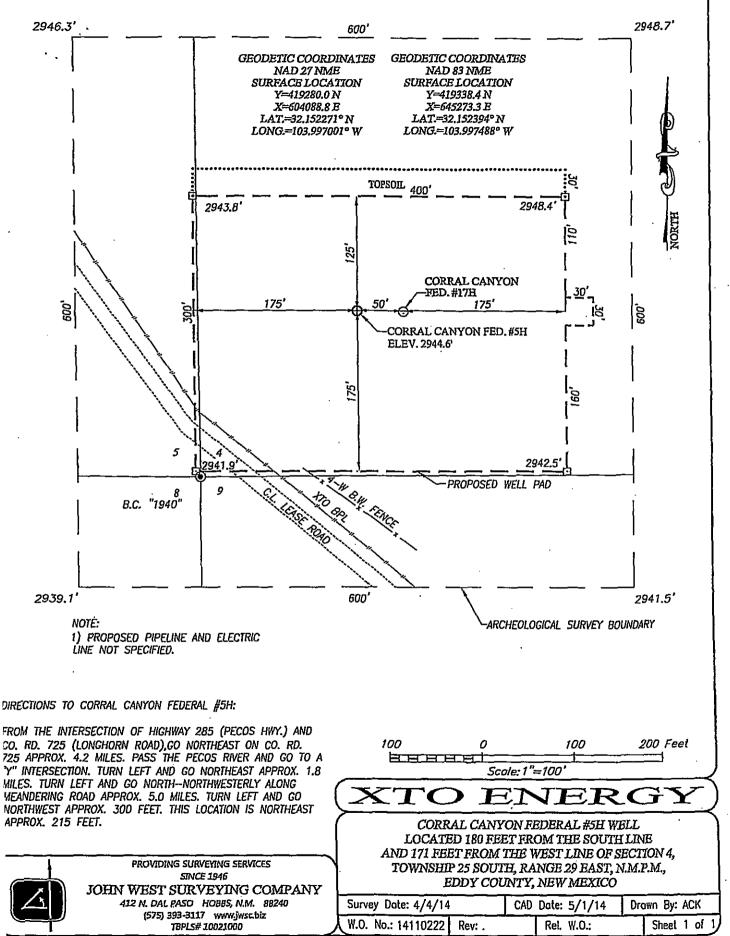

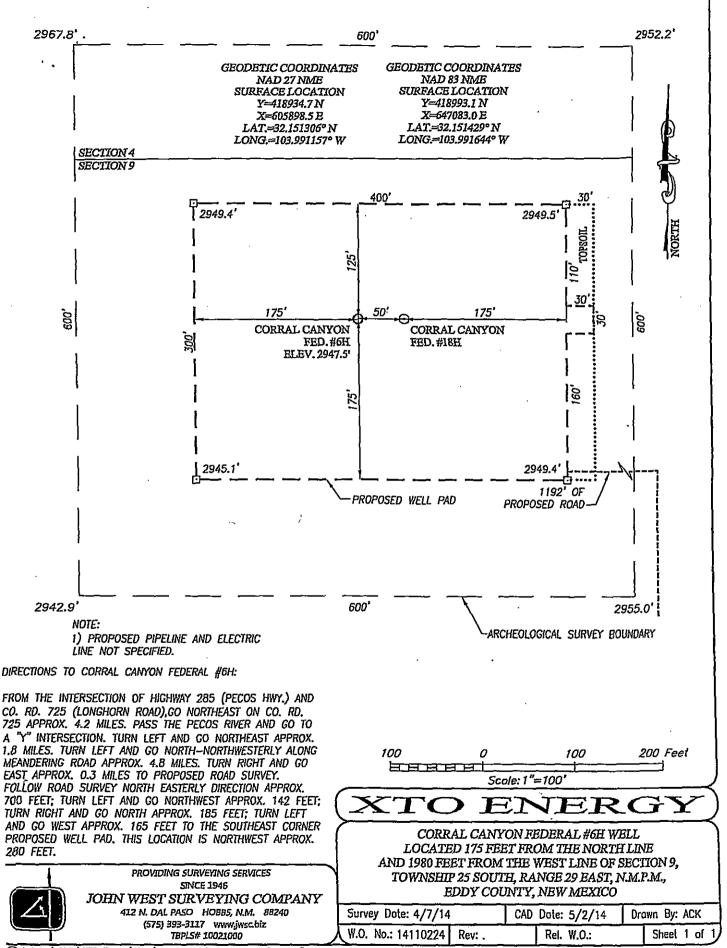

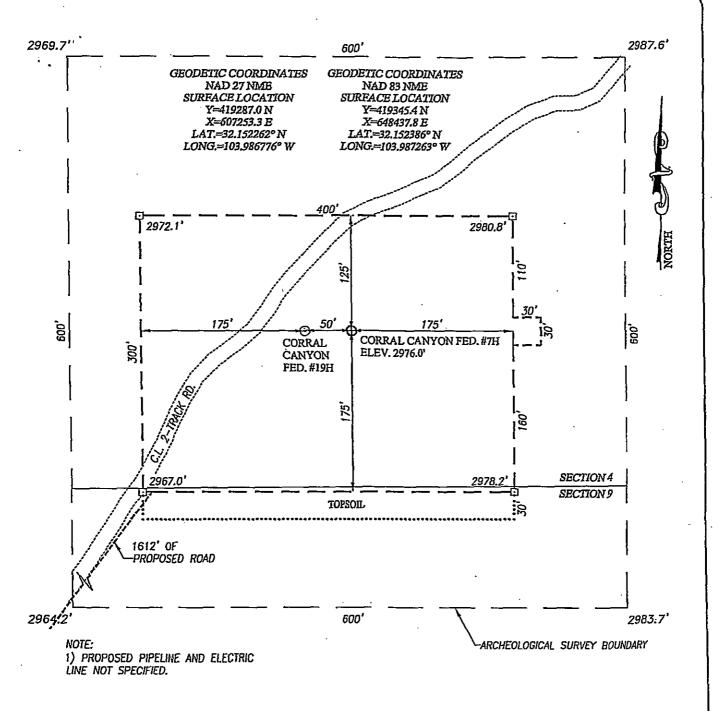

DIRECTIONS TO CORRAL CANYON FEDERAL #7H:

FROM THE INTERSECTION OF HIGHWAY 285 (PECOS HWY.) AND CO. RD. 725 (LONGHORN ROAD),GO NORTHEAST ON CO. RD. 725 APPROX. 4.2 MILES. PASS THE PECOS RIVER AND GO TO A "Y" INTERSECTION. TURN LEFT AND GO NORTHEAST APPROX. 1.8 MILES. TURN LEFT AND GO NORTH-NORTHWESTERLY ALONG MEANDERING ROAD APPROX. 4.8 MILES. TURN RIGHT AND GO EAST APPROX. 0.3 MILES TO PROPOSED ROAD SURVEY. FOLLOW ROAD SURVEY NORTHEASTERLY DIRECTION APPROX. 1605 FEET TO THE SOUTHWEST CORNER PROPOSED WELL PAD. THIS LOCATION IS NORTH APPROX. 280 FEET.




PROVIDING SURVEYING SERVICES
STNCE 1946


JOHN WEST SURVEYING COMPANY 412 N. DAL PASO HOBBS, N.M. 88240

12 N. DAL PASO HOBBS, N.M. 88240 (575) 393-3117 www.jwsc.biz TBPLS# 10021000

XTO ENERGY

CORRAL CANYON FEDERAL #7H WELL LOCATED 170 FEET FROM THE SOUTH LINE AND 1980 FEET FROM THE EAST LINE OF SECTION 4, TOWNSHIP 25 SOUTH, RANGE 29 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO

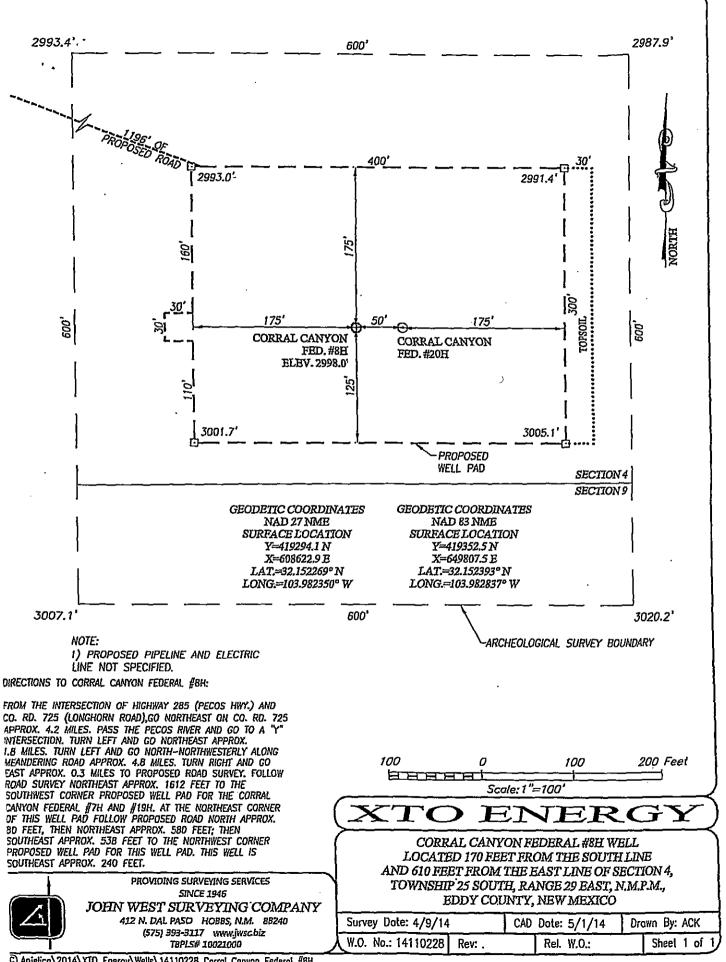


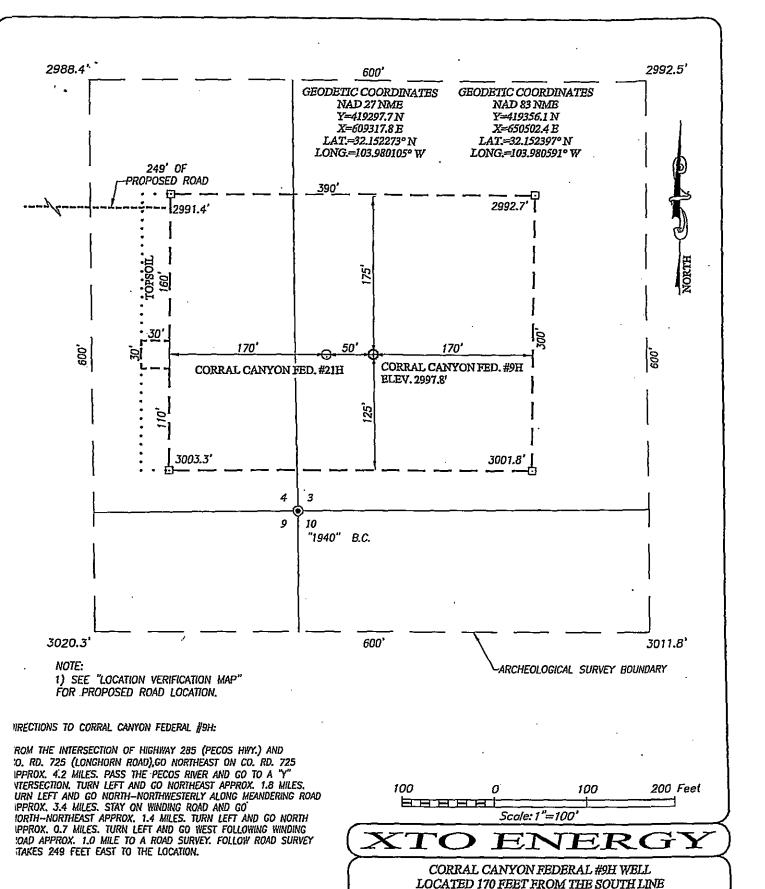


PROVIDING SURVEYING SERVICES
SINCE 1946

JOHN WEST SURVEYING COMPANY

412 N. DAL PASO HOBBS, N.M. 88240 (575) 393-3117 www.jwsc.blz TBPLS# 10021000 AND 84 FEET FROM THE WEST LINE OF SECTION 3, TOWNSHIP 25 SOUTH, RANGE 29 BAST, N.M.P.M., EDDY COUNTY, NEW MEXICO

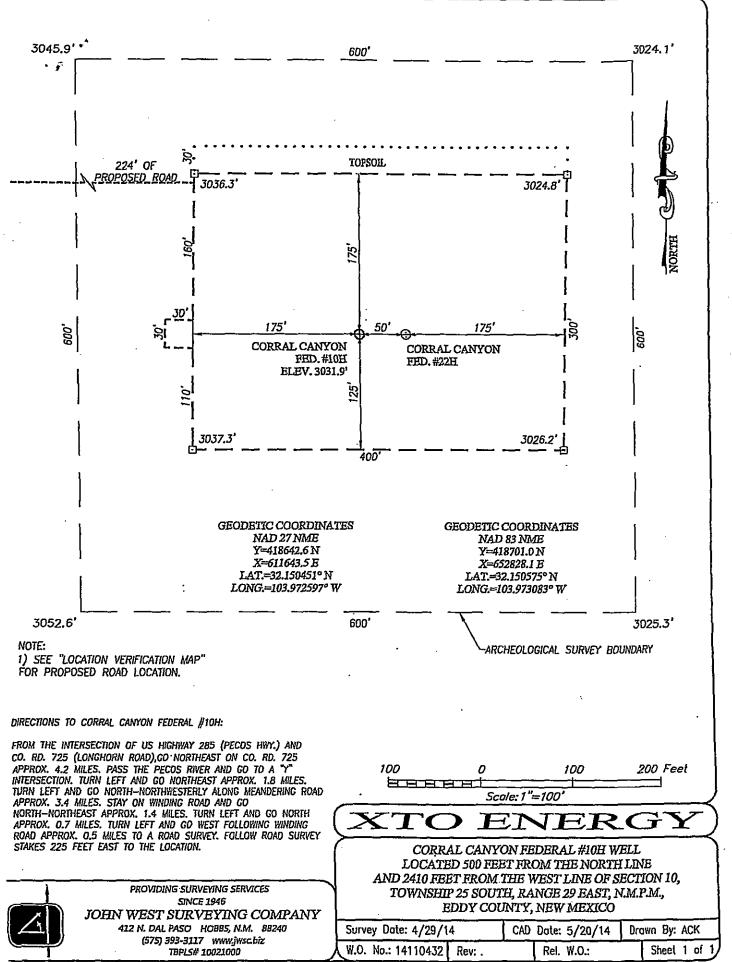

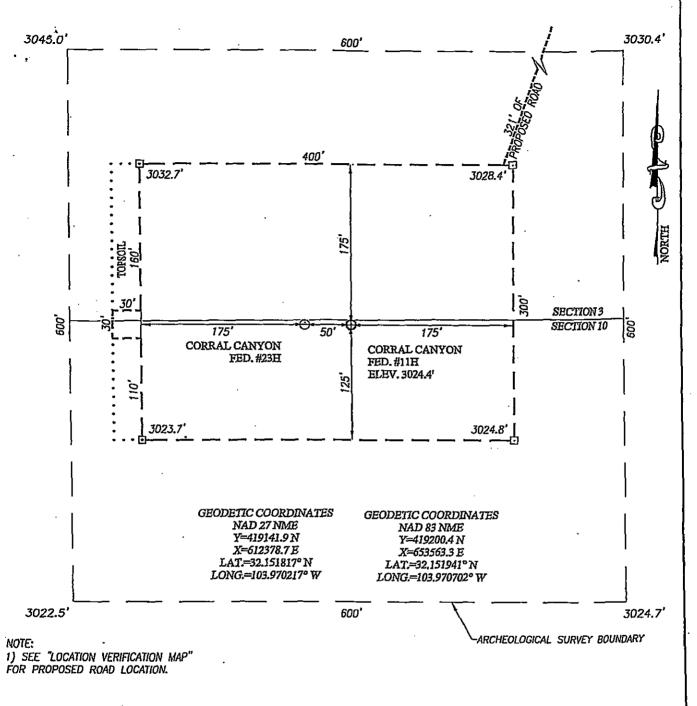

DIRECTIONS TO CORRAL CANYON FEDERAL #11H:

FROM THE INTERSECTION OF US HIGHWAY 285 (PECOS HWY.) AND CO. RD. 725 (LONGHORN ROAD),GO NORTHEAST ON CO. RD. 725 APPROX. 4.2 MILES. PASS THE PECOS RIVER AND GO TO A "Y" INTERSECTION. TURN LEFT AND GO NORTHEAST APPROX. 1.8 MILES. TURN LEFT AND GO NORTH-NORTHWESTERLY ALONG MEANDERING ROAD APPROX. 3.4 MILES. STAY ON WINDING ROAD AND GO NORTH-NORTHEAST APPROX. 1.4 MILES, TURN LEFT AND GO NORTH APPROX. 0.7 MILES. TURN LEFT AND GO WEST FOLLOWING WINDING ROAD APPROX. O.1 MILE TO A ROAD SURVEY. FOLLOW ROAD SURVEY STAKES 321 FEET SOUTH TO THE LOCATION.

100 200 Feet 100 BEHHE Scale: 1"=100


CORRAL CANYON FEDERAL #11H WELL LOCATED 5 FEET FROM THE NORTH LINE AND 2155 FEET FROM THE EAST LINE OF SECTION 10, TOWNSHIP 25 SOUTH, RANGE 29 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO


412 N. DAL PASO HOBBS, N.M. 88240 Survey Date: 5/5/14 CAD Date: 5/20/14 Drawn By: ACK (575) 393-3117 www.jwscbiz TBPLS# 10021000 W.O. No.: 14110434 Rel. W.O.: Sheet 1 of Rev: .



PROVIDING SURVEYING SERVICES **SINCE 1946**

JOHN WEST SURVEYING COMPANY

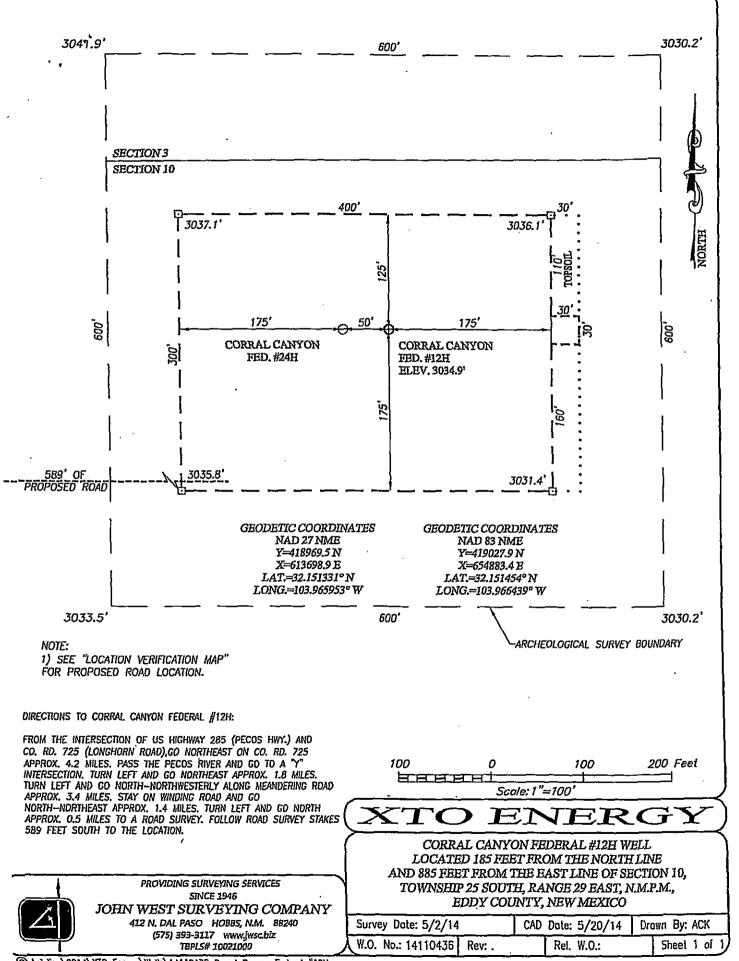

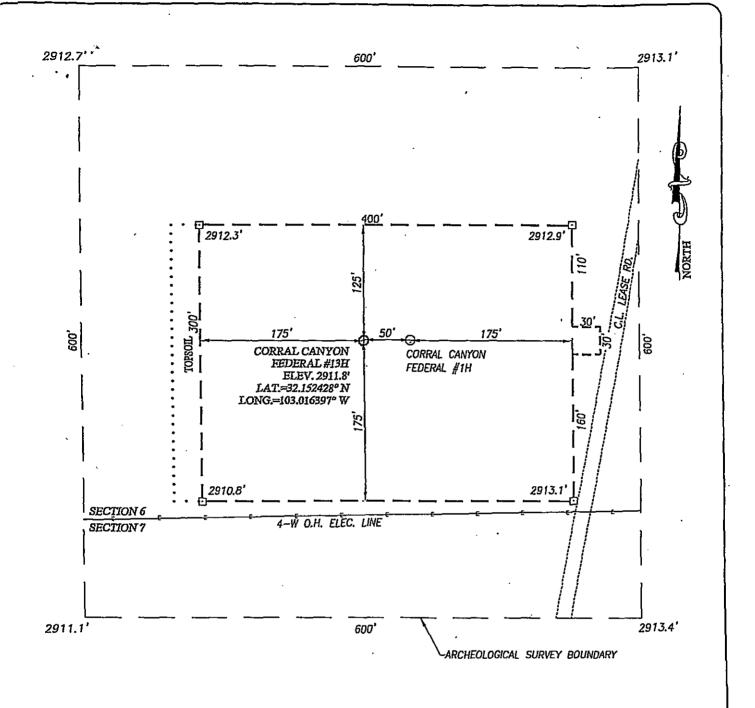

DIRECTIONS TO CORRAL CANYON FEDERAL #2H:

FROM THE INTERSECTION OF US HIGHWAY 285 (PECOS HWY.)
AND CO. RD. 725 (LONGHORN ROAD),GO NORTHEAST ON CO.
RD. 725 APPROX. 4.2 MILES. PASS THE PECOS RIVER AND GO
TO A "Y" INTERSECTION. TURN LEFT AND GO NORTHEAST
APPROX. 1.8 MILES. TURN LEFT AND GO
NORTH—NORTHWESTERLY ALONG MEANDERING ROAD APPROX. 5.0
MILES. TURN LEFT AND FOLLOW WINDING ROAD WEST APPROX.
1.3 MILES. THE LOCATION STAKE IS APPROX. 400 FEET SOUTH.




PROVIDING SURVEYING SERVICES SINCE 1946

JOHN WEST SURVEYING COMPANY
412 N. DAL PASO HOBBS, N.M. 88240

(575) 393-3117 www.jwsc.biz TBPLS# 10021000

XTO ENERGY

CORRAL CANYON FEDERAL #13H WELL LOCATED 190 FEET FROM THE SOUTH LINE AND 520 FEET FROM THE EAST LINE OF SECTION 6, TOWNSHIP 25 SOUTH, RANGE 29 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO

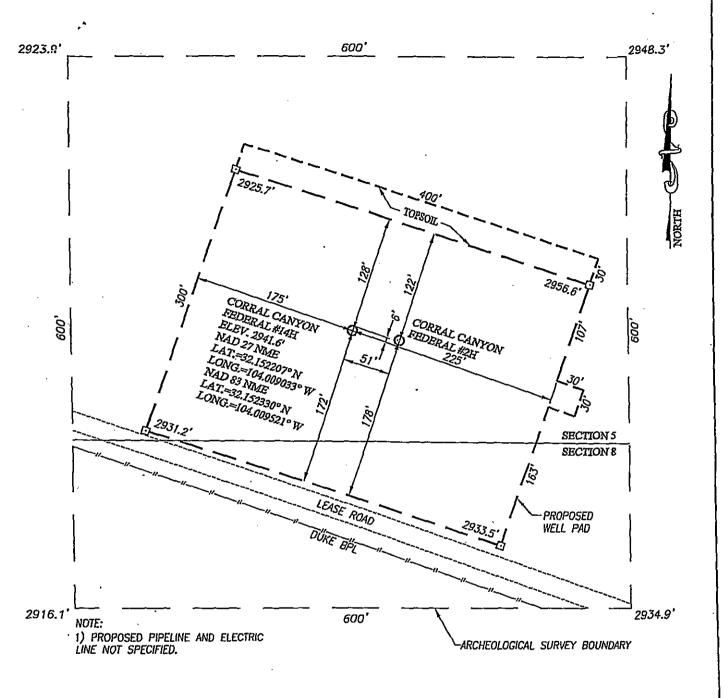

DIRECTIONS TO CORRAL CANYON FEDERAL #2H:

FROM THE INTERSECTION OF HIGHWAY 285 (PECOS HWY.) AND CO. RD. 725 (LONGHORN ROAD),GO NORTHEAST ON CO. RD. 725 APPROX. 4.2 MILES. PASS THE PECOS RIVER AND GO TO A Y" INTERSECTION. TURN LEFT AND GO NORTHEAST APPROX. 1.8 VILES. TURN LEFT AND GO NORTH-NORTHWESTERLY ALONG VEANDERING ROAD APPROX. 5.0 MILES. TURN LEFT AND GO SOUTHWEST APPROX. 0.25 MILES. TURN RIGHT AND GO VORTHWEST APPROX. 0.5 MILES. THE LOCATION STAKE IS APPROX. 200 FEET NORTH.



PROVIDING SURVEYING SERVICES SINCE 1946

JOHN WEST SURVEYING COMPANY 412 N. DAL PASO HOBBS, N.M. 88240

(575) 393-3117 www.jwsc.biz TBPLS# 10021000

100 200 Feet 100 BHHHH Scale: 1"=100

CORRAL CANYON FEDERAL #14H WELL LOCATED 120 FEET FROM THE SOUTH LINE AND 1760 FEET FROM THE WEST LINE OF SECTION 5, TOWNSHIP 25 SOUTH, RANGE 29 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO

Survey. Date: 03/06/14


CAD Date: 03/26/14


Drawn By: DSS

W.O. No.: 14110217 Rev:

Rel. W.O.:

Sheet 1 of

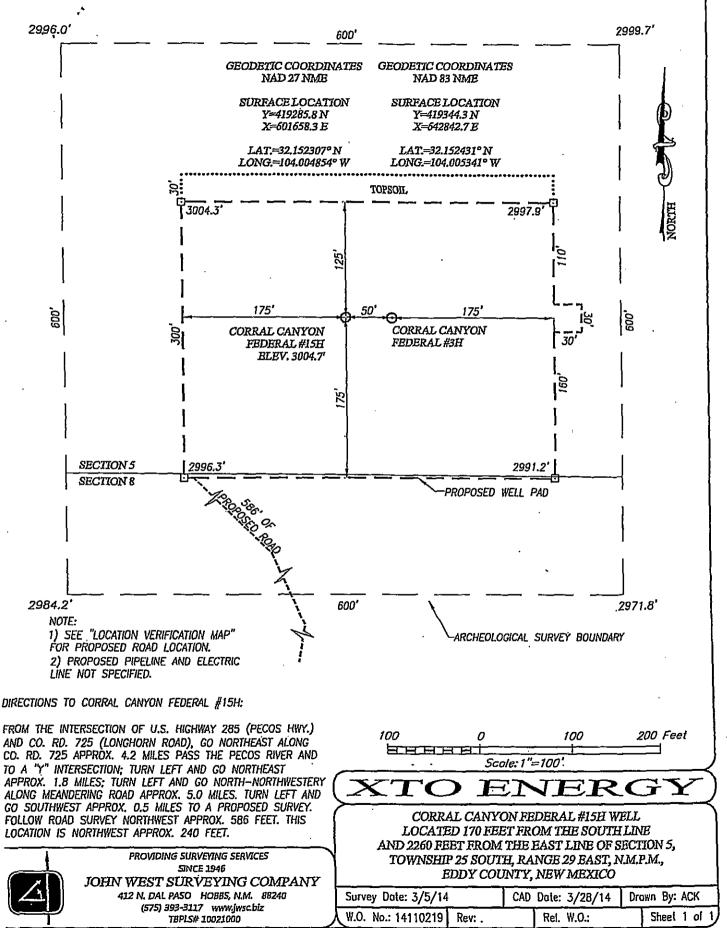

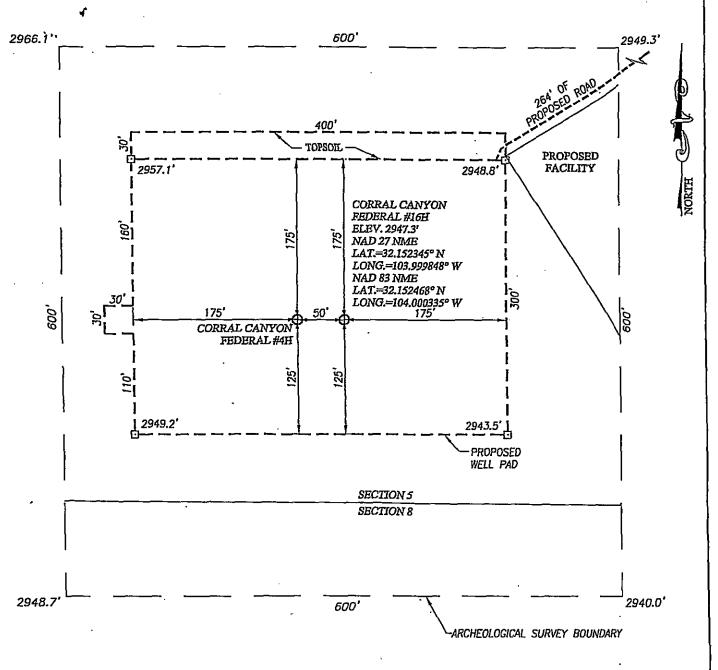

IRECTIONS TO CORRAL CANYON FEDERAL #16H:

ROM THE INTERSECTION OF HIGHWAY 285 (PECOS HWY.) AND CO. D. 725 (LONGHORN ROAD),GO NORTHEAST ON CO. RD. 725 PPROX. 4.2 MILES. PASS THE PECOS RIVER AND GO TO A "Y" ITERSECTION. TURN LEFT AND GO NORTHEAST APPROX. 1.8 MILES. URN LEFT AND GO NORTH-NORTHWESTERLY ALONG MEANDERING 'OAD APPROX. 5.0 MILES. VEER LEFT AND GO NORTH-NORTHWEST PPROX. 1.5 MILES TO PROPOSED ROAD SURVEY. FOLLOW ROAD URVEY STAKES SOUTHWEST APPROX. 264 FEET TO THE ORTHEAST CORNER OF PROPOSED WELL PAD. THIS LOCATION TAKE IS APPROX. 240 FEET SOUTHWEST.



PROVIDING SURVEYING SERVICES **SINCE 1946**

JOHN WEST SURVEYING COMPANY 412 N. DAL PASO HOBBS, N.M. 88240 (575) 393-3117 www.jwsc.biz

TBPLS# 10021000

NOTE:

- 1) SEE "LOCATION VERIFICATION MAP" FOR PROPOSED ROAD LOCATION.
- 2) PROPOSED PIPELINE AND ELECTRIC LINE NOT SPECIFIED.

100 100 200 Feet 8888 Scale:1"=100

CORRAL CANYON FEDERAL #16H WELL LOCATED 200 FEET FROM THE SOUTH LINE AND 710 FEET FROM THE EAST LINE OF SECTION 5, TOWNSHIP 25 SOUTH, RANGE 29 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO

Survey Date: 03/05/14

CAD Date: 03/26/14


Orawn By: DSS

W.O. No.: 14110221

Rev: .

Rel. W.O.:

Sheet 1 of 1

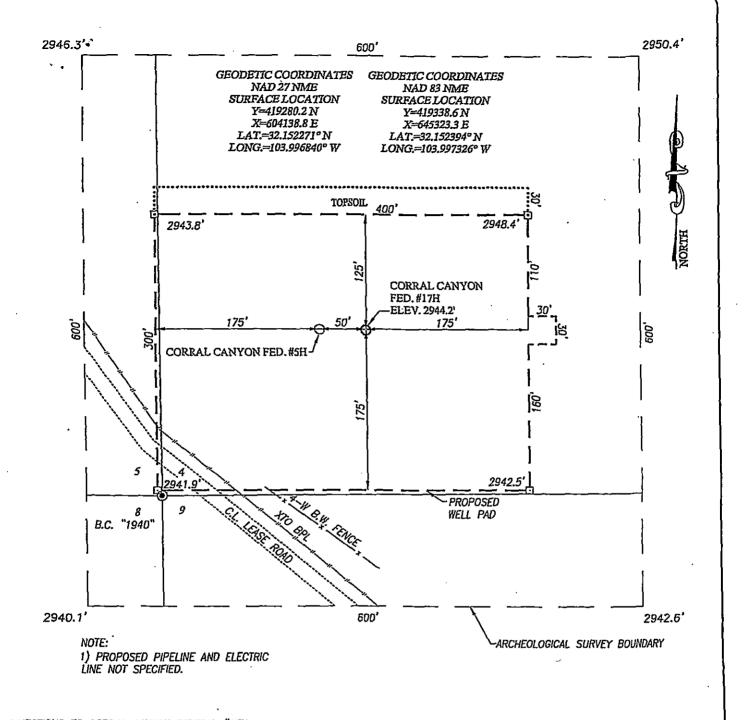

DIRECTIONS TO CORRAL CANYON FEDERAL #17H:

FROM THE INTERSECTION OF HIGHWAY 285 (PECOS HWY.) AND CO, RD. 725 (LONGHORN ROAD),GO NORTHEAST ON CO. RD. 725 APPROX. 4.2 MILES. PASS THE PECOS RIVER AND GO TO A "Y" INTERSECTION. TURN LEFT AND GO NORTHEAST APPROX. 1.8 MILES. TURN LEFT AND GO NORTH—NORTHWESTERLY ALONG MEANDERING ROAD APPROX. 5.0 MILES. TURN LEFT AND GO NORTHWIEST APPROX. 300 FEET. THIS LOCATION IS NORTHEAST APPROX. 260 FEET.




PROVIDING SURVEYING SERVICES SINCE 1946


JOHN WEST SURVEYING COMPANY
412 N. DAL PASO HOBBS, N.M. 88240


(575) 393-3117 www.jwsc.biz T8PLS# 10021000


XTO ENERGY

CORRAL CANYON FEDERAL #17H WELL LOCATED 180 FEET FROM THE SOUTH LINE AND 221 FEET FROM THE WEST LINE OF SECTION 4, TOWNSHIP 25 SOUTH, RANGE 29 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO

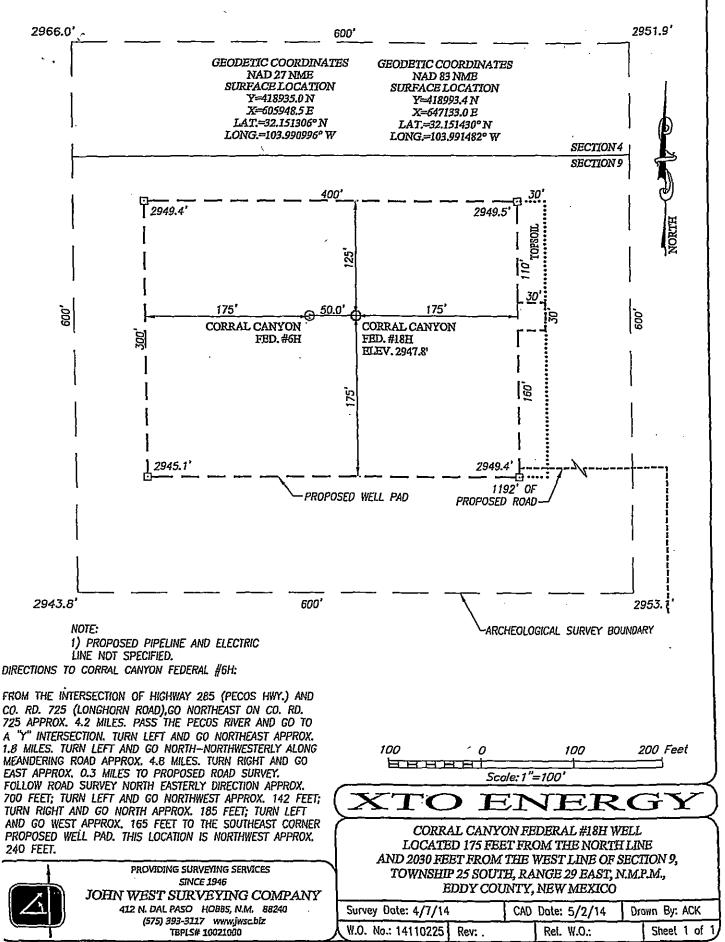

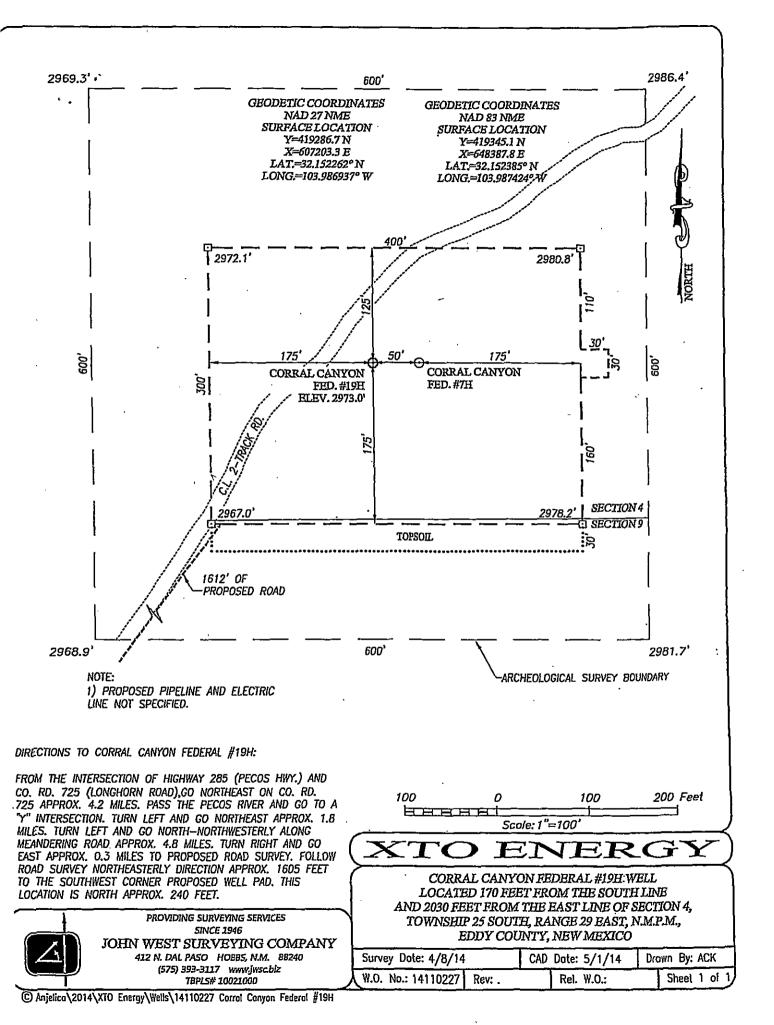

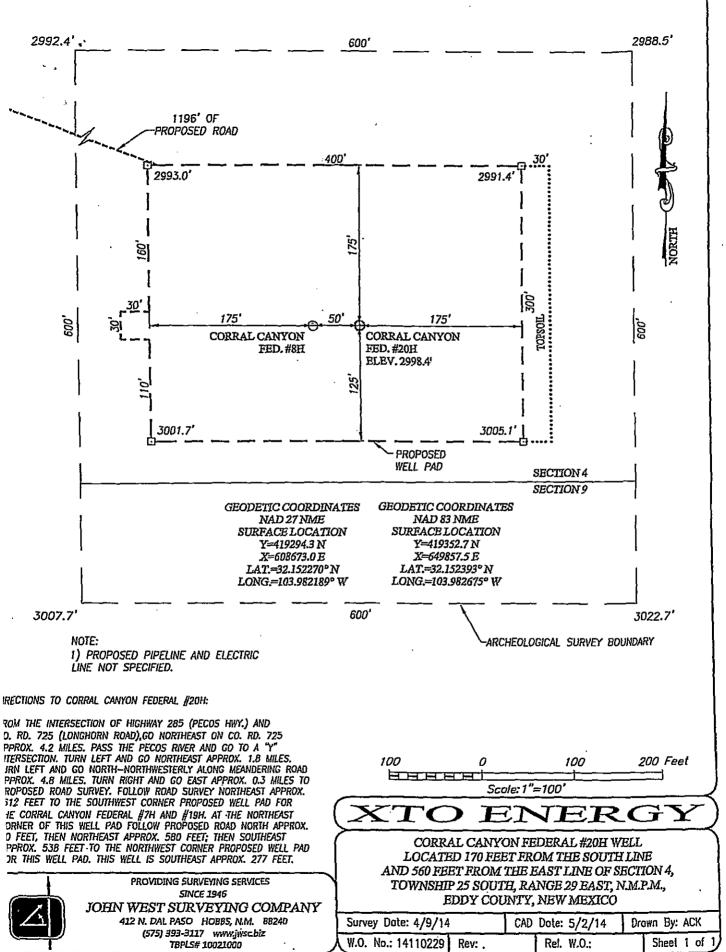

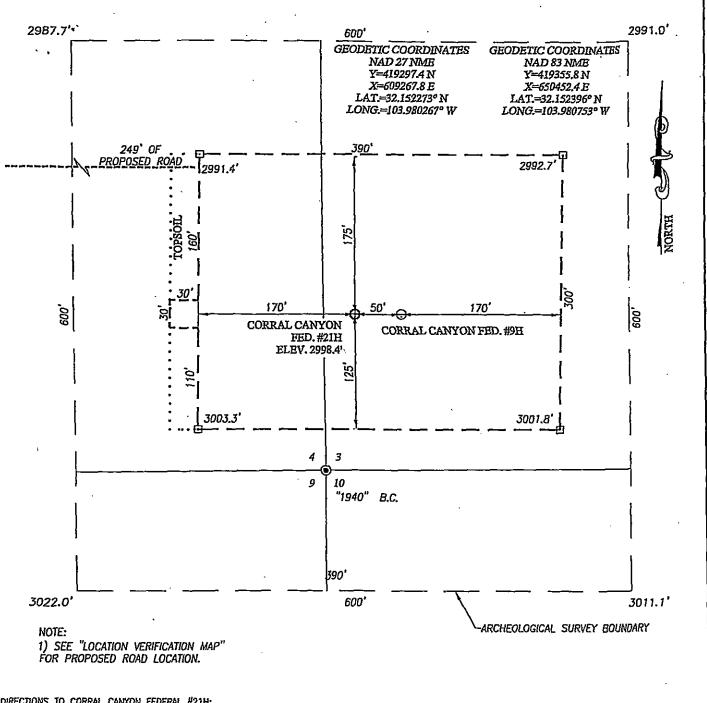

DIRECTIONS TO CORRAL CANYON FEDERAL #21H:

FROM THE INTERSECTION OF HIGHWAY 285 (PECOS HWY.) AND CO. RD. 725 (LONGHORN ROAD),GO NORTHEAST ON CO. RD. 725 APPROX. 4.2 MILES. PASS THE PECOS RIVER AND GO TO A "Y INTERSECTION. TURN LEFT AND GO NORTHEAST APPROX. 1.8 MILES. TURN LEFT AND GO NORTH-NORTHWESTERLY ALONG MEANDERING ROAD APPROX. 3.4 MILES. STAY ON WINDING ROAD AND GO NORTH-NORTHEAST APPROX. 1.4 MILES. TURN LEFT AND GO NORTH APPROX. 0.7 MILES. TURN LEFT AND GO WEST FOLLOWING WINDING ROAD APPROX. 1.0 MILE TO A ROAD SURVEY. FOLLOW ROAD SURVEY STAKES 249 FEET EAST TO THE LOCATION.



PROVIDING SURVEYING SERVICES **SINCE 1946**


JOHN WEST SURVEYING COMPANY 412 N. DAL PASO HOBBS, N.M. 88240

(575) 393-3117 www.jwsc.biz TBPLS# 10021000


100 200 Feet 100 Scale: 1"=100

CORRAL CANYON FEDERAL #21H WELL LOCATED 170 FEET FROM THE SOUTH LINE AND 34 FEET FROM THE WEST LINE OF SECTION 3, TOWNSHIP 25 SOUTH, RANGE 29 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO

CAD Dote: 5/19/14 Survey Date: 4/28/14 Drown By: ACK W.O. No.: 14110431 Sheet 1 of 1 Rev: . Rel. W.O.:

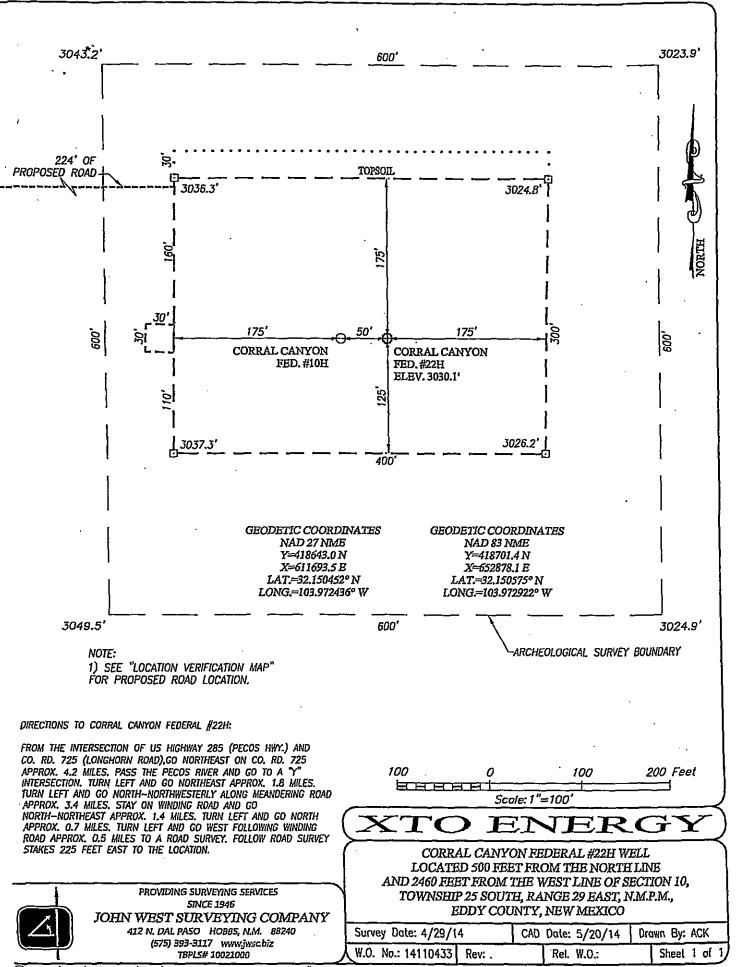


© Anjelico\2014\XTO Energy\Wells\14110433 Corrol Conyon Federal #22H

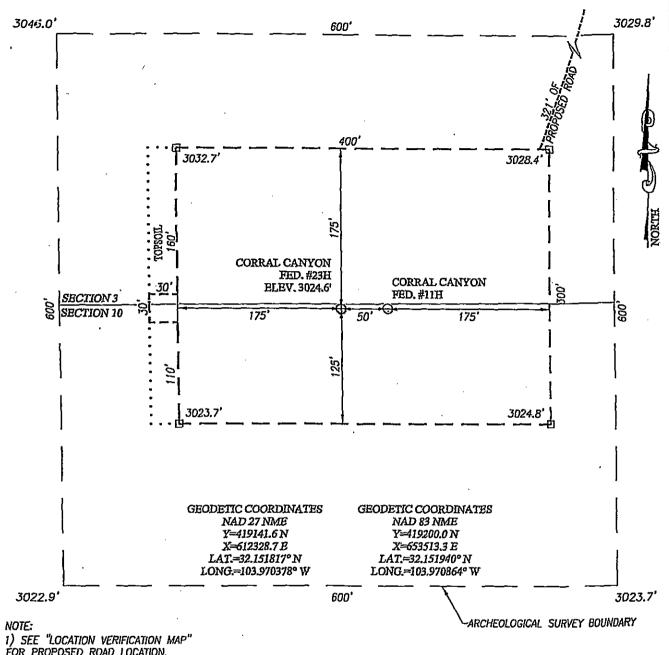

FOR PROPOSED ROAD LOCATION.

DIRECTIONS TO CORRAL CANYON FEDERAL #23H:

FROM THE INTERSECTION OF US HIGHWAY 285 (PECOS HWY.) AND CO. RD. 725 (LONGHORN ROAD),GO NORTHEAST ON CO. RD. 725 APPROX. 4.2 MILES. PASS THE PECOS RIVER AND GO TO A "Y" INTERSECTION. TURN LEFT AND GO NORTHEAST APPROX. 1,8 MILES. TURN LEFT AND GO NORTH-NORTHWESTERLY ALONG MEANDERING ROAD APPROX. 3.4 MILES. STAY ON WINDING ROAD AND GO NORTH-NORTHEAST APPROX. 1.4 MILES. TURN LEFT AND GO NORTH APPROX. 0.7 MILES. TURN LEFT AND GO WEST FOLLOWING WINDING ROAD APPROX. 0.1 MILE TO A ROAD SURVEY. FOLLOW ROAD SURVEY STAKES 321 FEET SOUTH TO THE LOCATION.



CORRAL CANYON FEDERAL #23H WELL LOCATED 5 FEET FROM THE NORTH LINE AND 2205 FEET FROM THE EAST LINE OF SECTION 10, TOWNSHIP 25 SOUTH, RANGE 29 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO


CAD Date: 5/20/14 Survey Date: 5/5/14 Drawn By: ACK W.O. No.: 14110435 Sheet 1 of Rel. W.O.: Rev: .



PROVIDING SURVEYING SERVICES SINCE 1946


JOHN WEST SURVEYING COMPANY 412 N. DAL PASO HOBBS, N.M. 88240

(575) 393-3117 www.jwsc.biz TBPLS# 10021000

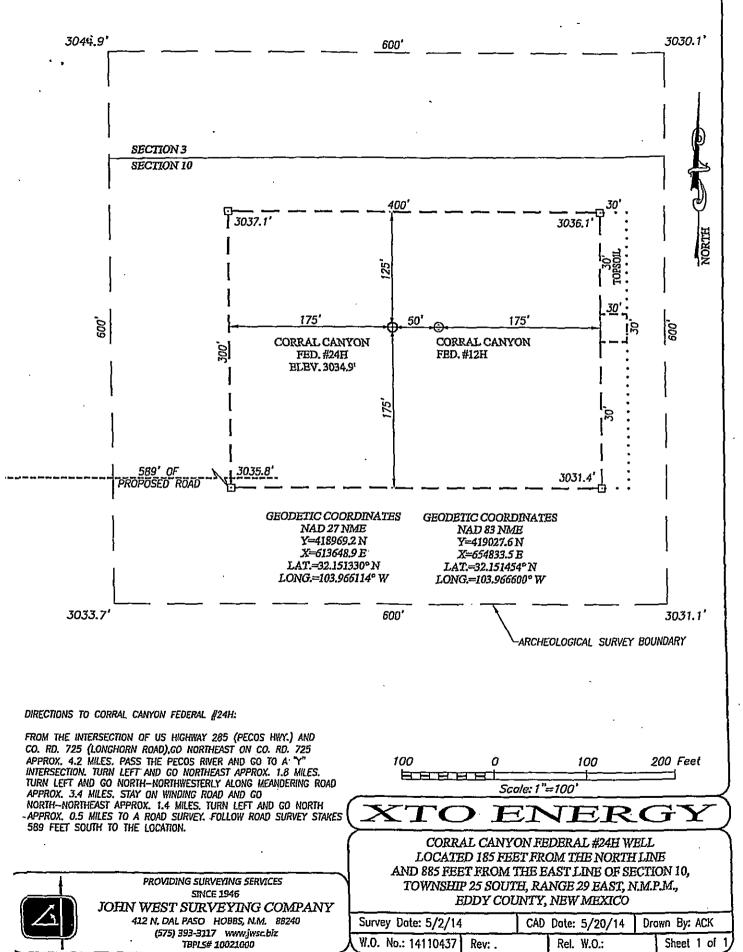

C Anjelico\2014\XTO Energy\Wells\14110437 Corrol Conyon Federal #24H

Interim Reclamation Diagram
Corral Canyon Fed Com #1H & #13H
V-Door East (Both Wells)

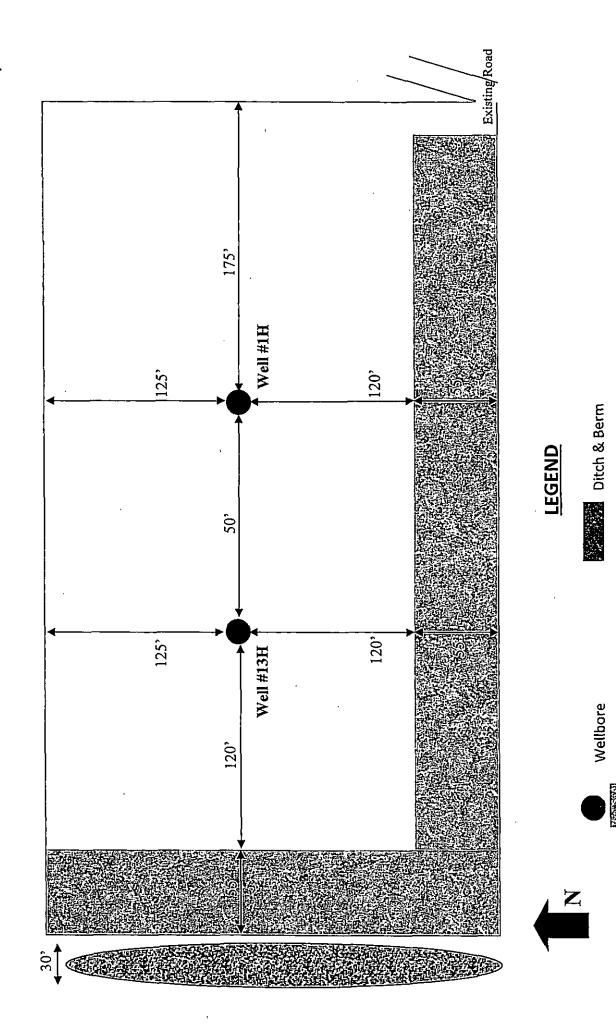


Topsoil

Interim Reclamation

Corral Canyon Fed Com #2H & #14H Interim Reclamation Diagram

V-Door East (Both Wells)

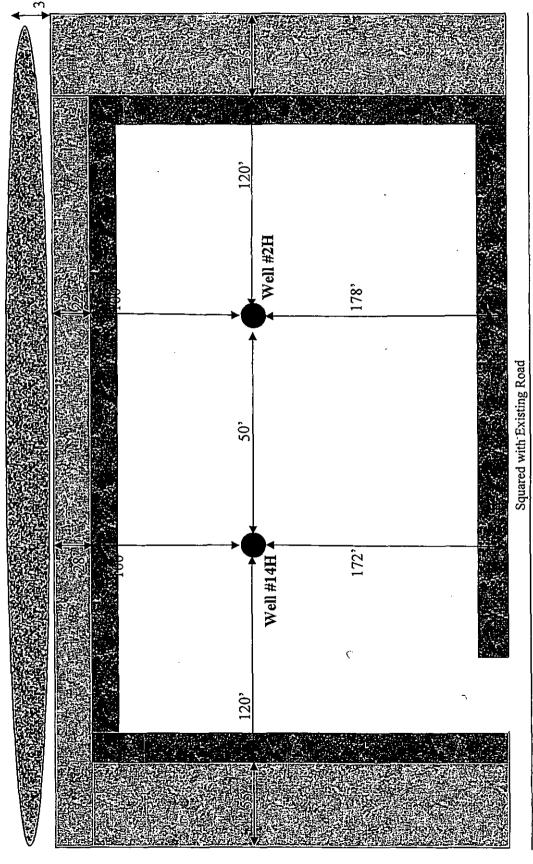















Interim Reclamation

Wellbore

Interim Reclamation Diagram

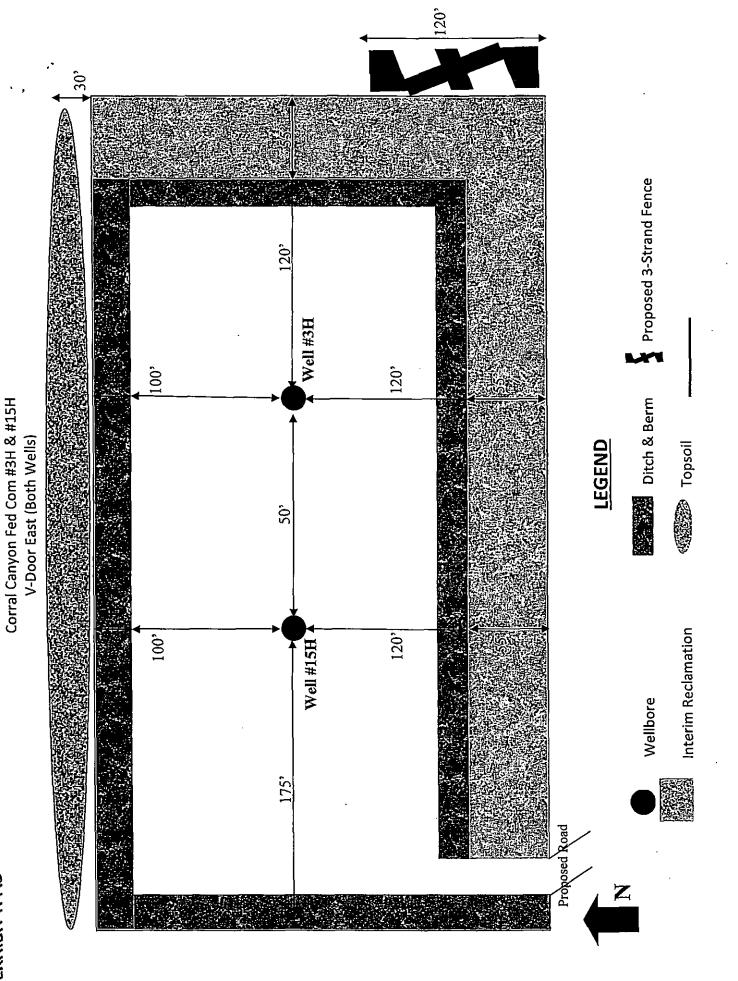

Corral Canyon Fed Com #4H & #16H Interim Reclamation Diagram

Facilities Pad Proposed Road 175, Well #16H 175, 100, V-Door West (Both Wells) 50, 100, Well #4H 120,

LEGEND








Interim Reclamation

Wellbore



Interim Reclamation Diagram

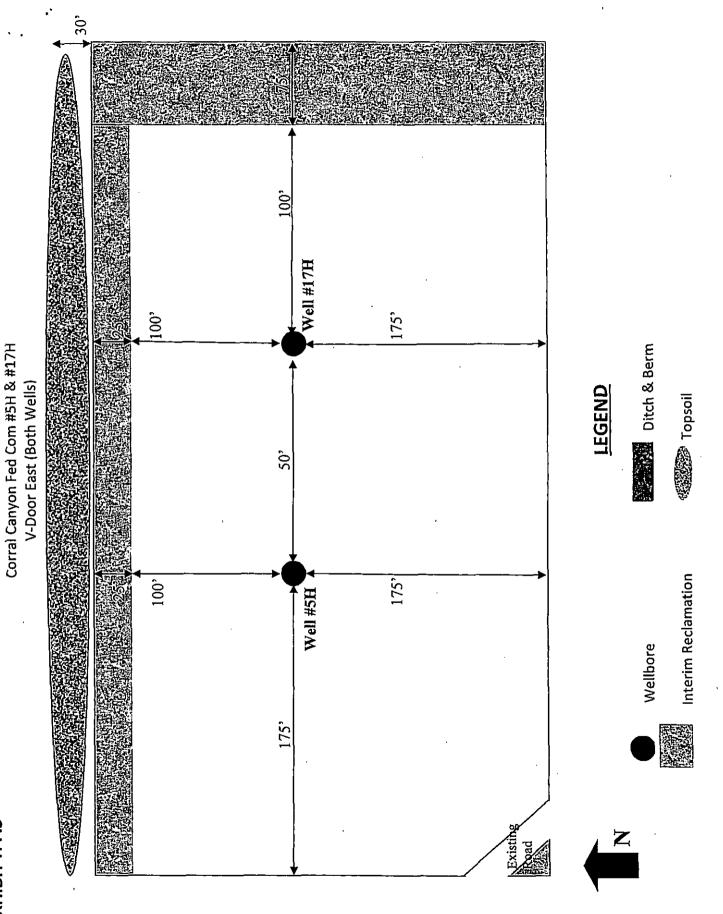


Interim Reclamation Diagram Corral Canyon Fed Com #6H & #18H

V-Door East (Both Wells)

Proposed Road Proposed 3-Strand Fence Well #18H 175, 00, Ditch & Berm LEGEND Topsoil 50, Interim Reclamation 175 100, Well #6H Wellbore 120,

60,


Interim Reclamation Diagram Corral Canyon Fed Com #7H & #19H

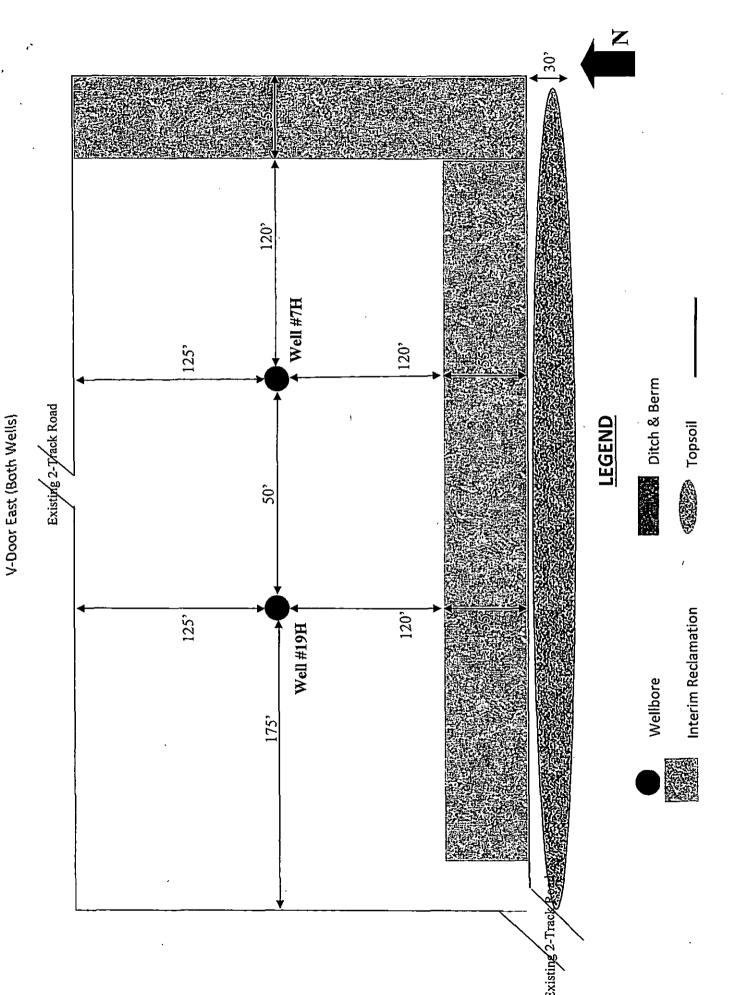


Interim Reclamation Diagram
Corral Canyon Fed Com #8H & #20H
V-Door West (Both Wells)

Well #8H 125, 120, Ditch & Berm LEGEND Topsoil 50, Interim Reclamation 125 120, Well #20H Wellbore 120, Proposed Road

Interim Reclamation Diagram Corral Canyon Fed Com #9H & #21H V-Door West (Both Wells)

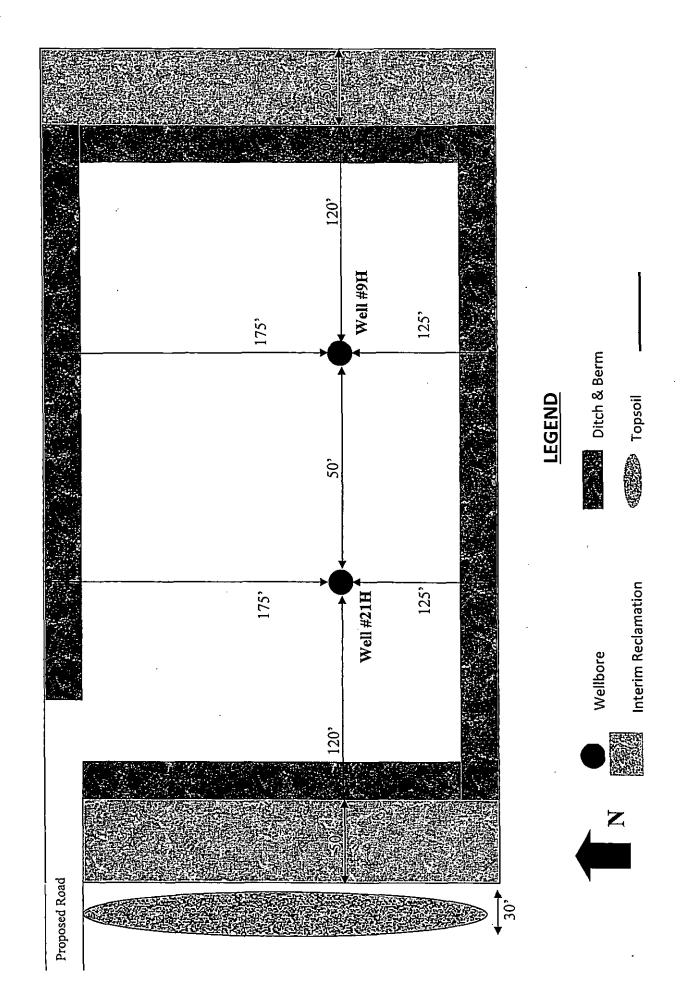

Corral Canyon Fed Com #10H & #22H Interim Reclamation Diagram V-Door West (Both Wells)

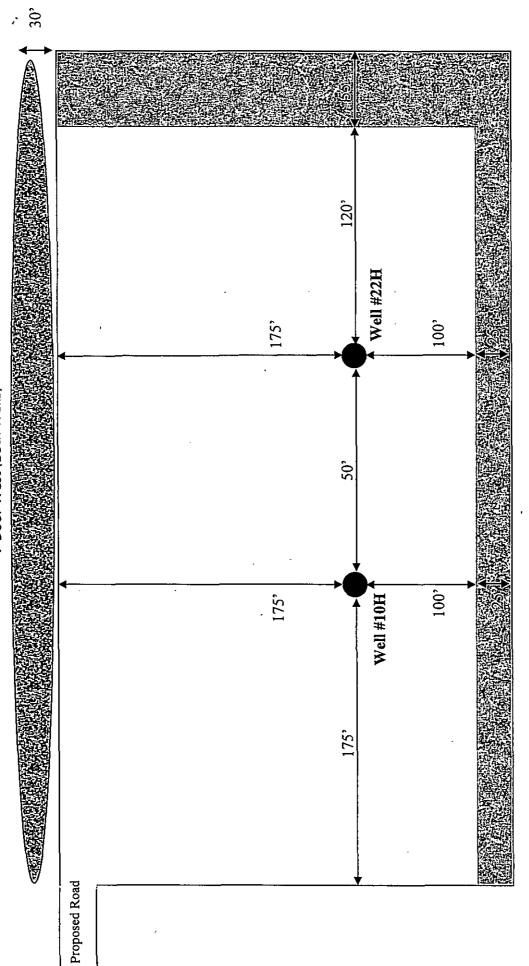


LEGEND

















Interim Reclamation Diagram

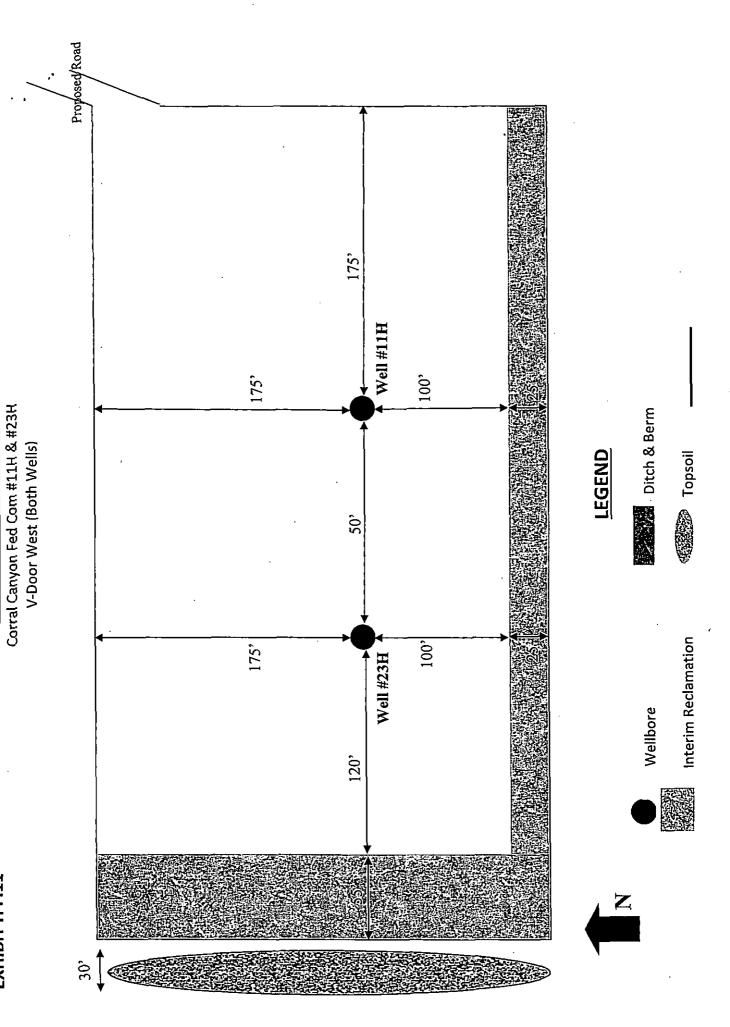

Interim Reclamation Diagram
Corral Canyon Fed Com #12H & #24H
V-Door East (Both Wells)

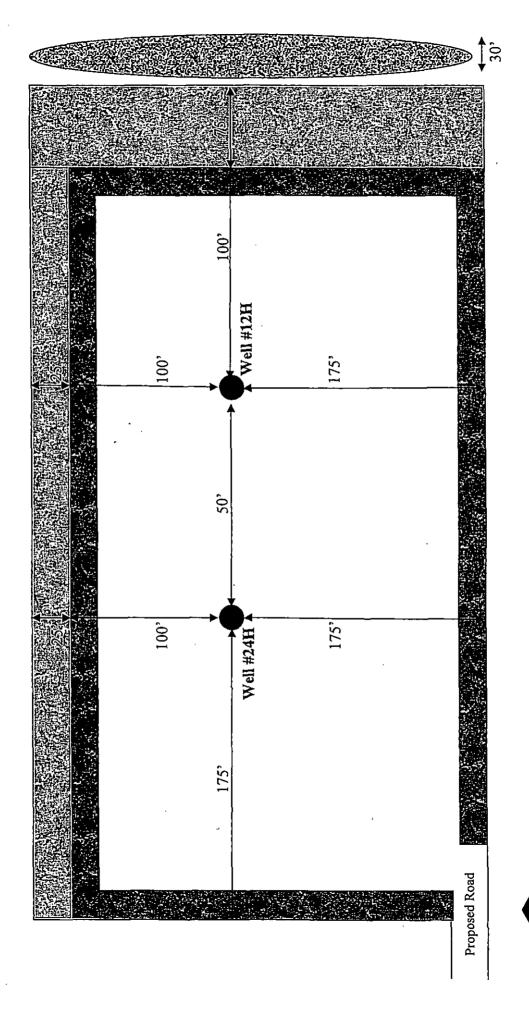













Wellbore

Interim Reclamation

PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME:
LEASE NO.:
NMNM015302
WELL NAME & NO.:
SURFACE HOLE FOOTAGE:
BOTTOM HOLE FOOTAGE
LOCATION:
COUNTY:

XTO Energy, Inc.
NMNM015302
21H – Corral Canyon Federal
170'/S & 34'/W
330'/N & 610'/W
Section 03, T 25 S., R 29 E., NMPM
Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

General Provisions
Permit Expiration
Archaeology, Paleontology, and Historical Sites
Noxious Weeds
Special Requirements
Cave/Karst
Avian Protection
Construction
Notification
Topsoil
Closed Loop System
Federal Mineral Material Pits
Well Pads
Roads
Road Section Diagram
☑ Drilling
Cement Requirements
H2S Requirements
Logging Requirements
Pressure Control Requirements
Waste Material and Fluids
☐ Production (Post Drilling)
Well Structures & Facilities
Pipelines
Electric Lines
Interim Reclamation
Final Abandanment & Declamation

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult

with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Cave and Karst

** Depending on location, additional Drilling, Casing, and Cementing procedures may be required by engineering to protect critical karst groundwater recharge areas.

Cave/Karst Surface Mitigation

The following stipulations will be applied to minimize impacts during construction, drilling and production.

Construction:

In the advent that any underground voids are opened up during construction activities, construction activities will be halted and the BLM will be notified immediately.

No Blasting:

No blasting will be utilized for pad construction. The pad will be constructed and leveled by adding the necessary fill and caliche.

Pad Berming:

The entire perimeter of the well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad.

- The compacted berm shall be constructed at a minimum of 12 inches high with impermeable mineral material (e.g. caliche).
- No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad.
- The topsoil stockpile shall be located outside the bermed well pad.
- Topsoil, either from the well pad or surrounding area, shall not be used to construct the berm.
- No storm drains, tubing or openings shall be placed in the berm.
- If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.
- The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed.
- Any access road entering the well pad shall be constructed so that the integrity of the berm height surrounding the well pad is not compromised. (Any access road crossing the berm cannot be lower than the berm height.)

Tank Battery Liners and Berms:

Tank battery locations and all facilities will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.

Leak Detection System:

A method of detecting leaks is required. The method could incorporate gauges to measure loss, situating values and lines so they can be visually inspected, or installing electronic sensors to alarm when a leak is present. Leak detection plan will be submitted to BLM for approval.

Automatic Shut-off Systems:

Automatic shut off, check values, or similar systems will be installed for pipelines and tanks to minimize the effects of catastrophic line failures used in production or drilling.

Cave/Karst Subsurface Mitigation

The following stipulations will be applied to protect cave/karst and ground water concerns:

Rotary Drilling with Fresh Water:

Fresh water will be used as a circulating medium in zones where caves or karst features are expected. SEE ALSO: Drilling COAs for this well.

Directional Drilling:

Kick off for directional drilling will occur at least 100 feet below the bottom of the cave occurrence zone. SEE ALSO: Drilling COAs for this well.

Lost Circulation:

ALL lost circulation zones from the surface to the base of the cave occurrence zone will be logged and reported in the drilling report.

Regardless of the type of drilling machinery used, if a void of four feet or more and circulation losses greater than 70 percent occur simultaneously while drilling in any cavebearing zone, the BLM will be notified immediately by the operator. The BLM will assess the situation and work with the operator on corrective actions to resolve the problem.

Abandonment Cementing:

Upon well abandonment in high cave karst areas additional plugging conditions of approval may be required. The BLM will assess the situation and work with the operator to ensure proper plugging of the wellbore.

Pressure Testing:

Annual pressure monitoring will be performed by the operator on all casing annuli and reported in a sundry notice. If the test results indicated a casing failure has occurred, remedial action will be undertaken to correct the problem to the BLM's approval.\

Avian Protection

Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006. The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all power line structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. The holder without liability or expense shall make such modifications and/or additions to the United States.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future

field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outsloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch



All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

400 foot road with 4% road slope:
$$\frac{400'}{4\%}$$
 + 100' = 200' lead-off ditch interval

Cattleguards

An appropriately sized cattleguard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattleguards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

- 1. Salvage topsoil
- 3. Redistribute topsoil
- 2. Construct road
- 4. Revegetate slopes

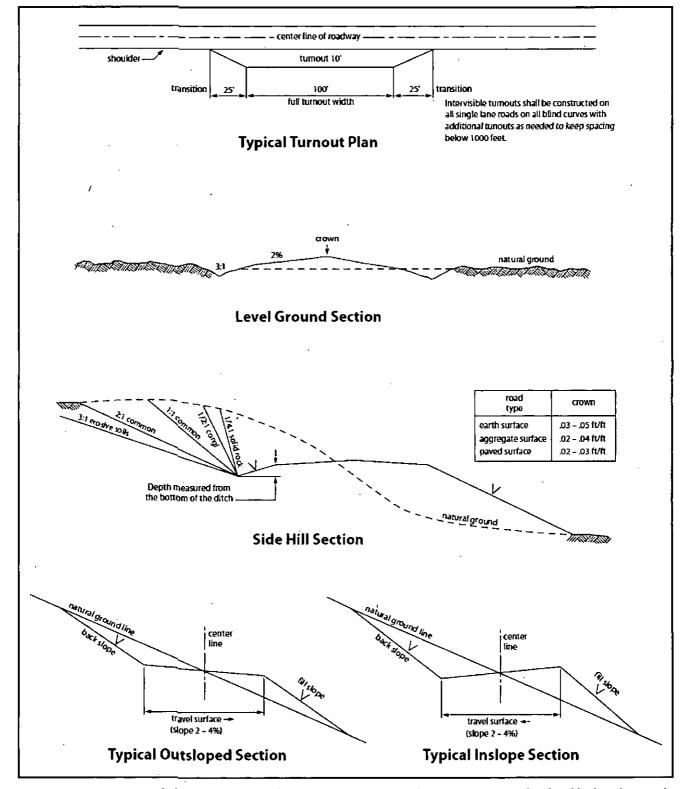


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. DRILLING

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (575) 361-2822

- 1. Although Hydrogen Sulfide has not been reported in the area, it is always a potential hazard. It is recommended that monitoring equipment be onsite for potential Hydrogen Sulfide. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, report measured amounts and formations to the BLM.
- 2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval. If the drilling rig is removed without approval an Incident of Non-Compliance will be written and will be a "Major" violation.
- 3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works is located, this does not include the dog house or stairway area.
 - 4. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

B. CASING

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the

approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.).

The initial wellhead installed on the well will remain on the well with spools used as needed.

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) for Water Basin:

After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. DURING THIS WOC TIME, NO DRILL PIPE, ETC. SHALL BE RUN IN THE HOLE.

Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

Risks:

Medium Cave/ Karst Occurrence Possibility of water flows in the Castile and in the Salado. Possibility of lost circulation in the Rustler and in the Delaware.

- , 1. The 13 3/8 inch surface casing shall be set at approximately 625 feet (if salt is encountered, set casing at least 25 feet above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.

- d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The minimum required fill of cement behind the 9 5/8 inch intermediate casing which shall be set at approximately 3000 feet (in the basal anhydrite of the Castile Formation) is:
 - □ Cement to surface. If cement does not circulate see B.1.a, c-d above. If cement does not circulate to surface on the intermediate casing, the cement on the production casing must come to surface. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst.

Centralizers required through the curve and a minimum of one every other joint.

- 3. The minimum required fill of cement behind the 5 1/2 inch production casing is:
 - Cement should tie-back at least 500 feet into previous casing string. Operator shall provide method of verification.
- 4. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

- 1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API 53.
- 2. Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor. If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).
- 3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 3000 (3M) psi.

- a. For surface casing only: If the BOP/BOPE is to be tested against casing, the wait on cement (WOC) time for that casing is to be met (see WOC statement at start of casing section). Independent service company required.
- 4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin / after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. The tests shall be done by an independent service company utilizing a test plug **not** a **cup** or **J-packer**. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - d. The results of the test shall be reported to the appropriate BLM office.
 - e. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
 - f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

D. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

E. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

KGR 10152015

VIII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will

dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the Grant and attachments, including stipulations, survey plat(s) and/or map(s), shall be on location during construction. BLM personnel may request to review a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

- 1. Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
- 2. Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, Holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC § 2601 et seq. (1982) with regard to any toxic substances that are used, generated by or stored on the right-of-way or on

facilities authorized under this right-of-way grant (see 40 CFR, Part 702-799 and in particular, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193). Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the Authorized Officer concurrent with the filing of the reports to the involved Federal agency or State government.

- 3. Holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. § 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way Holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way Holder on the Right-of-Way. This provision applies without regard to whether a release is caused by Holder, its agent, or unrelated third parties.
- 4. Holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. Holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:
 - a. Activities of Holder including, but not limited to: construction, operation, maintenance, and termination of the facility;
 - b. Activities of other parties including, but not limited to:
 - (1) Land clearing
 - (2) Earth-disturbing and earth-moving work
 - (3) Blasting
 - (4) Vandalism and sabotage;
 - c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline

system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of Holder, regardless of fault. Upon failure of Holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he/she deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of Holder. Such action by the Authorized Officer shall not relieve Holder of any responsibility as provided herein.

- 6. All construction and maintenance activity shall be confined to the authorized right-of-way width of <u>20</u> feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline shall be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline shall be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity shall be confined to existing roads or right-of-ways.
- 7. No blading or clearing of any vegetation shall be allowed unless approved in writing by the Authorized Officer.
- 8. Holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky of duney areas, the pipeline shall be "snaked" around hummocks and dunes rather than suspended across these features.
- 9. The pipeline shall be buried with a minimum of <u>24</u> inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.
- 10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.
- 11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.
- 12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint

used shall be a color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.

- 13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.
- 14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.
- 15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.
- 16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.
- 17. Surface pipelines shall be less than or equal to 4 inches and a working pressure below 125 psi.

C. ELECTRIC LINES

STANDARD STIPULATIONS FOR OVERHEAD ELECTRIC DISTRIBUTION LINES

A copy of the grant and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.

- 2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
- 3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.
- 4. There will be no clearing or blading of the right-of-way unless otherwise agreed to in writing by the Authorized Officer.
- 5. Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006. The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all powerline structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. Such modifications and/or additions shall be made by the holder without liability or expense to the United States.

Raptor deterrence will consist of but not limited to the following: triangle perch discouragers shall be placed on each side of the cross arms and a nonconductive perching deterrence shall be placed on all vertical poles that extend past the cross arms.

6. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When

- necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting the fence. No permanent gates will be allowed unless approved by the Authorized Officer.
- 7. The BLM serial number assigned to this authorization shall be posted in a permanent, conspicuous manner where the power line crosses roads and at all serviced facilities. Numbers will be at least two inches high and will be affixed to the pole nearest the road crossing and at the facilities served.
- 8. Upon cancellation, relinquishment, or expiration of this grant, the holder shall comply with those abandonment procedures as prescribed by the Authorized Officer.
- 9. All surface structures (poles, lines, transformers, etc.) shall be removed within 180 days of abandonment, relinquishment, or termination of use of the serviced facility or facilities or within 180 days of abandonment, relinquishment, cancellation, or expiration of this grant, whichever comes first. This will not apply where the power line extends service to an active, adjoining facility or facilities.
- 10. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.
- 11. Special Stipulations:
 - For reclamation remove poles, lines, transformer, etc. and dispose of properly.
 - Fill in any holes from the poles removed.

IX. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road

repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

X. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Seed Mixture 2, for Sandy Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be <u>no</u> primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law (s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

Species	l <u>b/acre</u>
Sand dropseed (Sporobolus cryptandrus)	1.0
Sand love grass (Eragrostis trichodes)	1.0
Plains bristlegrass (Setaria macrostachya)	2.0

^{*}Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed