Form 3160-5 (August 2007)	UNITED STATE DEPARTMENT OF THE I BUREAU OF LAND MANA	NTERIOR NM OIL C	ONSERVATION OMB : Expire	APPROVED NO. 1004-0135 s: July 31, 2010		
SUND	RY NOTICES AND REPO	SIA DISTRICT 5. Lease Serial No. NMNM67980	NMNM67980			
abandoned	e this form for proposals to I well. Use form 3160-3 (AP	6. If Indian, Allottee	or Tribe Name			
SUBMIT IN	TRIPLICATE - Other instruc	ctions on reverse side.RI	CEIVED 7. If Unit or CA/Ag	reement, Name and/or No.		
1. Type of Well ⊠ Oil Well □ Gas Well [7 Other	·····	8. Well Name and N SANTA FE FED			
2. Name of Operator RKI EXPLORATION & PF	Contact:	CRYSTAL FULTON on@wpxenergy.com	9. API Well No. 30-015-32526			
3a. Address 3500 ONE WILLIAMS CE TULSA, OK 74172	ENTER MD35	ode) 10. Field and Pool, o DELAWARE	10. Field and Pool, or Exploratory DELAWARE			
	lec., T., R., M., or Survey Description	n)	11. County or Parish	a, and State		
Sec 35 T22S R28E 2136	FNL 1650FEL		EDDY COUN	EDDY COUNTY COUNTY, NM		
12. CHECK A	APPROPRIATE BOX(ES) T	O INDICATE NATURE C	DF NOTICE, REPORT, OR OTH	ER DATA		
TYPE OF SUBMISSION		TYPI	E OF ACTION			
Nation of Lateral		Deepen	Production (Start/Resume)	U Water Shut-Off		
Notice of Intent	□ Alter Casing	Fracture Treat	Reclamation	U Well Integrity		
S-Subsequent Report.	Casing Repair	New Construction	C Recomplete	□ Other		
Final Abandonment Notice	ce 🗖 Change Plans	Plug and Abandor	Temporarily Abandon			
	Convert to Injection	Plug Back	UWater Disposal			
If the proposal is to deepen dire Attach the Bond under which the following completion of the inv	ectionally or recomplete horizontally he work will be performed or provide olved operations. If the operation re nal Abandonment Notices shall be fi	, give subsurface locations and m e the Bond No. on file with BLM esults in a multiple completion or	arting date of any proposed work and appr easured and true vertical depths of all per /BIA. Required subsequent reports shall recompletion in a new interval, a Form 3 cluding reclamation, have been complete	tinent markers and zones. be filed within 30 days 160-4 shall be filed once		
RKI EXPLORATION AND	PRODUCTION, LLC IS REC	QUESTING TO PLUG AND	ABANDON THE SANTA FE FEI	DERAL 11.		
PLEASE SEE ATTACHE	D PROCEDURE AND WBD.					
THIS HAS BEEN SENT	FO THE NMOCD.					
HARD COPY HAS BEEN	I MAILED TO THE BLM-CAR	LSBAD OFFICE.				
			SEE ATTACI	HED FOR		
	ł	ATION PROCEDURE ATTACHED		S OF APPROVAL		
14. I hereby certify that the forego	ning is true and correct					
14. Thereby certify that the forego	Electronic Submission #	#356767 verified by the BLM	Well Information System	or rece		
	Committed to AFMSS for	processing by DEBORAH M	CKINNEY on 11/02/2016	CD,		
Name (Printed/Typed) CRY	STAL FULTON	Title PEF	RMITTING TECHNOL NAM	b.		
Signature (Electr	ronic Submission)	Date 11/0	Well Information System to the Carlsbad ICKINNEY on 11/02/2016 DIED RMITTING TECHNIC CEP IN 12/2016	Let h.		
	THIS SPACE F	OR FEDERAL OR STA	TE OFFICE USE			
Approved By	, a. am	Title	SPET	11-26-1 Date		
Conditions of approval, if any, are a certify that the applicant holds legal which would entitle the applicant to	or equitable title to those rights in th	s not warrant or	160			
Title 18 U.S.C. Section 1001 and Tit States any false, fictitious or fraud	tle 43 U.S.C. Section 1212, make it a ulent statements or representations a	a crime for any person knowingly s to any matter within its jurisdic	and willfully to make to any department tion.	or agency of the United		

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **



Santa Fe Fed #11 Plug and Abandon Procedure

Herradura Bend East Field

Section 35, T-22S, R-28E Eddy Co., New Mexico

API # 30-015-32526 Property # NA

Spud Date: 10/23/03 TD Date: : 01/15/04

1

Producing Formations: Delaware Perfs: 6,200' – 6,210' OA

 KB Elev:
 3100'

 GL Elev:
 3095'

 TD:
 6,350'

 PBTD:
 6,323'

 Marker Joint:
 N/A

CASING SUMMARY:

Safety Factor = 80% of new applied to burst, collapse and tension parameters in table.

Size	Depth (ft)	Weight (#/ft)	Grade psi	Connection Type	Capacity (bbls/ft)	ID (in)	Drift (in)	Burst (psi)	Collapse (psi)	Tension (lbs)
8 5/8"	475'	24#	K-55	n/a	.0637	n/a	n/a	n/a	n/a	n/a
4 1/2"	6,350'	10.5#	K-55	n/a	.0238	n/a	n/a	n/a	n/a	n/a

Surface: 8 5/8": 0' - 475' - TOC @ surface

Production: 5 1/2 ": 0'- 6,350' - TOC @ surface cmt. w- 2350 sxs

COMPLETION HISTORY TO DATE:

OBJECTIVE: Plug and abandon.

WPX REQUIRES THAT HARD HATS, STEEL TOE BOOTS, FIRE RETARDANT CLOTHING, AND SAFETY GLASSES BE WORN ON LOCATION.

HOLD SAFETY MEETING PRIOR TO COMMENCING PERFORATING, WIRE LINE AND PUMPING OPERATIONS

NO IGNITION SOURCES WITHIN 100 FT OF THE WELLHEAD, FLOWBACK TANKS OR MANIFOLD.

PROCEDURE:

- 1) Test safety anchors and replace as necessary. Set 1 clean frac tank and fill with 480 BFW.
- 2) MIRU Service Unit. Deliver, unload and tally 6,200'- 2-3/8" 4.7# J-55 EUE work string.
- 3) ND WH, NU 3K# BOP.
- 4) POOH rods & tbg. & Lay Dn.
- 5) MI RU wireline unit. Run 5 1/2" GR/JB to 6,150.
- 6) RIH w- 5 1/2" tbg. conveyed CIBP & set @ 6,150' PU 1 jt. Pump 145 bbls. heavy mud. Spot 25sx Class C Cement (14.8 ppg, 6.3 gps, 1.32 cfs yield) 5900' - 6150' & flush with heavy mud. TOOH w- tbg.
- Add Alug (DVT) From 5100-4950 WOC Tag 350'-Spot 45 sxs from 2850'-2450'. cmt. Max tag 2450. Add (ES Sait) 1375-1275. WOCTag 7) WOC & Tag
- 8) PU & LD tbg. to 2850' Spot 45 sxs from 2850' 2450'.

9) PU & WOC – Tag cmt. – Max tag 2450.

- 10) RU WL & Perforate 4 holes @ 640'. RD MO wireline.
- 11) RIH w- Pkr & tbg. Attempt to establish pump rate. Squeeze 40 sx Class C Cement (14.8 ppg, 6.3 gps, 1.32 cfs yield).
- 12) WOC & Tag @ 425'
- 13) If good cement bond and unable to squeeze Spot 70 sxs from 640 to surface. If tagged cmt. @ 425' spot 25 sxs cmt. from 150' to surface.
- 14) RDMO Service Unit. RDMO Cementers.
- 15) MIRU Welder. Cut-off casing head. WO cap with well name and number, operator name, and date.
- 16) Pull safety anchors, dress, and reclaim surface location if necessary.


WPX	Title	Office	Cell	
Danny Emerson	Production Superintendent	575-885-1313	505-614-4867	
Scott Armstrong	Permian Production Engineer 53		918-557-9944	
Brad Ballinger	Permian Production Engineer	539-573-0135	303-928-0799	
Glenn Griffin	Permian Production Engineer	539-573-7547	405-437-9557	
Heather Stephens	Permian Production Engineer	539-573-8961	303-898-3918	
Josh Walker	Regulatory Specialist	539-573-0108	580-716-0330	
Les Peeler Plugging Consultant		405-454-0008	405-659-5185	

Emergency Contacts – New Mexico:


.

Hospital:	Carlsbad Medical Center 2430 W. Pierce St., Carlsbad, NM 88220	(575) 887-4100
Sheriff's Office:	Lea County Sheriff Dept Eddy County Sheriff Dept	(575) 396-3611 (575) 887-7551
Emergency Contacts – Texas:		
Hospital:	Reeves County Hospital 2323 Texas St, Pecos TX 79772	(432) 447-3551
Sheriff's Office:	Reeves County Sheriff Dept Loving County Sheriff Dept	(432) 445-4901 (432) 377-2411

Page 1

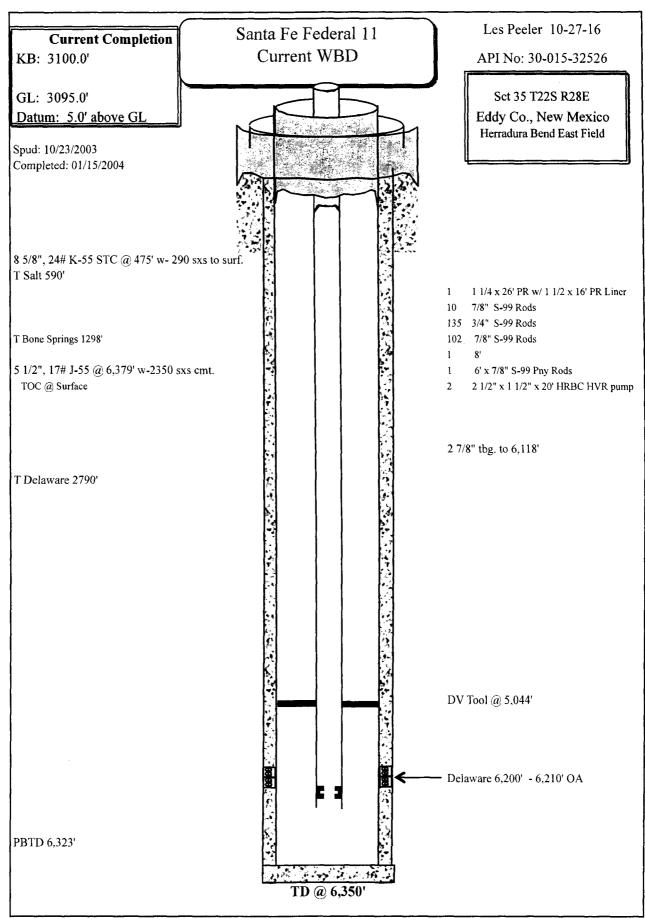

.

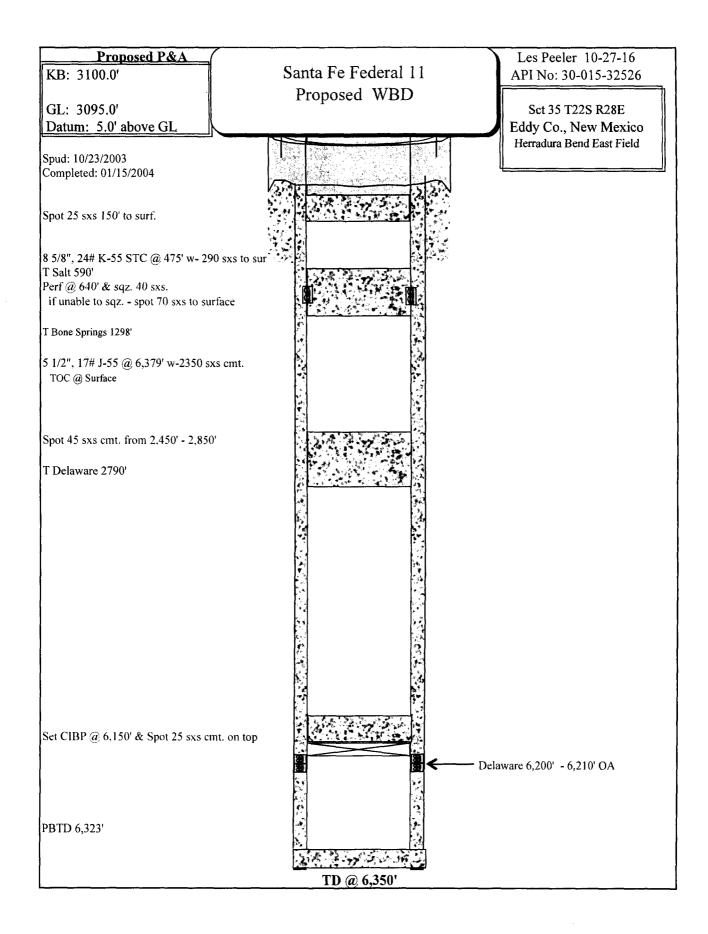

.

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

.

Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.

3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.

5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. <u>Dry Hole Marker</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

7. <u>Subsequent Plugging Reporting:</u> Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

8. <u>Trash</u>: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its predisturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any and all contaminants, scrap/trash, equipment, pipelines and powerlines. Strip and remove caliche, contour the location to blend with the surrounding landscape, redistribute the native soils, provide erosion control as needed, rip and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- 1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months.
- 3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation

equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos Supervisory Petroleum Engineering Tech 575-234-5909, 575-361-2648 (Cell)

Arthur Arias Environmental Protection Specialist 575-234-6230

Henryetta Price Environmental Protection Specialist 575-234-5951

Shelly Tucker Environmental Protection Specialist 575-234-5979