From 3160-5 (June 2015)

UNITED STATES

FORM APPROVED OMB NO. 1004-0137 Expires: January 31, 2018

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS AND SERVICE S

Do not use thi abandoned wel	is form for proposals to II. Use form 3160-3 (APL	drill or to re- o) for such	enter an copp alsA	esia	6. If Indian, Allottee of	or Tribe Nan	ne			
SUBMIT IN 1	7. If Unit or CA/Agreement, Name and/or No.									
Type of Well	8. Well Name and No. CEDAR LAKE FEDERAL CA 410H									
2. Name of Operator APACHE CORPORATION		9. API Well No. 30-015-43521-00-X1								
3a. Address 303 VETERANS AIRPARK LA MIDLAND, TX 79705	(include area code) 3.1167		10. Field and Pool or CEDAR LAKE	Exploratory Area						
4. Location of Well (Footage, Sec., T	11. County or P			arish, State						
Sec 4 T17S R31E NENE 1083		EDDY COUNTY, NM								
12. CHECK THE AI	PPROPRIATE BOX(ES)	TO INDICA	TE NATURE O	F NOTICE,	REPORT, OR OTH	HER DAT	 ГА			
TYPE OF SUBMISSION	BMISSION TYPE OF ACTION									
■ Notice of Intent	☐ Acidize	☐ Deep	□ Deepen		☐ Production (Start/Resume)		☐ Water Shut-Off			
_	☐ Alter Casing	☐ Hyd	raulic Fracturing	☐ Reclamation		■ Well	■ Well Integrity			
☐ Subsequent Report	☐ Casing Repair	□ New	ew Construction		lete		Other			
☐ Final Abandonment Notice	☐ Change Plans	Plug	and Abandon	□ Temporarily Abandon		Change to Original A PD				
	☐ Convert to Injection	☐ Plug Back		■ Water Disposal						
Attach the Bond under which the worfollowing completion of the involved testing has been completed. Final Addetermined that the site is ready for f BLM-CO-1463 NATIONWIDE	l operations. If the operation respandonment Notices must be file in al inspection. NMB-000736	sults in a multiple ed only after all t	e completion or reco requirements, includ	ompletion in a r ing reclamation	new interval, a Form 316 n, have been completed a	0-4 must be	e filed once			
APACHE REQUEST A VARIA	ANCE TO USE A FLEXIBI									
SEE ATTACHMENT FOR AD	DITIONAL INFORMATION	N SE	E ATTAC	HED F	UR DEPOMAT					
Manufacturer: Continental SN: 69915	VS OF	APPROVAL	r							
ID: 3")I(DIII)		11.00	E OOIAC	SERVATIO			
WP: 10,000psi TP: 15,000psi			RTESIA DI							
•/•		APR 1 0 2017								
14. I hereby certify that the foregoing is	Electronic Submission #3	CORPORAT	ON, sent to the C	Carlsbad	-	RECEI	<u>AED</u>			
Name (Printed/Typed) SORINA		TTING CON								
Signature (Electronic S	Submission)		Date 03/27/20	017		·				
	THIS SPACE FO	R FEDERA	L OR STATE	OFFICE U	SE					
Approved By MUSTAFA HAQUE			Title PETROLE	UM ENGINE	ER	Da	te 04/05/2017			
Conditions of approval, if any, are attache certify that the applicant holds legal or equivinch would entitle the applicant to conduct the conduction of the	d. Approval of this notice does uitable title to those rights in the		Office Carlsbac	d	-					
Title 18 U.S.C. Section 1001 and Title 43 States any false, fictitious or fraudulent	U.S.C. Section 1212, make it a statements or representations as	crime for any pe to any matter wi	rson knowingly and thin its jurisdiction.	willfully to ma	ke to any department or	agency of t	he United			

APR 1 0 2017

PECOS DISTRICT CONDITIONS OF APPROVAL

RECEIVED

OPERATOR'S NAME:

Apache Corporation

LEASE NO.:

NMLC029426A

WELL NAME & NO.:

Cedar Lake Federal CA 410H

SURFACE HOLE FOOTAGE:

1083'/N & 959'/E

BOTTOM HOLE FOOTAGE

395'/N & 330'/E SEC 3

LOCATION:

Section 4, T.17 S., R.31 E., NMPM

COUNTY:

Eddy County, New Mexico

All previous COAs still apply, except for the following:

1. Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor. If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).


MHH 04052017

Industrial Kft.

CONTITECH RUBBER | No: QC-DB-205 / 2015 Page: 8 / 128

ContiTech

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE						CERT. N°: 581				
PURCHASER:	Oil & Marine Corp.			P.O. Nº		4500511543				
CONTITECH RUBBER order N	HOSE TYPE: 3" ID			Choke and Kill Hose						
HOSE SERIAL Nº:	NOMINAL / ACTUAL LENGTH:			10,67 m / 10,76 m						
W.P. 68,9 MPa 1	0000 psi	T.P. 103,4	MPa	1500	0 psi	Duration:	60	min.		
Pressure test with water at ambient temperature		See attachm	ient. (1	l page)					
COUPLINGS Type		Serial N°			Qu	Quality Heat				
3" coupling with		7563	7565	;	AISI	4130	A0996X			
4 1/16" 10K API b.w. FI	lange end			AISI		4130	036282			
NOT DESIGNED FO	R WELL T	ESTING					PI Spec 16 C	В"		
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.										
STATEMENT OF CONFORMITY conditions and specifications of accordance with the referenced s	Y: We hereby of the above Purcestandards, codes	certify that the abordance or Order and and specifications	ove items/othersets and meet	equipment items/ex	nt supplie quipment ant accer	were fabricate	d inspected and tes	sted in		
-	T	COUNTRY OF OR	IGIN HUN	IGARY/E	U					
Date: Inspector Quality Control Confile A Strict Control Indicate Set Control Confile A Strict Control Confile A Str						i Jacque Cu	5			

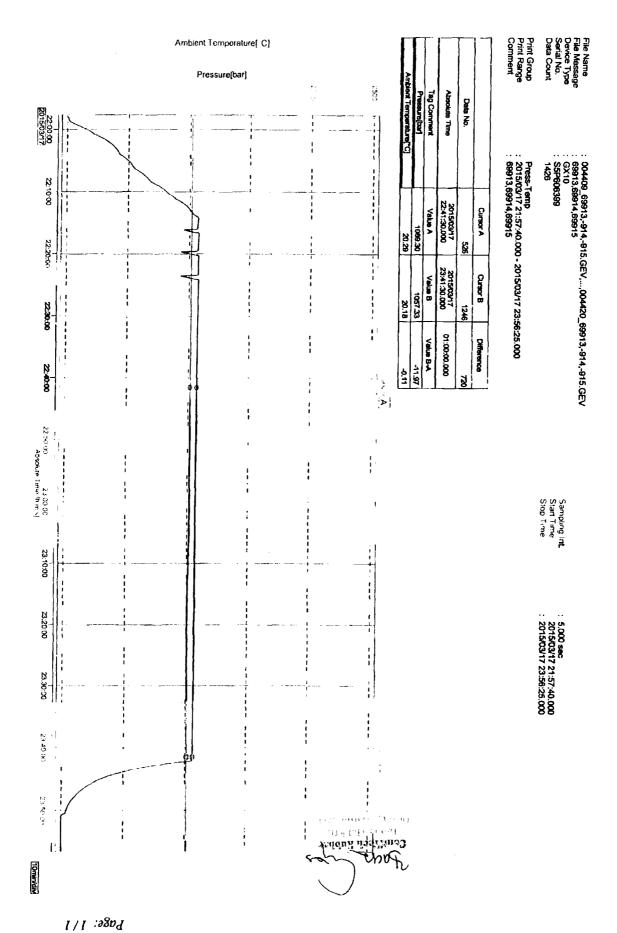

ATTACHMENT OF QUALITY CONTROL INSPECTION AND TEST CERTIFICATE No. 579, 581