Form 3160-5 (June 2015)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

Arla	FORM APPROVED OMB NO. 1004-013 Expires: January 31, 20
i hear:	5. Lease Serial No.

Do not use thi	NOTICES AND REPOR is form for proposals to d II. Use form 3160-3 (APD)	Irill or to re-en	S ter an posals.	CD_A	NMNM012121 6. If walia, Allegge of	or Tribe Name	
SUBMIT IN TRIPLICATE - Other instructions on page 2					6. If Malia (A) Page or Tribe Name 7. If Old CA/Agreement, Name and/or No.		
Type of Well					8. Well Name and No. COTTON DRAW UNIT 291H		
Name of Operator Contact: LINDA GOOD DEVON ENERGY PRODUCTION COMPAN: linda.good@dvn.com					9. API Well No. 30-015-44106-00-X1		
3a. Address 333 WEST SHERIDAN AVEN OKLAHOMA CITY, OK 73102	3b. Phone No. (include area code) Ph: 405.552.6558			Field and Pool or Exploratory Area PADUCA			
4. Location of Well (Footage, Sec., T		11. County or Parish, State			State		
Sec 25 T24S R31E SWSE 230FSL 1845FEL 32.181721 N Lat, 103.728928 W Lon					EDDY COUNTY, NM		
12. CHECK THE AI	PPROPRIATE BOX(ES) T	O INDICATE	NATURE O	F NOTICE,	REPORT, OR OTI	HER DATA	
TYPE OF SUBMISSION	TYPE OF ACTION						
Notice of Intent ■ Notice of Intent	☐ Acidize	□ Deepen		☐ Producti	on (Start/Resume)	■ Water Shut-Off	
_	☐ Alter Casing		lic Fracturing	☐ Reclama	tion	■ Well Integrity	
☐ Subsequent Report	☐ Casing Repair	_	onstruction	☐ Recomp			
☐ Final Abandonment Notice	☐ Change Plans		d Abandon		arily Abandon	PD	
	Convert to Injection	☐ Plug Ba	ick	☐ Water Disposal			
13. Describe Proposed or Completed Op. If the proposal is to deepen direction: Attach the Bond under which the wor following completion of the involved testing has been completed. Final Al determined that the site is ready for f	ally or recomplete horizontally, g rk will be performed or provide the doperations. If the operation results and bandonment Notices must be filed inal inspection.	ive subsurface loca he Bond No. on fil- alts in a multiple co	ations and measu e with BLM/BL ompletion or rec	ured and true ve A. Required sub ompletion in a r	rtical depths of all pertions requent reports must be new interval, a Form 316	nent markers and zones. e filed within 30 days 60-4 must be filed once	
1. SUMMARY OF CHANGES	;						
Devon Energy respectfully rec plan:	quests approval for the follo				- Idhe (OIL CONSERVATION	
Utilize a spudder rig to pre-set surface casing. Accepted for				5-19-1	IOCD	ARTESIA DISTRICT	
 Description of Operations Spudder rig will move in the 	eir rig to drill the surface ho					MAY 19 2017	
on the Cotton Draw Unit 291H. a. After drilling the surface hole section, the rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2 and all COA regulations).						RECEIVED	
14. I hereby certify that the foregoing is	s true and correct. Electronic Submission #3 For DEVON ENERGY nitted to AFMSS for process	PRODUCTION (OMPAN, ser	nt to the Carls	bad		
Name (Printed/Typed) LINDA GO	DOD	Ti	tle REGUL	_ATORY SPE	CIALIST		
Signature (Electronic Submission)		D	ate 05/11/2	2017			
	THIS SPACE FO	R FEDERAL	OR STATE	OFFICE US	SE		
Approved By TEUNGKU MUCHLIS KRUENG		1	TitlePETROLEUM ENGINEER		FR	Date 05/12/2017	
Conditions of approval, if any, are attached. Approval of this notice does not warrant o certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.			Office Carlsba				
T' 1 10 11 0 0 0 0 1 1001 1 1 T' 1 10	110000 1 1010 1 1			1 310 11	1	Cd II 's 1	

Additional data for EC transaction #375916 that would not fit on the form

32. Additional remarks, continued

b. Rig will utilize fresh water based mud to drill 17?? surface hole to TD. Solids control will be handled entirely on a closed loop basis.

2. The wellhead will be installed and tested once the 13-3/8? surface casing is cut off and the WOC

time has been reached.


3. A blind flange with the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with a pressure gauge installed on the wellhead. a. A means for intervention will be maintained while the drilling rig is not over the well.

4. Spudder rig operations is expected to take 8-10 days on a multi well pad.

- 5. The BLM will be contacted and notified 24 hours prior to commencing spudder rig operations.
- 6. Drilling operations will be performed with the drilling rig. At that time an approved BOP stack will be nippled up and tested on the wellhead before drilling operations commences on each well.
- a. The BLM will be contacted / notified 24 hours before the drilling rig moves back on to the pad with the pre-set surface casing.
- 7. Devon Energy will have supervision over the rig to ensure compliance with all BLM regulations and to oversee operations.
- 8. Once the rig is removed, Devon Energy will secure the wellhead area by placing a guard rail around the cellar area.

Mud Mixing tank and Shaker Moltale lists Mud Pumps 1 & 2 Spudder Rig Layout .20 Conex & Forklift Trailer Tool pusher

Wellhead - Cactus 13-5/8" 5K MBU-3T

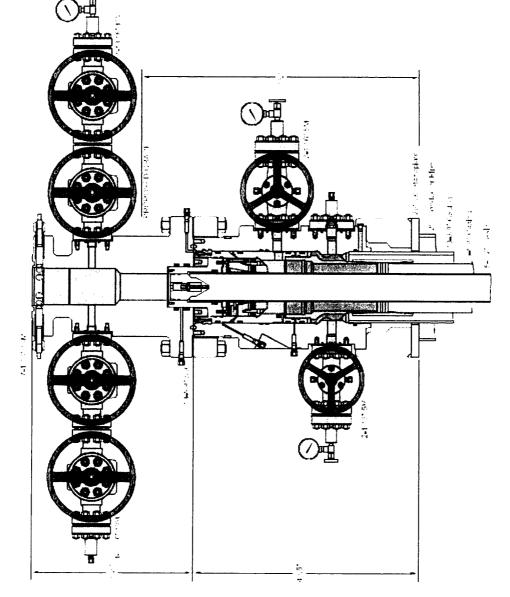

PRODUCTION CONFIGURATION