Form 3160-5 (June 2015)

NM OIL CONSERVATION

UNITED STATES
DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT**

ARTESIA DISTRICT
OCD Artesia
NOV 07 2017

FORM APPROVED OMB NO. 1004-0137 Expires: January 31, 2018

5. Lease Serial No.

SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such prop			NMNM074939	NMNM074939	
			6. If Indian, Allottee o	6. If Indian, Allottee or Tribe Name	
SUBMIT IN TRIPLICATE - Other instructions on page 2			7. If Unit or CA/Agre	7. If Unit or CA/Agreement, Name and/or No.	
1. Type of Well	8 Well Name and No.				
Oil Well Gas Well Oth	GISSLER B 36				
2 Name of Operator Contact: LESLIE GARVIS BURNETT OIL CO. INC. E-Mail: Igarvis@burnettoil.com			9 API Well No. 30-015-34022		
3a Address BURNETT PLAZA - SUITE 1500 801 CHERRY STREETPHJN8TF-983F-8780RTH, TX 76102 FORT WORTH, TX 76102			76102 10. Field and Pool or CEDAR LAKE	10. Field and Pool or Exploratory Area CEDAR LAKE GLORIETTA YESO	
4 Location of Well (Footage, Sec., T., R., M., or Survey Description)			11 County or Parish,	11 County or Parish, State	
Sec 14 T17S R30E Mer NMP 1650FNL 1650FWL			EDDY COUNT	EĐDY COUNTY, NM	
12. CHECK THE AF	PROPRIATE BOX(ES)	TO INDICATE NATURE OF	NOTICE, REPORT, OR OT	HER DATA	
TYPE OF SUBMISSION	TYPE OF ACTION				
Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	■ Water Shut-Off	
	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	mation	
☐ Subsequent Report	Casing Repair	■ New Construction	☐ Recomplete	⊘ Other	
☐ Final Abandonment Notice	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	_	
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal		
Describe Proposed or Completed Operation Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a national part of the past be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamate the substantial perturbation of the involved operation with operator has determined that the site is ready for final inspection. APPROVAL BY STATE 1. MIRU cementing company APPROVED 2. Pressure up on 9-5/8? x 5-1/2? casing annulus with fresh water;					
a. If annulus pressures up to 2 b. If pressure will not hold, est injection pressure to 250 psig. 3. If EIR established, mix and 300 psig. NOTE that the calculus and a second pressure to 250 psig.	250 psig, hold for 30 minut ablish injection rate, limitin	tes and call BLM ng surface nit surface pressure to	SEE ATTACE CONDITIONS OF	F APPROVAL	
14. I hereby certify that the foregoing is true and correct. Electronic Submission #378399 verified by the BLM Well Information System For BURNETT OIL CO. INC., sent to the Carlsbad Committed to AFMSS for processing by DEBORAH MCKINNEY on 06/13/20110 VED Name (Printe: UTypest) LESLIE GARVIS Title REGULATORY CORDINATORY					
Name (Printe VTvped) LESLIE G	ARVIS	Title REGULA	ATORY HODRDINATOR V [.ับ	

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Date

06/08/2017

Approved By

(Electronic Submission)

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

CARLSBAD FIELD OFFICE

BUREAU OF LAND MANAGEMENT RICE

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictatious or fraudulent statements or representations as to any matter within its jurisdiction

Signature

Additional data for EC transaction #378399 that would not fit on the form

32. Additional remarks, continued

shoe calls for 55 sx.

4. Shut down, RDMO cementing company.

Conditions of Approval

Burnett Oil Company, Inc. Gissler B - 36, API 3001534022 T17S-R30E, Sec 14, 1650 FNL & 1650FWL October 02, 2017

- 1. Begin wellbore operations within 90 days of these conditions of approval for the processed Electronic Submission #378399 notice of intent or request an extension.
- 2. Operator is required to have the BLM approved NOI procedure with applicable conditions of approval on location for this workover operation.
- 3. Subject to like approval by the New Mexico Oil Conservation Division.
- 4. Before adding, replacing, or repairing casing or a liner, prior BLM approval of the design is required. Use notice of intent Form 3160-5.
- 5. A closed loop system is required. The operator shall properly dispose of drilling/circulating contents at an authorized disposal site. Tanks are required for all operations, no excavated pits.
- 6. Surface disturbance beyond the existing pad shall have prior BLM approval.
- 7. Functional H₂S monitoring equipment shall be on location.
- 8. Blowout Prevention Equipment 2000 (2M) to be used. All BOPE and workover procedures shall establish fail safe well control. Ram(s) for the work string(s) used is required equipment. Manual BOP closure system including a blind ram and pipe ram(s) designed to close on all (hand wheels or automatic locking devices) equipment installed regardless of BOP design. Function test the installed BOPE to 50opsig when well conditions allow. Related equipment, (choke manifolds, kill trucks, gas vent or flare lines, etc.) employed when needed for reasonable well control requirements.
- 9. All waste (Le. trash, salts, chemicals, sewage, gray water, etc.) created during work over operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing Operations or any other crew intensive operations.
- 10. Notify BLM 575-361-2822 Eddy Co. as work begins. Some procedures witnessed. If there is no response, leave a voice mail with the AP1#, workover purpose, and a call back phone number.
- 11. The BLM PET witness is to run tubing tally and agree to cement volumes and placement. Sample each plug for cement curing time and tag and/or pressure test as requested by BLM PET witness.
- 12. Provide BLM with an electronic copy CBL record from the plug within 100' of the top perf taken with 0 psig casing pressure to TOC.
- 13. Squeeze cement in the 5 1/2 annulus to cover the Top of Salt and 9 5/8" shoe. Establish an injection rate, and squeeze 125 x Class "C" neat cmt mixed 14.8#/gal, 1.32 ft/sx, 6.3gal/sx from 1321 ft to surface.
- 14. Monitor wellhead for continued water flow.
- 15. File subsequent sundry Form 3160-5 within 30 days of workover procedures. Include (dated daily) descriptions of the well work, i.e. procedure descriptions and setting depths of each plug in the subsequent sundry.

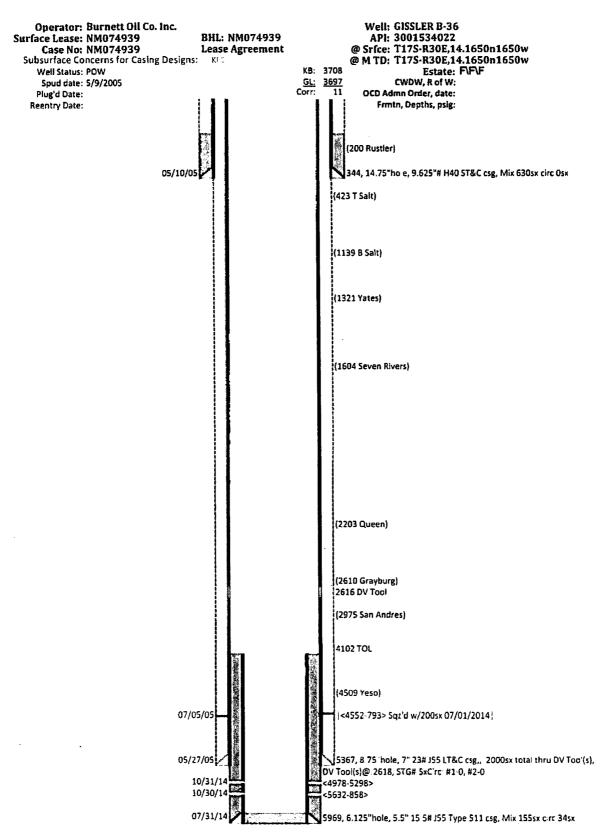


Diagram last updated 09/28/2017